

Harnett County Department of Public Health Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: James Gaydos PROPERTY LOCATION: 1207 Ponderosa Rd
 SUBDIVISION: CAROLINA SEASONS LOT # 71
 NEW REPAIR EXPANSION
 Site Improvements required prior to Construction Authorization Issuance: _____
 Type of Structure: Ex SFD
 Proposed Wastewater System Type: Accepted or Conventional
 Projected Daily Flow: 360 ^{Accepted} GPD
 Number of bedrooms: 3 Number of Occupants: 6 max
 Basement Yes No
 Pump Required: Yes No May be required based on final location and elevations of facilities
 Type of Water Supply: Community Public Well Distance from well _____ feet
 Permit valid for: Five years No expiration
 Permit conditions: _____

Authorized State Agent: James C. Mankant JR. ISAS Date: 1-11-21 SEE ATTACHED SITE SKETCH
 The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization (Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: James Gaydos PROPERTY LOCATION: 1201 Ponderosa Rd
 SUBDIVISION: CAROLINA SEASONS LOT # _____
 Facility Type: Ex SFD New Expansion Repair
 Basement? Yes No Basement Fixtures? Yes No
 Type of Wastewater System** _____ (Initial) Wastewater Flow: 360 GPD
 (See note below, if applicable Accepted ~~Ex SFD~~ OR Conventional (Repair)
 Installation Requirements/Conditions
 Number of trenches 2
 Septic Tank Size EXISTING gallons Exact length of each trench 100 feet Trench Spacing: 9 Feet on Center
 Pump Tank Size _____ gallons Trenches shall be installed on contour at a Soil Cover: 6 inches
 Maximum Trench Depth of: 24" inches (Maximum soil cover shall not exceed 36" above the trench bottom)
 (Trench bottoms shall be level to +/-1/4" in all directions)
 Pump Requirements: _____ ft. TDH vs. _____ GPM _____ 6 inches below pipe
 Aggregate Depth: _____ 2 inches above pipe
 _____ 12 inches total
 Conditions: Accepted on Conventional CAN BE USED
USE 12-BOX TOTAL OF LINE IS 200'

**WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.
 NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.**

***If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.*

Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: James C. Mankant JR. ISAS Date: 1-11-20
 Construction Authorization Expiration Date: 1-11-26

Application # EH 2010-0004

Harnett County Department of Public Health Site Sketch

Property Location: 501201 Ponderosa RD

Issued To: James Gaydos

Subdivision CAROLINA SEASONS


Lot # 79

Authorized State Agent: James E. Mandant ~~PH~~ REMS

Date: 1-11-21

* USE D-BOX ON NEW LINES

* 200' TOTAL LINE LENGTH

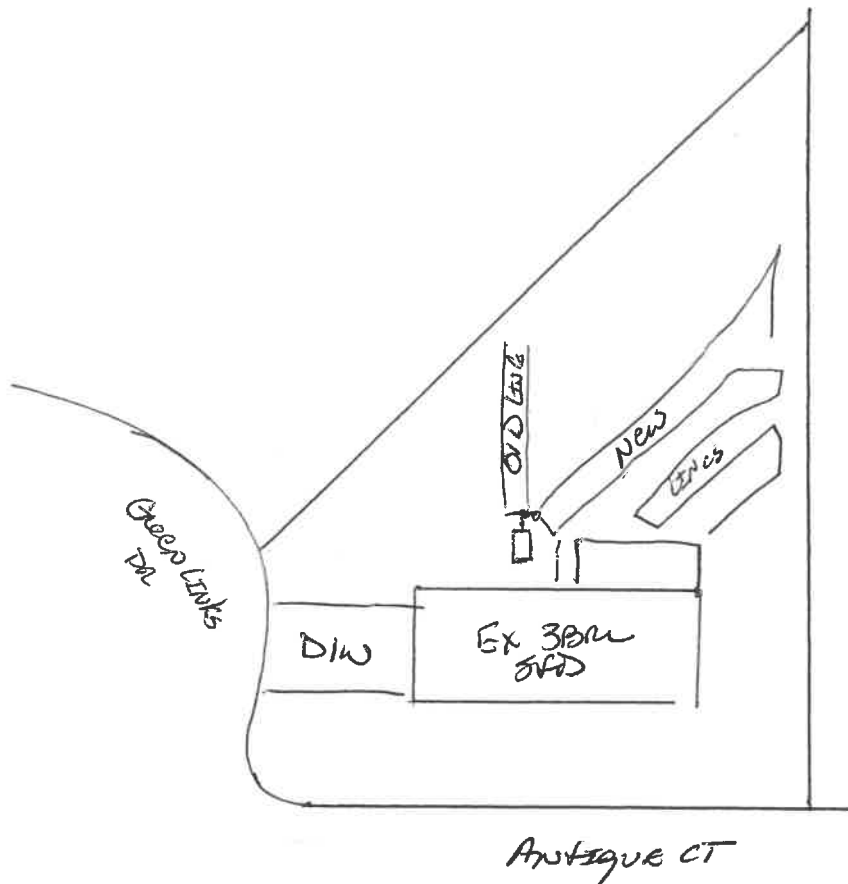

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.