

HARNETT COUNTY DEPARTMENT OF PUBLIC HEALTH

Well Abandonment Permit

Application Number: EH2209-0013 (2nd)

Applicant Name: Beal Well & Pump / Stencil Builders

Address: 5929 Honeycutt Road Holly Springs, NC 27540

Type of Well: Hand Dug Total Depth: 10ft Diameter: 24in Grouted: No Static Water Level: 4f


Directions to Site: 138 Bakertown Road (SR 1417)


Agent of the State  Date: 09/21/2022

Abandonment Procedure: Abandonment Procedure: 1. Remove all plumbing or piping into the well, along with any obstructions inside the well; 2. Remove as much of the well tile casing a possible, but no less than to a depth of three feet below land surface; 3. remove all soil or other subsurface material present down to the top of the remaining well casing, and extending to a width of at least 12 inches outside of the well casing on all sides; 4. Fill the well up to the top of the remaining casing with cement grout, concrete grout, bentonite grout, dry clay, or material excavated during drilling of the well and then compacted in place; 5. Pour a one foot thick concrete grout or cement grout plug that fills the entire excavated area about the top of the casing, including the area extending on all sides of the casing out to a width of at least 12 inches on all sides; 6. Complete the abandonment process by filling the remainder of the well above the concrete or cement plug with additional concrete grout, cement grout, or soil. A record of the abandonment must be submitted within 30 days of abandonment.

Note: Contact Harnett County Environmental Health for appointment prior to beginning of well abandonment procedure.

Well must be abandoned by a Certified North Carolina well driller/contractor.

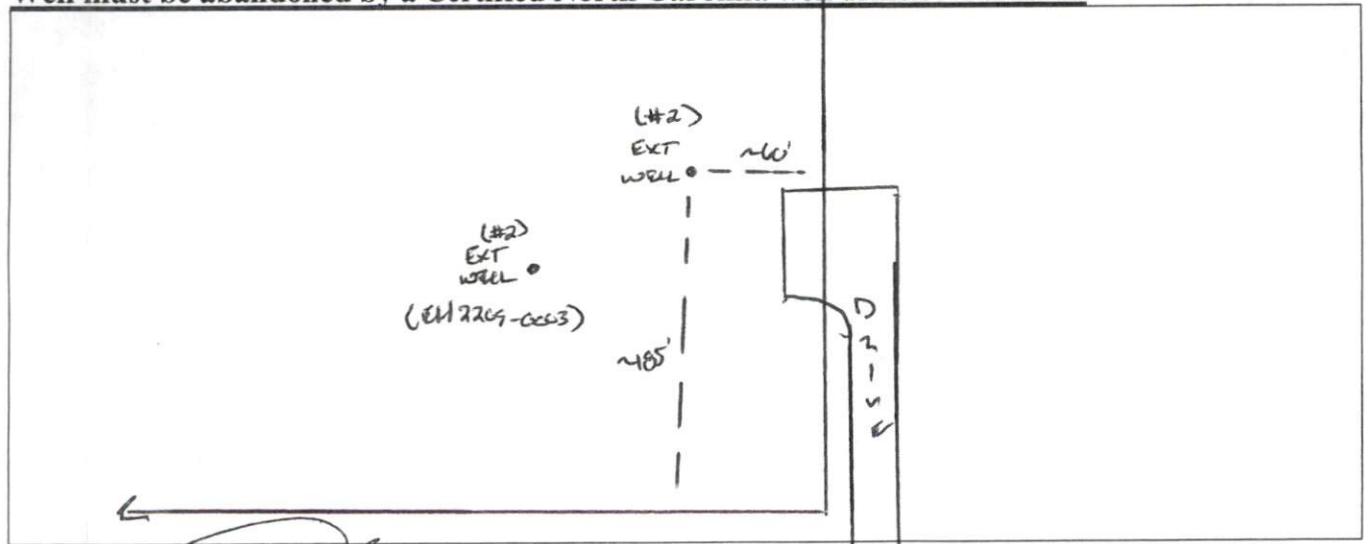



Property Owner's or Owners Legal Representative Signature Required

9/28/22
Date