

Job 72291511	Truss A01	Truss Type Truss	Qty 14	Ply 1	Service - 436 NATCHEZ Job Reference (optional)
-----------------	--------------	---------------------	-----------	----------	---

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Gina Tolley

Run: 8.510 S Oct 22 2021 Print: 8.510 S Oct 22 2021 MiTek Industries, Inc. Wed Sep 07 15:30:43

Page: 1

ID:vAK\_FJ0SDf2AyMe7LKvqnyfgy674-ft?t59vMpCjXiBIMjO09C7szuMpmam1Fwohau?ryg?0R

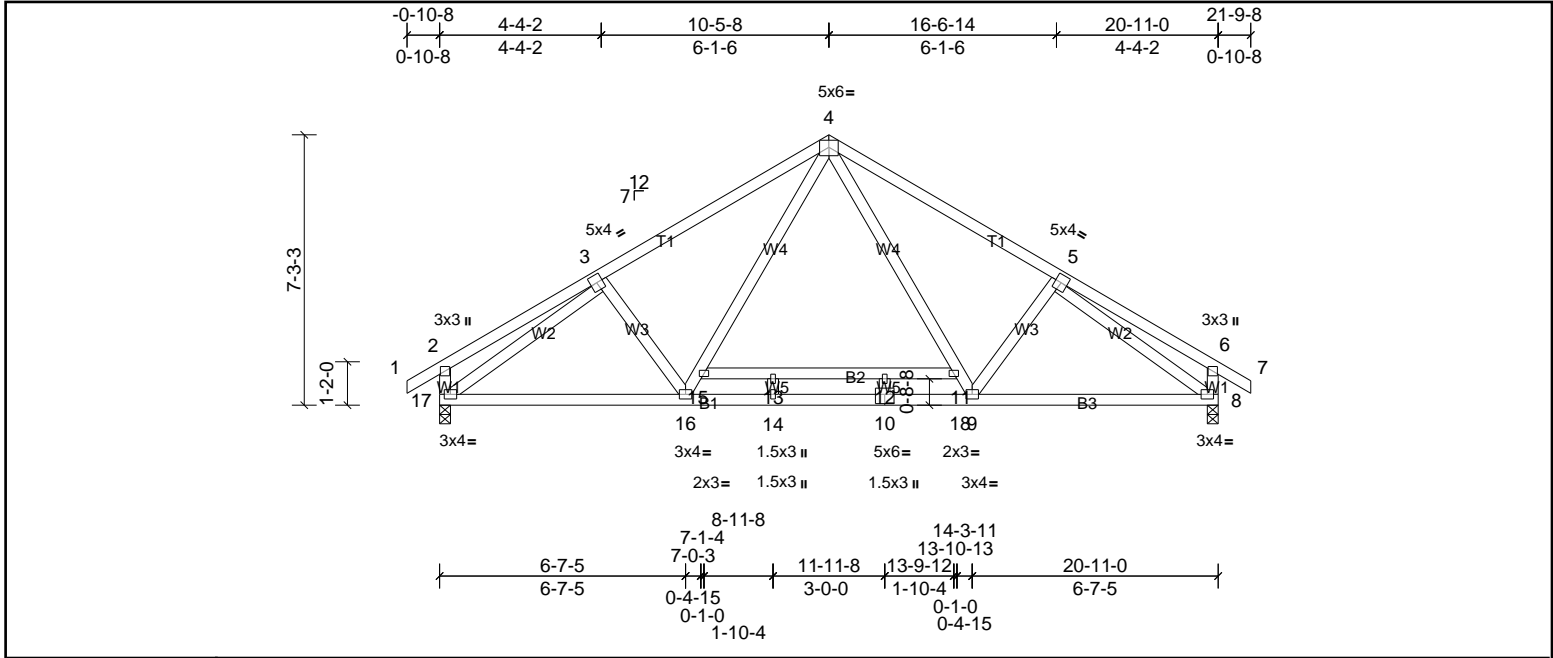


Plate Offsets (X, Y): [10:0-3-0,0-3-0]

Loading	(psf)	Spacing		CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	2-0-0	TC	0.54	Vert(LL)	-0.16	12-13	>999	240	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.93	Vert(CT)	-0.39	10-14	>641	180		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.72	Horz(CT)	0.03	8	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MSH							Weight: 133 lb	FT = 20%

LUMBER		BRACING	
TOP CHORD	2x4 SP No.2	TOP CHORD	Structural wood sheathing directly applied or 4-2-2 oc purlins, except end verticals.
BOT CHORD	2x4 SP No.2	BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing, Except:
WEBS	2x4 SP No.3		2-2-0 oc bracing: 10-14.
			6-0-0 oc bracing: 11-15

REACTIONS	(lb/size)	
	8=1049/0-3-8, (min. 0-1-8), 17=1049/0-3-8, (min. 0-1-8)	
	Max Horiz	17=154 (LC 9)
	Max Grav	8=1061 (LC 18), 17=1061 (LC 17)

FORCES	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD	3-4=-1324/0, 4-5=-1324/0
BOT CHORD	16-17=0/1192, 14-16=0/933, 10-14=0/933, 10-18=0/933, 9-18=0/933, 8-9=0/1080
WEBS	4-11=0/582, 9-11=0/437, 15-16=0/438, 4-15=0/582, 3-17=-1328/0, 5-8=-1329/0

- NOTES**
- Unbalanced roof live loads have been considered for this design.
  - Wind: ASCE 7-10; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
  - 185.0lb AC unit load placed on the bottom chord, 10-5-8 from left end, supported at two points, 3-0-0 apart.
  - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
  - \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
  - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



This design is based upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of the Building Designer. Building Designer shall verify all design information on this sheet for conformance with conditions and requirements of the specific building and governing codes and ordinances. Building Designer accepts responsibility for the correctness or accuracy of the design information as it may relate to a specific building. Certification is valid only when truss is fabricated by a UFPI plant. Bracing shown is for lateral support of truss members only and does not replace erection and permanent bracing. Refer to Building Component Safety Information (BCSI) for general guidance regarding storage, erection and bracing available from SBCA and Truss Plate Institute.



Job 72291511	Truss A02-G	Truss Type Truss	Qty 1	Ply 1	Service - 436 NATCHEZ Job Reference (optional)
-----------------	----------------	---------------------	----------	----------	---

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Gina Tolley

Run: 8.51 S Oct 22 2021 Print: 8.510 S Oct 22 2021 MiTek Industries, Inc. Wed Sep 07 15:30:43

Page: 1

ID:NMuNSf14\_yA1ZWDKv1Q3Jsyg673-7fZfUw\_ZWrOJLKYH5YOkkO8kmBrVbP30LKSyHyg?0Q

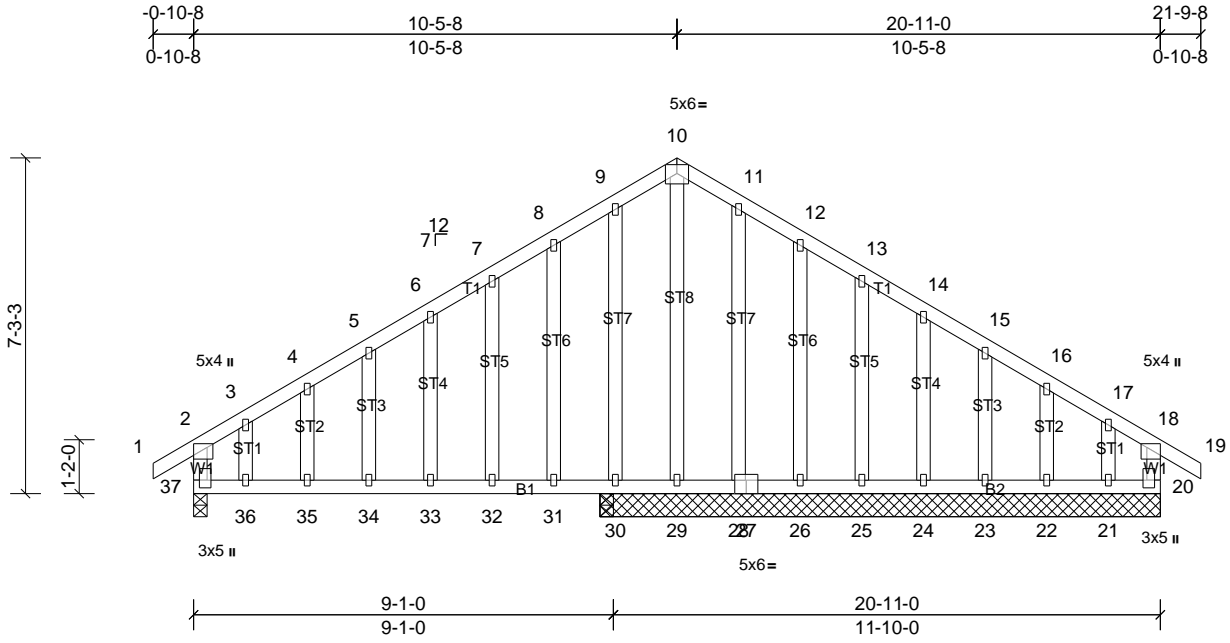


Plate Offsets (X, Y): [2:0-2-0,0-1-12], [18:0-2-0,0-1-12], [20:0-2-0,0-1-0], [37:0-2-0,0-1-8]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.53	Vert(LL)	0.16	33-34	>663	240	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.80	Vert(CT)	-0.30	33-34	>365	180		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.28	Horz(CT)	0.01	20	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MR							Weight: 158 lb	FT = 20%

LUMBER	BRACING
TOP CHORD 2x4 SP No.2	TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD 2x4 SP No.2	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 2x4 SP No.3	
OTHERS 2x4 SP No.3	

**REACTIONS**  
 All bearings 12-1-8. except 37=0-3-8, 30=0-3-8  
 (lb) - Max Horiz 37=154 (LC 9)  
 Max Uplift All uplift 100 (lb) or less at joint(s) 22, 23, 24, 25, 26, 28, 37 except  
 20=-180 (LC 10), 21=-431 (LC 17), 29=-863 (LC 17), 30=-203 (LC 10)  
 Max Grav All reactions 250 (lb) or less at joint(s) 21, 22, 23, 24, 25, 26, 28 except  
 20=718 (LC 17), 29=353 (LC 10), 30=959 (LC 17), 37=562 (LC 21)

**FORCES**  
 (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.  
 TOP CHORD 2-3=-438/100, 3-4=-399/112, 4-5=-386/135, 5-6=-384/156, 6-7=-386/177, 7-8=-378/198, 8-9=-400/226, 9-10=-549/270, 10-11=-464/253, 11-12=-463/239, 12-13=-431/213, 13-14=-411/198, 14-15=-415/183, 15-16=-423/168, 16-17=-412/148, 17-18=-544/167, 2-37=-430/115, 18-20=-503/130  
 BOT CHORD 36-37=-90/371, 35-36=-90/371, 34-35=-90/371, 33-34=-90/371, 32-33=-90/371, 31-32=-90/371, 30-31=-90/371, 29-30=-90/371, 28-29=-90/371, 27-28=-90/371, 26-27=-90/371, 25-26=-90/371, 24-25=-90/371, 23-24=-90/371, 22-23=-90/371, 21-22=-90/371, 20-21=-90/371  
 WEBS 10-29=-242/540, 9-30=-379/91

- NOTES**
- Unbalanced roof live loads have been considered for this design.
  - Wind: ASCE 7-10; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
  - Truss designed for wind loads in the plane of the truss only.
  - All plates are 1.5x3 MT20 unless otherwise indicated.
  - Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
  - Gable studs spaced at 1-4-0 oc.
  - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
  - \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
  - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 37, 28, 26, 25, 24, 23, 22 except (jt=lb) 20=179, 29=863, 21=430, 30=203.
  - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



This design is based upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of the Building Designer. Building Designer shall verify all design information on this sheet for conformance with conditions and requirements of the specific building and governing codes and ordinances. Building Designer accepts responsibility for the correctness or accuracy of the design information as it may relate to a specific building. Certification is valid only when truss is fabricated by a UFPI plant. Bracing shown is for lateral support of truss members only and does not replace erection and permanent bracing. Refer to Building Component Safety Information (BCSI) for general guidance regarding storage, erection and bracing available from SBCA and Truss Plate Institute.



Job 72291511	Truss A03-G	Truss Type Truss	Qty 1	Ply 1	Service - 436 NATCHEZ Job Reference (optional)
-----------------	----------------	---------------------	----------	----------	---

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Gina Tolley

Run: 8.510 S Oct 22 2021 Print: 8.510 S Oct 22 2021 MiTek Industries, Inc. Wed Sep 07 15:30:43

Page: 1

ID:rYSig?2ilGluBfoWTlx4yg672-7fZFIUw\_ZWrOJLKYH5YOkKOFAmNIVdh30LKSyHyg?0Q

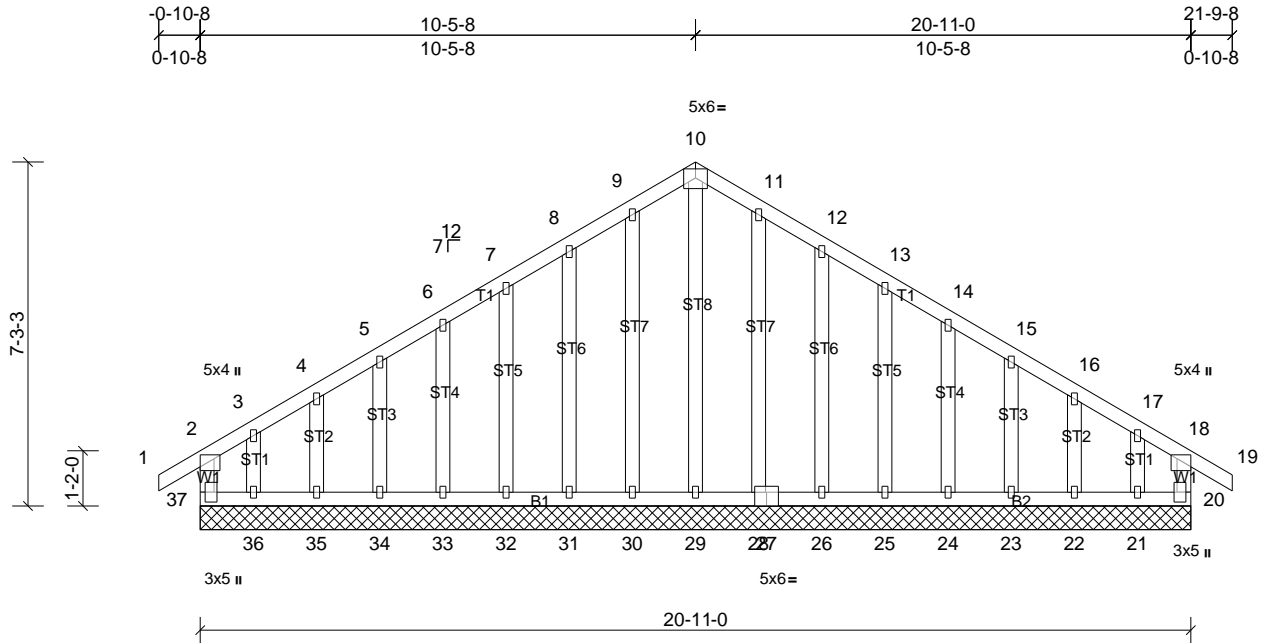


Plate Offsets (X, Y): [2:0-2-0,0-1-12], [18:0-2-0,0-1-12], [20:0-2-8,0-0-12], [37:0-2-8,0-1-4]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.12	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.06	Vert(CT)	n/a	-	n/a	999		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.13	Horz(CT)	0.00	20	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MR							Weight: 158 lb	FT = 20%

**LUMBER**  
TOP CHORD 2x4 SP No.2  
BOT CHORD 2x4 SP No.2  
WEBS 2x4 SP No.3  
OTHERS 2x4 SP No.3

**BRACING**  
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.  
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

**REACTIONS** All bearings 20-11-0.  
(lb) - Max Horiz 37=154 (LC 9)  
Max Uplift All uplift 100 (lb) or less at joint(s) 20, 21, 22, 23, 24, 25, 26, 28, 30, 31, 32, 33, 34, 35, 37 except 36=-105 (LC 7)  
Max Grav All reactions 250 (lb) or less at joint(s) 20, 21, 22, 23, 24, 25, 26, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37

**FORCES** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES**
- Unbalanced roof live loads have been considered for this design.
  - Wind: ASCE 7-10; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
  - Truss designed for wind loads in the plane of the truss only.
  - All plates are 1.5x3 MT20 unless otherwise indicated.
  - Gable requires continuous bottom chord bearing.
  - Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
  - Gable studs spaced at 1-4-0 oc.
  - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
  - \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
  - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 37, 20, 30, 31, 32, 33, 34, 35, 28, 26, 25, 24, 23, 22, 21 except (jt=lb) 36=105.
  - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



This design is based upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of the Building Designer. Building Designer shall verify all design information on this sheet for conformance with conditions and requirements of the specific building and governing codes and ordinances. Building Designer accepts responsibility for the correctness or accuracy of the design information as it may relate to a specific building. Certification is valid only when truss is fabricated by a UFPI plant. Bracing shown is for lateral support of truss members only and does not replace erection and permanent bracing. Refer to Building Component Safety Information (BCSI) for general guidance regarding storage, erection and bracing available from SBCA and Truss Plate Institute.




Job 72291511	Truss B01	Truss Type Truss	Qty 1	Ply 1	Service - 436 NATCHEZ Job Reference (optional)
-----------------	--------------	---------------------	----------	----------	---

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Gina Tolley

Run: 8.51 S Oct 22 2021 Print: 8.510 S Oct 22 2021 MiTek Industries, Inc. Wed Sep 07 15:30:44

Page: 1

ID:rYSlg?2ilGluBfoWTlxIs4yg672-bs7dWqwdKqzFxFvVkp3dHYxQgAj1E6cDF?3?4jyg?0P

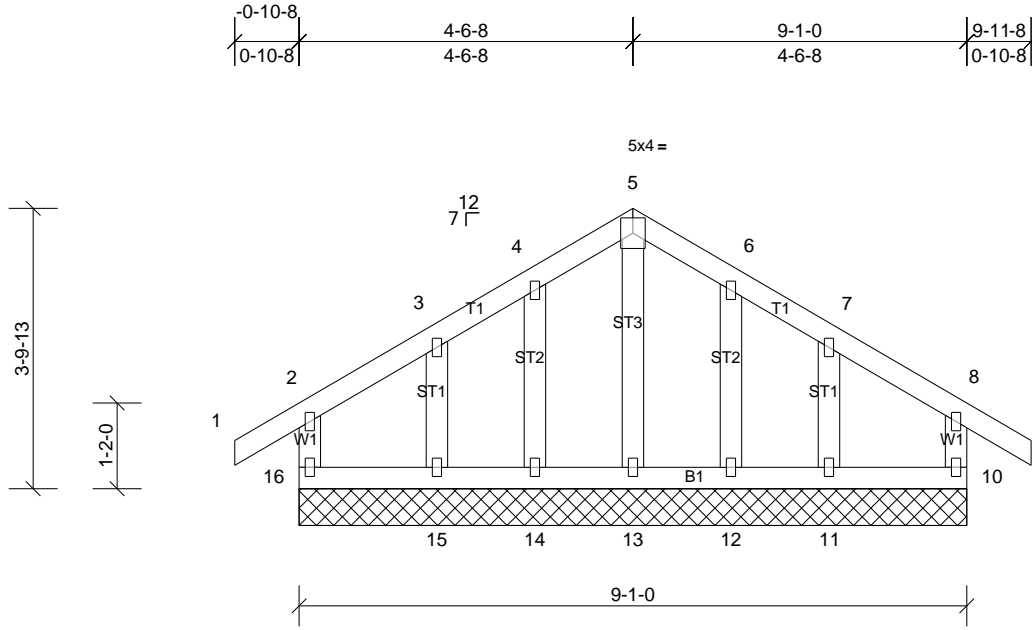

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.07	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.03	Vert(CT)	n/a	-	n/a	999		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.02	Horz(CT)	0.00	10	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MR							Weight: 52 lb	FT = 20%

**LUMBER**  
TOP CHORD 2x4 SP No.2  
BOT CHORD 2x4 SP No.2  
WEBS 2x4 SP No.3  
OTHERS 2x4 SP No.3

**BRACING**  
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.  
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

**REACTIONS** All bearings 9-1-0.  
(lb) - Max Horiz 16=88 (LC 9)  
Max Uplift All uplift 100 (lb) or less at joint(s) 10, 11, 12, 14, 15, 16  
Max Grav All reactions 250 (lb) or less at joint(s) 10, 11, 12, 13, 14, 15, 16

**FORCES** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES**
- Unbalanced roof live loads have been considered for this design.
  - Wind: ASCE 7-10; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
  - Truss designed for wind loads in the plane of the truss only.
  - All plates are 1.5x3 MT20 unless otherwise indicated.
  - Gable requires continuous bottom chord bearing.
  - Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
  - Gable studs spaced at 1-4-0 oc.
  - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
  - \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
  - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 16, 10, 14, 15, 12, 11.
  - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



This design is based upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of the Building Designer. Building Designer shall verify all design information on this sheet for conformance with conditions and requirements of the specific building and governing codes and ordinances. Building Designer accepts responsibility for the correctness or accuracy of the design information as it may relate to a specific building. Certification is valid only when truss is fabricated by a UFPI plant. Bracing shown is for lateral support of truss members only and does not replace erection and permanent bracing. Refer to Building Component Safety Information (BCSI) for general guidance regarding storage, erection and bracing available from SBCA and Truss Plate Institute.

