



HARNETT COUNTY ENVIROMENTAL HEALTH

File/Permit #: EH2507-0013

CDP #:

IMPROVEMENT PERMIT (IP)

☐ New ☒ Expansion ☒ Repair ☐ System Relocation ☐ Change of Use

Owner: Adam Allen Wontrop Applicant: Adam Allen Wontrop

Property Location: 327 NC 24 Cameron, NC PIN/Lot Identifier: 9565-97-8822

Subdivision: B H MANGUM PC#E-166C Lot #: Block: Section:

Facility Type: existing Number of bedrooms: 4 Number of Occupants: 8 Other:

Design Daily Flow: 480 GPD LTAR (Initial): .4 gpd/ft² LTAR (Repair): .4 gpd/ft²

Wastewater System Type: Replace septic tank and add a 100' line (Initial)

Pump Required: ☐ Yes ☒ No ☐ May be required Usable Depth to Limiting Condition (Initial): 48

Wastewater System Type: 25% reduction (Repair)

Pump Required: ☐ Yes ☐ No ☒ May be required Usable Depth to Limiting Condition (Repair): 48

Effluent Standard: ☒ DSE ☐ HSE ☐ Other: Type of Water Supply: ☐ Private well ☒ Municipal Supply ☐ Other:

Permit conditions:

The issuance of this permit in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This permit is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of 15A NCAC 18E and to the conditions of this permit.

Authorized Agent's Printed Name: Mark Osborne REHS

Date: 08/27/2025

Authorized Agent's Signature:

Expiration Date: 08/27/2030

CONSTRUCTION AUTHORIZATION (CA)

☐ New ☒ Expansion ☒ Repair ☐ System Relocation ☐ Change of Use

Owner: Adam Allen Wontrop Applicant: Adam Allen Wontrop

Property Location: 327 NC 24 Cameron, NC PIN/Lot Identifier: 9565-97-8822

Subdivision: B H MANGUM PC#E-166C Lot #: Block: Section:

Facility Type: existing Number of bedrooms: 4 Number of Occupants: 8 Other:

Design Daily Flow: 480 GPD LTAR: .4 gpd/ft²

Effluent Standard: ☒ DSE ☐ HSE ☐ Other: Type of Water Supply: ☐ Private well ☒ Municipal Supply ☐ Other:

Installation Requirements/Conditions

Wastewater System Type: Replace septic tank and add a 100' line Pump Required: ☐ Yes ☒ No ☐ May be required

Septic Tank Size: 1000 gallons Total Trench Length: 100 feet Trench Spacing: 9 feet on center

Pump Tank Size: gallons Maximum Trench Depth: 30 inches Soil Cover: 6 inches

Trench Width: 36 inches Distribution Method: ☐ Serial ☒ D-Box or Parallel ☐ Pressure Manifold ☐ Other:

Artificial Drainage Required: Yes ☐ No ☒ If yes, please specify details:

Management Entity Required: ☐ Yes ☒ No Minimum O&M Requirements:

Permit conditions:

replace busted septic tank and add a 100' drain line and tie all lines into a new dbox

The requirements of 15A NCAC 18E are incorporated by reference into this permit and shall be met. Systems shall be installed in accordance with the attached site sketch. This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be affected by a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of 15A NCAC 18E, or 15A NCAC 18A .1900, as applicable, and to the conditions of this permit.

Authorized Agent's Printed Name: Mark Osborne REHS

Date: 08/27/25

Authorized Agent's Signature:

Expiration Date: 08/27/2030

Owner/Legal Representative Signature:

Date:

*See attached site sketch

Harnett County Environmental Health

SITE SKETCH

PIN 9565-97-8822

Permit Number EH2507-0013

Adam Allen Wontrop

B H MANGUM PC#E-166C

Applicant's Name

Subdivision/Section/Lot Number

Mark Osborne REHS


08/27/2025

Authorized State Agent

Date

System components represent approximate contours only. The contractor must flag the system prior to beginning the installation to ensure that the proper grade is maintained.

Scale = NTS

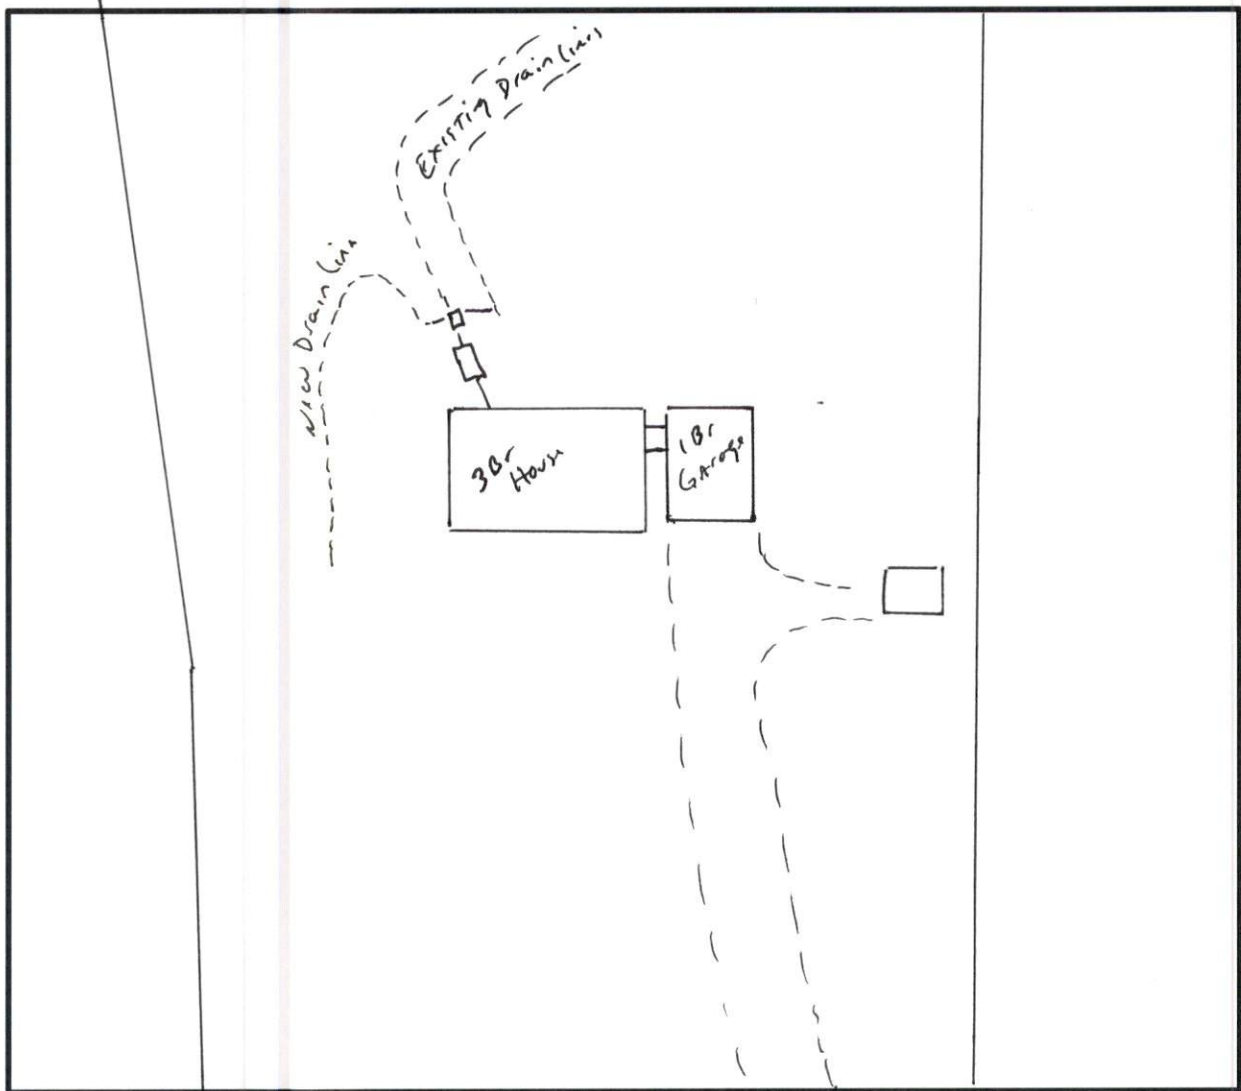

← NC 24 →