



HARNETT COUNTY ENVIROMENTAL HEALTH

File/Permit #: EH2508-0015

CDP #:

IMPROVEMENT PERMIT (IP)

☒ New☐ Expansion☐ Repair☐ System Relocation☐ Change of Use

Owner: Clayton Weber

Applicant: Clayton Weber

Property Location: 298 Barnes Ave (SR1297)

PIN/Lot Identifier: 0640-80-9892

Subdivision: SPENCER T NEWTON

Lot #: 3 Block: Section:

Facility Type: 26'x52' SFD

Number of bedrooms: 3

Number of Occupants: 6

Other:

Design Daily Flow: 360

GPD

LTAR (Initial): .4

gpd/ft²

LTAR (Repair): .4

gpd/ft²

Wastewater System Type: 25% reduction

(Initial)

Pump Required: ☐ Yes ☒ No ☐ May be required

Usable Depth to Limiting Condition (Initial): 48

Wastewater System Type: 25% reduction

(Repair)

Pump Required: ☐ Yes ☒ No ☐ May be required

Usable Depth to Limiting Condition (Repair): 48

Effluent Standard: ☒ DSE ☐ HSE ☐ Other:Type of Water Supply: ☐ Private well ☒ Municipal Supply ☐ Other:

Permit conditions:

The issuance of this permit in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This permit is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of 15A NCAC 18E and to the conditions of this permit.

Authorized Agent's Printed Name: Mark Osborne REHS

Date: 10/02/2025

Authorized Agent's Signature:

Expiration Date: 10/02/2030

CONSTRUCTION AUTHORIZATION (CA)

☒ New☐ Expansion☐ Repair☐ System Relocation☐ Change of Use

Owner: Clayton Weber

Applicant: Clayton Weber

Property Location: 298 Barnes Ave (SR1297)

PIN/Lot Identifier: 0640-80-9892

Subdivision: SPENCER T NEWTON

Lot #: 3 Block: Section:

Facility Type: 26'x52' SFD

Number of bedrooms: 3

Number of Occupants: 6

Other:

Design Daily Flow: 360

GPD

LTAR: .4

gpd/ft²Effluent Standard: ☒ DSE ☐ HSE ☐ Other:Type of Water Supply: ☐ Private well ☒ Municipal Supply ☐ Other:

Installation Requirements/Conditions

Wastewater System Type: 25% reduction

Pump Required: ☐ Yes ☒ No ☐ May be required

Septic Tank Size: 1000

gallons

Total Trench Length: 225

feet

Trench Spacing: 9

feet on center

Pump Tank Size:

gallons

Maximum Trench Depth: 28

inches

Soil Cover: 6

inches

Trench Width: 36

inches

Distribution Method: ☒ Serial☐ D-Box or Parallel☐ Pressure Manifold☐ Other:Artificial Drainage Required: Yes ☐ No ☒ If yes, please specify details:Management Entity Required: ☐ Yes ☒ No Minimum O&M Requirements:

Permit conditions:

The requirements of 15A NCAC 18E are incorporated by reference into this permit and shall be met. Systems shall be installed in accordance with the attached site sketch. This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be affected by a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of 15A NCAC 18E, or 15A NCAC 18A .1900, as applicable, and to the conditions of this permit.

Authorized Agent's Printed Name: Mark Osborne REHS

Date: 10/02/25

Authorized Agent's Signature:

Expiration Date: 10/02/2030

Owner/Legal Representative Signature:

Date:

*See attached site sketch

Harnett County Environmental Health

SITE SKETCH

PIN 0640-80-9892

Permit Number EH2508-0015

Clayton Weber

SPENCER T NEWTON 3

Applicant's Name
Mark Osborne REHS


Subdivision/Section/Lot Number
10/02/2025

Authorized State Agent

Date

System components represent approximate contours only. The contractor must flag the system prior to beginning the installation to ensure that the proper grade is maintained.

Scale = NTS

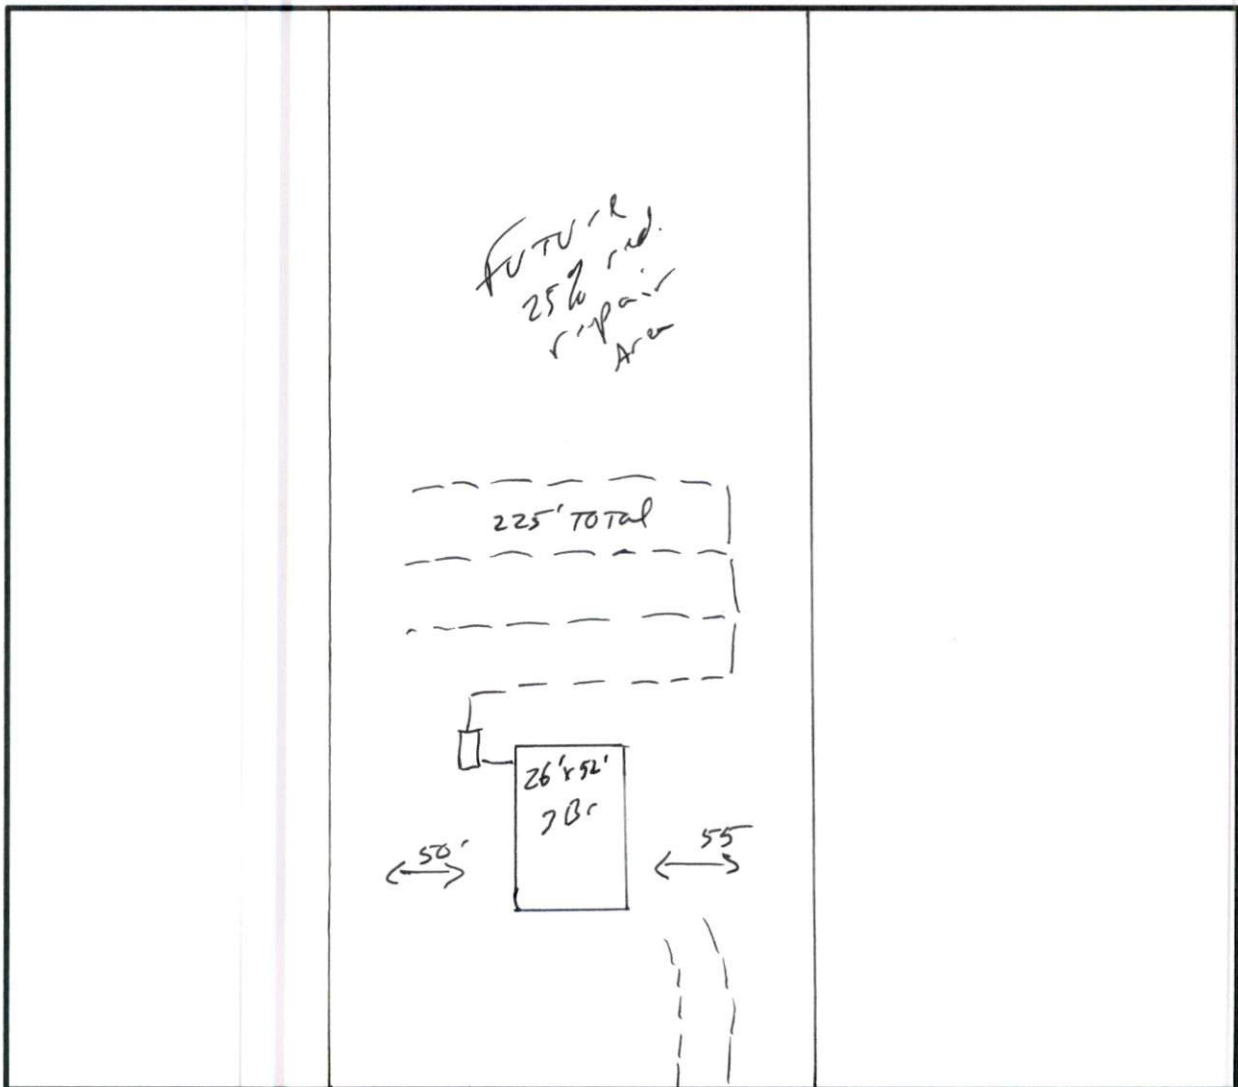

Barren Ave