



Harnett  
COUNTY  
NORTH CAROLINA

HARNETT COUNTY ENVIRONMENTAL HEALTH

File/Permit #: EH2510-0005

CDP #: \_\_\_\_\_

IMPROVEMENT PERMIT (IP)

New

Expansion

Repair

System Relocation

Change of Use

Owner: JAMES SAWELL

Applicant: Ready Roofing LLC

Property Location: 402 GEORGE PERRY LEE RD DUNN, NC 28334

PIN/Lot Identifier: 1527-82-6665.000

Subdivision: \_\_\_\_\_

Lot #: \_\_\_\_\_ Block: \_\_\_\_\_ Section: \_\_\_\_\_

Facility Type: SFD 80' x 62' Number of bedrooms: 3

Number of Occupants: 6 Other: \_\_\_\_\_

Design Daily Flow: 360 GPD LTAR (Initial): .4 gpd/ft<sup>2</sup> LTAR (Repair): .4 gpd/ft<sup>2</sup>

Wastewater System Type: 50% Reduction System T&J Panel Block (Horizontal) (Initial)

Pump Required:  Yes  No  May be required

Usable Depth to Limiting Condition (Initial): 34"

Wastewater System Type: 50% Reduction System T&J Panel Block (Horizontal) (Repair)

Pump Required:  Yes  No  May be required

Usable Depth to Limiting Condition (Repair): 34"

Effluent Standard:  DSE  HSE  Other: \_\_\_\_\_

Type of Water Supply:  Private well  Municipal Supply  Other: \_\_\_\_\_

Permit conditions:

No Foundation or Gutter Drains to be Directed Towards Septic System. No Cutting or Grading of Soil in Septic or Septic Repair Area.

Remove Both Trees and Fill in Stump Holes with Type 1 or 2 Soils. Must Install Initial Septic System and Repair Septic System at the Same Time to Achieve Additional 25% Reduction. (75% & 75%)

The issuance of this permit in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This permit is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of 15A NCAC 18E and to the conditions of this permit.

Authorized Agent's Printed Name: Ren Levocz

Date: 11/06/2025

Authorized Agent's Signature:

Expiration Date: 11/06/2030

CONSTRUCTION AUTHORIZATION (CA)

New

Expansion

Repair

System Relocation

Change of Use

Owner: JAMES SAWELL

Applicant: Ready Roofing LLC

Property Location: 402 GEORGE PERRY LEE RD DUNN, NC 28334

PIN/Lot Identifier: 1527-82-6665.000

Subdivision: \_\_\_\_\_

Lot #: \_\_\_\_\_ Block: \_\_\_\_\_ Section: \_\_\_\_\_

Facility Type: SFD 80' x 62' Number of bedrooms: 3

Number of Occupants: 6 Other: \_\_\_\_\_

Design Daily Flow: 360 GPD LTAR: .4 gpd/ft<sup>2</sup>

Effluent Standard:  DSE  HSE  Other: \_\_\_\_\_

Type of Water Supply:  Private well  Municipal Supply  Other: \_\_\_\_\_

Installation Requirements/Conditions

Wastewater System Type: 50% Reduction System T&J Panel Block (Horizontal)

Pump Required:  Yes  No  May be required

Septic Tank Size: 1,000 gallons Total Trench Length: 115' feet

Trench Spacing: 9' feet on center

Pump Tank Size: 1,000 gallons Maximum Trench Depth: 18" - 22" inches

Soil Cover: 6" inches

Trench Width: 36" inches Distribution Method:  Serial  D-Box or Parallel  Pressure Manifold  Other: \_\_\_\_\_

Artificial Drainage Required: Yes  No  If yes, please specify details: Install 4' Deep Curtain Drain as Seen on Site Plan

Management Entity Required:  Yes  No Minimum O&M Requirements: \_\_\_\_\_

Permit conditions:

No Foundation or Gutter Drains to be Directed Towards Septic System. No Cutting or Grading of Soil in Septic or Septic Repair Area.

Remove Both Trees and Fill in Stump Holes with Type 1 or 2 Soils. Must Install Initial Septic System and Repair Septic System at the Same Time to Achieve Additional 25% Reduction. (75% & 75%)

The requirements of 15A NCAC 18E are incorporated by reference into this permit and shall be met. Systems shall be installed in accordance with the attached site sketch. This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be affected by a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of 15A NCAC 18E, or 15A NCAC 18A .1900, as applicable, and to the conditions of this permit.

Authorized Agent's Printed Name: Ren Levocz

Date: 11/06/25

Authorized Agent's Signature:

Expiration Date: 11/06/2030

Owner/Legal Representative Signature: \_\_\_\_\_

Date: \_\_\_\_\_

\*See attached site sketch

# Harnett County Environmental Health

## SITE SKETCH

PIN 1527-82-6665.000

Permit Number EH2510-0005

Ready Roofing LLC

Applicant's Name  
Ren Levocz


Authorized State Agent

Subdivision/Section/Lot Number  
11/06/2025

Date

System components represent approximate contours only. The contractor must flag the system prior to beginning the installation to ensure that the proper grade is maintained.

Scale = NTS

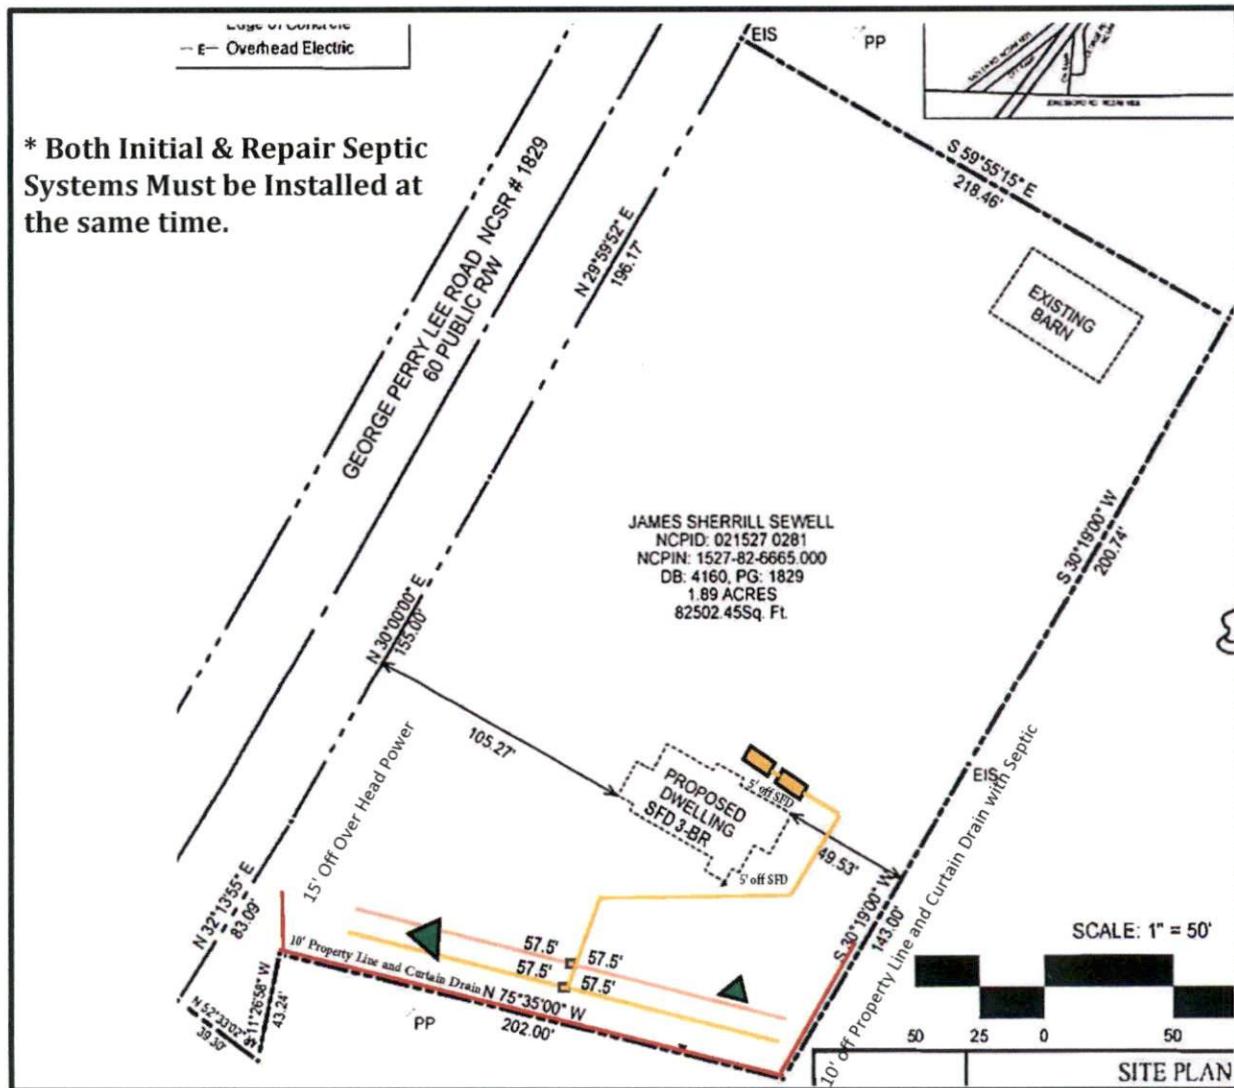

▲ = Trees to be removed