

4850⁰⁰

2#

09 58 10 8 00 113 17 2007

W1402-S 15405

Harnett County Department of Public Health 24539

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: BILL PANNHOFF PROPERTY LOCATION: BETHEL BAPTIST RD
 SUBDIVISION: CAROL W WOOD LOT # 4
 NEW REPAIR EXPANSION
 Type of Structure: 6000sq CATALING FACILITY
 Proposed Wastewater System Type: PUMP TO CONVENTIONAL
 Proposed Daily Flow: 370 GPD
 Number of Bedrooms: _____ Number of Occupants: 4 EMPLOYEES
 Basement: Yes No
 Pump Required: Yes No May be required based on final location and elevations of facilities
 Type of Water Supply: Community Public Well Distance from well: 00 feet
 Permit conditions: _____ Permit valid for: Five years No expiration

Authorized State Agent: [Signature] Date: 3/3/08 SEE ATTACHED SITE SKETCH
 The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies as to meeting their requirements. This site is subject to re-evaluation if the site plan, plan, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules 1950, 1952, 1954, 1956, 1958, 1959, 1961, 1963, 1964, 1967, 1968, and 1969 are incorporated by reference into this permit and shall be read in conjunction with the attached system layout.

ISSUED TO: BILL PANNHOFF PROPERTY LOCATION: BETHEL BAPTIST RD
 SUBDIVISION: CAROL W WOOD LOT # 4
 Facility Type: 6000sq CATALING FAC New Expansion Repair
 Basement: Yes No Basement Fixtures: Yes No
 Type of Wastewater System: PUMP TO CONVENTIONAL (Initial) Wastewater Flow: 370 GPD
 (See note below, if applicable): PUMP TO CONVENTIONAL (Repair)

Installation Requirements/Conditions

Septic Tank Size: 1000 gallons
 Pump Tank Size: 1000 gallons
 Sewage Trap: 1000 gallons
 Pump Requirements: _____ ft. TDH vs. _____ GPM
 Conditions: _____
 Exact length of each trench: 70 feet
 Trenches shall be installed on contour at a Maximum Trench Depth of: 24 inches (Trench bottoms shall be level to +/- 1/4" in all directions)
 Trench Spacing: 7 feet on Center
 Soil Cover: 12 inches (Maximum soil cover shall not exceed 36" above the trench bottom)
 Aggregate Depth: 6 inches below pipe, 2 inches above pipe, 12 inches total

*If applicable, I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to re-evaluation if the site plan, plan, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.


Authorized State Agent: [Signature] Date: 3/3/08 SEE ATTACHED SITE SKETCH

#11# 08-5-19405

Permit # 24539

Harnett County Department of Public Health Site Sketch

ISSUED TO: BILL FARMER PROPERTY LOCATION: BEEMEL BAPTIST RD
 SUBDIVISION: CAROL W V-1000 LOT # 4
 Authorized State Agent: [Signature] AS (OLIVE TO X-3005) Date: 3/3/08

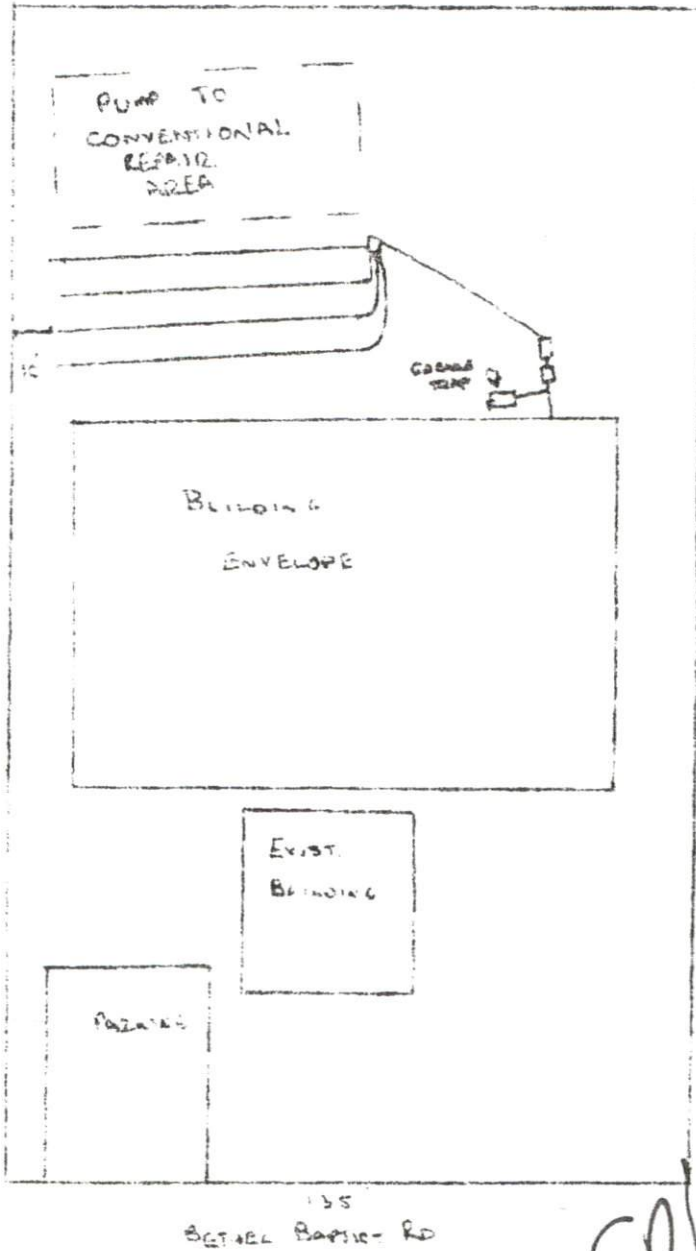

*Plumber
 stubs
 out
 shallow*

*15ft
 apart
 call
 AT&S upon
 stubs out*