



Item #: 178A23RHC Project: _____

Qty: _____ Date: _____ Approval: _____

Avantco A-23R-HC 29" Solid Door Reach-In Refrigerator

Item #178A23RHC



Technical Data

Width	29 Inches
Depth	32 1/4 Inches
Height	82 1/2 Inches
Interior Width	24 3/8 Inches
Interior Depth	27 1/8 Inches
Interior Height	53 1/2 Inches
Amps	1.37 Amps
Hertz	60 Hertz
Phase	1 Phase
Voltage	115 Volts
Access Type	Doors
BTU (LBP)	150
Capacity	20.6 cu. ft.
Casters	With Casters
Color	Silver
Compressor Location	Bottom Mounted
Construction	Stainless Steel and Aluminum
Door Style	Swing
Door Type	Solid
Dutch Half Doors	Without Dutch Half Doors
Features	Self-Closing Doors
Hinge Location	Right
Horsepower	1/3 HP
Individual Shelf Capacity	90 lb.
Installation Type	Freestanding
Number of Doors	1 Doors
Number of Shelves	3 Shelves
Plug Type	NEMA 5-15P
Refrigerant Type	R-290
Sections	1 Sections
Temperature Range	33 - 40 Degrees F
Type	Refrigerators

Features

- Corrosion-resistant stainless steel exterior with aluminum interior
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Eco-friendly R290 refrigerant; 115V; 1/3 hp; 1.37 Amps

Certifications



5-15P




ETL US



ETL Sanitation

Avantco Refrigeration

Plan View

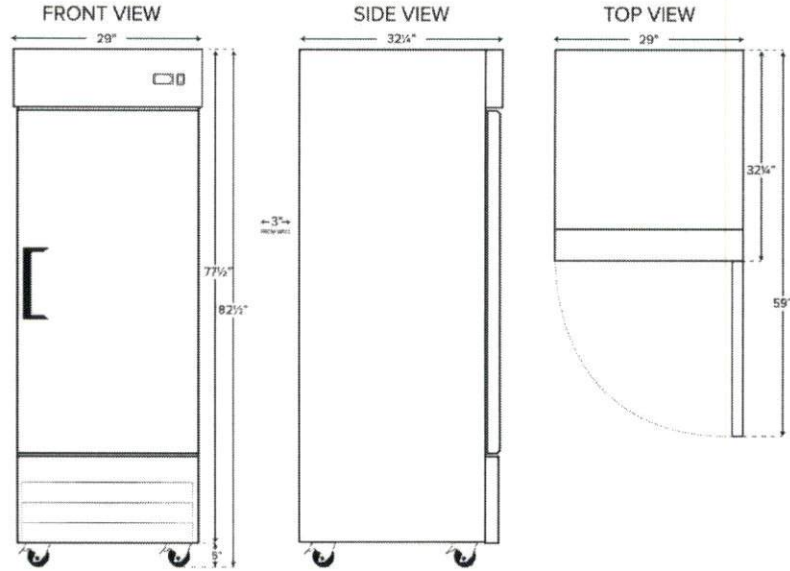

Notes & Details

Your establishment relies on refrigeration for proper food safety, and with this Avantco A-23R-HC 29" solid door refrigerator, you receive performance you can depend on! A painted aluminum interior gives you increased durability while a 430 stainless steel door and exterior sides give it a sleek appearance. For convenience, 3 epoxy coated shelves feature shelf clips for customization when desired.

Designed to maintain temperatures from 33-40 degrees Fahrenheit, this refrigerator boasts a bottom-mounted 1/3 hp compressor that uses eco-friendly R290 refrigerant. This specialized refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3, making it an environmentally-responsible choice for your business. In addition, the bottom-mounted design makes it easy for employees to load and unload products due to the raised bottom shelf. For optimal temperature retention, the entire cabinet is foamed-in place using polyurethane insulation. Other helpful features include the stay open locking door mechanism, automatic defrosting, and a digital temperature control with digital display. This item requires a 115V electrical connection for operation.

⚠ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.p65warnings.ca.gov.