



SR-42HZP Commercial Electric Rice Cooker

Thermostat for Precision Control

The rice cooker will maintain the cooked rice warm for up to 2 hours under nominal* operating conditions, virtually eliminating burning or overcooking of the rice. As a result, rice is cooked to the Chef's preference.

Easy Push-Button Operation

The push of a button starts the rice cooking. As soon as the rice is cooked, the unit shuts itself off.

Alternate Uses

Not only does it cook rice but can braise, heat liquids and cook many different items – call or see our web page for Chefs Technical Support for recipes.

Large Capacity

SR-42HZP can cook up to 23 cups (4.4 qts) in approximately 30 minutes.

Direct Heating System

Specially sheathed heating elements heat the pan bottom directly which minimizes heat loss and in turn saves energy costs. A thermal safety fuse will protect the unit from possible temperature rise.

Easy-to-clean Removable Pan Liner

The included Aluminum Alloy pan liner lifts easily out of the cooker to make washing and rinsing a breeze. An Optional "Non-Stick" pan liner is available.


* Ambient room temperature of 70°F and pan covered.

UL and NSF Approved

SR-42HZP is built with a durability and attention to safety that has earned certification from both Underwriters Laboratories and the National Sanitation Foundation for **commercial use**.

SR-42HZP Specifications

Servings	
Raw Rice	8.6 lbs. (23 - 6 oz. cups)
Servings	74 - 3 oz. portions, 54 - 4 oz. portions
Cook Time	Approximately 30 minutes
Technical Specifications	
Power Source	120 VAC, 60 Hz
Power Consumption	1550 W
Amperage	12.9 Amps
Cord Length	67"
Net Weight	12.1 lbs. (5.5Kg)
Carton Size	17"W x 17"D x 10-1/2"H
Master Carton	2 cartons in shrink wrap
Master Carton Weight	27 lbs.
Master Carton Cu. Ft.	3.51
Color	Silver

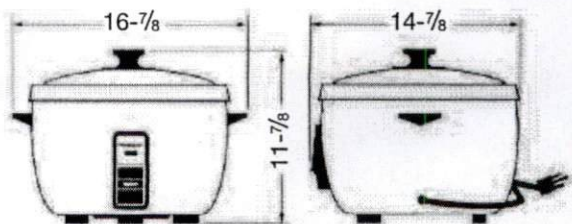

Panasonic ideas for life

Panasonic Consumer Electronics Company
Division of Panasonic Corporation of North America
Executive Offices: One Panasonic Way, Panazip 1H-2
Secaucus, NJ 07094

Toll-free: **888-350-9590**

Sales Support, Recipes and Training at: www.panasonic.com/cmo

For a Panasonic Distributor nearest you, 1-888-350-9590
For Panasonic Chef Support, 1-201-348-7305
For Panasonic Technical Support, 1-201-392-6894
For Panasonic HQ Sales, 1-201-348-7258
For Panasonic In Warranty Replacements, 1-866-907-9111


Design and specifications subject to change without notice.



CM070034SS

Digital Convection Oven

model #: **GS1125**

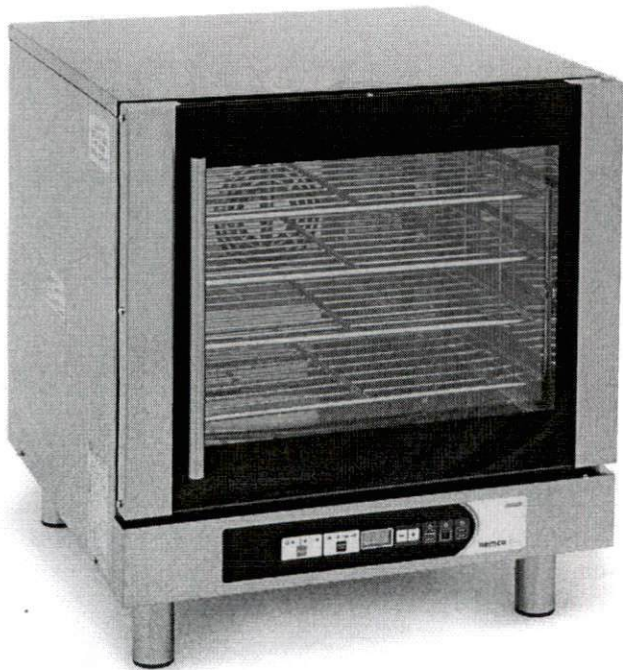

DIMENSIONS

- Equipment (w x d x h)23⁵/₈" x 28" x 21"
- Internal Cavity (w x d x h)19¹/₄" x 15³/₄" x 14¹/₂"
- Dimension Between Racks2³/₄"
- Equipment Weight104 lbs
- Shipping Weight107 lbs

CAPACITY

4- 18" x 13" Half Size Pans

Great for any size kitchen that needs to bake in small batches. This half size convection oven is the perfect space-saving solution for a tight kitchen. The added steam feature helps keep your food moist and digital controls make managing your cooking even easier.

STANDARD FEATURES

- Set temperature from 200°F to 500°F
- Set cooking time up to 9 hours and 59 minutes or "infinite" time to adjust cooking duration manually
- 2 cooking options available:
 - Convection cooking
 - Convection cooking with humidity/steam
- Humidity/steam set in manual or automatic mode (from 10% to 100%)
- 4 cooking steps available
- Possibility to set a delayed start of the cooking cycle up to 9 hours and 59 minutes
- Possibility to set a temperature and humidity/steam maintenance cycle
- Automatic preheating for programmed cooking cycles
- Cooking chamber entirely made with stainless steel
- Oven shell entirely made with stainless steel
- Inspection door to facilitate cleaning operations
- Reversing motor to guarantee cooking uniformity
- Recessed gasket to guarantee chamber cooking seal



Resfab Hot Food Case - Specs

DIMENSIONS

MODEL	DESCRIPTION	DIMENSIONS - W x D x H	NET WEIGHT	CRATED WEIGHT
KK-3P	3 PAN	42.5" X 26" X 35.25"	201 LBS	339 LBS
KK-4P	4 PAN	56.0" X 26" X 35.25"	248 LBS	386 LBS
KK-5P	5 PAN	69.5" X 26" X 35.25"	295 LBS	459 LBS
KK-3PL/R	3 PAN WITH SELF-SERVE	58.5" X 26" X 35.25"	268 LBS	406 LBS
KK-4PL/R	4 PAN WITH SELF-SERVE	72.0" X 26" X 35.25"	315 LBS	479 LBS

LIST OF ACCESSORIES INCLUDED WITH THE HEATED DISPLAY CASE

DESCRIPTION	KK-3P	KK-4P	KK-5P	KK-3P R OR L	KK-4P R OR L
FULL SERVE GRATE #17260	3	4	5	3	4
SELF SERVE GRATE #17624	0	0	0	1	1
75 WATT HALOGEN LAMP (LOWER SECTION) #59502	10	12	14	16	18
125 WATT INFRARED LAMP (TOP SECTION) #59503	5	7	9	9	11
120 VOLT ELECTRIC PANEL W/ NEMA 5-15 PLUG	1	1	1	1	0
10 FEET OF SERVICE WIRE, PLUG & RECEPTACLE (WIRE GAUGE)	#10	#10	#8	#8	#6

HEATED DISPLAY CASE ELECTRIC SPECIFICATION

MODEL	DESCRIPTION	VOLT	WATT	AMP.	SERVICE WIRE AWG	BREAKER SIZE	NEMA
KK-3P	Hot Food Case, 3 Full Pan	120	2500	21	10	30	5-30
KK-3PR	Hot Food Case, 3 Full Pan, with Self-Serve on the Right	120	4050	34	8	40	5-50
KK-3PL	Hot Food Case, 3 Full Pan, with Self-Serve on the Left	120	4050	34	8	40	5-50
KK-4P	Hot Food Case, 4 Full Pan	120	3275	28	10	40	5-50
KK-4PR	Hot Food Case, 4 Full Pan, with Self-Serve on the Right	120	4825	41	6	50	5-50
KK-4PL	Hot Food Case, 4 Full Pan, with Self-Serve on the Left	120	4825	41	6	50	5-50
KK-5P	Hot Food Case, 5 Full Pan	120	4050	34	8	40	5-50

NOTE: Right-Hand Self-Serve means that the customers will see the Self-Serve case on the right side of the display

Manufactured for Krispy Krunchy by:

Resfab Equipment Inc.

Phone: 1-866-359-0808

info@resfab.com

www.resfab.com



SERVITE

ServIt PDW18D2S 18" Self-Service Countertop Display Warmer with 4 Shelves

#423PDW18D2S

FEATURES

- Includes 4 chrome plated shelves for a wide variety of hot foods
- LED lights and 3-sided backlit decals provide elegant merchandising
- Dual door design for self-serve applications
- Includes a water pan and active, adjustable humidity control to prevent dryness
- Temperature range of 86-194 degrees Fahrenheit; 120V, 1700W

TECHNICAL DATA

Width	23 1/2 Inches
Depth	25 1/4 Inches
Height	27 1/2 Inches
Rack Width	21 1/2 Inches
Rack Depth	22 Inches
Amps	14.16 Amps
Phase	1 Phase
Voltage	120 Volts
Wattage	1700 Watts
Access Type	Doors
Color	Clear Silver
Door Type	Clear
Features	Controlled Humidity Lighted Interior
Installation Type	Countertop
Material	Chrome-Plated Metal
Number of Doors	2 Doors



CERTIFICATIONS



TECHNICAL DATA

Number of Shelves	4 Shelves
Plug Type	NEMA 5-15P
Power Type	Electric
Temperature Range	86 - 194 Degrees F
Temperature Settings	Adjustable