

Tortilleria y Taqueria Costa Chica

Equipment List

Eq No.	Qty	Nomenclature	Make	Model	Measurements	New/Used
1	2	Refrigerator	TRUE	GDM-72-HC-TSL01	78-1/8" x 29-7/8" x 78-5/8"	Used
2	1	Steam Table	BEVLES	BVST-4-240	58" x 22-1/2" x 34"	Used
3	1	Salad Table Refrigerator	INTERTERK	MSF8302GR	48-1/5" x 30" x 41-3/8"	Used
4	1	Ice Maker	INTERTERK	YR280-AP-161	23-1/2" x 28-1/2" x 38-3/5"	Used
5	1	Burner	COOK RITE	AGR-6B-NG	36" x 31" x 57-3/8"	Used
6	1	Griddle	TOASTMASTER	TMGE48	48" x 15-17/32" x 27-13/16"	Used
7	1	Fryer	COOK RITE	ATFS-40	15-3/5" x 30-1/10" x 44-2/5"	Used
8	1	Chicken Rotisserie Oven	METAL SUPREME	FRG8VE	24" x 46" x 75"	Used
9	1	Refrigerator	TURBO AIR	M3R24-1-N	28-3/4" x 30-3/4" x 78"	Used
10	1	Stirrer	CELORIO	CLASSIC	37" x 38" x 36-1/2"	Used
11	1	Tortilla Maker	CELORIO	100 KX	60" x 162" x 45"	Used
12	1	Freezer	ECONOMY SERIES	EF2A-FS	54" x 29" x 81"	Used
13	1	Refrigerator	ECONOMY SERIES	ER2A-FS	54" x 29" x 81"	Used



TRUE MANUFACTURING CO., INC.
U.S.A. FOODSERVICE DIVISION

2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400
Fax (636)272-2408 • Toll Free (800)325-6152 • Intl Fax# (001)636-272-7546
Parts Dept. (800)424-TRUE • Parts Dept. Fax# (636)272-9471 • www.truemfg.com

Project Name: _____

AIA # _____

Location: _____

Item #: _____ Qty: _____

SIS # _____

Model #: _____

Model:

GDM-72-HC~TSL01

Glass Door Merchandiser:

Swing Door Refrigerator with Hydrocarbon Refrigerant~True Standard Look Version 01



GDM-72-HC~TSL01

- ▶ The world's #1 manufacturer of glass door merchandisers.
- ▶ High capacity, factory balanced, refrigeration system holds 33°F to 38°F (.5°C to 3.3°C) for best food preservation in extreme conditions.
- ▶ Exterior - non-peel or chip black powder coated cold rolled steel; durable and permanent.
- ▶ Interior - attractive, white aluminum interior liner with stainless steel floor.
- ▶ Double pane thermal insulated glass swing doors. Black powder coated.
- ▶ Self closing doors. Positive seal, torsion type closure system.
- ▶ LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.
- ▶ Entire cabinet structure is foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

Bottom mounted units feature

- ▶ "No stoop" lower shelf to maximize product visibility.
- ▶ Storage on top of cabinet.
- ▶ Easily accessible condenser coil for cleaning.

Exterior Color Options



Standard Black Exterior



Optional White Exterior



Optional Stainless Exterior

ROUGH-IN DATA

Specifications subject to change without notice.
Chart dimensions rounded up to the nearest 1/8" (millimeters rounded up to next whole number).

Model	Doors	Shelves	Cabinet Dimensions (inches)			HP	Voltage	Amps	NEMA Config.	Cord Length (total ft.)	Crated Weight (lbs.)
			W	D†	H						
GDM-72-HC~TSL01	3	12	78 1/8 1985	29 7/8 759	78 3/8 1998	1/2 N/A	115/60/1	9.3 N/A	5-15P	9 2.74	630 286

† Depth does not include 1 3/8" (35 mm) for door handles.



APPROVALS:

AVAILABLE AT:

Model:
GDM-72-HC~TSL01

Glass Door Merchandiser: Swing Door Refrigerator with Hydrocarbon Refrigerant~True Standard Look Version 01

True

STANDARD FEATURES

DESIGN

- True's commitment to using the highest quality materials and oversized refrigeration systems provides the user with colder product temperatures, and lower utility costs in an attractive merchandiser that brilliantly displays packaged food and beverages.

REFRIGERATION SYSTEM

- Factory engineered, self-contained, capillary tube system using environmentally friendly R290 hydrocarbon refrigerant that has zero (0) ozone depletion potential (ODP), & three (3) global warming potential (GWP).
- High capacity, factory balanced refrigeration system that maintains cabinet temperatures of 33°F to 38°F (5°C to 3.3°C) for the best in food preservation.
- State of the art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies and move a more consistent volume of air which produces less heat, reduces energy consumption and provides greater motor reliability.
- Bottom mounted condensing unit positioned for easy maintenance. "No stoop" lower shelf maximizes visibility by raising merchandised product to higher level.

CABINET CONSTRUCTION

- Exterior - non-peel or chip black powder coated cold rolled steel; durable and permanent.
- Interior - attractive, white aluminum liner with stainless steel floor.

- Insulation - entire cabinet structure is foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- Welded, heavy duty steel frame rail, black powder coated for corrosion protection.
- Frame rail fitted with leg levelers.

DOORS

- Double pane thermal insulated glass swing doors. Black powder coated frames.
- Each door fitted with 12" (305 mm) long extruded handle.
- Self closing doors. Positive seal, torsion type closure system.
- Magnetic door gaskets of one piece construction, removable without tools for ease of cleaning.

SHELVING

- Twelve (12) adjustable, heavy duty PVC coated wire shelves 24 1/8" L x 20 3/4" D (613 mm x 528 mm). Four (4) chrome plated shelf clips included per shelf.
- Shelf support pilasters made of same material as cabinet interior; shelves are adjustable on 1/2" (13 mm) increments.

LIGHTING

- LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.

MODEL FEATURES

- Evaporator is epoxy coated to eliminate the potential of corrosion.
- See our website www.truemfg.com for latest color and sign offerings.

- Convenient clean-out drain built in cabinet floor.
- Listed under NSF/ANSI Standard 7 for the storage and/or display of packaged or bottled product.

ELECTRICAL

- Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.




115/60/1
NEMA-5-15R

OPTIONAL FEATURES/ACCESSORIES


Upcharge and lead times may apply.

- ☐ White exterior.
- ☐ Stainless steel exterior.
- ☐ Black aluminum interior liner with black shelving.
- ☐ Stainless steel interior liner.
- ☐ 6" (153 mm) standard legs.
- ☐ 6" (153 mm) seismic/flanged legs.
- ☐ 2 1/2" (64 mm) diameter castors.
- ☐ 4" (102 mm) diameter castors.
- ☐ Red wine thermostat.
- ☐ White wine thermostat.
- ☐ Chocolate thermostat.
- ☐ Barrel Locks located in grill assembly (requires one per door)
- ☐ Wine racks.
- ☐ Additional shelves.
- ☐ TrueFlex gravity feed organizers.
- ☐ Pricing strips.

EXTERIOR PLAN VIEW

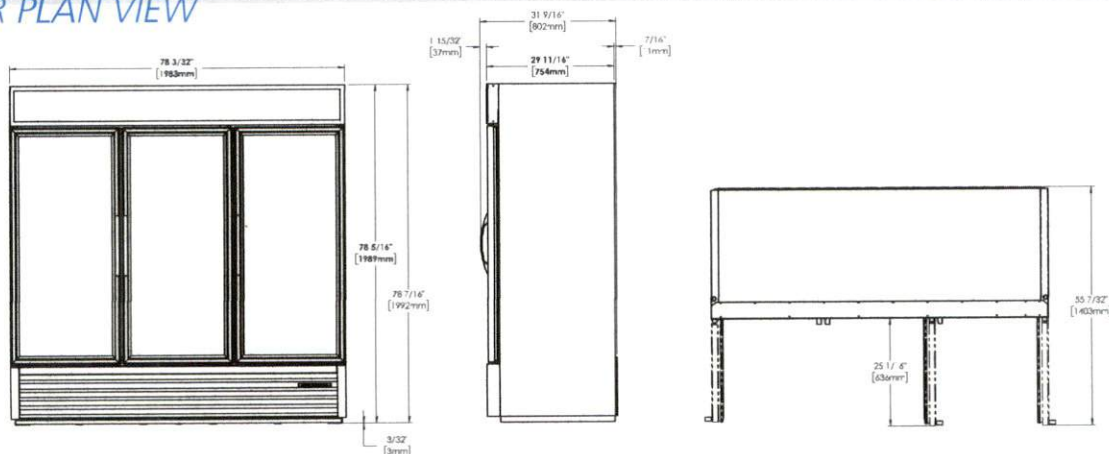

INTERIOR PLAN VIEW

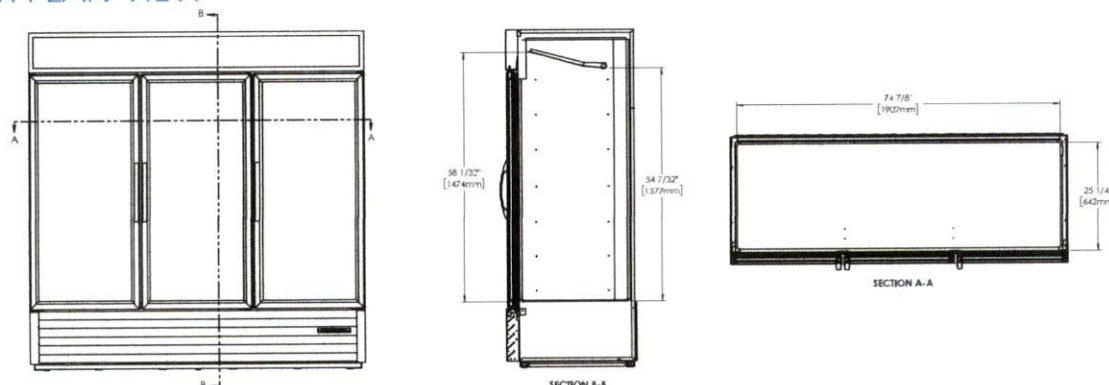


METRIC DIMENSIONS ROUNDED UP TO THE
NEAREST WHOLE MILLIMETER

SPECIFICATIONS SUBJECT TO CHANGE
WITHOUT NOTICE

Model	Elevation	Right	Plan	3D	Back
GDM-72-HC~TSL01	TFAY01E	TFAY01S	TFAY01P	TFAY013	

TRUE MANUFACTURING CO., INC.

2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400 • Fax (636)272-2408 • Toll Free (800)325-6152 • Intl. Fax# (001)636-272-7546 • www.truemfg.com

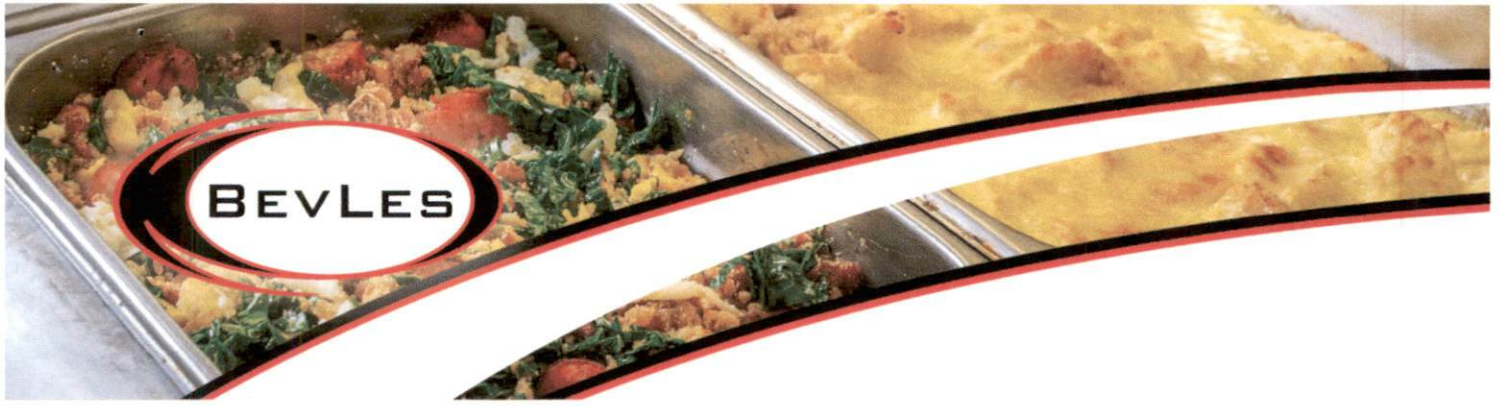

BVST Steam Tables

\$1,333.50

120V 230V



- Available in 2, 3, 4 and 5 dry wells
- Each well features a single formed Calrod heating element with independent temperature control
- Stainless steel well liners are designed to hold a variety of foods, well opening measure 12" x 20" x 8"
- Each well can be used with standard steam table pans or with optional spillage pans
- Red LED indicator light displays which wells are "ON"
- Heavy duty stainless steel tabletop with an adjustable undershelf for additional storage
- Equipped with 8" x 1/2" h polyethylene cutting board
- Galvanized steel legs with adjustable feet
- Optional accessories such as sneeze guard, casters and spillage pans are available



SKU: **BVST-2-120**

[Products](#) [Support](#)

[Resources](#) [Contact Us](#)

[Find Sales Rep/Dealers](#)

[Account](#)

120V

			Overall Dimensions (W x D x H)		Ship Weight		Electrical	
Model	Pan Wells	Plug	Inches	Millimeters	Pounds	Kilos	Volts	Watts
BVST-2-120	2	NEMA 5-15	30 x 22.5 x 34	762 x 572 x 864	95	43	120	1000
BVST-3-120	3	NEMA 5-15	44 x 22.5 x 34	1118 x 572 x 864	128	58	120	1500
BVST-4-120	4	NEMA 5-30	58 x 22.5 x 34	1473 x 572 x 864	160	73	120	2000

230V

			Overall Dimensions (W x D x H)		Ship Weight		Electrical	
Model	Pan Wells	Plug	Inches	Millimeters	Pounds	Kilos	Volts	Watts
BVST-2-240	2	NEMA 6-20	30 x 22.5 x 34	762 x 572 x 864	95	43	208-230	1500/2000
BVST-3-240	3	NEMA 6-20	44 x 22.5 x 34	1118 x 572 x 864	128	58	208-230	2250/3000
BVST-4-240	4	NEMA 6-30	58 x 22.5 x 34	1473 x 572 x 864	160	73	208-230	3000/4000
BVST-5-240	5	NEMA 6-30	72 x 22.5 x 34	1828 x 572 x 864	197	89	208-230	3750/5000

[Menu](#)

[Resources](#)

[Support](#)

[Contact Us](#)

[Products](#)

Heated Holding Cabinets

Roast & Hold Ovens & Smokers

PICA Proofing and Holding Cabinets

PHC Proofing and Holding Cabinets

HPC Proofing and Holding Cabinets

Steam Tables

Follow Us

Information

About Us

Where to Buy

CCPA

California AB1200

Contact Us

Factory:

1525 East Lake Road, Erie, PA 16511

Toll Free: 1-833-537-3307

Fax: 814-455-6336

Corporate:

3355 Enterprise Avenue, Suite 160, Weston, FL 33331

Phone: 954-202-7419

Fax: 954-202-7337

BevLes

Contact us · ToS · © 2025 BevLes





"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

Standard Top Sandwich Prep Tables

Standard Features

- Stainless steel exterior & interior
- Rear mount compressor with environmentally friendly R290 refrigerant
- Concentrated airflow design for even distribution of airflow around pans. Unmatched cabinet airflow design
- Electronic Temperature Controller
- Removable stainless steel pan liner
- Maintains temperatures between 35°F – 38°F
- Locking divider bars
- Pre-installed 6" deep poly pans
- 9-1/4" cutting board
- Recessed door handle(s)
- Self-closing door(s) with stay open feature
- Magnetic door gasket(s) standard for positive door seal
- One(1) pre-installed shelf per section
- Pre-installed casters

Optional Accessories

- Double overshelf for 27", 36", 48", 60" and 72" models
- Part # 82021902 - 12" cross bar
- Night covers




Models	Dimensions	Weight Capacity (lb)
MROS-2RE	12 1/2 x 27	150
MROS-3RE	12 1/2 x 36	170
MROS-4RE	12 1/2 x 48	200
MROS-5RE	12 1/2 x 60	230
MROS-6RE	12 1/2 x 72	250

For the best results of food preservation we recommend setting your refrigerator between 35°F to 38 °F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.

MODELS:

MSF8301GR / MSF3610GR
MSF8302GR / MSF8303GR / MSF8304GR



MSF8301GR



MSF3610GR



MSF8302GR



MSF8303GR



MSF8304GR



2 YEAR PARTS AND LABOR WARRANTY
5 YEAR COMPRESSOR PART WARRANTY



REV. 09/24



"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosausa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

280 lb Ice Machine

MODELS:

YR280-AP-161

Standard Features

- Up to 283 lb production ice machine (per 24 hrs)
- Built-in storage capacity of 88 lb (under counters)
- Durable stainless steel exterior
- Slanted blue plastic bin door
- Ice scoop included
- Height includes leg levelers
- Air cooled condenser
- Removable air filter
- Power switch accessible without panel removal
- For freestanding or built-in applications
- Requires use of a drain
- NSF and ETL listed
- Ice dimension: 3/8" x 7/8" x 7/8"
- **Includes 3M water filter system standard**
- NEMA 5-15P plug standard



Maintenance and cleaning are not covered under warranty


All Atosa Ice machines should have the included 3M water filter system & cartridge installed. Recommended 3M cartridge replacement is recommended every 6 months. (may vary based on water quality)

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.

Half-diced cube




Inlet hose



Drain hose



Ice scooper



2 YEAR PARTS AND LABOR WARRANTY
5 YEAR COMPRESSOR PART WARRANTY



REV. 05/24



"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com


California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

SPECIFICATIONS


Model	Type	Refrigerant	Voltage (V/Hz/Ph)	Rated Current (A)	Power(W)	kWh/100 lbs Ice	Ice-making Capacity (lbs/hr)	Leg (inch)	Exterior Dimensions (inch)	Gross Weight (lbs)
YR280-AP-161	Cube ice	R290	115/60/1	7.2	704	5.97	283/24	6	23 ^{1/2} ×28 ^{1/2} ×38 ^{3/5}	187

PLAN VIEW


YR280-AP-161 Front View

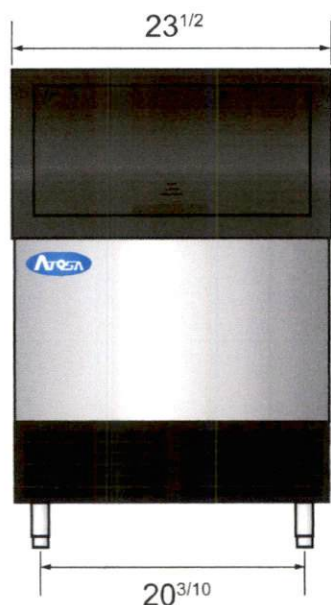


YR280-AP-161 Top View

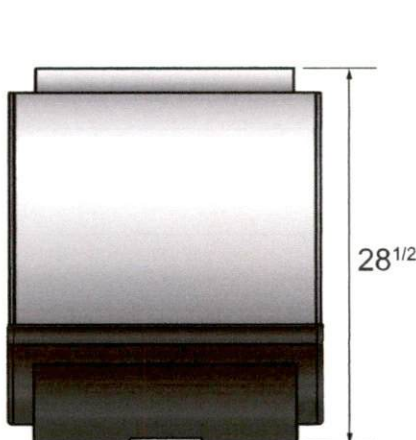

YR280-AP-161 Side View

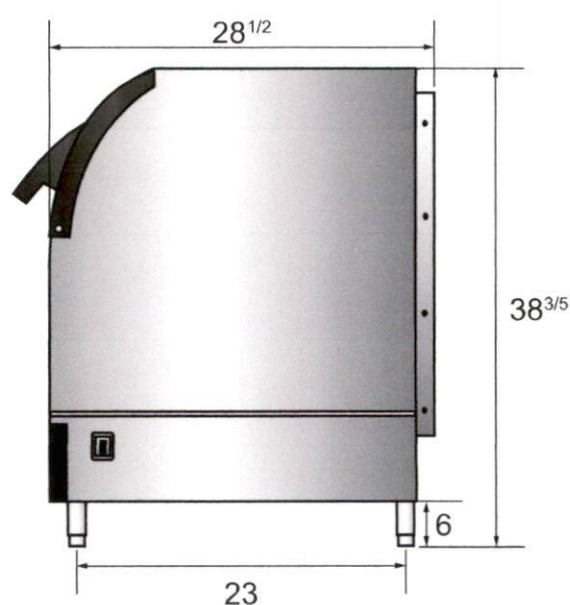

NEMA 5-15P



Model	Water Inlet	Water Outlet	Bin Drain
YR140-AP-161	3/8" "Slip" style connector / Accepts 3/8" OD Tubing	3/4" Hose Barb / Accepts 3/4" Rubber Hose (hose clamp needed)	Incorporated in Water Outlet
YR280-AP-161	3/8" "Slip" style connector / Accepts 3/8" OD Tubing	3/4" Hose Barb / Accepts 3/4" Rubber Hose (hose clamp needed)	Incorporated in Water Outlet
YR450-AP-161	3/8" "Slip" style connector / Accepts 3/8" OD Tubing	3/4" Hose Barb / Accepts 3/4" Rubber Hose (hose clamp needed)	3/4" Hose Barb / Accepts 3/4" Rubber Hose (hose clamp needed)
YR450S-AP-161	3/8" "Slip" style connector / Accepts 3/8" OD Tubing	3/4" Hose Barb / Accepts 3/4" Rubber Hose (hose clamp needed)	3/4" Hose Barb / Accepts 3/4" Rubber Hose (hose clamp needed)
YR800-AP-261	1/4" "Slip" style connector / Accepts 1/4" OD Tubing	3/4" Hose Barb / Accepts 3/4" Rubber Hose (hose clamp needed)	3/4" Hose Barb / Accepts 3/4" Rubber Hose (hose clamp needed)
HD350-AP-161	3/8" "Slip" style connector / Accepts 3/8" OD Tubing	3/4" Hose Barb / Accepts 3/4" Rubber Hose (hose clamp needed)	3/4" Hose Barb / Accepts 3/4" Rubber Hose (hose clamp needed)

Gas Ranges

(4, 6, 8 & 10 Burner models)

MODELS:

AGR-4B / AGR-6B / AGR-8B / AGR-10B

Standard Features

- Stainless steel exterior including front, back sides, kick plate, back guard and over shelf
- Heavy duty 12" X 12" removable, cast iron top grates
- Drip tray provided under burners to catch grease drippings
- 32,000 BTU top burners & 27,000 BTU oven burners
- Oven temperature range between 175°F to 550°F
- Standing pilot for open top burners
- Oven pilot with 100% safety shut off
- Enamel interior oven for easy cleaning
- Multiple position oven rack guides
- Two(2) chrome oven rack per oven standard
- Available in Natural and Propane
- 3/4" NPT rear gas connection and regulator provided
- Four(4) casters standard

Optional Accessories

- Leg part #: 301110006
- AGR-4B/AGR-8B extra oven rack part #: 301100013
- AGR-6B/AGR-10B extra oven rack part #: 301100012



AGR-4B



AGR-10B



AGR-6B



AGR-8B



1 YR WARRANTY ON ALL PARTS AND LABOR (US ONLY)




Complies to ANSI
STD Z39.1-19-2009 (2011)
Certified to CSA
STD 1.8B-2009 (2011)
Complies to NSF/ANSA STD 4



SPECIFICATIONS

Models	Gas Type	Burner Name	Total BTU B.T.U./h	Number of Burners	Valve Types	Oven Size (inch)	Hot Plates Working Area (inch)	Exterior Dimensions (inch)	Net Weight (lbs)	Gross Weight (lbs)
AGR-4B	NG	Hot plates	128,000	4	Pilot light	20×26×14	4pcs 11 ^{4/5} ×11 ^{4/5}	24×31×57 ^{3/8}	326	428
		Oven	24,000	1						
	LP	Hot plates	128,000	4						
		Oven	24,000	1						
AGR-6B	NG	Hot plates	192,000	6	Pilot light	26 ^{1/2} ×26×14	6pcs 11 ^{4/5} ×11 ^{4/5}	36×31×57 ^{3/8}	440	568
		Oven	27,000	1						
	LP	Hot plates	192,000	6						
		Oven	27,000	1						
AGR-8B	NG	Hot plates	256,000	8	Pilot light	20×26×14	8pcs 11 ^{4/5} ×11 ^{4/5}	48×31×57 ^{3/8}	607	765
		Oven	48,000	2						
	LP	Hot plates	256,000	8						
		Oven	48,000	2						
AGR-10B	NG	Hot plates	320,000	10	Pilot light	26 ^{1/2} ×26×14	10pcs 11 ^{4/5} ×11 ^{4/5}	60×31×57 ^{3/8}	732	897
		Oven	54,000	2						
	LP	Hot plates	320,000	10						
		Oven	54,000	2						

PLAN VIEW

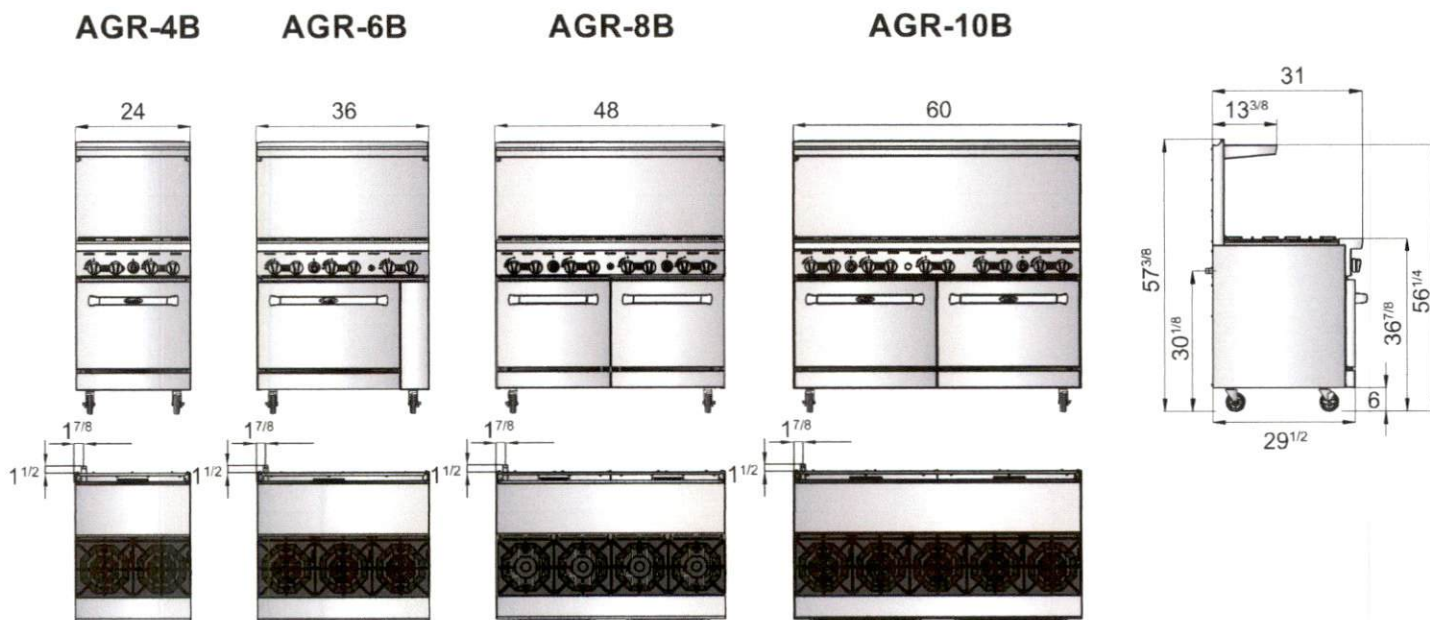

Heavy duty burners

Chrome oven rack

Stainless steel knobs





Foodservice Equipment

Job _____ Item# _____

Electric Griddles

TMGE24, TMGE36, TMGE48

Standard Features:

- Ultra smooth 5/8" thick polished steel plate.
- Available in 24", 36" and 48" widths.
- Snap action thermostat control from 150°- 450°F.
- A 4,000 watt element every 12" of cooking surface.
- Spatula wide 3-1/4" front grease trough and grease chute.
- Thermostat with positive "OFF" position.
- Stainless steel front panel, bull nose and grease drawer.
- 4-3/8" rear and side splash guards.
- 4" nickel plated steel legs.



TMGE48

Applications:

The Toastmaster Countertop Electric Griddle is the most economical and flexible Countertop Griddle in the food service industry. It offers unsurpassed performance, combining a proven control system with Toastmaster quality and durability. Available in three different sizes: 24", 36", and 48".

General Information:

Stainless steel front including top rail, with aluminized steel rear and sides. Full width stainless

steel grease trough and easy to access grease drawer. 4-3/8" rear and side splash guards.


Warranty:

Toastmaster griddles are covered by Toastmaster's one year parts and labor warranty.



Electric Griddles

TMGE24, TMGE36, TMGE48

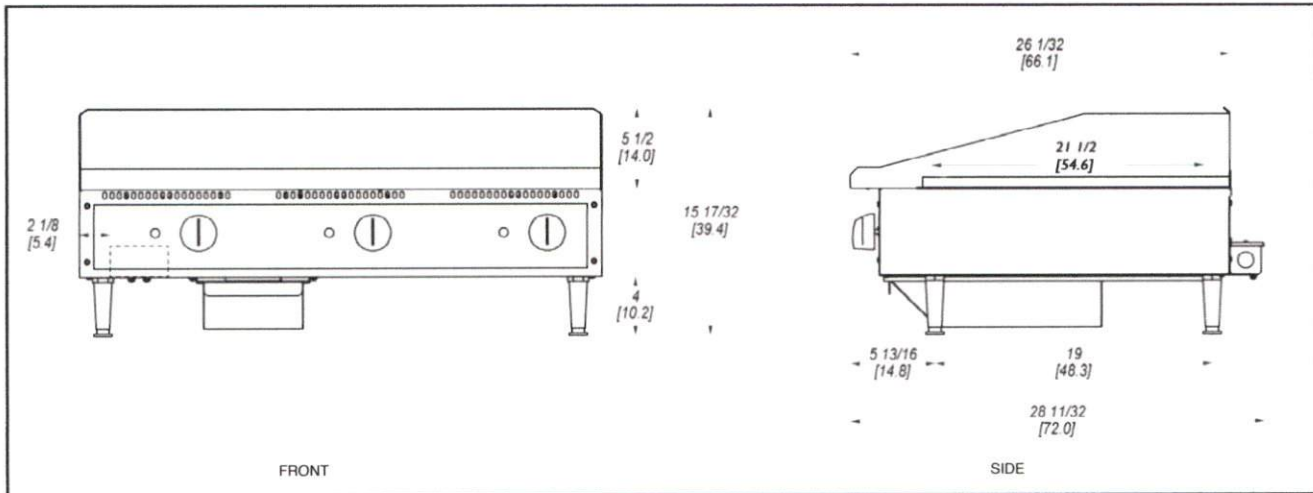

Model Number	TMGE24	TMGE36	TMGE48
Dimensions	24" W x 15-17/32" H x 27-13/16" L	36" W x 15-17/32" H x 27-13/16" L	48" W x 15-17/32" H x 27-13/16" L
Number of Controls	2	3	4
Griddle Plate Thickness	5/8"	5/8"	5/8"
Cook Zone Size	24"	36"	48"
Installed Weight (lbs.) (kg)	147 lbs. (67.0)	221 lbs. (100.5)	295 lbs. (134.1)
Shipping Weight (lbs.) (kg)	157 lbs. (71.4)	236 lbs. (107.3)	315 lbs. (143.2)

Model No.	Rated Wattage		3 Phase Loading KW Per Phase						Nominal Amps Per Line Wire							
	208V	240V	208V			240V			208V-3PH			240V-3PH			208V	240V
			X-Y	Y-Z	X-Z	X-Y	Y-Z	X-Z	X	Y	Z	X	Y	Z	1PH	1PH
TMGE24	6,008	8,000	3	3	-	4	4	-	14.4	25	14.4	16.7	28.9	16.7	28.9	33.3
TMGE36	9,012	12,000	3	3	3	4	4	4	25	25	25	28.9	28.9	28.9	-	-
TMGE48	12,016	16,000	3	3	6	4	4	8	38.2	25	38.2	44.2	28.9	44.2	57.8	66.7

Typical Specifications:

Electric griddles are constructed of stainless steel front panel and reinforced wall aluminized steel side panels. Griddle plate is 5/8" (1.6 cm) thick highly polished steel with 4-3/8" (11.1 cm) wrap-around stainless steel splash guard. Unit has a 3-1/4" (8.3cm) wide front grease trough with grease chute and 4-1/2 qt.(4.257 L) stainless steel grease drawer. Unit is heated with a 4000 watt incoloy sheath type element every 12" (30.48 cm) of griddle width and is controlled with a snap-action thermostat. Thermostat knob is protected by a stainless steel bull nose front. Units are supplied with 4" (10.16 cm) die cast nickel plated legs that have a 1-3/8" (3.5 cm) adjustment. A junction box is provided for making electrical connections. Units are listed by Underwriters Laboratories, and are UL Sanitation approved. Printed in the U.S.A.

INTENDED FOR COMMERCIAL USE ONLY. NOT FOR HOUSEHOLD USE.

TM107/1060

Toastmaster

Toastmaster, in line with its policy to continually improve its product, reserves the right to change materials or specifications without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions, or replacements for previously purchased equipment.

THE MIDDLEBY CORPORATION
THE BRAND BEHIND THE BRANDS

Toastmaster® 10 Sunnen Dr, St. Louis MO 63143 • www.toastmastercorp.com
Toll Free: 1-800-264-7827 • Telephone: 1-314-781-2777 • Fax: 1-314-781-3636

Fryers

Standard Features

- Stainless steel exterior and interior
- Welded stainless steel tank
- Heavy duty burners with a standing flame, standby pilots
- High quality millivolt thermostat (T-Stat) maintains select temperature automatically between 200°F – 400°F
- Oil cooling zone in the bottom of the tank captures food particles and extends oil life
- Safety valve with an automatic voltage stabilizing function
- Self-reset high temperature limiting device
- Two (2) nickel plated baskets with coated handles standard
- Basket hanger standard
- Available in Natural & Propane gas
- 3/4" NPT rear gas connection and regulator
- Four (4) casters standard

Optional Accessories

- Leg kit part #: 301110006
- Fryer splash guard part #: 21101001047
- ATFS-35ES & ATFS-40 & ATFS-50 Fryer cover #: 21201001019
- ATFS-75 Fryer cover #: 21201003015
- Joiner strip #: 21101001046
- Mesh fryer screen for ATFS-35ES/40/50: R06018000069
- Mesh fryer screen for ATFS-75: R06018000070

MODELS:

ATFS-35ES / ATFS-40 / ATFS-50 / ATFS-75



ATFS-35ES



ATFS-40



ATFS-50



ATFS-75



1 YEAR PARTS AND LABOR WARRANTY



ATFS-35ES



Compliance with ANSI
STD A98.119-2009 (2011)
Certified to CSA
STD 1.89-2009 (2011)
Compliance to NSF ANSI 3ET-1A




REV. 07/25

"WE MAKE THE KITCHEN BETTER!"

SPECIFICATIONS

Models	Burners and Control Method	Gas Type	Intake-tube Pressusre (in.W.C.)	Per BTU B.T.U./h	Total BTU B.T.U./h	Regulator	Basket Dimensions (inch)	Exterior Dimensions (inch)	Net Weight (lbs)	Gross Weight (lbs)
ATFS-35ES	3 Burners, Independent Manual Control	NG	4	20,000	60,000	4" w.c.	13 ^{3/10} ×6 ^{1/2} ×5 ^{9/10}	15 ^{3/5} ×30 ^{1/10} ×44 ^{2/5}	133	166
		LP	10	20,000	60,000	10" w.c.				
ATFS-40	3 Burners, Independent Manual Control	NG	4	34,000	102,000	4" w.c.	13 ^{3/10} ×6 ^{1/2} ×5 ^{9/10}	15 ^{3/5} ×30 ^{1/10} ×44 ^{2/5}	131	160
		LP	10	30,000	90,000	10" w.c.				
ATFS-50	4 Burners, Independent Manual Control	NG	4	34,000	136,000	4" w.c.	13 ^{3/10} ×6 ^{1/2} ×5 ^{9/10}	15 ^{3/5} ×30 ^{1/10} ×44 ^{2/5}	143	171
		LP	10	30,000	120,000	10" w.c.				
ATFS-75	5 Burners, Independent Manual Control	NG	4	34,000	170,000	4" w.c.	13 ^{3/10} ×9 ^{1/2} ×5 ^{9/10}	21 ^{1/10} ×30 ^{1/10} ×44 ^{2/5}	168	200
		LP	10	30,000	150,000	10" w.c.				


PLAN VIEW

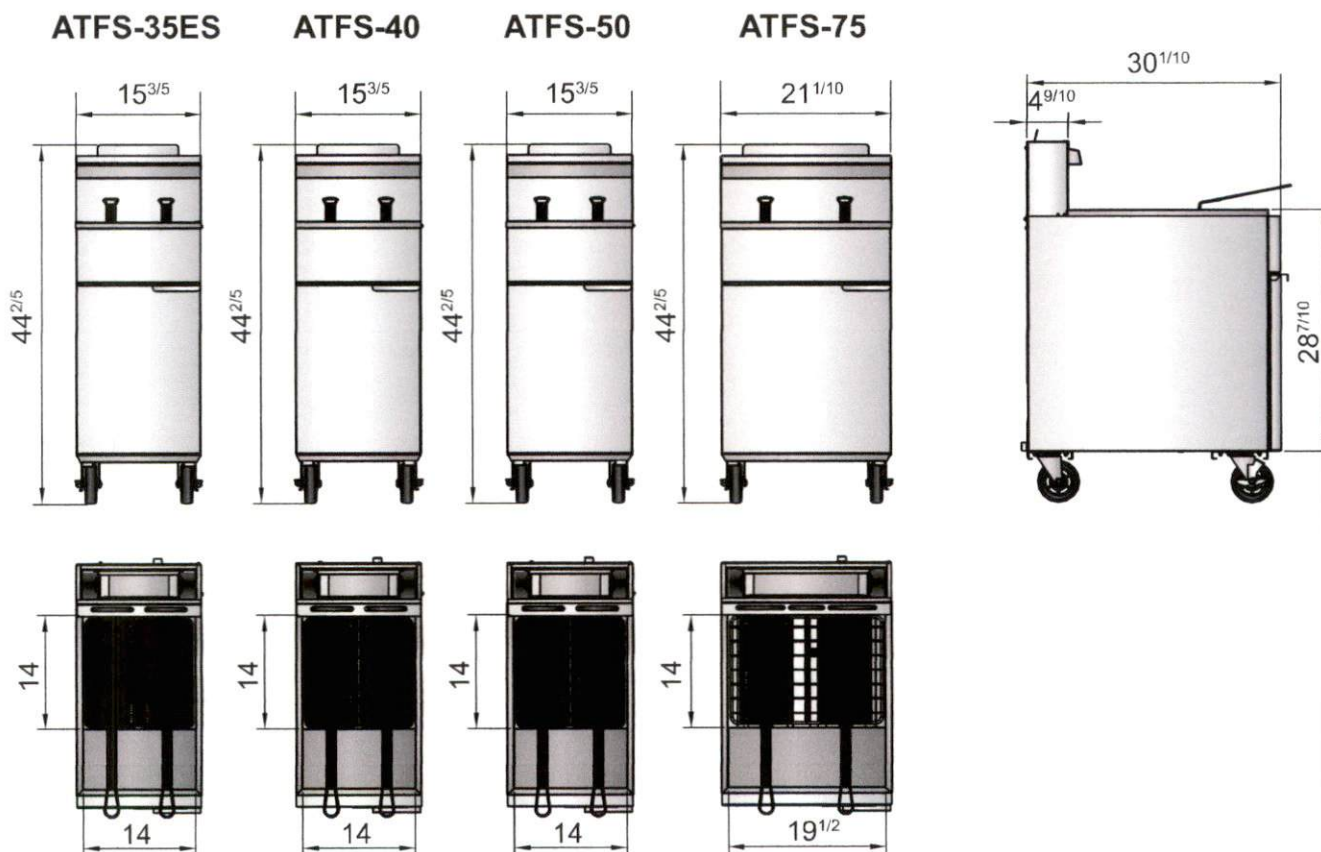

Stainless steel tank




Baskets



Basket hanger



Temperature limiting device



ECONOMY GAS CHICKEN ROTISSERIES

METAL
SUPREME

MADE IN VENEZUELA



FRG2VE



FRG6VE

- Tempered glasses
- Stainless Steel Hooks
- 2 stainless steel grease drawers
- Front, sided and inside chamber stainless steel construction
- Includes legs (10 chickens model)
- Includes 3" Casters (20 and 30 chickens models)
- Independent motor per skewer
- Motor rotation speed 2 RPM
- Capacity 5 chickens per skewers
- Cooking time 50 to 60 min (calculates with 4 lbs chickens)

	GAS				
	FRG2VE	FRG3VE	FRG4VE	FRG6VE	FRG8VE
Chickens Capacity	10	10 (Or 1 pork leg)	20	30	40
Voltage	110v / 60 Hz / 1ph (Plug NEMA 15-5)				
Amperage	1.2 AMPS	1.8 AMPS	2.4 AMPS	3.6 AMPS	4.8 AMPS
Power	30,000 BTU		60,000 BTU	90,000 BTU	120,000 BTU
Product Dimensions	24x46x31"	24x46x31"	24x46x58"	24x46x65"	24x46x70"
Net weight	137 lbs	137 lbs	227 lbs	271 lbs	302 lbs
Shipping Dimensions	25x47x32"	25x47x31"	25x47x59"	25x47x66"	25x47x75"
Shipping weight	167 lbs	167 Lbs	267 lbs	311 lbs	376 Lbs

INSTALLATION NOTE:

At least a 5" clearance is needed on left side where controllers are located to avoid overheating.

Turbo air
REFRIGERATOR MANUFACTURER

more durable, efficient, beautiful

4184 E. Conant St.
Long Beach, CA 90808
Tel. 310-900-1000
Fax. 310-900-1077
www.turboairinc.com

Project:	
Model #:	
Item #:	
Available W/H:	Qty:
Approval:	
AIA #:	SIS #:
CSI Section 11400	

Solid Door Refrigerator

Reach-In Top Mount
M3 Series

FEATURES & BENEFITS

Model : M3R24-1-N

Self-Cleaning Condenser

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

Digital temperature control & monitor system

- Keeps food products safe by maintaining constant temperatures
- Alarms that sound when doors are not sealed shut; protect against food spoilage that originates from cold air leaks
- Early warning alarm program detects issues before malfunction occurs
- Digital display allows for easy monitoring
- Programs interpret the condition of refrigeration systems by self-diagnosis
- Rapid cool-down function (Turbo cooling)
- Automatic evaporator fan motor delays

Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

Hot gas condensate system

Through Turbo Air's creative innovation, the condensate system surfaces have been specially treated to resist corrosion. This not only increases efficiency without the risk of refrigerant leakage from corrosion, but also thoroughly prevents the overflow of condensate water.

Stainless steel exterior

The Turbo Air M3 refrigerator model boasts a stainless steel exterior (galvanized steel top, bottom and back) and AL interior with stainless steel floor. It guarantees the utmost in cleanliness and long product life. Sharp corners and edges have been rounded to reduce the risk of injury. The M3 adds a touch of style to the most refined setting.

Door pressure release device

Pressure relief doors are designed to eliminate vacuum pressure and allow easy, instant door opening.

Field reversible door hinge

LED interior lighting

Adjustable, heavy duty, PE (polyethylene) coated wire shelves

High-density polyurethane insulation


The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

Top mount compressor



Refrigerator holds 33°F ~ 38°F for the best in food preservation

Patented Self-Cleaning Condenser



This product is equipped with a fine mesh filter to the front of the condenser to catch dust, and a rotating brush that moves up and down daily to remove excess buildup outward and away.

NATURAL
Refrigerant

ETL
Intertek

ETL
Intertek

3 YEAR
WARRANTY

ENERGY STAR
Qualified

Model	Swing Door	CU./FT.	#of Shelves	HP	AMPS	Crated Weight (lbs.)	L x D x H [†] (inches)
M3R24-1-N	1	21.6	3	1/4+	2.5	270	28 3/4 x 30 3/4 x 78

Solid Door Refrigerator

Reach-In Top Mount
M3 Series

Model : M3R24-1-N

ELECTRICAL DATA	
Voltage	115/60/1
Plug Type	 NEMA 5-15P
Full Load Amperes	2.5
Compressor HP	1/4+
Feed Wires with Ground	3
Cord Length (ft.)	9
Refrigerant	R-290
DIMENSIONAL DATA	
# of Doors	1
# of Racks Accepted	1
Net Capacity (cu. ft.)	21.6
Ext. Length Overall (in.)	28 3/4 (730mm)
Ext. Depth Overall (in.)*	30 3/4 (780mm)
Ext. Height Overall (in.)†	78 (1981mm)
Int. Length Overall (in.)	24 3/4 (629mm)
Int. Depth Overall (in.)	26 1/2 (675mm)
Int. Height Overall (in.)	54 1/2 (1378mm)
# of Shelves	3
Shelf Size (L x D) (in.)	24 x 23 1/2
Gross Weight (lbs.)	270

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 2" for rear condensate enclosure.

† Height does not include 5" for caster height.

- **WARRANTY :** 5 Year Parts and Labor Warranty
7 Year Compressor Warranty

■ STANDARD FEATURES


- Anti-corrosion coated evaporator
- Self-contained system
- 4" dia. swivel casters with locks on the front set
- Door locks
- Magnetic door gaskets
- Solid and sturdy grille design

■ OPTIONAL ACCESSORIES


- 5" caster, 1/2" diameter & 13 TPI: M726500100 (non-brake), M726500200 (w/ brake)
- 6" stainless steel leg: 30221M0600
- Additional PE coated wire shelf: G2F0800100
- Half door bun tray rack: TSP-2224 (each holds up to six 18"L x 26"D sheet pans)
- Full door bun tray rack: TSP-2250 (each holds up to fifteen 18"L x 26"D sheet pans)

PLAN VIEW

(unit : inch)

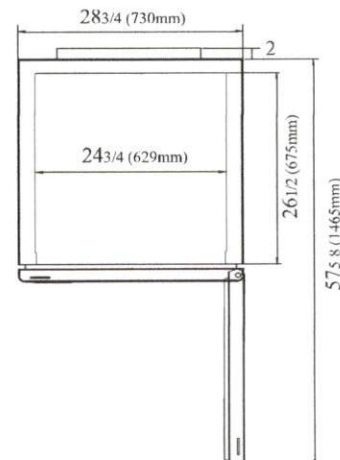

TOP VIEW

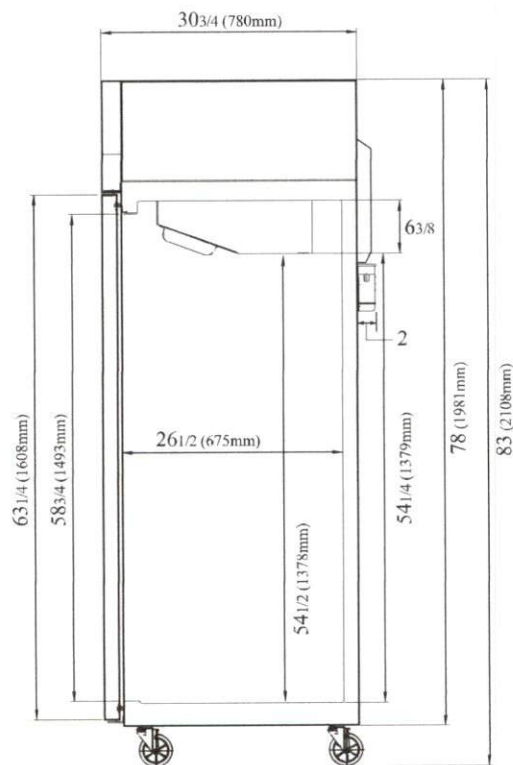

SIDE VIEW

Ver.20230119

NATURAL
Refrigerant



ENERGY STAR®
Qualified

- Turbo Air : 800-627-0032 ■ GK : 800-500-3519
- Warranty : 800-381-7770 ■ AC : 888-900-1002

TURBO AIR REFRIGERATOR MANUFACTURER
Turbo air

GERMAN
KNIFE

RADIANCE

TURBO AIR REFRIGERATOR MANUFACTURER
Turbo air

Texaking

Continued product development may necessitate specification changes without notice.



EF1A-FS/EF2A-FS

One and Two Section Full Stainless Freezer

EF1A-FS/EF2A-FS

08/17/20


Item # 13562

W x D x H

27" x 29.63" x 81.63"
(including 4" casters)

W x D x H

54.38" x 29.63" x 81.63"
(including 4" casters)

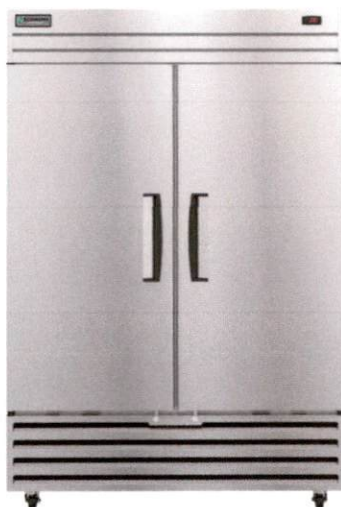

Item #: _____

Project: _____

Qty: _____

AIA#: _____

Features

- Energy efficient interior LED light
- Environmentally friendly R290 hydrocarbon refrigerant
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Self-closing door(s) is field reversible
- Stainless steel exterior door(s) come standard with lock(s)
- Stainless steel interior floor with aluminum sides, rear, and top
- Time initiated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 3 per section. 105 lbs. capacity
- Aluminum shelf supports
- Standard with 4" casters (two with brakes)
- 9 ft. cord and plug
- Container Qty:
ER1A-FS: 47
ER2A-FS: 28



Dimensions / Capacity

Interior Storage Capacity (CF) (AHAM)

Overall Width x Depth

Height (including 4" casters)

Door Opening (W x H)

Depth with Door Open at 90°

Adjustable Shelves

Shelf Dimensions (W x D)

Crated Shipping Weight

Crated Length x Depth x Height

One Section EF1A-FS

17.74 ft³
27" x 29.63"
81.63"
22.25" x 52.1"
55.38"
3
21.5" x 23.1"
279 lbs
31.5" x 28.75" x 84"

Two Section EF2A-FS

38.54 ft³
54.38" x 29.63"
81.63"
22.9" x 52.1"
55.38"
6
24.3" x 21.7"
523 lbs
58" x 31.5" x 84"

Electrical / Refrigeration

Voltage

HACR Breaker

Electrical Connection (NEMA)

Voltage Range

Ambient Temp. Range

Control Setpoint Range

Amperage

Energy Consumption (kWh/day) @ASHRAE

Approx. Nominal Compress. BTU/HR (HP)

Refrigerant / Charge Amount (oz.)

One Section EF1A-FS

115/60/1
15.0 Amps
5-15P
103-127
45° to 100°F
-5° to 5°F
3.2
4.62
1399(1/3HP)
R290 / (3.5oz)

Two Section EF2A-FS

115/60/1
15.0 Amps
5-15P
103-127
45° to 100°F
-5° to 5°F
4.7
8.8
2074(1/2HP)
R290 / (4.2oz)

Options

Additional epoxy shelves

☐ HS-5511(1 section)

☐ HS-5512 (2 section)

Warranty

* 2 Year - Parts and Labor on entire machine.

5 Year - Parts on Compressor

Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact

factory for warranty in other countries.



EF1A-FS/EF2A-FS


One and Two Section Full Stainless Freezer

EF1A-FS/EF2A-FS


08/17/20

Item # 13562


FRONT VIEW

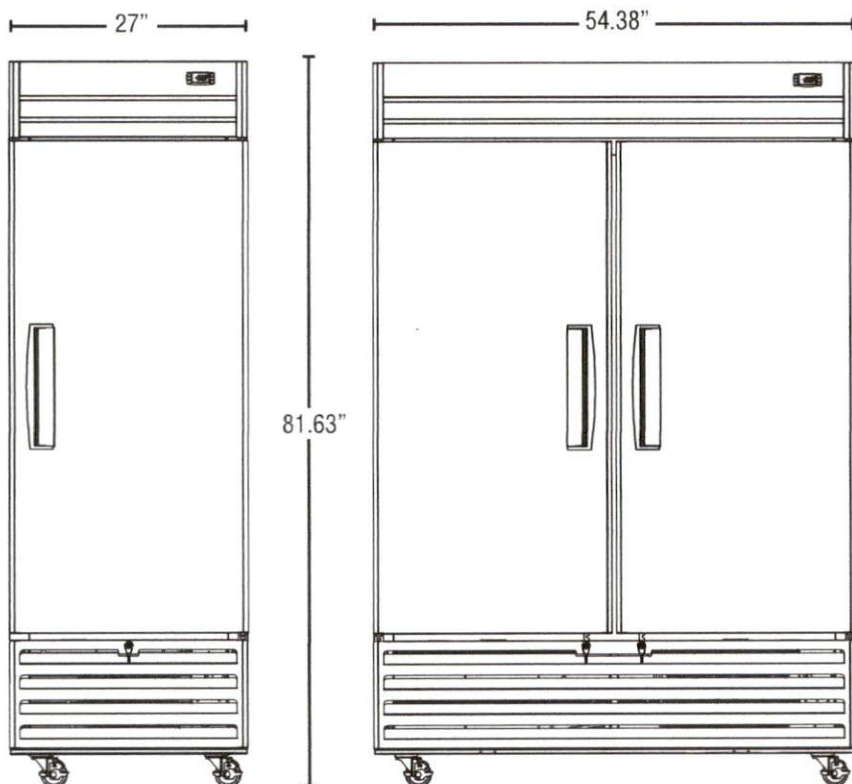

SIDE VIEW

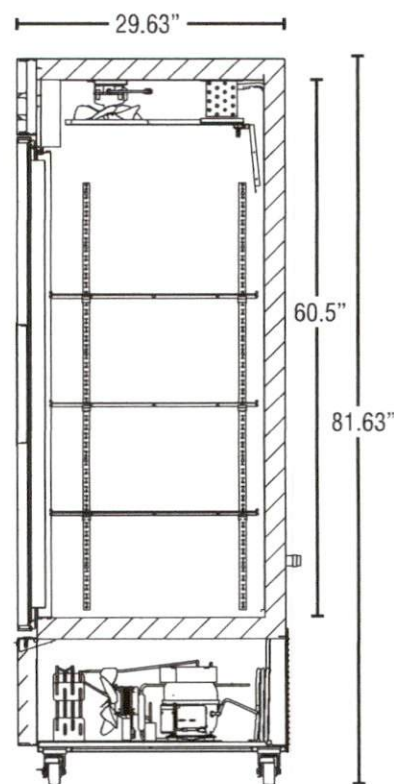

PLAN VIEW

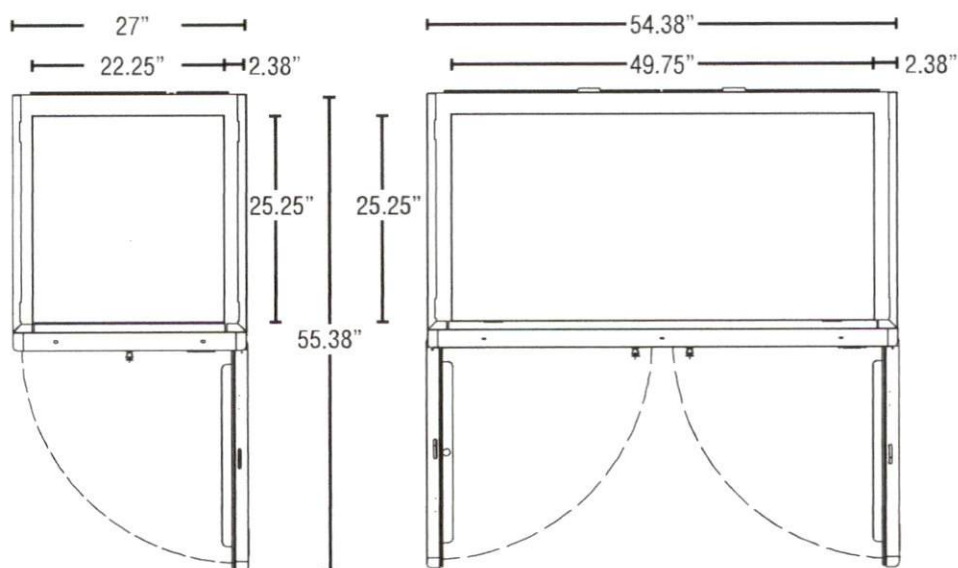



CLASSIC

1 or 2 masa bulks



Celorio stirrer with food grade stainless steel tray.

Celorio mixer with aluminum hopper (1 package).

[Request your quote here!](#)

Technical Data	
Models	1 and 2 bulks of 40kg and 80kg
Engine	220 V-60Hz 2Hp Three-phase
Height	0.95m
Length	0.96m
Width	0.93m

[Privacy](#) - [Terms](#)



Contáctanos



"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com


California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

SPECIFICATIONS


Models	Door	Capacity (Cu.Ft.)	Shelves	Casters (inch)	Amps (A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior Dimensions (inch)	Net Weight (lb)	Gross Weight (lb)
MSF8301GR	1	7.2	1	2	2.3	115/60/1	1/7	R290	27 ^{1/2} ×30×41 ^{3/8}	159	196
MSF3610GR	2	8.7	2	2	2.3	115/60/1	1/7	R290	36 ^{5/16} ×30×41 ^{3/8}	173	227
MSF8302GR	2	13.4	2	2	2.3	115/60/1	1/7	R290	48 ^{1/5} ×30×41 ^{3/8}	231	276
MSF8303GR	2	17.2	2	2	2.8	115/60/1	1/5	R290	60 ^{1/5} ×30×41 ^{3/8}	271	320
MSF8304GR	3	21.1	3	2	2.8	115/60/1	1/5	R290	72 ^{7/10} ×30×41 ^{3/8}	317	379

PLAN VIEW


MSF8301GR




MSF3610GR





MSF8302GR

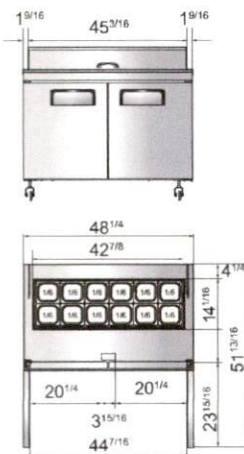



SIDE VIEW

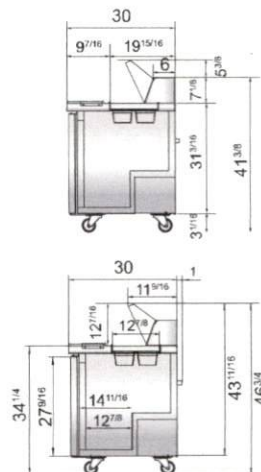

MSF8303GR



MSF8304GR




Stainless steel
pan liner



Concentrated airflow design
for even distribution
of airflow around pans



Unmatched cabinet
airflow design



Locking divider bars



NEMA 5-15P



NEMA
15A/125V



NEW 2020 Total Security

Celorio 2020 mixer, with safety gate and automatic sensor.


Completely made of food grade stainless steel and long-lasting bearings.

[Request your quote here!](#)


Technical Data	
Models	2 bulks of 80kg
Engine	220 V-60Hz 2Hp Three-phase
Height	1.22m
Length	1.18m
Width	1.12m

★ (Opcional) tablero de control y timer programable.

GET TO KNOW OUR PRODUCTS

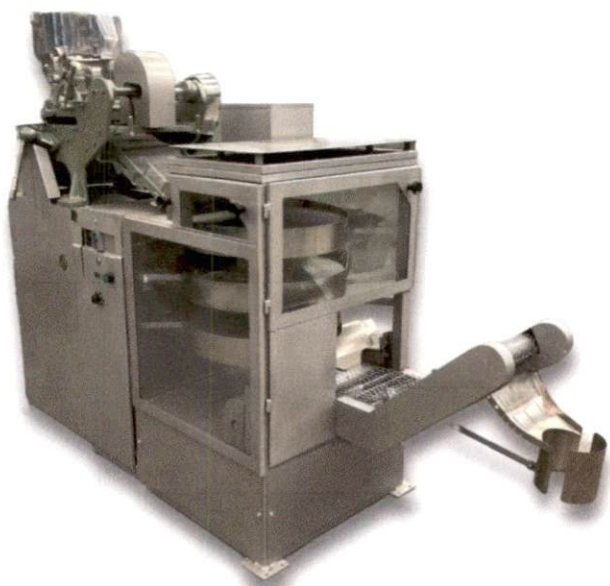


30 KS ARTESANAL

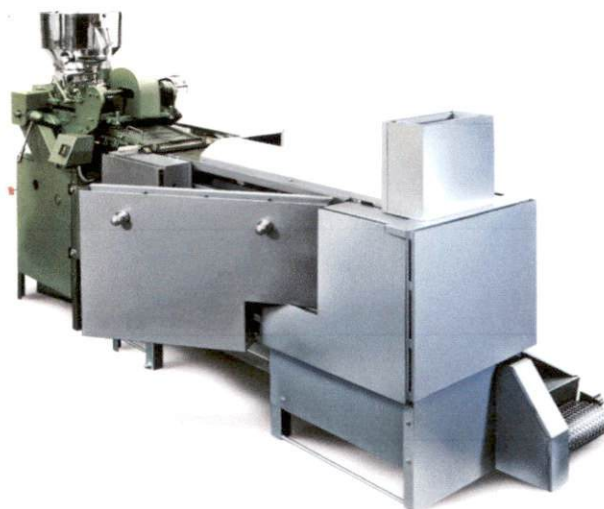


70 KS




100KS Classic

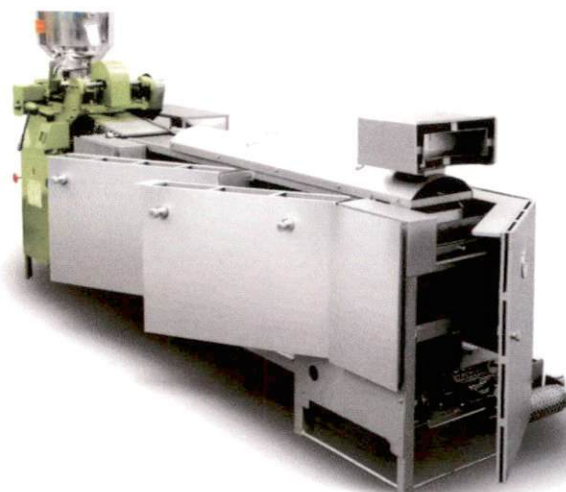

100KS 4 Doors

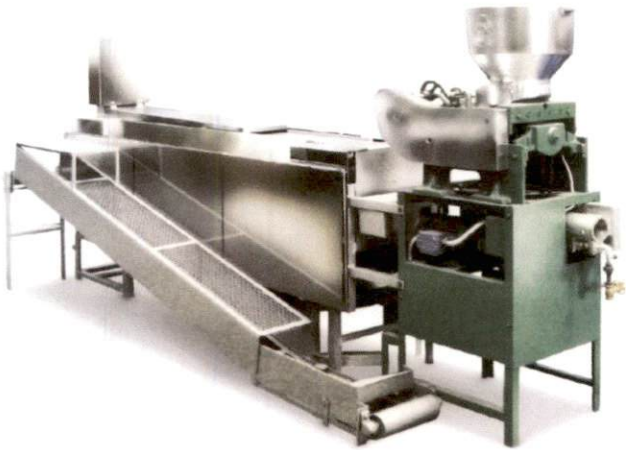


130 KS

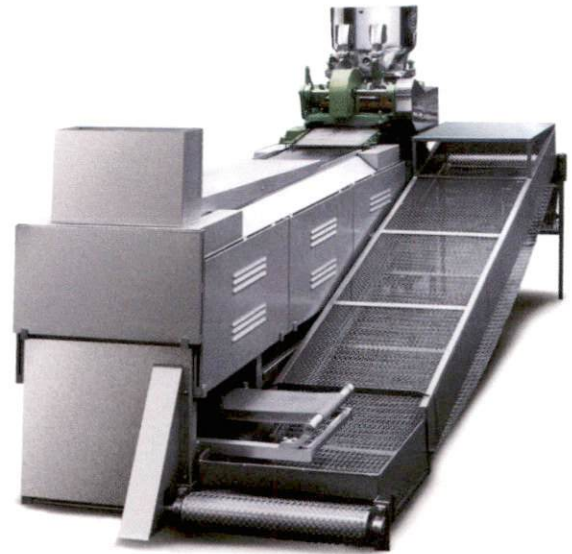

200 KS



100 KX

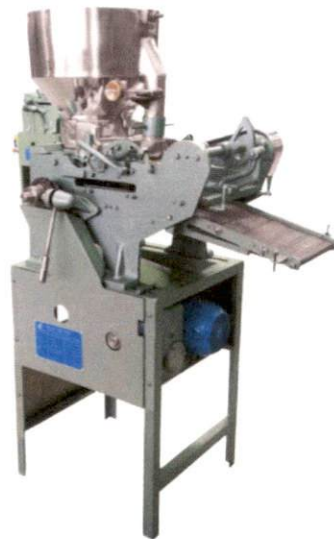

Restaurant



Masa Stirrer



Cooling Rack



Contact us

Mexico Sales

Fill out your information and our advisors will contact you as soon as possible

Name

Phone

Estate

Country

Email



Comments

Send



Ventas México (55) 55 76 20 22
Email: digicel@tortilladorascelorio.com
ventas@tortilladorascelorio.com

[Escribenos por whatsapp](#) 



[Aviso de Privacidad](#)

©2025 por Tortilladoras Celorio.