

3:00

No. 2221

IMPROVEMENT PERMIT

No Laundry Services

Rest Home

Without Laundry

As it ordained by the Harnett County Board of Health as follows:
 III, Item B. "No person shall begin construction of any building at which a septic tank system is to be used for disposal of sewage without first obtaining a written permit from the Harnett County Health Department."

Name: (owner) Jerry Johnson (Johnson Better Care) New Installation Septic Tank
 Property Location: Hwy 301 N across from Mary Stewart School Repairs Nitrification Line

Number of Bedrooms Proposed: 10 bed addition Dish Washer Garbage Disposal
 Lot Size: _____ Water Supply: Well City Community
 Distance From Well?

Above information certified by: Application

Following is the minimum specifications for sewage disposal system on above captioned property. Subject to final approval.

Kind of Material for Tank: Concrete Other pump tank 1200 gallons

Size of Tank: Capacity 1200 Gallons


Subsurface No. of Drainage Field Ditches 5 Exact Length of each Ditch 100 Ft. Width of Ditches 3 Depth of Ditches 22 Inches

Date: 5/2/89

Void After 3 Years

Signed: Mike Eaker
 (SANITARIAN)

⑥ Pump to produce 70gpm
 ⑦ Total Dynamic Head needs to be determined by contractor.

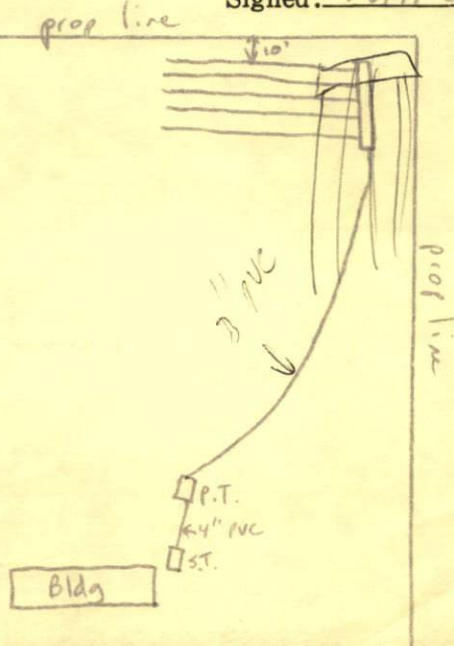

- ① 4" Sch. 80 PVC Manifold to be installed level
- ② 10" taps off Manifold
- ③ 9 ft centers between taps
- ④ High water alarm and floats to be installed on separate circuit
- ⑤ Pump and floats to Harnett Co. Specs.

Bldg