

IMPROVEMENT PERMIT

Be it ordained by the Harnett County Board of Health as follows: Section III, Item B. "No person shall begin construction of any building at which a septic tank system is to be used for disposal of sewage without first obtaining a written permit from the Harnett County Health Department".

Name: (owner) Terry W. Nicely New Installation Septic Tank
 Property Location: Roberts Rd. Repairs Nitrification Line

Number of Bedrooms Proposed: 2 Lot Size: large

Basement with Plumbing: Garage:
 Water Supply: Well Public Community

Distance From Well: 50+ ft.

Following is the minimum specifications for sewage disposal system on above captioned property. Subject to final approval.

Type of system: Conventional Other _____

Size of tank: Septic Tank: 1000 gallons Pump Tank: _____ gallons

Subsurface Drainage Field No. of ditches 3 exact length of each ditch 80 ft. width of ditches 3 ft. depth of ditches 18-22 in.

French Drain required: _____ Linear feet


This permit is subject to revocation if site plans or intended use change.

Date: 29 June, 1993

Signed: [Signature]

Environmental Health Specialist

VOID AFTER 5 YEARS

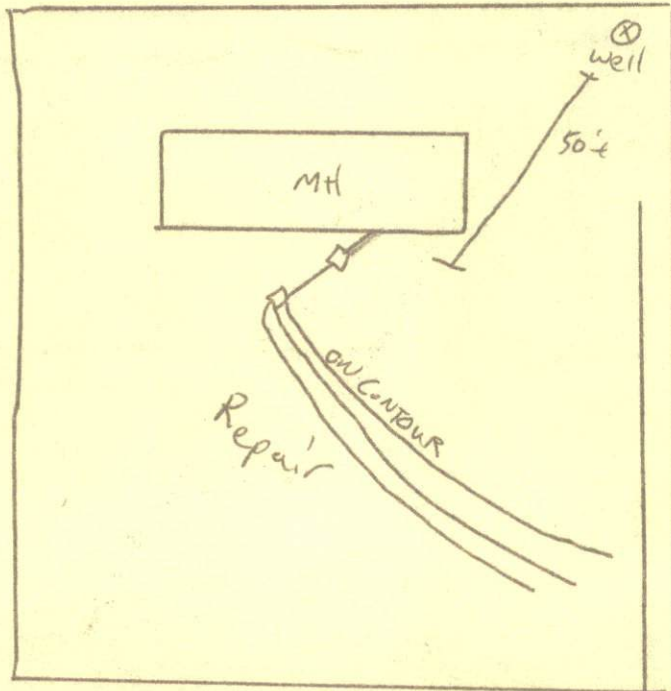

- * Maintain at least 5' from ~~dwelling~~ dwellings
- * Maintain 10' from property lines
- * Install on contours
- * Maintain max. feasible distance from well, but in no case closer than 50'
- * Do not build or drive on system or repair area

Drive to Roberts Rd ↓