

HTE# Attempt to Repair

Harnett County Department of Public Health

25257

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Michele + Dennis Shaw PROPERTY LOCATION: 421
NEW ☐ REPAIR ☒ EXPANSION ☐ SUBDIVISION _____ LOT # _____
Type of Structure: SFD Site Improvements required prior to Construction Authorization Issuance: _____
Proposed Wastewater System Type: pump to conventional
Projected Daily Flow: 600 GPD
Number of bedrooms: 5 Number of Occupants: 10 max
Basement ☒ Yes ☐ No
Pump Required: ☒ Yes ☐ No ☐ May be required based on final location and elevations of facilities
Type of Water Supply: ☐ Community ☒ Public ☐ Well Distance from well 80 feet Permit valid for: ☒ Five years
Permit conditions: _____ ☐ No expiration

Authorized State Agent: Bryan McSwain, R.S. Date: 4/7/2009 SEE ATTACHED SITE SKETCH
The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Michele + Dennis Shaw PROPERTY LOCATION: 421
SUBDIVISION _____ LOT # _____
Facility Type: SFD ☐ New ☐ Expansion ☒ Repair
Basement? ☒ Yes ☐ No Basement Fixtures? ☒ Yes ☐ No
Type of Wastewater System** _____ (Initial) Wastewater Flow: 600 GPD
(See note below, if applicable ☐) pump to conventional (Repair)
Installation Requirements/Conditions
Septic Tank Size Existing gallons
Pump Tank Size 1250 gallons
Number of trenches 1
Exact length of each trench 410 feet
Trench Spacing: 9 Feet on Center
Trenches shall be installed on contour at a
Soil Cover: 6-8 inches
Maximum Trench Depth of: 20 inches (Maximum soil cover shall not exceed
(Trench bottoms shall be level to $\pm 1/4$ " 36" above the trench bottom)
in all directions)
Pump Requirements: _____ ft. TDH vs. _____ GPM
Aggregate Depth: 6 inches below pipe
2 inches above pipe
Conditions: One well to be filled in. Drain lines to be run on contour
Supply line to be 30 inches deep under drive. Water line to be rerouted 10 ft
from system

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: Bryan McSwain, R.S. Date: 4/7/2009
Construction Authorization Expiration Date: 4/7/2014


HTE# Attempt to Repair

Permit # 25257

Harnett County Department of Public Health Site Sketch

ISSUED TO: Michele Denis Shaw PROPERTY LOCATOR: 421
SUBDIVISION _____ LOT # _____

Authorized State Agent: Bryan McSwain, E.S. Date: 4/7/2009

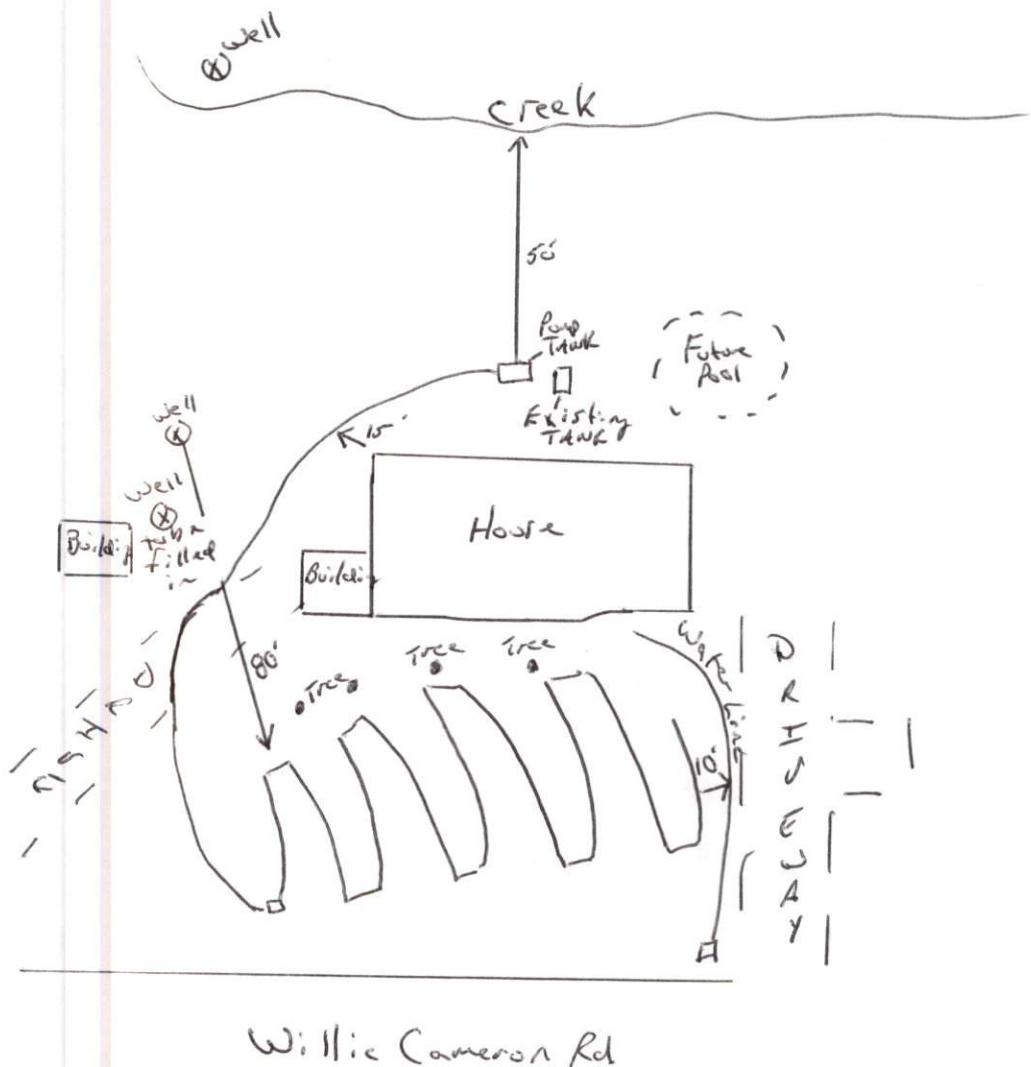

421