

HTE# RepairHarnett County Department of Public Health
Improvement Permit

25823

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Steve Murphy PROPERTY LOCATION: 421 (10721) 4215 Erwin
NEW ☐ REPAIR ☒ EXPANSION ☐ SUBDIVISION _____ LOT # _____
Type of Structure: Existing SFD Site Improvements required prior to Construction Authorization Issuance: _____
Proposed Wastewater System Type: shallow conventional
Projected Daily Flow: 480 GPD
Number of bedrooms: 4 Number of Occupants: 8 max
Basement ☐ Yes ☒ No
Pump Required: ☐ Yes ☒ No ☐ May be required based on final location and elevations of facilities
Type of Water Supply: ☐ Community ☒ Public ☐ Well Distance from well _____ feet
Permit conditions: _____ Permit valid for: ☒ Five years ☐ No expiration

Authorized State Agent: Bryan McSwain, LEHS Date: 2/15/2010 SEE ATTACHED SITE SKETCH
The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Steve Murphy PROPERTY LOCATION: 10721 4215 Erwin
SUBDIVISION _____ LOT # _____
Facility Type: _____ ☐ New ☐ Expansion ☒ Repair
Basement? ☐ Yes ☒ No Basement Fixtures? ☐ Yes ☐ No
Type of Wastewater System** _____ (Initial) Wastewater Flow: _____ GPD
(See note below, if applicable ☐)

Installation Requirements/Conditions

Septic Tank Size Existing gallons
Pump Tank Size _____ gallons
Number of trenches 5
Exact length of each trench 80 feet
Trenches shall be installed on contour at a
Maximum Trench Depth of: 12 inches
(Trench bottoms shall be level to $\pm 1/4"$ in all directions)
Trench Spacing: 9 Feet on Center
Soil Cover: 6-12 inches
(Maximum soil cover shall not exceed 36" above the trench bottom)
Pump Requirements: _____ ft. TDH vs. _____ GPM
Aggregate Depth: 6 inches below pipe
2 inches above pipe
12 inches total
Conditions: Run drainlines on contour & NO DEEPER than 12 inches. Water line must be 10 ft. from any part of septic system

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.

SEE ATTACHED SITE SKETCH

Authorized State Agent: Bryan McSwain, LEHS Date: 2/15/2010
Construction Authorization Expiration Date: 2/15/2010

HTE# REPAIR

Permit # 25823

Harnett County Department of Public Health
Site Sketch

ISSUED TO: Steve Murphy

PROPERTY LOCATON: 10721 4215 Erwin


SUBDIVISION

LOT #

Authorized State Agent: Brian McSwain, REHS

Date: 2/15/2010

* Contractor to meet on site
prior to installing system

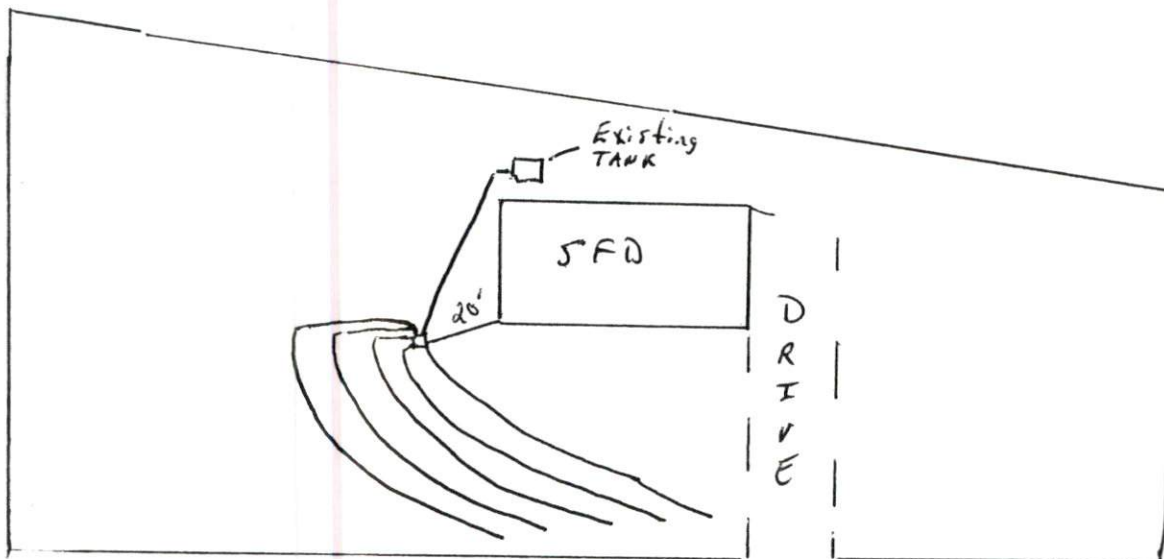

421

