

HTE# Repair

## Harnett County Department of Public Health

25821

## Improvement Permit

A building permit cannot be issued with only an Improvement Permit

PROPERTY LOCATION: Harnett Central Rd.ISSUED TO: Charles Lane

SUBDIVISION \_\_\_\_\_

LOT # \_\_\_\_\_

NEW ☐REPAIR ☒EXPANSION ☐

Site Improvements required prior to Construction Authorization Issuance: \_\_\_\_\_

Type of Structure: SFDProposed Wastewater System Type: pump to 25% reductionProjected Daily Flow: 360 GPDNumber of bedrooms: 3 Number of Occupants: 6 maxBasement ☐ Yes ☒ NoPump Required: ☒ Yes ☐ No ☐ May be required based on final location and elevations of facilitiesType of Water Supply: ☐ Community ☒ Public ☐ Well Distance from well 80 feet

Permit valid for:

☒ Five years☐ No expiration

Permit conditions: \_\_\_\_\_

Authorized State Agent: Bryan McSwain, R.E.H.S. Date: 2/12/2010

SEE ATTACHED SITE SKETCH

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

## Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Charles LanePROPERTY LOCATION: Harnett Central Rd.

SUBDIVISION \_\_\_\_\_

LOT # \_\_\_\_\_

Facility Type: SFD☐ New☐ Expansion☒ RepairBasement? ☐ Yes ☒ NoBasement Fixtures? ☐ Yes ☐ No

Type of Wastewater System\*\*

(Initial) Wastewater Flow: 360 GPD(See note below, if applicable ☐)Pump to 25% Reduction (Repair)

## Installation Requirements/Conditions

Septic Tank Size Existing gallonsPump Tank Size 1000 gallonsNumber of trenches 4Exact length of each trench 75 feet

Trenches shall be installed on contour at a

Maximum Trench Depth of: 18-24 inches(Trench bottoms shall be level to  $\pm 1/4"$ 

in all directions)

Trench Spacing: 9 Feet on CenterSoil Cover: 12 inches

(Maximum soil cover shall not exceed 36" above the trench bottom)

Pump Requirements: \_\_\_\_\_ ft. TDH vs. \_\_\_\_\_ GPM

Conditions: Well must be abandoned, Stepdowns will be needed

Aggregate Depth: \_\_\_\_\_

\_\_\_\_\_ inches below pipe

\_\_\_\_\_ inches above pipe

\_\_\_\_\_ inches total

\*\*If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: \_\_\_\_\_

Date: \_\_\_\_\_

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This

Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.

SEE ATTACHED SITE SKETCH

Authorized State Agent: Bryan McSwain, R.E.H.S.Date: 2/12/2010Construction Authorization Expiration Date: 2/12/2015

HTE# Repair


Permit # 25821

## Harnett County Department of Public Health Site Sketch

ISSUED TO: Charles Lane PROPERTY LOCATOR: Harnett Central Rd.  
SUBDIVISION \_\_\_\_\_ LOT # \_\_\_\_\_

Authorized State Agent: Guy McSwain, RCHS Date: 2/12/2010

\*Contractor to  
meet on site  
prior to installing  
system

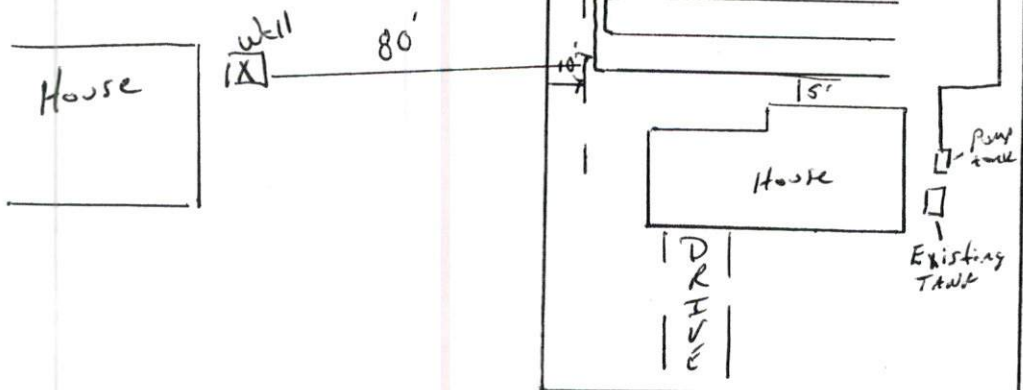

PT 2/22/2010  
ST Son