

HTE# Repair

Harnett County Department of Public Health

Improvement Permit

27650

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Sloan Griffin PROPERTY LOCATION: 2566 NC 55E
SUBDIVISION _____ LOT # _____
NEW ☐ REPAIR ☒ EXPANSION ☐ Site Improvements required prior to Construction Authorization Issuance: _____
Type of Structure: SFD
Proposed Wastewater System Type: 25% Reduction System
Projected Daily Flow: 240 GPD
Number of bedrooms: 2 Number of Occupants: 4 max
Basement ☐ Yes ☒ No
Pump Required: ☐ Yes ☒ No ☐ May be required based on final location and elevations of facilities
Type of Water Supply: ☐ Community ☒ Public ☐ Well Distance from well 50 feet Permit valid for: ☒ Five years
Permit conditions: _____ ☐ No expiration

Authorized State Agent: Bryan McSwain, REHS Date: 1/24/2014 SEE ATTACHED SITE SKETCH
The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Sloan Griffin PROPERTY LOCATION: 2566 NC 55E
SUBDIVISION _____ LOT # _____
Facility Type: SFD ☐ New ☐ Expansion ☒ Repair
Basement? ☐ Yes ☒ No Basement Fixtures? ☐ Yes ☐ No
Type of Wastewater System** _____ (Initial) Wastewater Flow: 240 GPD
(See note below, if applicable ☐) 25% Reduction System (Repair)

Installation Requirements/Conditions

Septic Tank Size Existing gallons
Pump Tank Size _____ gallons

Number of trenches 4Exact length of each trench 50 feet

Trenches shall be installed on contour at a

Maximum Trench Depth of: 18-22 inches(Trench bottoms shall be level to $\pm 1/4"$ in all directions)Trench Spacing: 9 Feet on CenterSoil Cover: 6-10 inches

(Maximum soil cover shall not exceed 36" above the trench bottom)

Pump Requirements: _____ ft. TDH vs. _____ GPM

Aggregate Depth: _____ inches below pipe

_____ inches above pipe

_____ inches total

Conditions: Replace "T" in tank. Repair liner will cross existing liner,
use solid pipe to cross existing liner

WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.
NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This

Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.

SEE ATTACHED SITE SKETCH

Authorized State Agent: Bryan McSwain, REHS Date: 1/24/2014

Construction Authorization Expiration Date: 1/24/2019


HTE# Repair

Permit # 27650

Harnett County Department of Public Health Site Sketch

ISSUED TO: Sloan Griffin PROPERTY LOCATOR: 2566 NC 55E
SUBDIVISION _____ LOT # _____

Authorized State Agent: Bryan McSwain, REHS Date: 1/24/2014

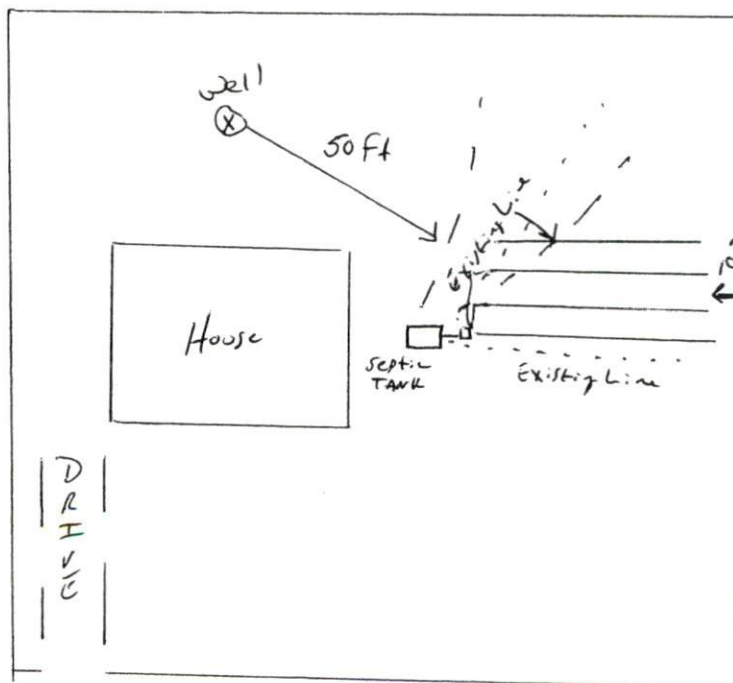

NC 55E