

Trenco
818 Soundside Rd
Edenton, NC 27932

Re: J0221-0760
Weaver/Lot 4 Atkins Farm/Harnett

The truss drawing(s) referenced below have been prepared by Truss Engineering Co. under my direct supervision based on the parameters provided by Comtech, Inc - Fayetteville.

Pages or sheets covered by this seal: E15440834 thru E15440854

My license renewal date for the state of North Carolina is December 31, 2021.

North Carolina COA: C-0844



February 24, 2021

Gilbert, Eric

IMPORTANT NOTE: The seal on these truss component designs is a certification that the engineer named is licensed in the jurisdiction(s) identified and that the designs comply with ANSI/TPI 1. These designs are based upon parameters shown (e.g., loads, supports, dimensions, shapes and design codes), which were given to MiTek or TRENCO. Any project specific information included is for MiTek's or TRENCO's customers file reference purpose only, and was not taken into account in the preparation of these designs. MiTek or TRENCO has not independently verified the applicability of the design parameters or the designs for any particular building. Before use, the building designer should verify applicability of design parameters and properly incorporate these designs into the overall building design per ANSI/TPI 1, Chapter 2.

Job	Truss	Truss Type	Qty	Ply	Weaver/Lot 4 Atkins Farm/Harnett	E15440834
J0221-0760	A1	PIGGYBACK BASE	1	1	Job Reference (optional)	

Comtech, Inc., Fayetteville, NC - 28314,

8.330 s Oct 7 2020 MiTek Industries, Inc. Wed Feb 24 09:28:05 2021 Page 1

ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-TGWzhV3aLIXuhfWaVcX1w8BVMROOHOSWRd4F6zhzJu

0-10-8 9-7-8 19-3-0 24-9-0 34-4-8 44-0-0 44-10-8
 0-10-8 9-7-8 9-7-8 5-5-15 9-7-8 9-7-8 9-7-8 0-10-8

Scale = 1:86.5

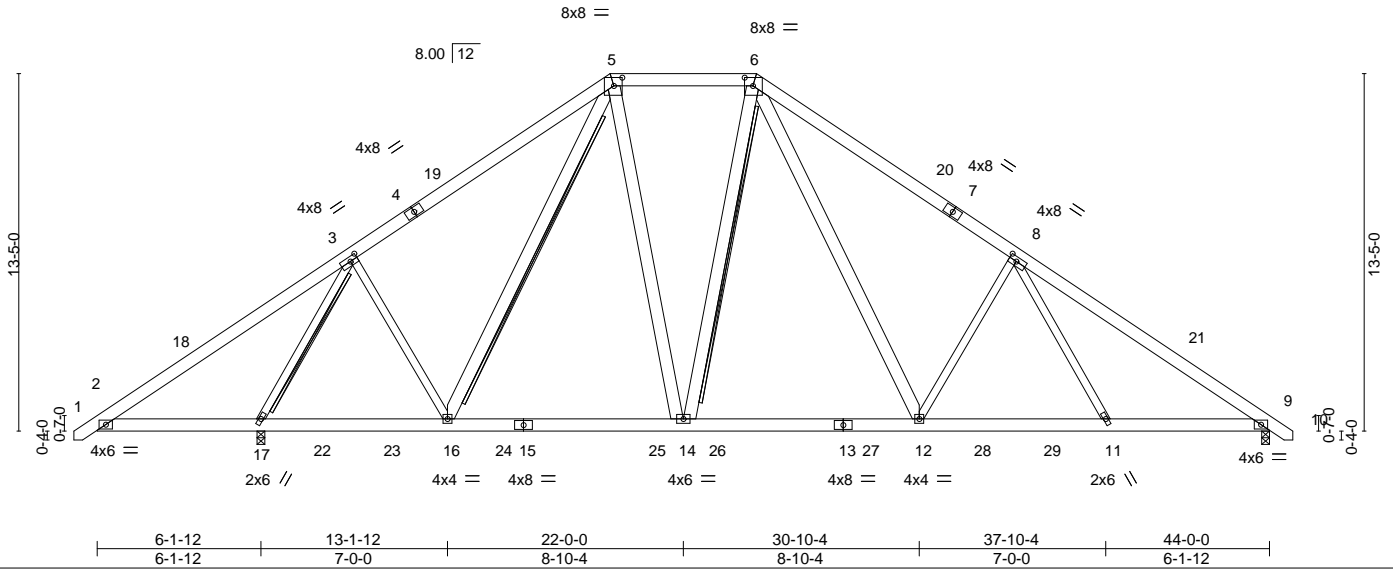


Plate Offsets (X,Y)-- [3:0-3-6,0-2-1], [5:0-3-12,0-3-12], [6:0-3-12,0-3-12], [8:0-3-6,0-2-0]

LOADING (psf)	SPACING-	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.15	TC 0.48	Vert(LL) -0.10	12-14	>999	360	MT20	244/190
TCDL 10.0	Lumber DOL 1.15	BC 0.45	Vert(CT) -0.17	12-14	>999	240		
BCLL 0.0 *	Rep Stress Incr YES	WB 0.68	Horz(CT) 0.05	9	n/a	n/a		
BCDL 10.0	Code IRC2015/TPI2014	Matrix-S	Wind(LL) 0.04	12	>999	240		
							Weight: 395 lb	FT = 20%

LUMBER-

TOP CHORD 2x6 SP No.1
 BOT CHORD 2x6 SP No.1
 WEBS 2x6 SP No.1 *Except*
 3-17,3-16,8-12,8-11: 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-7-3 oc purlins, except 2-0-0 oc purlins (6-0-0 max.): 5-6.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 6-0-0 oc bracing: 2-17.
 WEBS T-Brace: 2x4 SPF No.2 - 3-17
 2x6 SPF No.2 - 5-16, 6-14
 Fasten (2X) T and I braces to narrow edge of web with 10d (0.131"x3") nails, 6in o.c., with 3in minimum end distance.
 Brace must cover 90% of web length.

REACTIONS.

(size) 17=0-3-8, 9=0-3-8
 Max Horz 17=-320(LC 10)
 Max Uplift 17=-108(LC 12), 9=-94(LC 13)
 Max Grav 17=2255(LC 2), 9=1725(LC 20)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-405/688, 3-5=-1444/385, 5-6=-1256/435, 6-8=-2202/565, 8-9=-2628/426
 BOT CHORD 2-17=-458/455, 16-17=-181/968, 14-16=-6/1238, 12-14=0/1314, 11-12=-218/1927,
 9-11=-190/2042
 WEBS 3-17=-2295/704, 3-16=-19/655, 8-12=-744/366, 8-11=0/310, 5-16=-278/131,
 6-14=-283/186, 5-14=-75/684, 6-12=-236/1034

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCCL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2) -0-8-9 to 3-8-4, Interior(1) 3-8-4 to 19-3-14, Exterior(2) 19-3-14 to 30-10-13, Interior(1) 30-10-13 to 44-8-9 zone; cantilever left exposed ;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 9 except (jt=lb) 17=108.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
- Warning: Additional permanent and stability bracing for truss system (not part of this component design) is always required.



February 24, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



818 Soundside Road
 Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Weaver/Lot 4 Atkins Farm/Harnett	E15440835
J0221-0760	A1SE	GABLE	1	1	Job Reference (optional)	

Comtech, Inc., Fayetteville, NC - 28314,

8.330 s Oct 7 2020 MiTek Industries, Inc. Wed Feb 24 09:28:07 2021 Page 1

ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-Qfek6B4rtvncxcpvhwf76LDY4A6hsBjl_I6BJ_zhJs

0-10-8 9-7-8 19-3-0 24-9-0 34-4-8 44-0-0 44-10-8
 0-10-8 9-7-8 9-7-8 5-5-15 9-7-8 9-7-8 0-10-8

Scale = 1:86.5

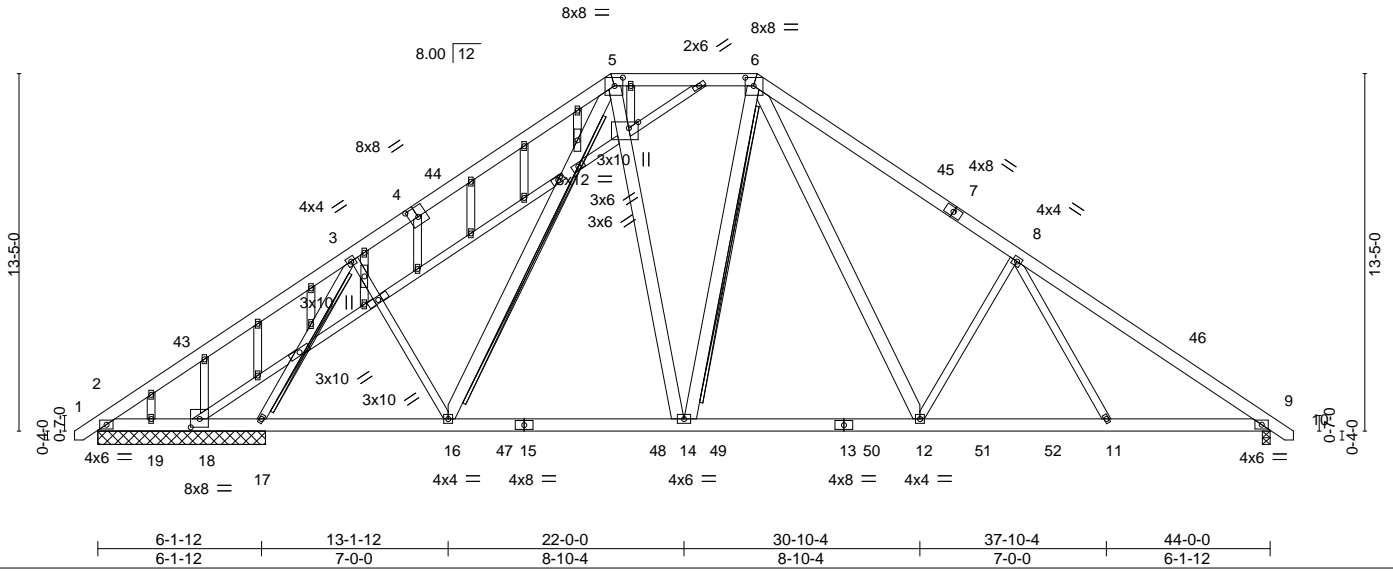


Plate Offsets (X,Y)-- [4:0-4-0,0-4-8], [5:0-3-12,0-3-12], [6:0-3-12,0-3-12], [18:0-4-0,0-3-12], [21:0-4-4,0-2-12]

LOADING (psf)	SPACING-	CSL	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.15	TC 0.42	Vert(LL) -0.10	12-14	>999	360	MT20	244/190
TCDL 10.0	Lumber DOL 1.15	BC 0.46	Vert(CT) -0.17	12-14	>999	240		
BCLL 0.0 *	Rep Stress Incr YES	WB 0.69	Horz(CT) 0.05	9	n/a	n/a		
BCDL 10.0	Code IRC2015/TPI2014	Matrix-S	Wind(LL) 0.05	12	>999	240		
							Weight: 455 lb	FT = 20%

LUMBER-

TOP CHORD 2x6 SP No.1
 BOT CHORD 2x6 SP No.1
 WEBS 2x4 SP No.2 *Except*
 6-14,5-14,5-16,6-12: 2x6 SP No.1
 OTHERS 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-6-15 oc purlins, except
 2-0-0 oc purlins (6-0-0 max.): 5-6.
 BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.
 WEBS T-Brace: 2x4 SPF No.2 - 3-17
 2x6 SPF No.2 - 6-14, 5-16
 Fasten (2X) T and I braces to narrow edge of web with 10d (0.131"x3") nails, 6in o.c., with 3in minimum end distance.
 Brace must cover 90% of web length.

REACTIONS.

All bearings 6-3-8 except (jt=length) 9=0-3-8.
 (lb) - Max Horz 2=400(LC 10)
 Max Uplift All uplift 100 lb or less at joint(s) 2 except 17=365(LC 12), 9=324(LC 13), 18=120(LC 1), 19=200(LC 12)
 Max Grav All reactions 250 lb or less at joint(s) 2, 18 except 17=1945(LC 19), 9=1735(LC 20), 19=350(LC 19)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 2-3=-170/365, 3-5=-1480/491, 5-6=-1288/476, 6-8=-2209/608, 8-9=-2635/468
 BOT CHORD 2-19=-272/297, 18-19=-272/297, 17-18=-272/297, 16-17=-226/1062, 14-16=-76/1251, 12-14=0/1309, 11-12=-266/1937, 9-11=-238/2046
 WEBS 3-17=-2059/467, 3-16=-25/580, 8-12=-743/486, 8-11=0/309, 6-14=-272/221, 5-16=-258/131, 5-14=-110/687, 6-12=-350/1055

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2) -0-8-9 to 3-8-4, Interior(1) 3-8-4 to 19-3-14, Exterior(2) 19-3-14 to 30-10-13, Interior(1) 30-10-13 to 44-8-9 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- Provide adequate drainage to prevent water ponding.
- All plates are 2x4 MT20 unless otherwise indicated.
- Gable studs spaced at 2-0-0 oc.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2 except (jt=lb) 17=365, 9=324, 18=120, 19=200.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
- Warning: Additional permanent and stability bracing for truss system (not part of this component design) is always required.



February 24, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




818 Soundside Road
 Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Weaver/Lot 4 Atkins Farm/Harnett	E15440838
J0221-0760	A4	ROOF SPECIAL	2	1	Job Reference (optional)	

Comtech, Inc, Fayetteville, NC - 28314,

8.330 s Oct 7 2020 MiTek Industries, Inc. Wed Feb 24 09:28:10 2021 Page 1

ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-qEJsID7JAq9Bo3XUN2Cikzr5LN7v3bCBgJLrwJzhzJp

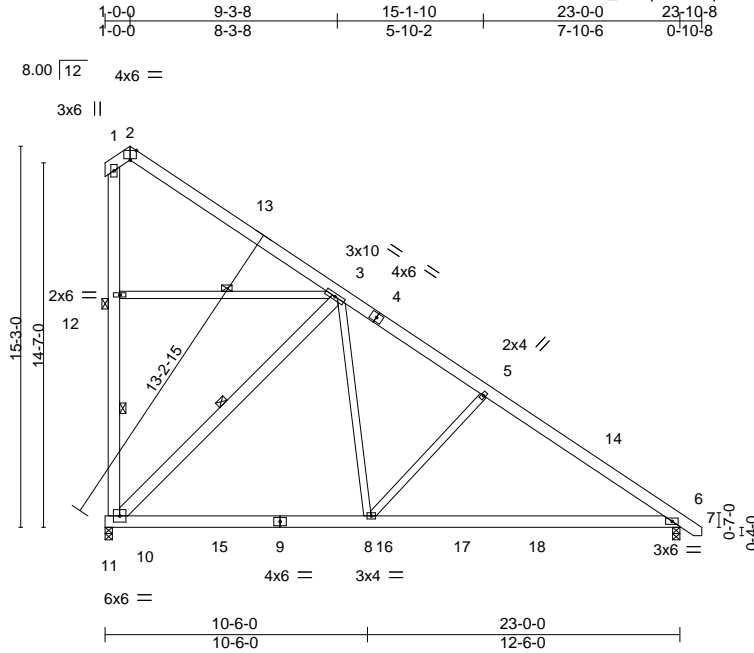

Scale = 1:92.2

Plate Offsets (X,Y)-- [2:0-3:0,Edge]

LOADING (psf)	SPACING-	CSI.	DEFL.	PLATES	GRIP
TCLL 20.0	2-0-0	TC 0.29	in (loc) l/defl L/d	MT20	244/190
TCDL 10.0	Plate Grip DOL 1.15	BC 0.56	Vert(LL) -0.13 6-8 >999 360		
BCLL 0.0 *	Lumber DOL 1.15	WB 0.45	Vert(CT) -0.28 6-8 >970 240		
BCDL 10.0	Rep Stress Incr YES	Matrix-S	Horz(CT) 0.02 6 n/a n/a		
	Code IRC2015/TPI2014		Wind(LL) 0.03 6-8 >999 240	Weight: 219 lb	FT = 20%

LUMBER-

TOP CHORD 2x6 SP No.1
 BOT CHORD 2x6 SP No.1
 WEBS 2x4 SP No.2 *Except*
 1-10,3-10: 2x6 SP No.1

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
 WEBS 1 Row at midpt 10-12, 3-10, 3-12
 JOINTS 1 Brace at Jt(s): 12

REACTIONS.


(size) 10=0-3-8, 6=0-3-8
 Max Horz 10=-482(LC 13)
 Max Uplift 10=-236(LC 13)
 Max Grav 10=1177(LC 20), 6=1071(LC 20)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 3-5=-1052/0, 5-6=-1298/0, 10-12=-259/166, 1-12=-259/166
 BOT CHORD 8-10=0/743, 6-8=0/987
 WEBS 5-8=-424/234, 3-10=-1116/335, 3-8=-26/850

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TC DL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2) 0-4-4 to 5-4-13, Interior(1) 5-4-13 to 23-8-9 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 10=236.

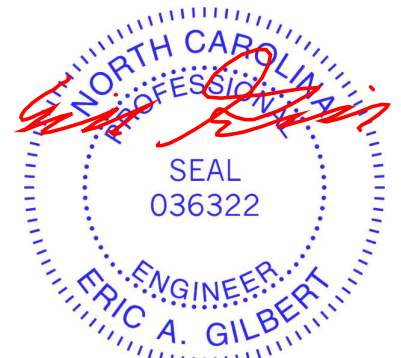

February 24, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601





818 Soundside Road
 Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Weaver/Lot 4 Atkins Farm/Harnett	E15440839
J0221-0760	A5	ROOF SPECIAL	1	1	Job Reference (optional)	

Comtech, Inc, Fayetteville, NC - 28314,

8.330 s Oct 7 2020 MiTek Industries, Inc. Wed Feb 24 09:28:10 2021 Page 1

ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-qEJslD7jAq9Bo3XUN2Cikzr4?N8v3bGBglRwJzhzJp

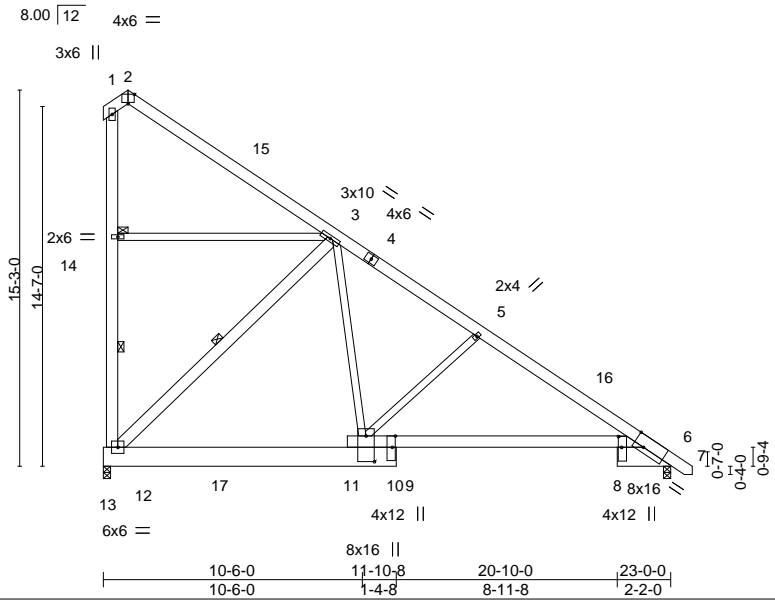

Scale = 1:93.4

Plate Offsets (X,Y)-- [2:0-3-0,Edge], [6:0-5-0,Edge], [8:0-5-4,0-1-8], [9:0-5-8,Edge], [10:1-0-8,0-4-0]

LOADING (psf)	SPACING-	CSI.	DEFL.	PLATES	GRIP
TCLL 20.0	2-0-0	TC 0.37	in (loc) l/defl L/d	MT20	244/190
TCDL 10.0	Plate Grip DOL 1.15	BC 0.49	Vert(LL) -0.12 6-10 >999 360		
BCLL 0.0 *	Lumber DOL 1.15	WB 0.45	Vert(CT) -0.30 6-10 >887 240		
BCDL 10.0	Rep Stress Incr YES	Matrix-S	Horz(CT) 0.08 6 n/a n/a		
	Code IRC2015/TPI2014		Wind(LL) 0.05 6-10 >999 240	Weight: 245 lb	FT = 20%

LUMBER-

TOP CHORD 2x6 SP No.1
 BOT CHORD 2x10 SP No.1 *Except*
 6-11: 2x6 SP No.1
 WEBS 2x4 SP No.2 *Except*
 1-12,3-12: 2x6 SP No.1

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-11-14 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
 WEBS 1 Row at midpt 12-14, 3-12
 JOINTS 1 Brace at Jt(s): 14

REACTIONS.


(size) 6=0-3-8, 12=0-3-8
 Max Horz 12=-481(LC 13)
 Max Uplift 12=-233(LC 13)
 Max Grav 6=979(LC 20), 12=1127(LC 20)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 3-5=-1079/0, 5-6=-1350/0, 12-14=-256/166, 1-14=-257/166
 BOT CHORD 10-12=0/827, 6-10=0/1044
 WEBS 5-10=-432/206, 3-12=-1146/302, 3-10=0/874

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2) 0-4-4 to 5-4-13, Interior(1) 5-4-13 to 23-8-9 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 12=233.

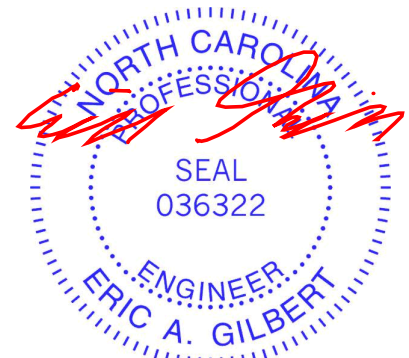

February 24, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




818 Soundside Road
 Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Weaver/Lot 4 Atkins Farm/Harnett	E15440840
J0221-0760	A6	ROOF SPECIAL	1	2	Job Reference (optional)	

Comtech, Inc., Fayetteville, NC - 28314,

8.330 s Oct 7 2020 MiTek Industries, Inc. Wed Feb 24 09:28:11 2021 Page 1

ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-IQTEyY7Lx8H2PD6gwmjxGBOEInUQo?QKuN4PSIzhzJo



Scale = 1:93.4

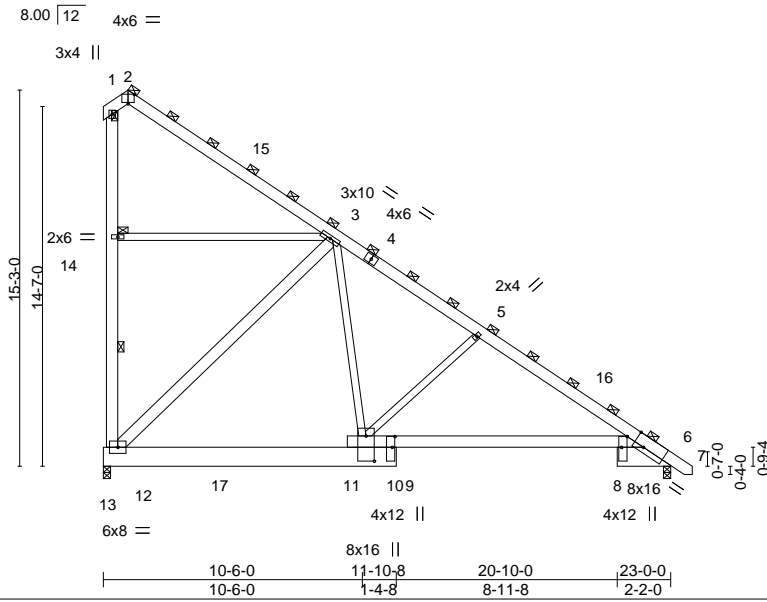


Plate Offsets (X,Y)-- [2:0-3-0,Edge], [6:0-5-0,Edge], [8:0-5-4,Edge], [9:0-5-4,0-1-4], [10:1-0-4,0-4-0]

LOADING (psf)	SPACING-	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.15	TC 0.37	Vert(LL) -0.11	6-10	>999	360	MT20	244/190
TCDL 10.0	Lumber DOL 1.15	BC 0.47	Vert(CT) -0.27	6-10	>999	240		
BCLL 0.0 *	Rep Stress Incr NO	WB 0.65	Horz(CT) 0.07	6	n/a	n/a		
BCDL 10.0	Code IRC2015/TPI2014	Matrix-S	Wind(LL) 0.05	6-10	>999	240	Weight: 490 lb	FT = 20%

LUMBER-

TOP CHORD 2x6 SP No.1
 BOT CHORD 2x10 SP No.1 *Except*
 6-11: 2x6 SP No.1
 WEBS 2x4 SP No.2 *Except*
 1-12,3-12: 2x6 SP No.1

BRACING-

TOP CHORD 2-0-0 oc purlins (6-0-0 max.), except end verticals
 (Switched from sheeted: Spacing > 2-8-0).
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
 WEBS 1 Row at midpt 12-14
 JOINTS 1 Brace at Jt(s): 2, 1, 14

REACTIONS.

(size) 6=0-3-8, 12=0-3-8
 Max Horz 12=-842(LC 13)
 Max Uplift 12=-407(LC 13)
 Max Grav 6=1713(LC 20), 12=1971(LC 20)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-2=-333/223, 2-3=-379/107, 3-5=-1889/0, 5-6=-2362/0, 12-14=-448/290,
 1-14=-449/291
 BOT CHORD 10-12=0/1448, 6-10=0/1827
 WEBS 5-10=-757/361, 3-12=-2006/528, 3-10=0/1529

NOTES-

- 2-ply truss to be connected together with 10d (0.131"x3") nails as follows:
 Top chords connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc.
 Bottom chords connected as follows: 2x10 - 2 rows staggered at 0-9-0 oc, 2x6 - 2 rows staggered at 0-9-0 oc.
 Webs connected as follows: 2x4 - 1 row at 0-9-0 oc, 2x6 - 2 rows staggered at 0-9-0 oc.
- All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2) 0-4-4 to 5-4-13, Interior(1) 5-4-13 to 23-8-9 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 12=407.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 24, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601





818 Soundside Road
 Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Weaver/Lot 4 Atkins Farm/Harnett	E15440841
J0221-0760	A7	ROOF SPECIAL	1	2	Job Reference (optional)	

Comtech, Inc, Fayetteville, NC - 28314,

8.330 s Oct 7 2020 MiTek Industries, Inc. Wed Feb 24 09:28:12 2021 Page 1

ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-mdRd9u8ziSPv1NhsUTEApOxPSBqfXsgU71qy?CzhzJn

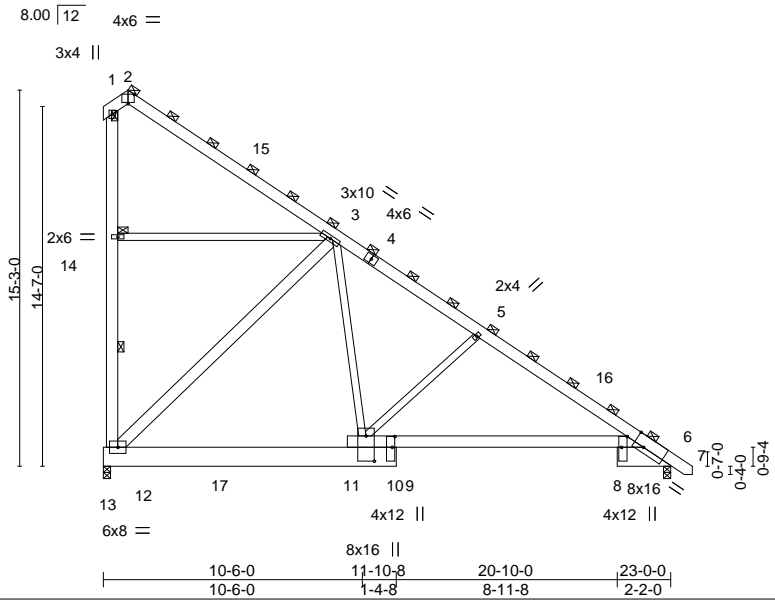

Scale = 1:93.4

Plate Offsets (X,Y)-- [2:0-3-0,Edge], [6:0-5-0,Edge], [8:0-5-4,Edge], [9:0-5-4,0-1-4], [10:1-0-4,0-4-0]

LOADING (psf)	SPACING-	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.15	TC 0.37	Vert(LL) -0.11	6-10	>999	360	MT20	244/190
TCDL 10.0	Lumber DOL 1.15	BC 0.47	Vert(CT) -0.27	6-10	>999	240		
BCLL 0.0 *	Rep Stress Incr NO	WB 0.65	Horz(CT) 0.07	6	n/a	n/a		
BCDL 10.0	Code IRC2015/TPI2014	Matrix-S	Wind(LL) 0.05	6-10	>999	240		
							Weight: 490 lb	FT = 20%

LUMBER-

TOP CHORD 2x6 SP No.1
 BOT CHORD 2x10 SP No.1 *Except*
 6-11: 2x6 SP No.1
 WEBS 2x4 SP No.2 *Except*
 1-12,3-12: 2x6 SP No.1

BRACING-

TOP CHORD 2-0-0 oc purlins (6-0-0 max.), except end verticals
 (Switched from sheeted: Spacing > 2-8-0).
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
 WEBS 1 Row at midpt 12-14
 JOINTS 1 Brace at Jt(s): 2, 1, 14

REACTIONS.

(size) 6=0-3-8, 12=0-3-8
 Max Horz 12=-842(LC 13)
 Max Uplift 12=-407(LC 13)
 Max Grav 6=1713(LC 20), 12=1971(LC 20)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-2=-333/223, 2-3=-379/107, 3-5=-1889/0, 5-6=-2362/0, 12-14=-448/290,
 1-14=-449/291
 BOT CHORD 10-12=0/1448, 6-10=0/1827
 WEBS 5-10=-757/361, 3-12=-2006/528, 3-10=0/1529

NOTES-

- 2-ply truss to be connected together with 10d (0.131"x3") nails as follows:
 Top chords connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc.
 Bottom chords connected as follows: 2x10 - 2 rows staggered at 0-9-0 oc, 2x6 - 2 rows staggered at 0-9-0 oc.
 Webs connected as follows: 2x4 - 1 row at 0-9-0 oc, 2x6 - 2 rows staggered at 0-9-0 oc.
- All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2) 0-4-4 to 5-4-13, Interior(1) 5-4-13 to 23-8-9 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 12=407.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 24, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



818 Soundside Road
 Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Weaver/Lot 4 Atkins Farm/Harnett	E15440842
J0221-0760	A8	ROOF TRUSS	1	2	Job Reference (optional)	

Comtech, Inc., Fayetteville, NC - 28314,

8.330 s Oct 7 2020 MiTek Industries, Inc. Wed Feb 24 09:28:13 2021 Page 1

ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-Ep??NE9bTIXmfXG32BmPmCTUcbCCGyYdMhZVXezhzJm

1-0-0 4-8-7 15-1-10 23-0-0 23-10-8
 1-0-0 3-8-7 10-5-3 7-10-6 0-10-8

Scale = 1:91.0

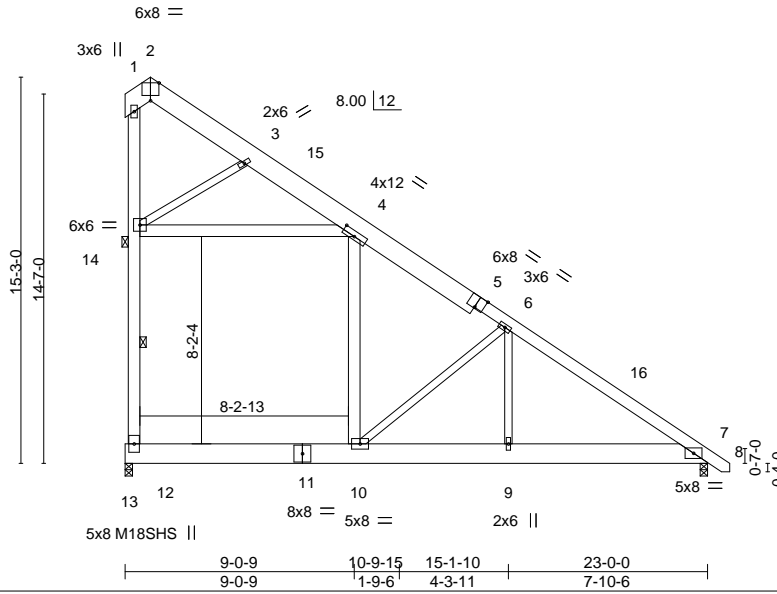


Plate Offsets (X,Y)-- [2:0-4-0,Edge], [4:0-6-0,0-2-8], [5:0-4-0,Edge]

LOADING (psf)	SPACING-	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	2-8-0 Plate Grip DOL 1.15	TC 0.73	Vert(LL) -0.21	10	>999	360	MT20	244/190
TCDL 10.0	Lumber DOL 1.15	BC 0.33	Vert(CT) -0.46	10	>587	240	M18SHS	244/190
BCLL 0.0 *	Rep Stress Incr NO	WB 0.48	Horz(CT) 0.01	7	n/a	n/a		
BCDL 10.0	Code IRC2015/TPI2014	Matrix-S	Wind(LL) 0.17	10	>999	240		
							Weight: 563 lb	FT = 20%

LUMBER-
 TOP CHORD 2x10 SP No.1 *Except*
 5-8: 2x6 SP No.1
 BOT CHORD 2x10 SP 2400F 2.0E
 WEBS 2x6 SP No.1 *Except*
 6-9,6-10,3-14: 2x4 SP No.2

BRACING-
 TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
 WEBS 1 Row at midpt 12-14
 JOINTS 1 Brace at Jt(s): 14

REACTIONS. (size) 12=0-3-8, 7=0-3-8
 Max Horz 12=-633(LC 13)
 Max Uplift 12=-7(LC 13)
 Max Grav 12=2288(LC 21), 7=1482(LC 21)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 3-4=-808/104, 4-6=-829/128, 6-7=-2233/92, 12-14=-1091/133
 BOT CHORD 10-12=-119/629, 9-10=0/1720, 7-9=0/1720
 WEBS 4-14=-184/957, 6-9=0/1086, 4-10=0/833, 6-10=-2198/295, 3-14=-1790/225

- NOTES-**
- 2-ply truss to be connected together with 10d (0.131"x3") nails as follows:
 Top chords connected as follows: 2x10 - 2 rows staggered at 0-9-0 oc, 2x6 - 2 rows staggered at 0-9-0 oc.
 Bottom chords connected as follows: 2x10 - 2 rows staggered at 0-9-0 oc.
 Webs connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc, 2x4 - 1 row at 0-9-0 oc.
 - All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
 - Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2) 0-4-4 to 5-4-13, Interior(1) 5-4-13 to 23-8-9 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - All plates are MT20 plates unless otherwise indicated.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - Ceiling dead load (10.0 psf) on member(s). 4-14; Wall dead load (5.0psf) on member(s).4-10
 - Bottom chord live load (40.0 psf) and additional bottom chord dead load (10.0 psf) applied only to room. 10-12
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 12.
 - Attic room checked for L/360 deflection.



February 24, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




818 Soundside Road
 Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Weaver/Lot 4 Atkins Farm/Harnett	E15440843
J0221-0760	A9	ROOF TRUSS	3	1	Job Reference (optional)	

Comtech, Inc., Fayetteville, NC - 28314,

8.330 s Oct 7 2020 MiTek Industries, Inc. Wed Feb 24 09:28:14 2021 Page 1

ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-i?ZNaAEE3fdGgrFcuHeup0ct_Wa?NynbLJ334zhJl

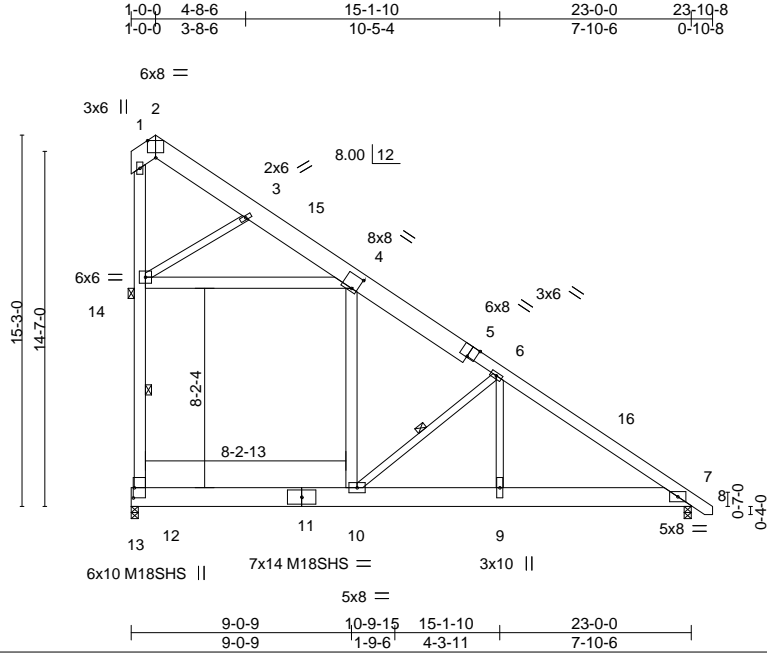

Scale = 1:94.6

Plate Offsets (X,Y)-- [2:0-4:0,Edge], [4:0-2:12,0-6-8], [5:0-4:0,Edge], [12:0-5:0,0-0-8]

LOADING (psf)	SPACING-	CSI.	DEFL.	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.15	TC 0.96	Vert(LL) -0.32 10 >844 360	MT20	244/190
TCDL 10.0	Lumber DOL 1.15	BC 0.45	Vert(CT) -0.69 10 >392 240	M18SHS	244/190
BCLL 0.0 *	Rep Stress Incr YES	WB 0.60	Horz(CT) 0.01 7 n/a n/a		
BCDL 10.0	Code IRC2015/TPI2014	Matrix-S	Wind(LL) 0.26 10 >999 240		
				Weight: 282 lb	FT = 20%

LUMBER-

TOP CHORD 2x10 SP No.1 *Except*
5-8: 2x6 SP No.1
BOT CHORD 2x10 SP 2400F 2.0E
WEBS 2x6 SP No.1 *Except*
6-9,6-10,3-14: 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals.
BOT CHORD Rigid ceiling directly applied or 8-6-0 oc bracing.
WEBS 1 Row at midpt 12-14, 6-10
JOINTS 1 Brace at Jt(s): 14

REACTIONS.


(size) 12=0-3-8, 7=0-3-8
Max Horz 12=-475(LC 13)
Max Uplift 12=-5(LC 13)
Max Grav 12=1716(LC 21), 7=1111(LC 21)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 3-4=-606/78, 4-6=-622/96, 6-7=-1675/69, 12-14=-818/100
BOT CHORD 10-12=-89/471, 9-10=0/1290, 7-9=0/1290
WEBS 4-14=-138/718, 6-9=0/815, 4-10=0/624, 6-10=-1648/221, 3-14=-1342/169

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TC DL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2) 0-4-4 to 5-4-13, Interior(1) 5-4-13 to 23-8-9 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- All plates are MT20 plates unless otherwise indicated.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Ceiling dead load (10.0 psf) on member(s). 4-14; Wall dead load (5.0psf) on member(s). 4-10
- Bottom chord live load (40.0 psf) and additional bottom chord dead load (10.0 psf) applied only to room. 10-12
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 12.
- Attic room checked for L/360 deflection.

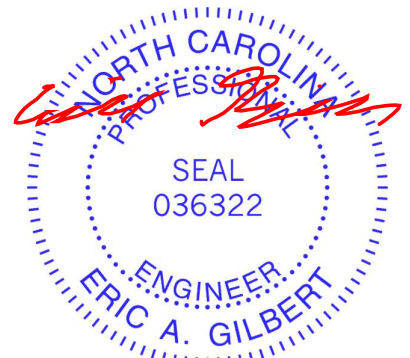

February 24, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



818 Soundside Road
Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Weaver/Lot 4 Atkins Farm/Harnett	E15440844
J0221-0760	A9GE	COMMON SUPPORTED GAB	1	1	Job Reference (optional)	

Comtech, Inc. Fayetteville, NC - 28314,

8.330 s Oct 7 2020 MiTek Industries, Inc. Wed Feb 24 09:28:15 2021 Page 1

ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-BC7lowBs?NnTuqQR9cotR1Z?ZOypk3wp?2cbWzhzJk

1-0-0 23-0-0 23-10-8
 1-0-0 22-0-0 0-10-8

8.00 | 12 5x5 =

Scale = 1:89.8

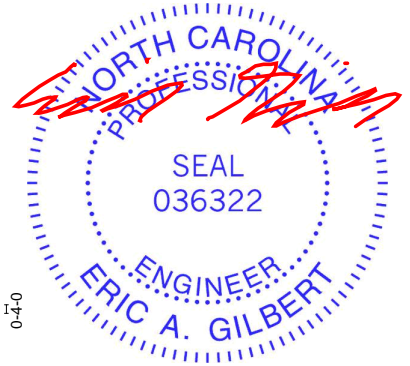
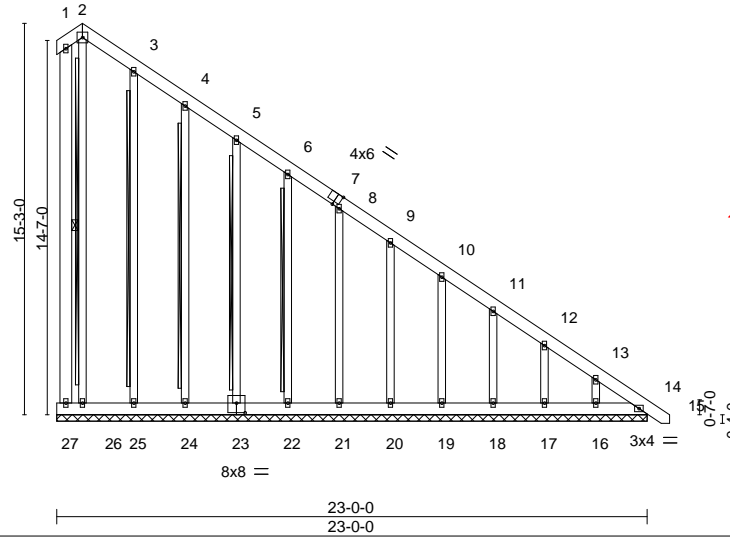


Plate Offsets (X,Y)-- [7:0-2-9,Edge], [23:0-4-0,0-4-8]

LOADING (psf)	SPACING-	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.15	TC 0.06	Vert(LL) 0.00	14	n/r	120	MT20	244/190
TCDL 10.0	Lumber DOL 1.15	BC 0.06	Vert(CT) 0.00	14	n/r	120		
BCLL 0.0 *	Rep Stress Incr YES	WB 0.16	Horz(CT) 0.01	14	n/a	n/a		
BCDL 10.0	Code IRC2015/TPI2014	Matrix-S						
							Weight: 280 lb	FT = 20%

LUMBER-

TOP CHORD 2x6 SP No.1
 BOT CHORD 2x6 SP No.1
 WEBS 2x6 SP No.1
 OTHERS 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
 WEBS 1 Row at midpt 1-27
 T-Brace: 2x4 SPF No.2 - 3-25, 4-24, 5-23, 6-22
 2x6 SPF No.2 - 2-26
 Fasten (2X) T and I braces to narrow edge of web with 10d (0.131"x3") nails, 6in o.c., with 3in minimum end distance.
 Brace must cover 90% of web length.

REACTIONS.

All bearings 23-0-0.
 (lb) - Max Horz 27=-695(LC 13)
 Max Uplift All uplift 100 lb or less at joint(s) 27, 26, 25, 24, 23, 22, 21, 20, 19, 18, 17 except 16=-116(LC 13), 14=-100(LC 11)
 Max Grav All reactions 250 lb or less at joint(s) 27, 26, 25, 24, 23, 22, 21, 20, 19, 18, 17, 16 except 14=414(LC 13)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 5-6=-254/197, 6-8=-329/256, 8-9=-404/314, 9-10=-479/373, 10-11=-554/432, 11-12=-629/491, 12-13=-705/550, 13-14=-794/626
 BOT CHORD 26-27=-536/694, 25-26=-536/694, 24-25=-536/694, 23-24=-536/694, 22-23=-536/694, 21-22=-536/694, 20-21=-536/694, 19-20=-536/694, 18-19=-536/694, 17-18=-536/694, 16-17=-536/694, 14-16=-536/694

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Corner(3) 0-4-4 to 5-4-13, Exterior(2) 5-4-13 to 23-8-9 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- All plates are 2x4 MT20 unless otherwise indicated.
- Gable requires continuous bottom chord bearing.
- Gable studs spaced at 2-0-0 oc.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 27, 26, 25, 24, 23, 22, 21, 20, 19, 18, 17 except (jt=lb) 16=116, 14=100.
- Warning: Additional permanent and stability bracing for truss system (not part of this component design) is always required.

February 24, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




818 Soundside Road
 Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Weaver/Lot 4 Atkins Farm/Harnett	E15440845
J0221-0760	B1	COMMON SUPPORTED GAB	5	1	Job Reference (optional)	

Comtech, Inc. Fayetteville, NC - 28314,

8.330 s Oct 7 2020 MiTek Industries, Inc. Wed Feb 24 09:28:16 2021 Page 1

ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-fOh7?GBUlgvKW_?ejJ6zE57Po5dTFD32foA8zzhJj



Scale = 1:85.1

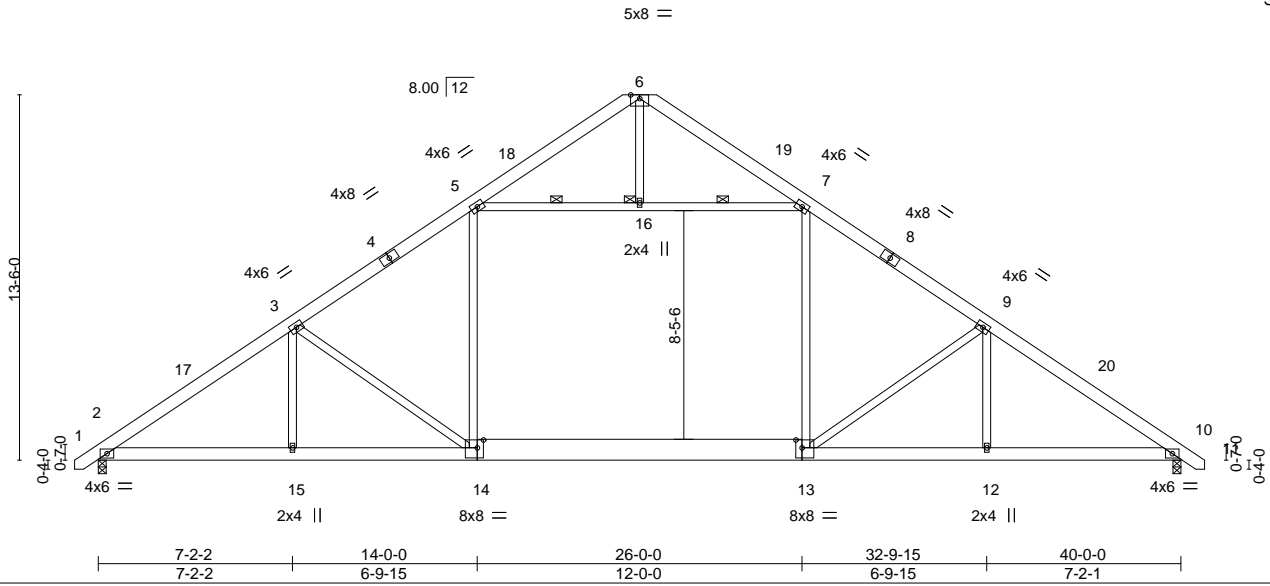


Plate Offsets (X,Y)-- [8:0-0-0-0-0-0], [13:0-2-12,0-3-8], [14:0-2-12,0-3-8]

LOADING (psf)	SPACING-	CSI.	DEFL.	PLATES	GRIP
TCLL 20.0	2-0-0	TC 0.25	in (loc) l/defl L/d	MT20	244/190
TCDL 10.0	Plate Grip DOL 1.15	BC 0.86	Vert(LL) -0.38 14-15 >999 360		
BCLL 0.0 *	Lumber DOL 1.15	WB 0.74	Vert(CT) -0.44 12-13 >999 240		
BCDL 10.0	Rep Stress Incr YES	Matrix-S	Horz(CT) 0.06 10 n/a n/a		
	Code IRC2015/TPI2014		Wind(LL) 0.33 14-15 >999 240	Weight: 316 lb	FT = 20%

LUMBER-

TOP CHORD 2x6 SP No.1
 BOT CHORD 2x6 SP No.1 *Except*
 WEBS 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-7-8 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
 WEBS 1 Row at midpt 5-16, 7-16
 JOINTS 1 Brace at Jt(s): 16

REACTIONS.

(size) 2=0-3-8, 10=0-3-8
 Max Horz 2=331(LC 11)
 Max Uplift 2=-96(LC 12), 10=-96(LC 13)
 Max Grav 2=1796(LC 19), 10=1796(LC 20)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-2750/460, 3-5=-2355/477, 5-6=-484/192, 6-7=-484/192, 7-9=-2357/477, 9-10=-2751/460
 BOT CHORD 2-15=-245/2414, 14-15=-245/2414, 13-14=-82/1966, 12-13=-247/2167, 10-12=-247/2167
 WEBS 5-14=-6/763, 7-13=-6/764, 5-16=-1571/395, 7-16=-1571/395, 3-15=-43/260, 3-14=-642/238, 9-12=-48/260, 9-13=-642/240

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TC DL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2) -0-8-9 to 3-8-4, Interior(1) 3-8-4 to 20-0-0, Exterior(2) 20-0-0 to 24-4-13, Interior(1) 24-4-13 to 40-8-9 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2, 10.



February 24, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



818 Soundside Road
 Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Weaver/Lot 4 Atkins Farm/Harnett	E15440846
J0221-0760	B1GE	COMMON SUPPORTED GAB	1	1	Job Reference (optional)	

Comtech, Inc, Fayetteville, NC - 28314,

8.330 s Oct 7 2020 MiTek Industries, Inc. Wed Feb 24 09:28:18 2021 Page 1
ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-bnouQyDkHI92I90rLa3fBWqc_?xGLMWzHGCzrhzJh

0-10-8 20-0-0 40-0-0 40-10-8
0-10-8 20-0-0 20-0-0 0-10-8

Scale = 1:85.1

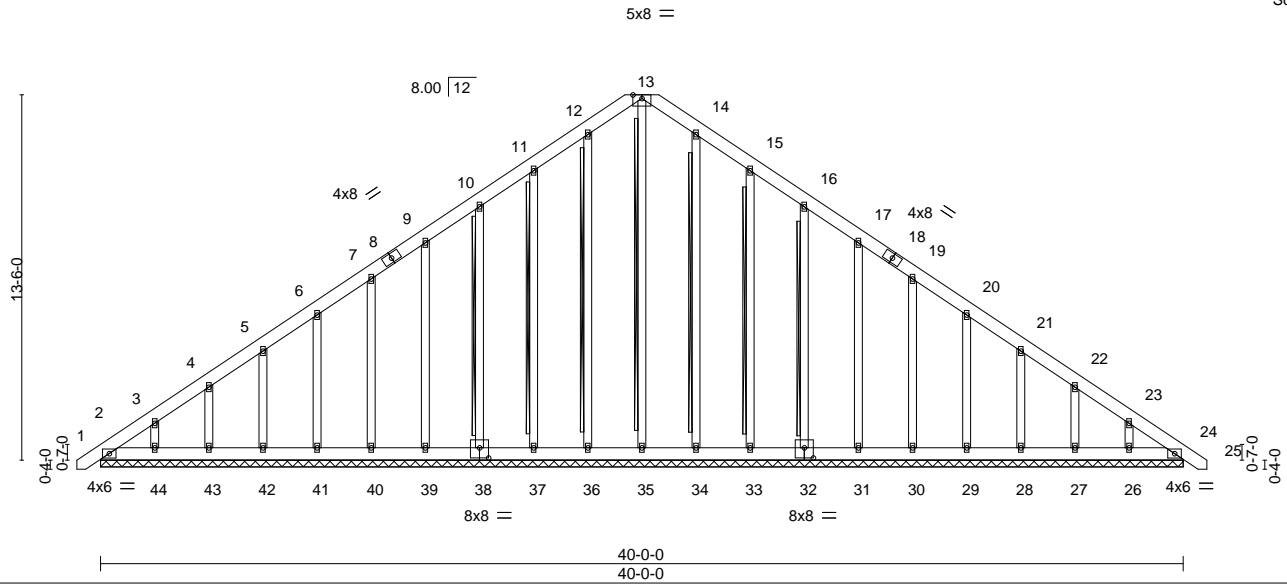


Plate Offsets (X,Y)-- [32:0-4-0,0-4-8], [38:0-4-0,0-4-8]

LOADING (psf)	SPACING-	CSL.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.15	TC 0.06	Vert(LL) 0.00	24	n/r	120	MT20	244/190
TCDL 10.0	Lumber DOL 1.15	BC 0.03	Vert(CT) 0.00	24	n/r	120		
BCLL 0.0 *	Rep Stress Incr YES	WB 0.25	Horz(CT) 0.01	24	n/a	n/a		
BCDL 10.0	Code IRC2015/TPI2014	Matrix-S						
							Weight: 399 lb	FT = 20%

LUMBER-

TOP CHORD 2x6 SP No.1
BOT CHORD 2x6 SP No.1
OTHERS 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS T-Brace: 2x4 SPF No.2 - 13-35, 12-36, 11-37, 10-38, 14-34, 15-33, 16-32

Fasten (2X) T and I braces to narrow edge of web with 10d (0.131"x3") nails, 6in o.c., with 3in minimum end distance. Brace must cover 90% of web length.

REACTIONS.

All bearings 40-0-0.
(lb) - Max Horz 2=414(LC 11)
Max Uplift All uplift 100 lb or less at joint(s) 35, 36, 38, 39, 40, 41, 42, 43, 34, 32, 31, 30, 29, 28, 27, 24 except 2=-110(LC 8), 37=-102(LC 12), 44=-105(LC 12), 33=-106(LC 13), 26=-102(LC 13)
Max Grav All reactions 250 lb or less at joint(s) 2, 36, 37, 38, 39, 40, 41, 42, 43, 44, 34, 33, 32, 31, 30, 29, 28, 27, 26, 24 except 35=277(LC 13)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-441/318, 3-4=-357/284, 4-5=-292/257, 10-11=-216/283, 11-12=-284/333, 12-13=-310/354, 13-14=-310/354, 14-15=-284/319, 22-23=-263/167, 23-24=-346/238
BOT CHORD 2-44=-212/326, 43-44=-212/326, 42-43=-212/326, 41-42=-212/326, 40-41=-212/326, 39-40=-212/326, 38-39=-212/326, 37-38=-212/326, 36-37=-212/326, 35-36=-212/326, 34-35=-212/326, 33-34=-212/326, 32-33=-212/326, 31-32=-212/326, 30-31=-212/326, 29-30=-212/326, 28-29=-212/326, 27-28=-212/326, 26-27=-212/326, 24-26=-212/326
WEBS 13-35=-256/167

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TC DL=6.0psf; BC DL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Corner(3) -0-8-9 to 3-8-4, Exterior(2) 3-8-4 to 20-0-0, Corner(3) 20-0-0 to 24-4-13, Exterior(2) 24-4-13 to 40-8-9 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- All plates are 2x4 MT20 unless otherwise indicated.
- Gable requires continuous bottom chord bearing.
- Gable studs spaced at 2-0-0 oc.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 35, 36, 38, 39, 40, 41, 42, 43, 34, 32, 31, 30, 29, 28, 27, 24 except (jt=lb) 2=110, 37=102, 44=105, 33=106, 26=102.
- Warning: Additional permanent and stability bracing for truss system (not part of this component design) is always required.



February 24, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




818 Soundside Road
Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Weaver/Lot 4 Atkins Farm/Harnett	E15440847
J0221-0760	C1	ATTIC	1	1		

Comtech, Inc. Fayetteville, NC - 28314,

8.330 s Oct 7 2020 MiTek Industries, Inc. Wed Feb 24 09:28:19 2021 Page 1

ID:FKRF2G2VvSGFSXRUG_ubJqzKaK1d-3zMGdIEM2blvNSjCORtpbtjcn?CjgiiWkd0qkzhzJg



6x8 =

Scale = 1:81.1

Plate Offsets (X,Y)--	[2:0-1-8,0-2-0], [3:0-4-0,Edge], [6:0-4-0,Edge], [9:0-4-0,Edge], [10:0-1-8,0-2-0], [13:0-5-0,0-7-0], [15:0-5-0,0-7-0]
-----------------------	---

LOADING (psf)	SPACING-	CSI.	DEFL.	PLATES	GRIP
TCLL 20.0	2-0-0	TC 0.33	in (loc) l/defl L/d	MT20	244/190
TCDL 10.0	Plate Grip DOL 1.15	BC 0.58	Vert(LL) -0.12 13-15 >999 360		
BCLL 0.0 *	Lumber DOL 1.15	WB 0.31	Vert(CT) -0.19 13-15 >999 240		
BCDL 10.0	Rep Stress Incr YES	Matrix-S	Horz(CT) 0.01 12 n/a n/a		
	Code IRC2015/TPI2014		Wind(LL) 0.05 15 >999 240	Weight: 268 lb	FT = 20%

LUMBER-	BRACING-
TOP CHORD 2x10 SP No.1 *Except* 1-3,9-11: 2x6 SP No.1	TOP CHORD Structural wood sheathing directly applied or 5-9-8 oc purlins, except end verticals.
BOT CHORD 2x10 SP No.1	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 2x6 SP No.1 *Except* 2-15,10-13: 2x4 SP No.2	

REACTIONS. (size) 16=0-3-8, 12=0-3-8
 Max Horz 16=-419(LC 10)
 Max Grav 16=1469(LC 21), 12=1469(LC 20)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 2-4=-1675/22, 4-5=-1045/187, 7-8=-1045/187, 8-10=-1675/21, 2-16=-1615/65, 10-12=-1616/65
 BOT CHORD 15-16=-425/555, 13-15=0/1123
 WEBS 5-7=-1194/265, 4-15=0/744, 8-13=0/744, 2-15=-1/1037, 10-13=-10/1044

- NOTES-**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCCL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Corner(3) 0-9-0 to 3-7-13, Exterior(2) 3-7-13 to 11-2-0, Corner(3) 11-2-0 to 15-6-13, Exterior(2) 15-6-13 to 23-1-0 zone; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - Ceiling dead load (10.0 psf) on member(s). 4-5, 7-8, 5-7; Wall dead load (5.0psf) on member(s).4-15, 8-13
 - Bottom chord live load (40.0 psf) and additional bottom chord dead load (10.0 psf) applied only to room. 13-15
 - Attic room checked for L/360 deflection.




February 24, 2021

Job	Truss	Truss Type	Qty	Ply	Weaver/Lot 4 Atkins Farm/Harnett	E15440848
J0221-0760	C2	ATTIC	8	1	Job Reference (optional)	

Comtech, Inc. Fayetteville, NC - 28314,

8.330 s Oct 7 2020 MiTek Industries, Inc. Wed Feb 24 09:28:20 2021 Page 1

ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-X9werdE_pvQm_bIPy9O284GnwPWWP9sfzHmNHkzhJf

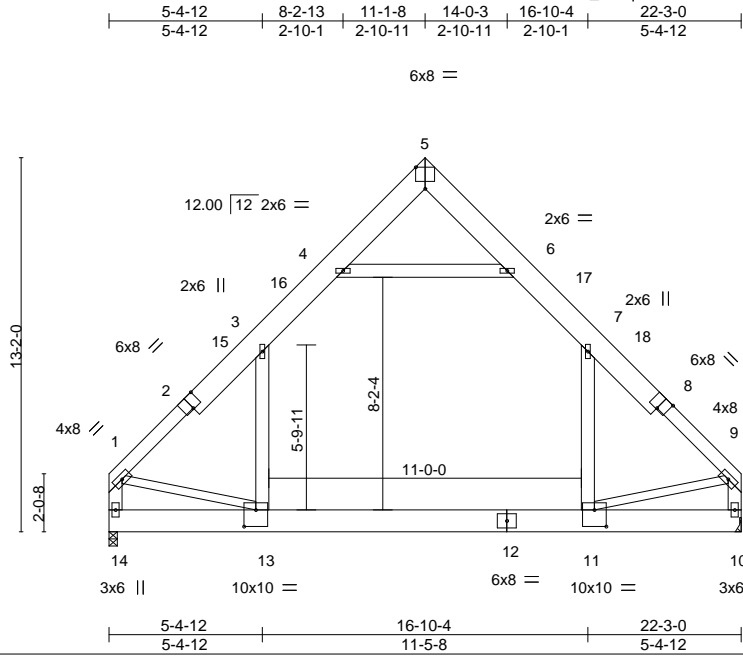

Scale = 1:81.1

Plate Offsets (X,Y)-- [2:0-4-0,Edge], [5:0-4-0,Edge], [8:0-4-0,Edge], [11:0-5-0,0-7-0], [13:0-5-0,0-7-0]

LOADING (psf)	SPACING-	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.15	TC 0.34	Vert(LL) -0.12	11-13	>999	360	MT20	244/190
TCDL 10.0	Lumber DOL 1.15	BC 0.58	Vert(CT) -0.20	11-13	>999	240		
BCLL 0.0 *	Rep Stress Incr YES	WB 0.31	Horz(CT) 0.01	10	n/a	n/a		
BCDL 10.0	Code IRC2015/TPI2014	Matrix-S	Wind(LL) 0.04	13	>999	240		
							Weight: 262 lb	FT = 20%

LUMBER-

TOP CHORD 2x10 SP No.1 *Except*
1-2,8-9: 2x6 SP No.1
BOT CHORD 2x10 SP No.1
WEBS 2x6 SP No.1 *Except*
1-13,9-11: 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-8-7 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 14=0-3-8, 10=Mechanical
Max Horz 14=-256(LC 8)
Max Grav 14=1434(LC 21), 10=1434(LC 20)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-3=-1657/0, 3-4=-1042/150, 6-7=-1042/150, 7-9=-1657/0, 1-14=-1567/0, 9-10=-1568/0
BOT CHORD 13-14=-284/368, 11-13=0/1079
WEBS 4-6=-1225/195, 3-13=0/728, 7-11=0/728, 1-13=0/1036, 9-11=0/1039

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCCL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2) 0-3-4 to 4-8-1, Interior(1) 4-8-1 to 11-2-0, Exterior(2) 11-2-0 to 15-6-13, Interior(1) 15-6-13 to 22-0-12 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Ceiling dead load (10.0 psf) on member(s). 3-4, 6-7, 4-6; Wall dead load (5.0psf) on member(s). 3-13, 7-11
- Bottom chord live load (40.0 psf) and additional bottom chord dead load (10.0 psf) applied only to room. 11-13
- Refer to girder(s) for truss to truss connections.
- Attic room checked for L/360 deflection.



February 24, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




818 Soundside Road
Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Weaver/Lot 4 Atkins Farm/Harnett	E15440849
J0221-0760	C3	ATTIC	1	2	Job Reference (optional)	

Comtech, Inc. Fayetteville, NC - 28314,

8.330 s Oct 7 2020 MiTek Industries, Inc. Wed Feb 24 09:28:21 2021 Page 1

ID:FKRF2G2VvSGFSXRUG_ubJqzAK1d-?LU02ZfdaDYdcltbWsvHglpx8pql8dJpCwVwpAzhzJe



6x8 =

Scale = 1:81.1

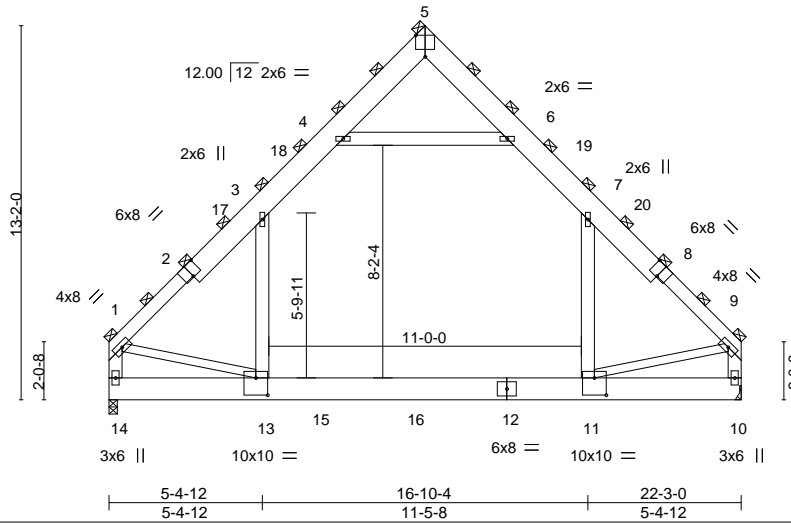


Plate Offsets (X,Y)-- [2:0-4-0,Edge], [5:0-4-0,Edge], [8:0-4-0,Edge], [11:0-5-0,0-7-4], [13:0-5-0,0-7-4]

LOADING (psf)	SPACING-	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.15	TC 0.44	Vert(LL) -0.14	11-13	>999	360	MT20	244/190
TCDL 10.0	Lumber DOL 1.15	BC 0.76	Vert(CT) -0.22	11-13	>999	240		
BCLL 0.0 *	Rep Stress Incr NO	WB 0.24	Horz(CT) 0.01	10	n/a	n/a		
BCDL 10.0	Code IRC2015/TPI2014	Matrix-S	Wind(LL) 0.04	11-13	>999	240	Weight: 525 lb	FT = 20%

LUMBER-

TOP CHORD 2x10 SP No.1 *Except*
1-2,8-9: 2x6 SP No.1
BOT CHORD 2x10 SP No.1
WEBS 2x6 SP No.1 *Except*
1-13,9-11: 2x4 SP No.2

BRACING-

TOP CHORD 2-0-0 oc purlins (6-0-0 max.), except end verticals
(Switched from sheeted: Spacing > 2-8-0).
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 14=0-3-8, 10=Mechanical
Max Horz 14=-384(LC 8)
Max Grav 14=2783(LC 21), 10=2577(LC 20)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.


TOP CHORD 1-3=-3251/46, 3-4=-1860/268, 4-5=-57/484, 5-6=-61/417, 6-7=-1926/277, 7-9=-3167/41,
1-14=-3094/67, 9-10=-3003/54
BOT CHORD 13-14=-426/576, 11-13=0/2085
WEBS 4-6=-2511/389, 3-13=0/1662, 7-11=0/1480, 1-13=0/1970, 9-11=0/2076

NOTES-

- 2-ply truss to be connected together with 10d (0.131"x3") nails as follows:
Top chords connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc, 2x10 - 2 rows staggered at 0-9-0 oc.
Bottom chords connected as follows: 2x10 - 2 rows staggered at 0-9-0 oc.
Webs connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc, 2x4 - 1 row at 0-9-0 oc.
- All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2) 0-3-4 to 4-8-1, Interior(1) 4-8-1 to 11-2-0, Exterior(2) 11-2-0 to 15-6-13, Interior(1) 15-6-13 to 22-0-12 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Ceiling dead load (10.0 psf) on member(s). 3-4, 6-7, 4-6; Wall dead load (5.0psf) on member(s). 3-13, 7-11
- Bottom chord live load (40.0 psf) and additional bottom chord dead load (10.0 psf) applied only to room. 11-13
- Refer to girder(s) for truss to truss connections.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 529 lb down and 76 lb up at 7-4-8, and 529 lb down and 76 lb up at 10-8-8 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- Attic room checked for L/360 deflection.

LOAD CASE(S) Standard

Continued on page 2

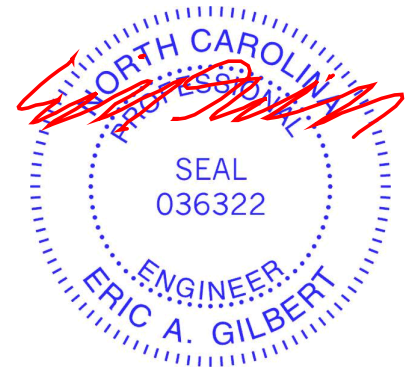

February 24, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



818 Soundside Road
Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Weaver/Lot 4 Atkins Farm/Harnett	E15440849
J0221-0760	C3	ATTIC	1	2	Job Reference (optional)	

Comtech, Inc, Fayetteville, NC - 28314,

8.330 s Oct 7 2020 MiTek Industries, Inc. Wed Feb 24 09:28:21 2021 Page 2
 ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-?LU02zFdaDYdcltbWsvHglpx8pql8dJpCwVwpAzhzJe

LOAD CASE(S) Standard

1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15

Uniform Loads (plf)

Vert: 13-14=-30, 11-13=-60, 10-11=-30, 1-3=-90, 3-4=-120, 4-5=-90, 5-6=-90, 6-7=-120, 7-9=-90, 4-6=-30

Drag: 3-13=-15, 7-11=-15

Concentrated Loads (lb)

Vert: 15=-300(B) 16=-300(B)

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




818 Soundside Road
 Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Weaver/Lot 4 Atkins Farm/Harnett	E15440850
J0221-0760	G1	FINK	6	1	Job Reference (optional)	

Comtech, Inc., Fayetteville, NC - 28314,

8.330 s Oct 7 2020 MiTek Industries, Inc. Wed Feb 24 09:28:22 2021 Page 1

ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-TY2PGJGFLWgUEvSn4aQWDVL3dDFyt3dyQaFULczhzJd



Scale = 1:53.4

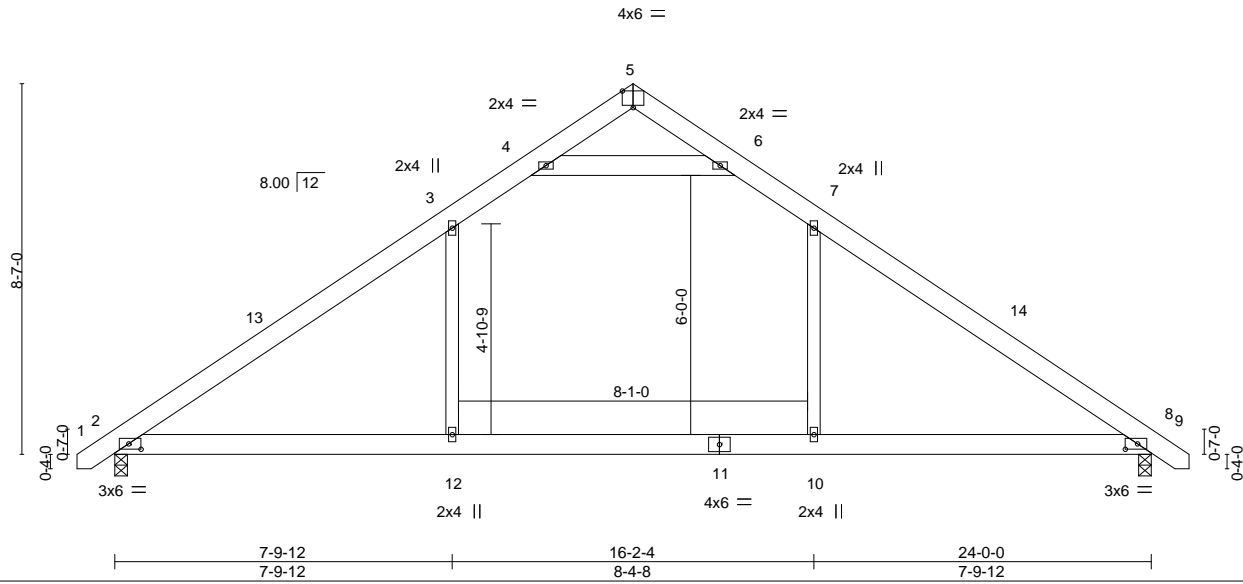


Plate Offsets (X,Y)-- [2:0-3-6,0-1-8], [5:0-3-0,Edge], [8:0-3-6,0-1-8]

LOADING (psf)	SPACING-	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.15	TC 0.59	Vert(LL) -0.17	10-12	>999	360	MT20	244/190
TCDL 10.0	Lumber DOL 1.15	BC 0.41	Vert(CT) -0.24	10-12	>999	240		
BCLL 0.0 *	Rep Stress Incr YES	WB 0.30	Horz(CT) 0.02	8	n/a	n/a		
BCDL 10.0	Code IRC2015/TPI2014	Matrix-S	Wind(LL) 0.15	2-12	>999	240		
							Weight: 155 lb	FT = 20%

LUMBER-

TOP CHORD 2x6 SP No.1
 BOT CHORD 2x6 SP No.1
 WEBS 2x4 SP No.2 *Except*
 4-6: 2x6 SP No.1

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-8-12 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 2=0-3-8, 8=0-3-8
 Max Horz 2=-203(LC 10)
 Max Uplift 2=-62(LC 12), 8=-62(LC 13)
 Max Grav 2=1118(LC 19), 8=1118(LC 20)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-1548/251, 3-4=-1077/310, 4-5=-98/433, 5-6=-98/433, 6-7=-1077/310,
 7-8=-1548/251
 BOT CHORD 2-12=-54/1187, 10-12=-54/1187, 8-10=-54/1187
 WEBS 3-12=0/469, 7-10=0/469, 4-6=-1618/472

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCCL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2) -0-8-9 to 3-8-4, Interior(1) 3-8-4 to 12-0-0, Exterior(2) 12-0-0 to 16-2-4, Interior(1) 16-2-4 to 24-8-9 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2, 8.



February 24, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




818 Soundside Road
 Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Weaver/Lot 4 Atkins Farm/Harnett	E15440851
J0221-0760	G1GE	GABLE	1	1	Job Reference (optional)	

Comtech, Inc., Fayetteville, NC - 28314,

8.330 s Oct 7 2020 MiTek Industries, Inc. Wed Feb 24 09:28:23 2021 Page 1
 ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-ykcnTfHt6qoLr31_dHxlmjuN_dhLcY45fE_1t3zhzJc



5x5 =

Scale = 1:53.7

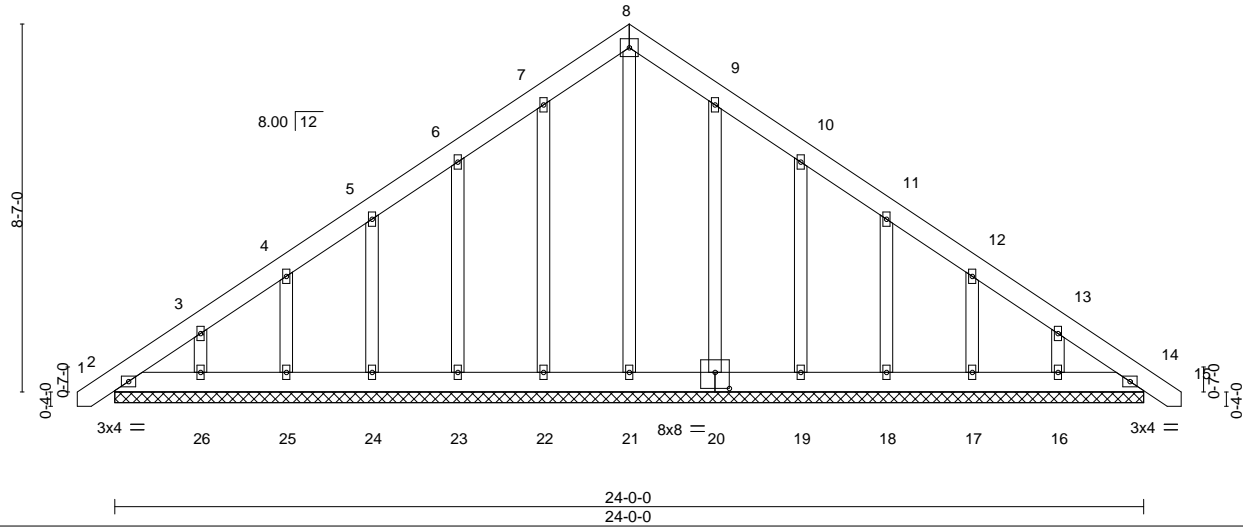


Plate Offsets (X,Y)-- [20:0-4-0,0-4-8]

LOADING (psf)	SPACING-	CSL	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.15	TC 0.03	Vert(LL) 0.00	14	n/r	120	MT20	244/190
TCDL 10.0	Lumber DOL 1.15	BC 0.02	Vert(CT) 0.00	14	n/r	120		
BCLL 0.0 *	Rep Stress Incr YES	WB 0.16	Horz(CT) 0.00	14	n/a	n/a		
BCDL 10.0	Code IRC2015/TPI2014	Matrix-S						
							Weight: 195 lb	FT = 20%


LUMBER-
 TOP CHORD 2x6 SP No.1
 BOT CHORD 2x6 SP No.1
 OTHERS 2x4 SP No.2

BRACING-
 TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. All bearings 24-0-0.
 (lb) - Max Horz 2=-254(LC 10)
 Max Uplift All uplift 100 lb or less at joint(s) 2, 14, 22, 23, 24, 25, 26, 20, 19, 18, 17, 16
 Max Grav All reactions 250 lb or less at joint(s) 2, 14, 21, 22, 23, 24, 25, 26, 20, 19, 18, 17, 16

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TC DL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Corner(3) 0-8-9 to 3-8-4, Exterior(2) 3-8-4 to 12-0-0, Corner(3) 12-0-0 to 16-4-13, Exterior(2) 16-4-13 to 24-8-9 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
 - All plates are 2x4 MT20 unless otherwise indicated.
 - Gable requires continuous bottom chord bearing.
 - Gable studs spaced at 2-0-0 oc.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2, 14, 22, 23, 24, 25, 26, 20, 19, 18, 17, 16.

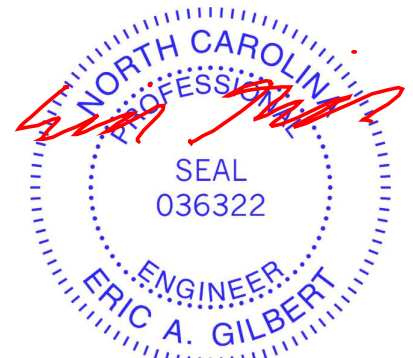

February 24, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.
 Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601


ENGINEERING BY
TRENCO
 A MiTek Affiliate
 818 Soundside Road
 Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Weaver/Lot 4 Atkins Farm/Harnett	E15440852
J0221-0760	G2	FINK	1	2	Job Reference (optional)	

Comtech, Inc., Fayetteville, NC - 28314,

8.330 s Oct 7 2020 MiTek Industries, Inc. Wed Feb 24 09:28:24 2021 Page 1

ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-Qw99h?IVt8wCTDcAB?S_lwRSN0vZLq9FuukbQVzhzJb



Scale = 1:53.0

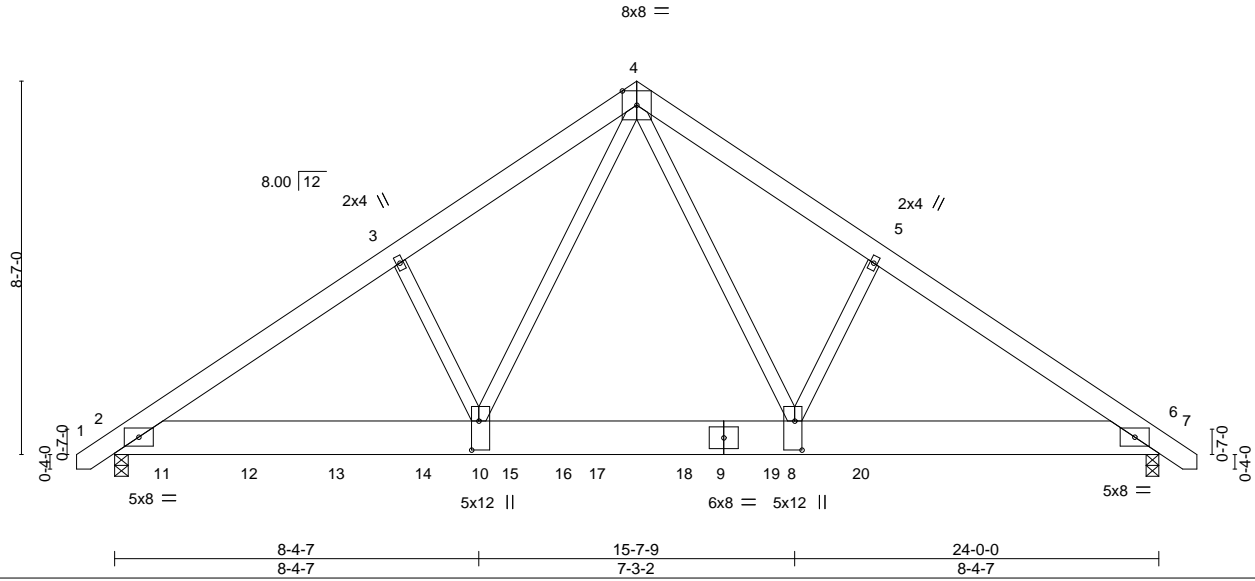


Plate Offsets (X,Y)-- [8:0-8-0,0-2-0], [10:0-8-0,0-2-0]

LOADING (psf)	SPACING-	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.15	TC 0.44	Vert(LL) -0.12	8-10	>999	360	MT20	244/190
TCDL 10.0	Lumber DOL 1.15	BC 0.53	Vert(CT) -0.24	8-10	>999	240		
BCLL 0.0 *	Rep Stress Incr NO	WB 0.87	Horz(CT) 0.04	6	n/a	n/a		
BCDL 10.0	Code IRC2015/TPI2014	Matrix-S	Wind(LL) -0.01	10	>999	240		
							Weight: 407 lb	FT = 20%

LUMBER-

TOP CHORD 2x6 SP No.1
 BOT CHORD 2x10 SP 2400F 2.0E
 WEBS 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-6-6 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 2=0-3-12, 6=0-3-8
 Max Horz 2=-203(LC 25)
 Max Grav 2=9019(LC 2), 6=6408(LC 2)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.


TOP CHORD 2-3=-11364/0, 3-4=-11231/0, 4-5=-10548/0, 5-6=-10714/0
 BOT CHORD 2-10=0/9409, 8-10=0/6355, 6-8=0/8815
 WEBS 3-10=-342/199, 4-10=0/7095, 4-8=0/5752, 5-8=-315/247

NOTES-

- 2-ply truss to be connected together with 10d (0.131"x3") nails as follows:
 Top chords connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc.
 Bottom chords connected as follows: 2x10 - 2 rows staggered at 0-3-0 oc.
 Webs connected as follows: 2x4 - 1 row at 0-9-0 oc.
- All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 1382 lb down at 1-0-12, 1381 lb down at 3-0-12, 1381 lb down at 5-0-12, 1381 lb down at 7-0-12, 1381 lb down at 9-0-12, 1381 lb down at 11-0-12, 1381 lb down at 13-0-12, and 1381 lb down at 15-0-12, and 2464 lb down at 17-1-8 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.

LOAD CASE(S) Standard

- Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
 Uniform Loads (plf)
 Vert: 2-6=-20, 1-4=-60, 4-7=-60
 Concentrated Loads (lb)
 Vert: 11=-1147(F) 12=-1146(F) 13=-1146(F) 14=-1146(F) 15=-1146(F) 17=-1146(F) 18=-1146(F) 19=-1146(F) 20=-1961(F)

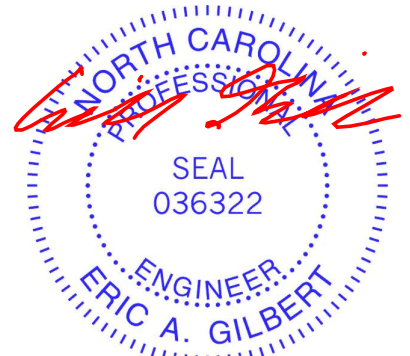

February 24, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




818 Soundside Road
 Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Weaver/Lot 4 Atkins Farm/Harnett	E15440853
J0221-0760	PB	PIGGYBACK	8	1	Job Reference (optional)	

Comtech, Inc. Fayetteville, NC - 28314,

8.330 s Oct 7 2020 MiTek Industries, Inc. Wed Feb 24 09:28:25 2021 Page 1
 ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-u7JxUL7eR235NBMizDr8zjFQLu4U?O7YT8yxzhJa
 5-5-15
 2-8-15

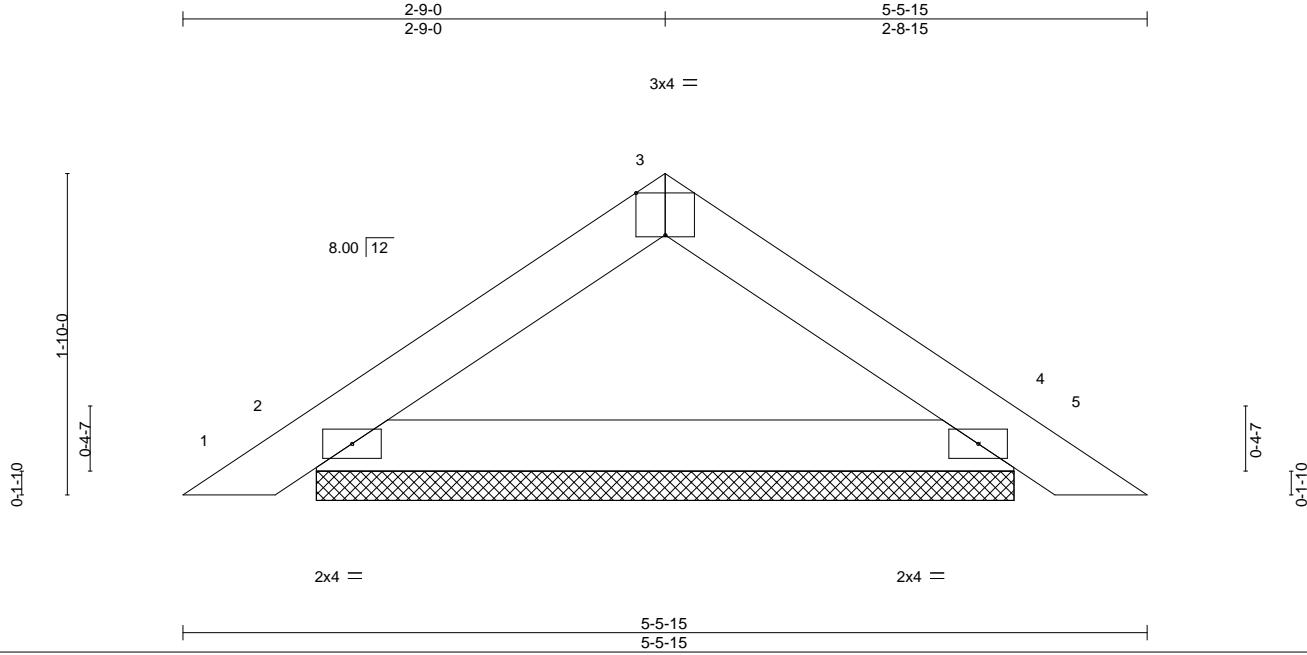

Scale = 1:13.1

LOADING (psf)		SPACING-		CSI.		DEFL.				PLATES		GRIP	
TCLL	20.0	Plate Grip DOL	1.15	TC	0.05	Vert(LL)	0.00	4	n/r	120	MT20	244/190	
TCDL	10.0	Lumber DOL	1.15	BC	0.14	Vert(CT)	0.00	5	n/r	120	Weight: 16 lb FT = 20%		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.00	Horz(CT)	0.00	4	n/a	n/a			
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-P									


LUMBER-
 TOP CHORD 2x4 SP No.1
 BOT CHORD 2x4 SP No.1

BRACING-
 TOP CHORD Structural wood sheathing directly applied or 5-5-15 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 2=3-11-11, 4=3-11-11
 Max Horz 2=-40(LC 10)
 Max Uplift 2=-16(LC 12), 4=-16(LC 13)
 Max Grav 2=189(LC 1), 4=189(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2) zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Gable requires continuous bottom chord bearing.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2, 4.
 - See Standard Industry Piggyback Truss Connection Detail for Connection to base truss as applicable, or consult qualified building designer.

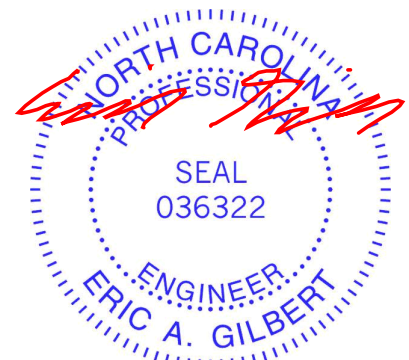


February 24, 2021

Job	Truss	Truss Type	Qty	Ply	Weaver/Lot 4 Atkins Farm/Harnett	E15440854
J0221-0760	PBGE	GABLE	1	1	Job Reference (optional)	

Comtech, Inc., Fayetteville, NC - 28314,

8.330 s Oct 7 2020 MiTek Industries, Inc. Wed Feb 24 09:28:26 2021 Page 1
 ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-MJHv5hJPIAwimWmZJQVSNLWu?qiupx5YLCdHuoZhzJZ

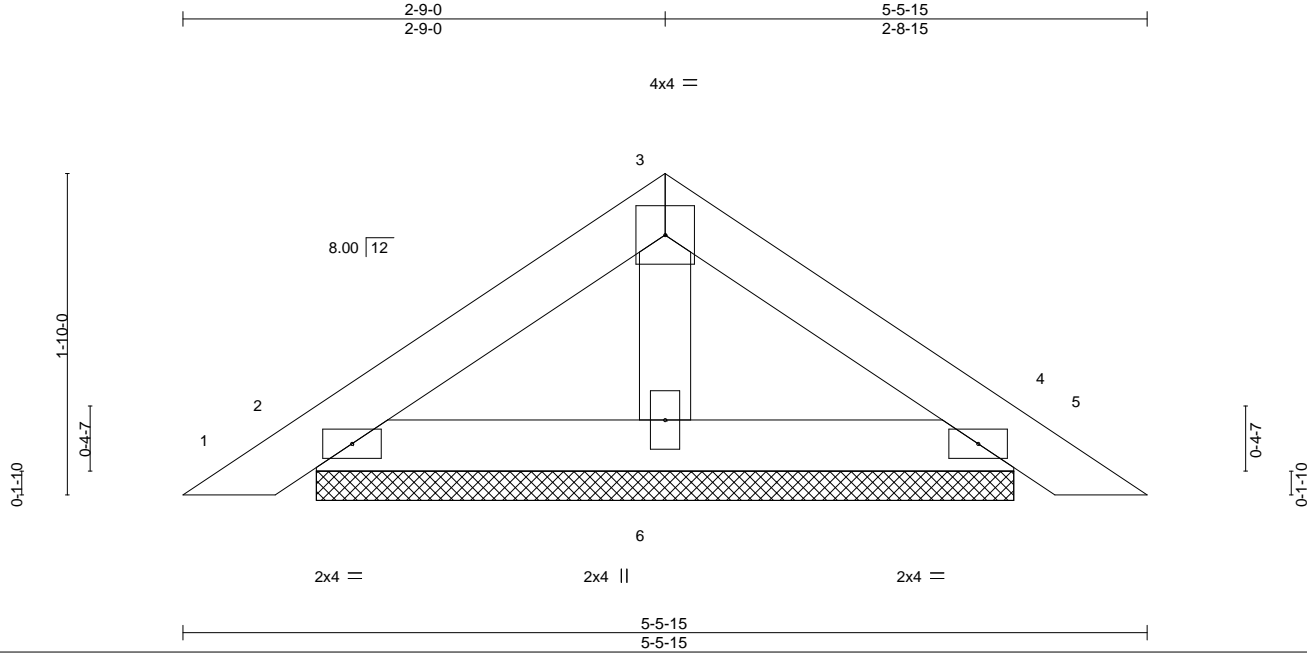

Scale = 1:13.1

LOADING (psf)	SPACING-	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	2-0-0	TC 0.05	Vert(LL)	0.00	4	n/r	MT20	244/190
TCDL 10.0	Plate Grip DOL 1.15	BC 0.03	Vert(CT)	0.00	5	n/r		
BCLL 0.0 *	Lumber DOL 1.15	WB 0.01	Horz(CT)	0.00	4	n/a		
BCDL 10.0	Rep Stress Incr YES	Matrix-P					Weight: 17 lb	FT = 20%
	Code IRC2015/TPI2014							

LUMBER-

TOP CHORD 2x4 SP No.1
 BOT CHORD 2x4 SP No.1
 OTHERS 2x4 SP No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-5-15 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS.

(size) 2=3-11-11, 4=3-11-11, 6=3-11-11
 Max Horz 2=50(LC 11)
 Max Uplift 2=45(LC 12), 4=52(LC 13)
 Max Grav 2=119(LC 1), 4=119(LC 1), 6=139(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TC DL=6.0psf; BC DL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Corner(3) zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- Gable requires continuous bottom chord bearing.
- Gable studs spaced at 2-0-0 oc.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2, 4.
- See Standard Industry Piggyback Truss Connection Detail for Connection to base truss as applicable, or consult qualified building designer.

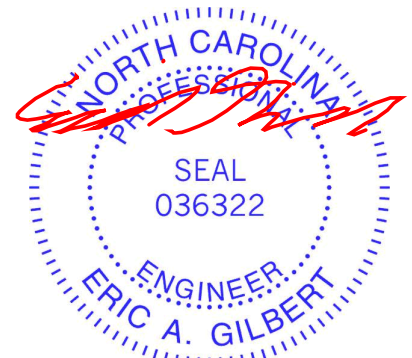

February 24, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component


Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




818 Soundside Road
 Edenton, NC 27932

Symbols

PLATE LOCATION AND ORIENTATION



Center plate on joint unless x, y offsets are indicated. Dimensions are in ft-in-sixteenths. Apply plates to both sides of truss and fully embed teeth.

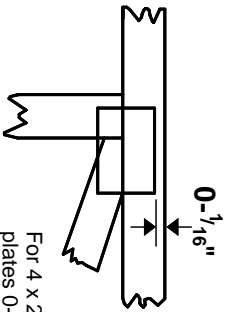

For 4 x 2 orientation, locate plates 0- 1/16" from outside edge of truss.



This symbol indicates the required direction of slots in connector plates.

* Plate location details available in **MITek 20/20 software** or upon request.

PLATE SIZE

4 X 4

The first dimension is the plate width measured perpendicular to slots. Second dimension is the length parallel to slots.

LATERAL BRACING LOCATION



Indicated by symbol shown and/or by text in the bracing section of the output. Use T or I bracing if indicated.

BEARING




Indicates location where bearings (supports) occur. Icons vary but reaction section indicates joint number where bearings occur. Min size shown is for crushing only.

Industry Standards:

ANSI/TFP 1: National Design Specification for Metal Plate Connected Wood Truss Construction.
DSB-89: Design Standard for Bracing, Building Component Safety Information, Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses.

Numbering System

6-4-8
dimensions shown in ft-in-sixteenths
(Drawings not to scale)

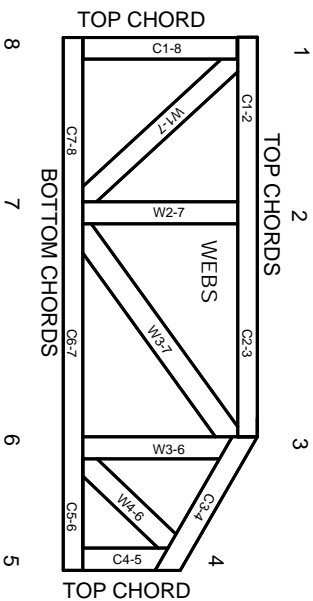

JOINTS ARE GENERALLY NUMBERED/LETTERED CLOCKWISE AROUND THE TRUSS STARTING AT THE JOINT FARTHEST TO THE LEFT.

CHORDS AND WEBS ARE IDENTIFIED BY END JOINT NUMBERS/LETTERS.

PRODUCT CODE APPROVALS

ICC-ES Reports:

ESR-1311, ESR-1352, ESR1988
ER-3907, ESR-2362, ESR-1397, ESR-3282

Trusses are designed for wind loads in the plane of the truss unless otherwise shown.

Lumber design values are in accordance with ANSI/TFP 1 section 6.3 These truss designs rely on lumber values established by others.

© 2012 MITteK® All Rights Reserved



MITek Engineering Reference Sheet: Mill-7473 rev. 5/19/2020



General Safety Notes

Failure to Follow Could Cause Property Damage or Personal Injury

1. Additional stability bracing for truss system, e.g. diagonal or X-bracing, is always required. See BCSI.
2. Truss bracing must be designed by an engineer. For wide truss spacing, individual lateral braces themselves may require bracing, or alternative Tor I bracing should be considered.
3. Never exceed the design loading shown and never stack materials on inadequately braced trusses.
4. Provide copies of this truss design to the building designer, erection supervisor, property owner and all other interested parties.
5. Cut members to bear tightly against each other.
6. Place plates on each face of truss at each joint and embed fully. Knots and wane at joint locations are regulated by ANSI/TFP 1.
7. Design assumes trusses will be suitably protected from the environment in accord with ANSI/TFP 1.
8. Unless otherwise noted, moisture content of lumber shall not exceed 19% at time of fabrication.
9. Unless expressly noted, this design is not applicable for use with fire retardant, preservative treated, or green lumber.
10. Camber is a non-structural consideration and is the responsibility of truss fabricator. General practice is to camber for dead load deflection.
11. Plate type, size, orientation and location dimensions indicated are minimum plating requirements.
12. Lumber used shall be of the species and size, and in all respects, equal to or better than that specified.
13. Top chords must be sheathed or purlins provided at spacing indicated on design.
14. Bottom chords require lateral bracing at 10 ft. spacing, or less, if no ceiling is installed, unless otherwise noted.
15. Connections not shown are the responsibility of others.
16. Do not cut or alter truss member or plate without prior approval of an engineer.
17. Install and load vertically unless indicated otherwise.
18. Use of green or treated lumber may pose unacceptable environmental, health or performance risks. Consult with project engineer before use.
19. Review all portions of this design (front, back, words and pictures) before use. Reviewing pictures alone is not sufficient.
20. Design assumes manufacture in accordance with ANSI/TFP 1 Quality Criteria.
21. The design does not take into account any dynamic or other loads other than those expressly stated.