



nail into each flange.

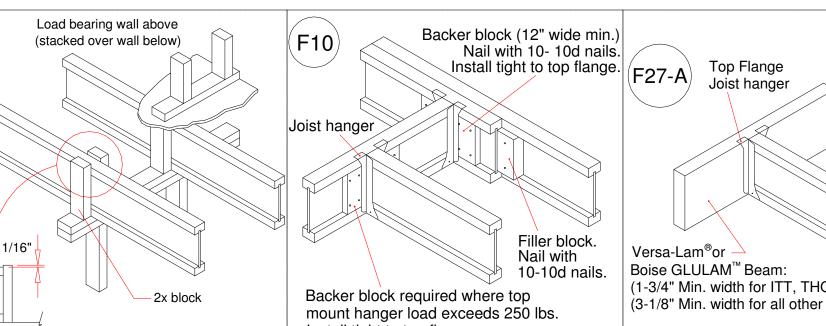


Install tight to top flange.

Solid block all posts from

above to bearing below.

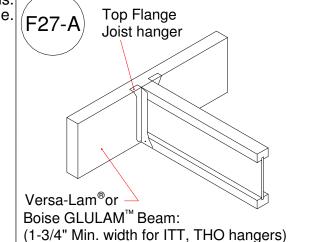

(3-1/8" Min. width for all other top flange hangers)

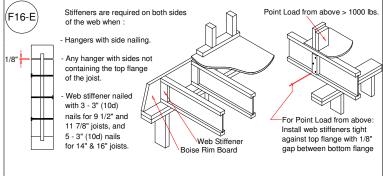



Boise Cascade www.bldr.com

1135 ROBESON STREET FAYETTEVILLE, NC 28305 V (910) 485-1111

7601 BOEING DRIVE

GREENSBORO, NC 27409 V (336) 884-5454

3189 NC HIGHWAY5 ABERDEEN NC 28315 V (910) 944-2516

This layout and associated materials list has been prepared based on project plans and/or information provided to Builders FirstSource (BFS). It remains the responsibility of the builder, architect, designer, or other responsible persons to review this information to assure that it is appropriate, accurate, complete and complies with applicable building codes.

1.) READ THE INSTALLATION GUIDE BEFORE FRAMING.
2.) ALL WALLS SHOWN ARE LOAD BEARING UNLESS NOTED OTHERWISE. WALLS NOT SHOWN ARE CONSIDERED NON-LOAD BEARING.
3.) UNLESS STATED OTHERWISE ALL CEILING & ROOF LOADS BRACE DIRECTLY TO LOAD BEARING WALLS SUPPORTED BY FOUNDATION.
4.) CONTACT BUILDERS FIRSTSOURCE BEFORE MAKING ANY ALTERATIONS OR ADJUSTMENTS...FAILURE TO DO SO MAY RESULT IN COSTLY REPAIRS.

FRR016 Wilmington

CRAWL EWP PLACEMENT PLAN

CRAWL EWP PLACEMENT PLAN

Builders FirstSource, Central Carolina Markets

DRAWN BY: AJ Napier

SCALE: NTS

MINIMUM DESIGN DATA

LIVE LOAD 40 PSF DEAD LOAD 10 PSF

TOTAL LOAD 50 PSF

DOL = 100%


DEFLECTION CRITERIA L/480 (MINIMUM)


ARCHITECTUAL PLAN DATE XX-XX-XX REVISED ARCH. PLAN DATE XX-XX-XX

> XXXXXX Sheet 1 of 1



		Products			
PlotID	Length	Product	Plies	Net Qty	Fab Type
FJ-1	32' 10"	11-7/8" BCI® 4500s-1.8	1	10	FF
FJ-2	31' 10"	11-7/8" BCI® 4500s-1.8	1	4	FF
FJ-3	30' 10"	11-7/8" BCI® 4500s-1.8	1	4	FF
FJ-4	15' 4"	11-7/8" BCI® 4500s-1.8	1	13	FF
FJ-5-2	15' 4"	11-7/8" BCI® 4500s-1.8	2	2	FF
FJ-6	13' 5 1/4"	11-7/8" BCI® 4500s-1.8	1	1	FF
FJ-7	12' 10"	11-7/8" BCI® 4500s-1.8	1	2	FF
FJ-8	11' 5 1/4"	11-7/8" BCI® 4500s-1.8	1	1	FF
Rim1	12' 0"	1" × 11-7/8" BC RIM BOARD OSB	1	15	FF
Bk1	28' 0"	11-7/8" BCI® 4500s-1.8	1	1	FF

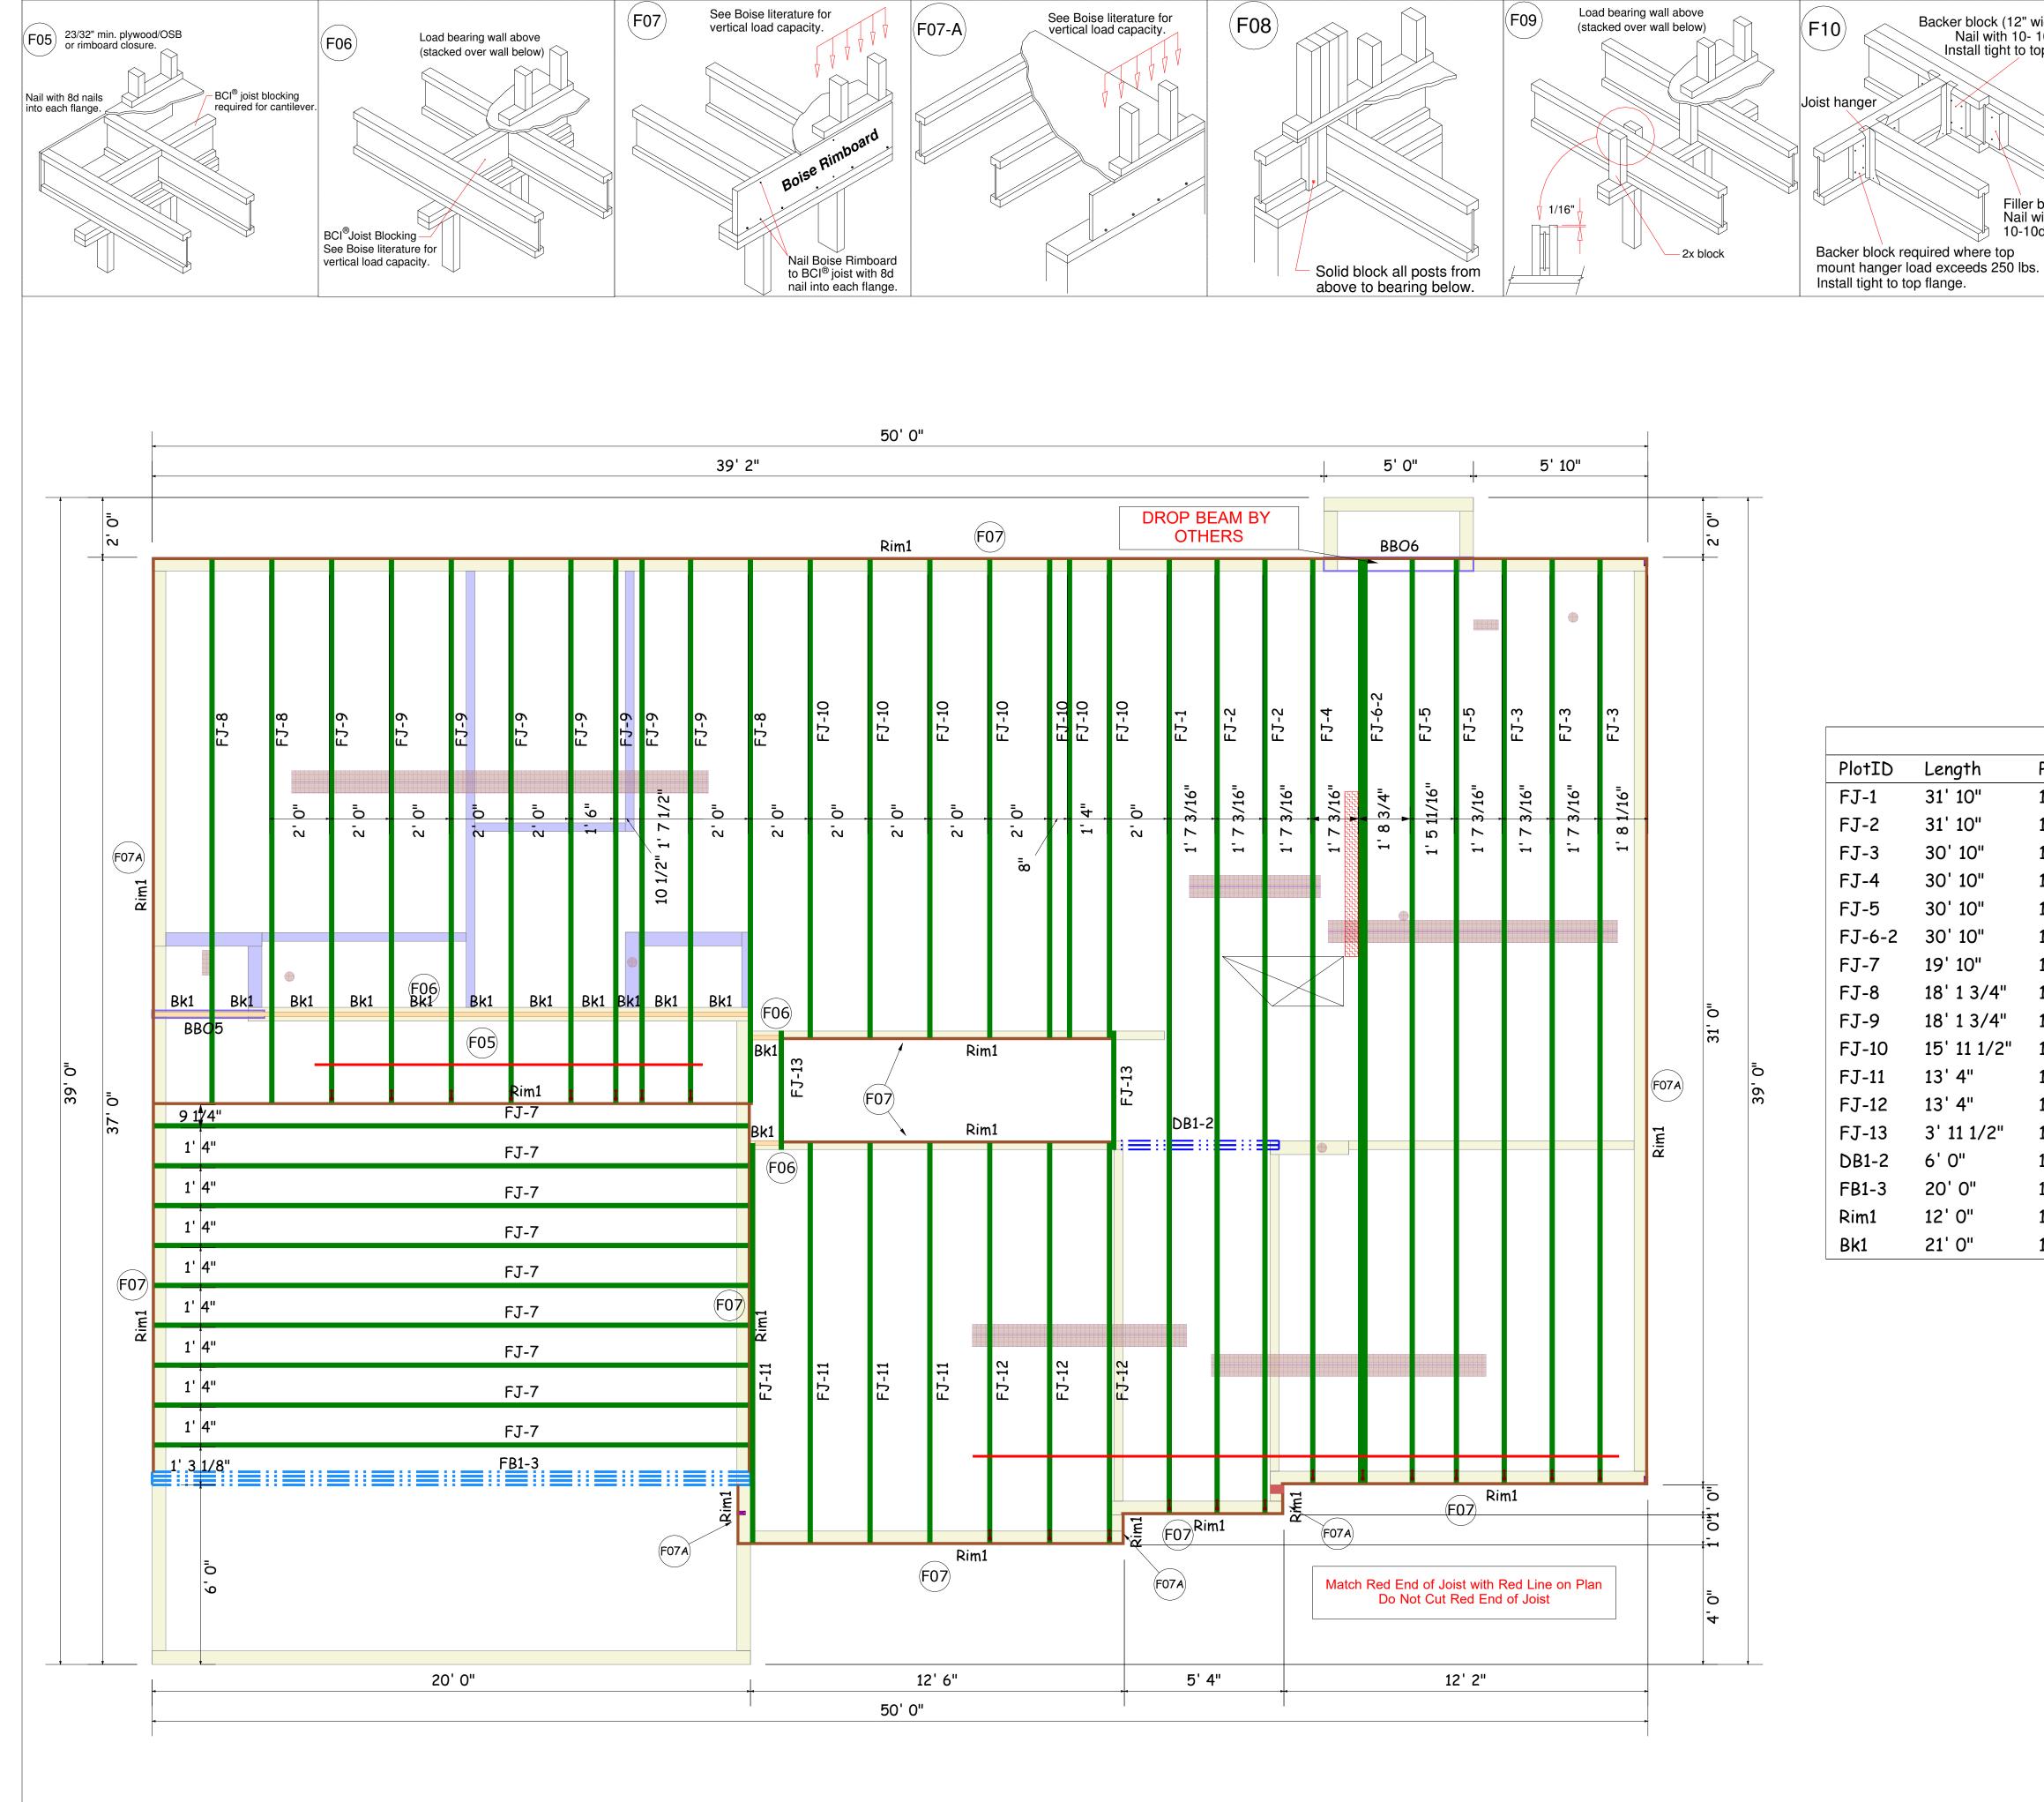

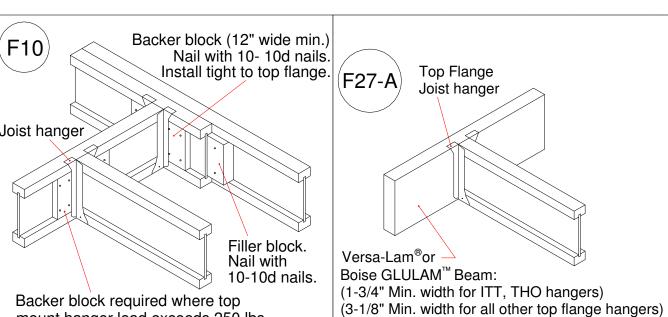



Length

Product

14" BCI® 4500s-1.8

14" BCI® 4500s-1.8

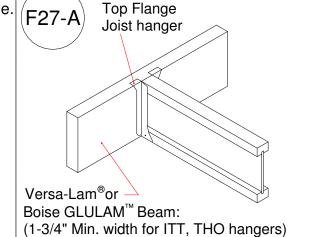

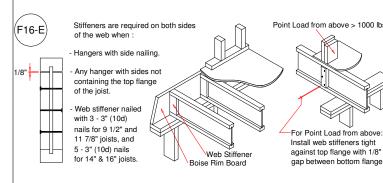

Plies Net Qty Fab Type



Boise Cascade www.bldr.com

1135 ROBESON STREET FAYETTEVILLE, NC 28305 V (910) 485-1111

7601 BOEING DRIVE GREENSBORO, NC 27409 V (336) 884-5454

3189 NC HIGHWAY5 ABERDEEN NC 28315 V (910) 944-2516

This layout and associated materials list has been prepared based on project plans and/or information provided to Builders FirstSource (BFS). It remains the responsibility of the builder, architect, designer, or other responsible persons to review this information to assure that it is appropriate, accurate, complete and complies with

applicable building codes.

1.) READ THE INSTALLATION GUIDE BEFORE FRAMING.
2.) ALL WALLS SHOWN ARE LOAD BEARING UNLESS NOTED OTHERWISE. WALLS NOT SHOWN ARE CONSIDERED NON-LOAD BEARING.
3.) UNLESS STATED OTHERWISE ALL CEILING & ROOF LOADS BRACE DIRECTLY TO LOAD BEARING WALLS SUPPORTED BY FOUNDATION.
4.) CONTACT BUILDERS FIRSTSOURCE BEFORE MAKING ANY ALTERATIONS OR ADJUSTMENTS...FAILURE TO DO SO MAY RESULT IN COSTLY REPAIRS.

wp placement plan , Central Carolina Markets

FRR016 Wilmington SCALE: NTC

MINIMUM DESIGN DATA

LIVE LOAD 40 PSF DEAD LOAD 10 PSF

TOTAL LOAD 50 PSF

DOL = 100%

DEFLECTION CRITERIA L/480 (MINIMUM)

ARCHITECTUAL PLAN DATE XX-XX-XX REVISED ARCH. PLAN DATE XX-XX-XX

> XXXXXXX Sheet

1 of 1

30' 10" 14" BCI® 4500s-1.8 14" BCI® 4500s-1.8 14" BCI® 4500s-1.8 FF 14" BCI® 4500s-1.8 14" BCI® 4500s-1.8 15' 11 1/2" 13' 4" 14" BCI® 4500s-1.8 13' 4" 14" BCI® 4500s-1.8 14" BCI® 4500s-1.8 3' 11 1/2" 6' 0" 1-3/4" x 9-1/4" VERSA-LAM® 2.0 3100 SP 20' 0" 1-3/4" x 24" VERSA-LAM® 2.0 3100 SP 12' 0" 1" x 14" BC RIM BOARD OSB 21' 0" 14" BCI® 4500s-1.8 FF WILMINGTON

Products

2nd FLOOR EWP PLACEMENT PLAN