





Action Solar & Electric, LLC  
 Julian Nuñez, Electrical Contractor 31399-U  
 204 Deer Ridge Dr., Chapel Hill, NC 27516  
 12/10/2020

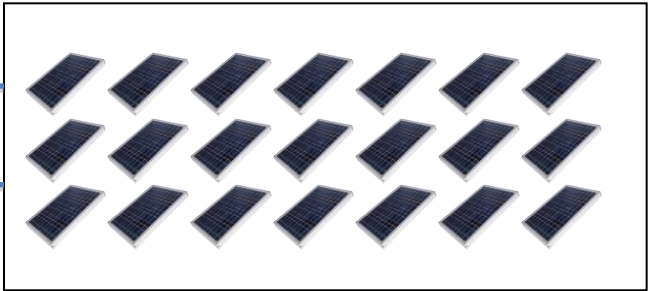

(21) roof mounted Heliene 480w modules mounted with Rescom Solar Matters Composition Shingle Rapid Kit mini-rail mounting system.. #6 solid copper conductor to ground racking system.  
 (3) strings of 7 modules  
 VOC: 438.2v  
 Max VOC: 525v DC per string  
 & (1) Soladeck flashed PV roof mount enclosure

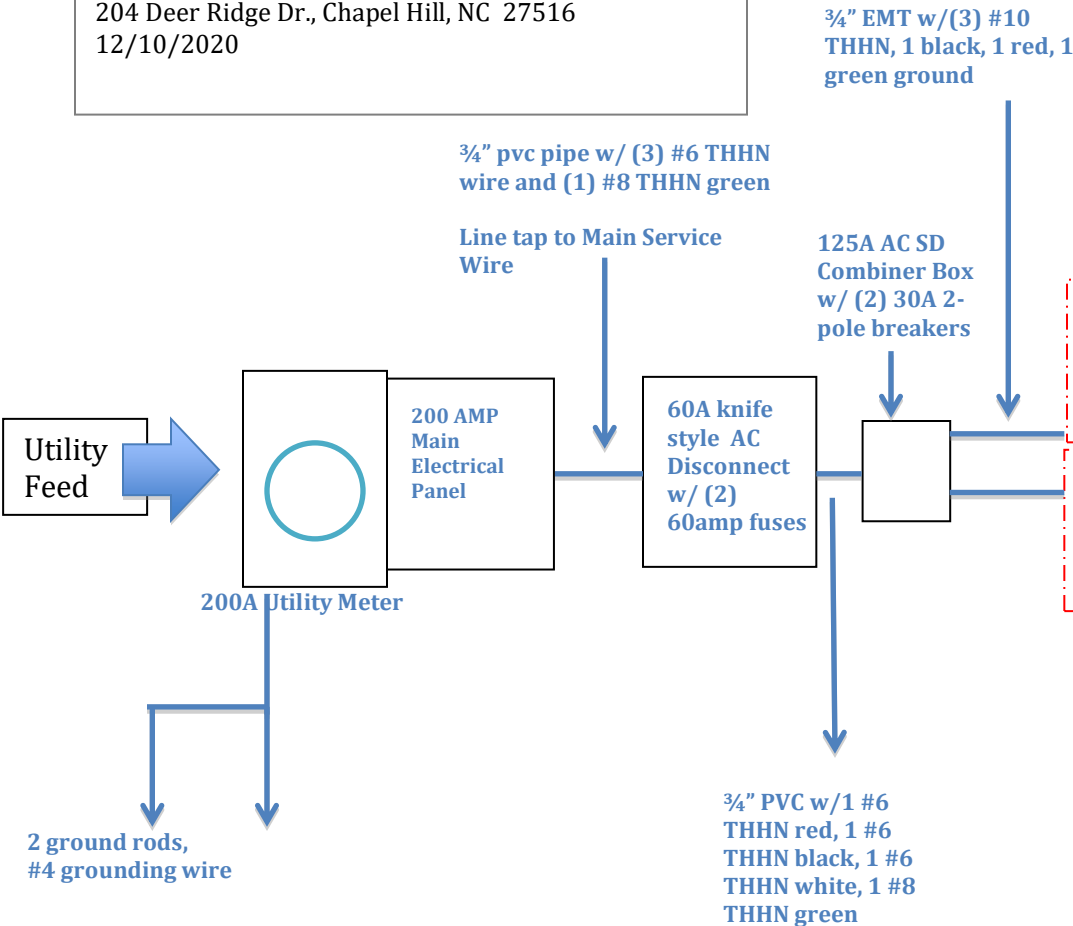

3/4" pvc pipe w/ (3) #6 THHN wire and (1) #8 THHN green

3/4" EMT with (5) #10 THHN wires (2) black, (2) red, (1) green for grounding  
 Inverter #1 to (1) string of 7 modules, Inverter #2 to (2) strings of 7 modules each

**Project Description:**  
 Victoria L. Olive  
 1876 NC 87N, Sanford, NC 27332-1752

10KW AC Roof Mount System Array  
 (21) 480watt Heliene PV Modules (model: 96M480)  
 (2) 5KW Growatt inverters (model: MTL P5000-US)  
 (6) NEP PVG Rapid Shut-offs