

BM7-4 (Roof Beam)

Dry | 1 span | No cant.

July 10, 2019 07:28:30

BC CALC® Member Report

Build 7082

Job name: Ellington

File name:

Address:

Description:

City, State, Zip:




Specifier:

Builder: LAMCO

Designer:

Code reports: ESR-1040

Company: BFS

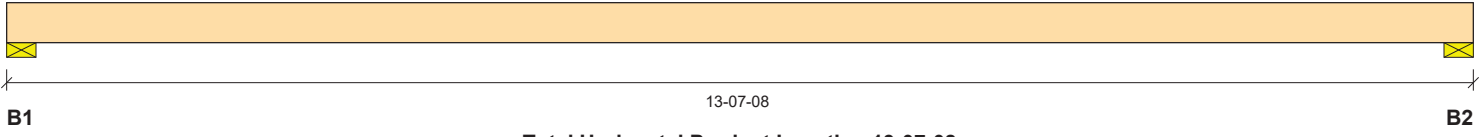

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind	Roof Live
B1, 3-1/2"		5474 / 0			5310 / 0
B2, 3-1/2"		5474 / 0			5310 / 0

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	100%	90%	115%	160%	Roof Live 125%	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	13-07-08	Top		24				00-00-00
1	A02 Trusses	Unf. Lin. (lb/ft)	L	00-00-00	13-07-08	Top		734			734	n/a
2	J02 Trusses	Unf. Lin. (lb/ft)	L	00-00-00	13-07-08	Top		46			46	n/a

Controls Summary

	Value	% Allowable	Duration	Case	Location
Pos. Moment	34305 ft-lbs	64.5 %	125%	4	06-09-12
End Shear	8756 lbs	44.4 %	125%	4	01-03-06
Total Load Deflection	L/288 (0.548")	62.4 %	n/a	4	06-09-12
Live Load Deflection	L/586 (0.27")	41.0 %	n/a	5	06-09-12
Max Defl.	0.548"	54.8 %	n/a	4	06-09-12
Span / Depth	13.3				

Bearing Supports

Bearing Supports	Dim. (LxW)	Value	% Allow Support	% Allow Member	Material
B1	Wall/Plate 3-1/2" x 7"	10785 lbs	n/a	58.7 %	Unspecified
B2	Wall/Plate 3-1/2" x 7"	10785 lbs	n/a	58.7 %	Unspecified

Cautions

For roof members with slope (1/4)/12 or less final design must ensure that ponding instability will not occur.

For roof members with slope (1/2)/12 or less final design must account for Rain-on-Snow surcharge load.

Notes

- Design meets Code minimum (L/180) Total load deflection criteria.
- Design meets Code minimum (L/240) Live load deflection criteria.
- Design meets arbitrary (1") Maximum Total load deflection criteria.
- Calculations assume member is fully braced.
- BC CALC® analysis is based on IBC 2009.
- Design based on Dry Service Condition.
- Beams 7 inches wide will be assumed to be either top-loaded only, or equally loaded from each side.
- Bolts are assumed to be Grade A307 or Grade 2 or higher.
- Member has no side loads.

BM7-4 (Roof Beam)

Dry | 1 span | No cant.

July 10, 2019 07:28:30

BC CALC® Member Report

Build 7082

Job name: Ellington

File name:

Address:

Description:

City, State, Zip:

Specifier:


Builder: LAMCO

Designer:

Code reports: ESR-1040

Company: BFS

Connection Diagram: Full Length of Member

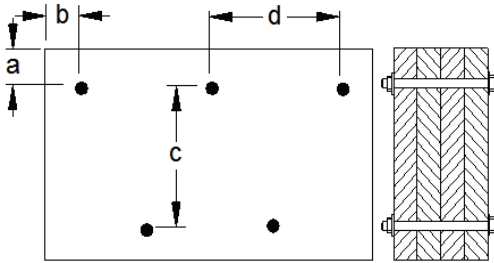

a minimum = 2" c = 7-7/8"
 b minimum = 2-1/2" d = 24"

Beams 7 inches wide will be assumed to be either top-loaded only, or equally loaded from each side.
 Bolts are assumed to be Grade A307 or Grade 2 or higher.
 Member has no side loads.
 Connectors are: 1/2 in. Staggered Through Bolt

Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,