## Harnett County Department of Public Health


## Improvement Permit

A building permit cannot be issued with only an Improvement Permit

		e Lot # 7
UED TO: Benjamin Stout Real Estate SUBDIVISION Spartan Ridge LOT # 7  W □ REPAIR □ EXPANSION □ Site Improvements required prior to Construction Authorization Issuance:		
Type of Structure: 45' x 38' SFD	site improvements rec	quired prior to construction nationalation issuance.
Proposed Wastewater System Type: 25% reduction		
Projected Daily Flow: 480 GPD		
Number of bedrooms: 4 Number of Occupants: 8	max	
Basement Yes 🗵 No		
Pump Required: Yes No May be required based on	nal location and elevations of facilities	_
Type of Water Supply: Community Public Well	Distance from wellfeet	Permit valid for: 🗵 Five years
Permit conditions:		No expiration
Authorized State Agent:: Mah Ath REHS	Date: 05-07-21	CEE ATTACHED CITE CHETCH
Authorized State Agent::  The issuance of this permit by the Health Department in no way guarantees the issuance		SEE ATTACHED SITE SKETCH
site is subject to revocation if the site plan, plat, or the intended use changes. The Impro		
the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.		
Cor	struction Authorization	
	(Required for Building Permit)	
The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956,		into this permit and shall be met. Systems shall be installed in accordance
with the attached system layout.		
ISSUED TO: Benjamin Stout Real Estate	PROPERTY LOCATION: 191 [	Dove Rd, Cameron (SR1200)
15. Derijarimi eteat i teat	SUBDIVISION Spartan R	
Facility Type: 45' x 38' SFD	lew Expansion Repair	201 /1
Basement? Yes No Basement Fixtures? Yes		
Type of Wastewater System** 25% reduction		(Initial) Wastewater Flow: 480 GPD
,,		(IIIIIIai) Wastewater Flow. 400 Grb
(See note below, if applicable   )		
25% reduction	(Poppie)	
25% reduction	(Repair)	
Installation Requirements/Conditions Number of	trenches 4	Treach Society O. Sout on South
Installation Requirements/Conditions Number of Septic Tank Size 1000 gallons Exact length	trenches 4 of each trench 50 feet	Trench Spacing: 9 Feet on Center
Installation Requirements/Conditions Number of Septic Tank Size 1000 gallons Exact lengt Pump Tank Size gallons Trenches sh	trenches 4 feet all be installed on contour at a	Soil Cover: 6inches
Installation Requirements/Conditions Septic Tank Size 1000 gallons Pump Tank Size gallons Trenches sh	trenches 4 n of each trench 50 feet all be installed on contour at a rench Depth of: 18" - 24" inches	Soil Cover: 6inches (Maximum soil cover shall not exceed
Installation Requirements/Conditions Septic Tank Size 1000 gallons Pump Tank Size gallons Trenches sh Maximum T (Trench both	trenches 4  n of each trench 50 feet all be installed on contour at a rench Depth of: 18" - 24" inches toms shall be level to +/-1/4"	Soil Cover: 6inches
Installation Requirements/Conditions Septic Tank Size 1000 gallons Pump Tank Size gallons Trenches sh Maximum T (Trench bot in all direct	trenches 4  n of each trench 50 feet all be installed on contour at a rench Depth of: 18" - 24" inches toms shall be level to +/-1/4"	Soil Cover: 6inches (Maximum soil cover shall not exceed 36" above the trench bottom)
Installation Requirements/Conditions Septic Tank Size 1000 gallons Pump Tank Size gallons Trenches sh Maximum T (Trench both	trenches 4  n of each trench 50 feet all be installed on contour at a rench Depth of: 18" - 24" inches toms shall be level to +/-1/4"	Soil Cover: 6inches  (Maximum soil cover shall not exceed 36" above the trench bottom)  inches below pipe
Installation Requirements/Conditions  Septic Tank Size 1000 gallons  Pump Tank Size gallons  Trenches sh Maximum T  (Trench bot in all direct  Pump Requirements: ft. TDH vs. GPM	trenches 4 n of each trench 50 feet all be installed on contour at a rench Depth of: 18" - 24" inches toms shall be level to +/-1/4"	Soil Cover: 6inches  (Maximum soil cover shall not exceed 36" above the trench bottom)  inches below pipe Aggregate Depth: inches above pipe
Installation Requirements/Conditions Septic Tank Size 1000 gallons Pump Tank Size gallons Trenches sh Maximum T (Trench bot in all direct	trenches 4 n of each trench 50 feet all be installed on contour at a rench Depth of: 18" - 24" inches toms shall be level to +/-1/4"	Soil Cover: 6inches  (Maximum soil cover shall not exceed 36" above the trench bottom)  inches below pipe
Installation Requirements/Conditions Septic Tank Size 1000 gallons Pump Tank Size gallons Trenches sh Maximum T (Trench bot in all direct Pump Requirements: ft. TDH vs GPM  Conditions:	trenches 4 n of each trench 50 feet all be installed on contour at a rench Depth of: 18" - 24" inches toms shall be level to +/-1/4"	Soil Cover: 6inches  (Maximum soil cover shall not exceed 36" above the trench bottom) inches below pipe Aggregate Depth:inches above pipeinches total
Installation Requirements/Conditions  Septic Tank Size 1000 gallons  Pump Tank Size gallons  Trenches sh Maximum T  (Trench bot in all direct  Pump Requirements: ft. TDH vs. GPM	trenches 4 n of each trench 50 feet all be installed on contour at a rench Depth of: 18" - 24" inches toms shall be level to +/-1/4"	Soil Cover: 6inches  (Maximum soil cover shall not exceed 36" above the trench bottom) inches below pipe Aggregate Depth:inches above pipeinches total
Installation Requirements/Conditions Septic Tank Size 1000 gallons Pump Tank Size gallons Trenches sh Maximum T (Trench bot in all direct Pump Requirements: ft. TDH vs GPM  Conditions:	trenches 4 n of each trench 50 feet all be installed on contour at a rench Depth of: 18" - 24" inches toms shall be level to +/-1/4"  MANY PART OF SEPTIC SYSTEM OR 1	Soil Cover: 6inches  (Maximum soil cover shall not exceed 36" above the trench bottom) inches below pipe Aggregate Depth:inches above pipeinches total
Installation Requirements/Conditions Septic Tank Size 1000 gallons Pump Tank Size gallons Trenches sh Maximum T (Trench bot in all direct generations:  Conditions:  WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FRO NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD	trenches 4 n of each trench 50 feet all be installed on contour at a rench Depth of: 18" - 24" inches toms shall be level to +/-1/4"  IM ANY PART OF SEPTIC SYSTEM OR I AREA.	Soil Cover: 6inches  (Maximum soil cover shall not exceed 36" above the trench bottom) inches below pipe Aggregate Depth:inches above pipeinches total  REPAIR AREA.
Installation Requirements/Conditions Septic Tank Size 1000 gallons Pump Tank Size gallons Trenches sh Maximum T (Trench bot in all direct gallons:  Conditions:  WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FRO	trenches 4 n of each trench 50 feet all be installed on contour at a rench Depth of: 18" - 24" inches toms shall be level to +/-1/4"  IM ANY PART OF SEPTIC SYSTEM OR I AREA.	Soil Cover: 6inches  (Maximum soil cover shall not exceed 36" above the trench bottom) inches below pipe Aggregate Depth:inches above pipeinches total  REPAIR AREA.
Installation Requirements/Conditions Septic Tank Size 1000 gallons Pump Tank Size gallons Trenches sh Maximum T (Trench bot in all direct pump Requirements: ft. TDH vs. GPM  Conditions:  WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FRO NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD  **If applicable: 1 understand the system type specified is different in the system type specified in the system type specified is different in the system type specified in the system type specified is different in the system type specified in the system type specified is different in the system type specified in the s	trenches 4 n of each trench 50 feet all be installed on contour at a rench Depth of: 18" - 24" inches toms shall be level to +/-1/4"  IM ANY PART OF SEPTIC SYSTEM OR IN AREA.  From the type specified on the application	Soil Cover: 6inches  (Maximum soil cover shall not exceed 36" above the trench bottom) inches below pipe Aggregate Depth:inches above pipeinches total  REPAIR AREA.
Installation Requirements/Conditions Septic Tank Size 1000 gallons Pump Tank Size gallons Trenches sh Maximum T (Trench bot in all direct pump Requirements: ft. TDH vs. GPM  Conditions:  WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FRO NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD  **If applicable: 1 understand the system type specified is different in the system type specified in the system type specified is different in the system type specified in the system type specified is different in the system type specified in the system type specified is different in the system type specified in the s	trenches 4 n of each trench 50 feet all be installed on contour at a rench Depth of: 18" - 24" inches toms shall be level to +/-1/4"  IM ANY PART OF SEPTIC SYSTEM OR IN AREA.  From the type specified on the application	Soil Cover: 6inches  (Maximum soil cover shall not exceed 36" above the trench bottom) inches below pipe Aggregate Depth:inches above pipeinches total  REPAIR AREA.
Installation Requirements/Conditions Septic Tank Size 1000 gallons Pump Tank Size gallons Trenches sh Maximum T (Trench bot in all direct pump Requirements: ft. TDH vs GPM  Conditions: WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FRO NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD  **If applicable: understand the system type specified is different of the system type specified is different.  Owner/Legal Representative Signature: This Construction Authorization is subject to revocation if the site plan, plat, or the intended.	trenches 4 n of each trench 50 feet all be installed on contour at a rench Depth of: 18" - 24" inches toms shall be level to +/-1/4" ions)  MANY PART OF SEPTIC SYSTEM OR I AREA.  From the type specified on the application and use changes The Construction Authorization shall not	Soil Cover: 6inches  (Maximum soil cover shall not exceed 36" above the trench bottom) inches below pipe Aggregate Depth:inches above pipeinches total  REPAIR AREA.  Date:  be transferred when there is a change in ownership of the site. This
Installation Requirements/Conditions Septic Tank Size 1000 gallons Pump Tank Size gallons Trenches sh Maximum T (Trench bot in all direct pump Requirements: ft. TDH vs. GPM  Conditions:  WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FRO NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD  **If applicable: 1 understand the system type specified is different in the system type specified in the system type specified is different in the system type specified in the system type specified is different in the system type specified in the system type specified is different in the system type specified in the s	trenches 4 n of each trench 50 feet all be installed on contour at a rench Depth of: 18" - 24" inches toms shall be level to +/-1/4" ions)  MANY PART OF SEPTIC SYSTEM OR I AREA.  From the type specified on the application and use changes The Construction Authorization shall not	Soil Cover: 6inches  (Maximum soil cover shall not exceed 36" above the trench bottom) inches below pipe Aggregate Depth:inches above pipeinches total  REPAIR AREA.  Date:  be transferred when there is a change in ownership of the site. This
Installation Requirements/Conditions Septic Tank Size 1000 gallons  Pump Tank Size gallons  Trenches sh Maximum T (Trench bot in all direct pump Requirements:	trenches 4 n of each trench 50 feet all be installed on contour at a rench Depth of: 18" - 24" inches toms shall be level to +/-1/4" ions)  MANY PART OF SEPTIC SYSTEM OR I AREA.  From the type specified on the application and use changes The Construction Authorization shall not tes for Sewage Treatment and Disposal and to the conditi	Soil Cover: 6inches  (Maximum soil cover shall not exceed 36" above the trench bottom) inches below pipe Aggregate Depth:inches above pipeinches total  REPAIR AREA.  Date:  be transferred when there is a change in ownership of the site. This SEE ATTACHED SITE SKETCH
Installation Requirements/Conditions Septic Tank Size 1000 gallons  Fixact length gallons  Fixact length gallons  Fixact length gallons  Trenches show maximum Tourier for all direct garden gallons  Fump Requirements:  WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD  **If applicable: I understand the system type specified is different garden g	trenches 4 n of each trench 50 feet all be installed on contour at a rench Depth of: 18" - 24" inches toms shall be level to +/-1/4" ions)  MANY PART OF SEPTIC SYSTEM OR I AREA.  From the type specified on the application and use changes The Construction Authorization shall not tes for Sewage Treatment and Disposal and to the conditi	Soil Cover: 6inches  (Maximum soil cover shall not exceed 36" above the trench bottom) inches below pipe Aggregate Depth:inches above pipeinches total  REPAIR AREA.  Date: be transferred when there is a change in ownership of the site. This SEE ATTACHED SITE SKETCH

## Harnett County Department of Public Health Site Sketch

Property Location: 191 Dove Rd, Cameron (SR	200)	
Issued To: Benjamin Stout Real Estate	Subdivision Spartan Ridge	Lot # 7
Authorized State Agent:	K-REH	Date: 05-07-21

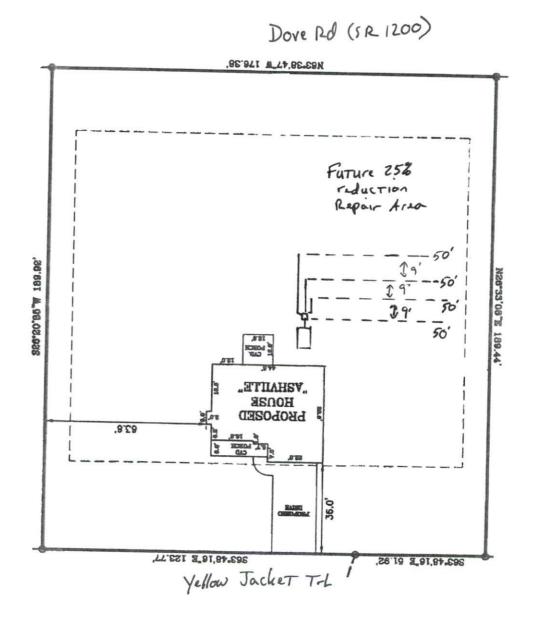

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.