



**ROOF & FLOOR TRUSSES & BEAMS**

Reilly Road Industrial Park  
Fayetteville, N.C. 28309  
Phone: (910) 864-8787  
Fax: (910) 864-4444


Bearing reactions less than or equal to 3000# are deemed to comply with the prescriptive Code requirements. The contractor shall refer to the attached Tables ( derived from the prescriptive Code requirements ) to determine the minimum foundation size and number of wood studs required to support reactions greater than 3000# but not greater than 1500#. A registered design professional shall be retained to design the support system for any reaction that exceeds those specified in the attached Tables. A registered design professional shall be retained to design the support system for all reactions that exceed 1500#.

Signature \_\_\_\_\_  
**Sales Area**

**LOAD CHART FOR JACK STUDS**

(BASED ON TABLES 1007.2(1) & (2))  
NUMBER OF JACK STUDS REQUIRED @ EA END OF HEADERS/BEAMS

END REACTION (UP TO)	NO. OF STUDS FOR EACH HEAD	END REACTION (UP TO)	NO. OF STUDS FOR EACH HEAD	END REACTION (UP TO)	NO. OF STUDS FOR EACH HEAD
1700	1	2550	1	3400	1
3400	2	5100	2	6800	2
5100	3	7650	3	10200	3
6800	4	10200	4	13600	4
8500	5	12750	5	17000	5
10200	6	15300	6		
11900	7				
13600	8				
15300	9				

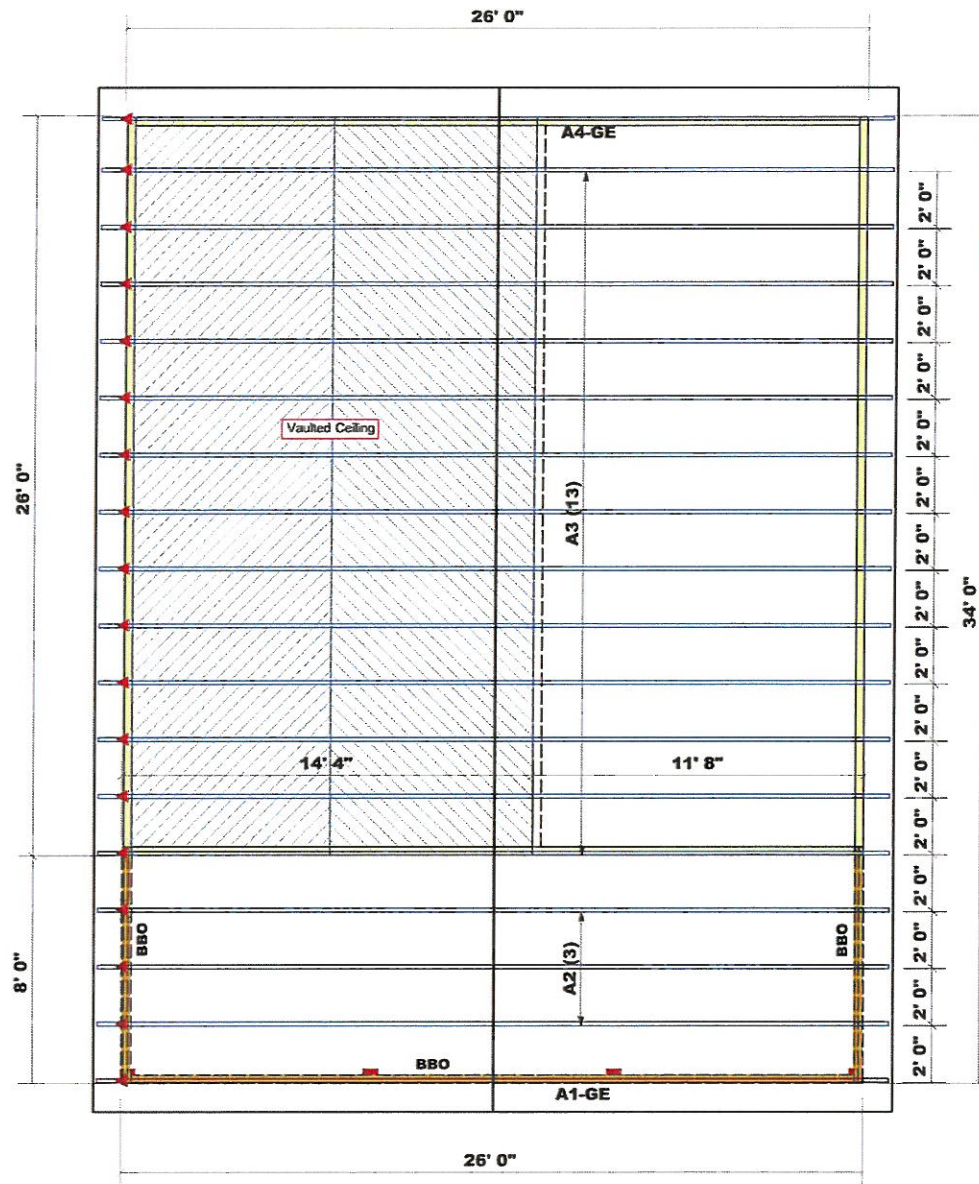

**Dimension Notes**  
1. All exterior wall to wall dimensions are to face of sheathing unless noted otherwise  
2. All interior wall dimensions are to face of frame wall unless noted otherwise  
3. All exterior wall to truss dimensions are to face of frame wall unless noted otherwise

Roof Area = 1312.12 sq.ft.  
Ridge Line = 36 ft.  
Hip Line = 0 ft.  
Horiz. OH = 72 ft.  
Raked OH = 72.9 ft.  
Decking = 45 sheets

All Walls Shown Are Considered Load Bearing

▲ = Indicates Left End of Truss (Reference Engineered Truss Drawing)  
Do Not Erect Trusses Backwards

Truss Placement Plan  
SCALE: 1/4" = 1'-0"

BUILDER	Mark Rice	COUNTY	Harnett County
JOB NAME	Rice Cottage	ADDRESS	102 Mabry Rd. / Angier, NC
PLAN	Rice Cottage	MODEL	Roof
SEAL DATE	3/12/21	DATE REV.	3/18/21
QUOTE #	B0321-1748	DRAWN BY	Anthony Williams
JOB #	TBD	SALESMAN	Neil Baggett

THIS IS A TRUSS PLACEMENT DIAGRAM ONLY. These trusses are designed as individual building components to be incorporated into the building design at the specification of the building designer. See individual design sheets for such truss design identified on the placement drawing. The building designer is responsible for temporary and permanent bracing of the roof and floor system and for the overall structure. The design of the truss support structure including headers, beams, walls, and columns is the responsibility of the building designer. For general guidance regarding bracing, consult IBCS-81 and IBCS-83 provided with the truss delivery package or online @ sbciindustry.com