Harnett County Department of Public Health


Improvement Permit

A building permit cannot be issued with only	an Improvement Permit
PROPERTY LOCATION	IN 1703 RED Hill CHURCH RIS
ISSUED TO: VICTORIA Wicken SUBDIVISION CA	TWE MILL BLAKS LOT # 23
NEW REPAIR EXPANSION Site I	Improvements required prior to Construction Authorization Issuance:
1 m of (material) 560	
Proposed Wastewater System Type: The Tremond System (75%)	
Projected Daily Flow: 360 GPD	
Number of bedrooms: 3 Number of Occupants: 6 max	
Basement Yes No	
Pump Required: Ves No May be required based on final location and elevations of	of facilities
Type of Water Supply: Community Public Well Distance from well	feet Permit valid for: Five years
	□ No expiration
Permit conditions:	
À 1 1 7 2845	
Authorized State Agent: Date: 5	-25-21 SEE ATTACHED SITE SKETCH
The invested of this parmit by the Health Department in no way quarantees the issuance of other permits. The permit holder	is responsible for checking with appropriate governing bodies in meeting their requirements. This
site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected	by a change in ownership of the site. This permit is subject to compliance with the provisions of
the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.	
Construction Author	rization
(Required for Building Pe	ermit)
The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorp	porated by references into this permit and shall be met. Systems shall be installed in accordance
with the attached system layout.	
ISSUED TO: VICTORIA WICKER PROPERTY LOCA	ATION: SAID BED HILL CHURCH RD
SUED TO: TECTOR POLICY	CANE MIN ESPORES LOT # 23
	Repair
Facility Type: SFD	Li kepan
Basement? Yes No Basement Fixtures? Yes No	74) 3/ 0
Type of Wastewater System** Deno croom Sys from 15%	(Initial) Wastewater Flow: 360 GPD
(see note below, it applicable)	
50% REFULTION System (Rep	pair)
Installation Requirements/Conditions Number of trenches 2	
	feet Trench Spacing: Feet on Center
Pump Tank Size 1000 gallons Trenches shall be installed on contour	
Pump Tank Size	i at a
Maximum Trench Depth of: 18-24	(-18 inches (Maximum soil cover shall not exceed
Maximum Trench Depth of: 18-24 (Trench bottoms shall be level to +1	(-18 inches (Maximum soil cover shall not exceed
Maximum Trench Depth of: 18-24	(Maximum soil cover shall not exceed 36" above the trench bottom)
Maximum Trench Depth of: 18-24 (Trench bottoms shall be level to +/- in all directions)	(Maximum soil cover shall not exceed 36" above the trench bottom)
Maximum Trench Depth of: 18-24 (Trench bottoms shall be level to +/- in all directions)	(Maximum soil cover shall not exceed 36" above the trench bottom)
Maximum Trench Depth of: 18-29 (Trench bottoms shall be level to +1/2) in all directions) Pump Requirements:ft. TDH vsGPM	(Maximum soil cover shall not exceed 36" above the trench bottom) Aggregate Depth:
Maximum Trench Depth of: 18-29 (Trench bottoms shall be level to +1/2) in all directions) Pump Requirements:ft. TDH vsGPM	(Maximum soil cover shall not exceed 36" above the trench bottom) Aggregate Depth:
Maximum Trench Depth of: 18-24 (Trench bottoms shall be level to +1/2) in all directions) Pump Requirements:ft. TDH vsGPM Conditions:	(Maximum soil cover shall not exceed 36" above the trench bottom) Aggregate Depth: Aggregate Depth: Z inches above pipe 1/2 inches total
Maximum Trench Depth of: 18-29 (Trench bottoms shall be level to +1/2) in all directions) Pump Requirements:ft. TDH vsGPM	(Maximum soil cover shall not exceed 36" above the trench bottom) Aggregate Depth: Aggregate Depth: Z inches above pipe 1/2 inches total
Maximum Trench Depth of: 18-29 (Trench bottoms shall be level to +1/2) in all directions) Pump Requirements:ft. TDH vsGPM Conditions:	(Maximum soil cover shall not exceed 36" above the trench bottom) Aggregate Depth: Aggregate Depth: Z inches above pipe 1/2 inches total
Maximum Trench Depth of: 18-24 (Trench bottoms shall be level to +/- in all directions) Pump Requirements:ft. TDH vsGPM Conditions:ft. Patio Allowed WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.	(Maximum soil cover shall not exceed 36" above the trench bottom) Aggregate Depth: Aggregate Depth: Z inches above pipe inches total C SYSTEM OR REPAIR AREA.
Maximum Trench Depth of: 18-29 (Trench bottoms shall be level to +1/2) in all directions) Pump Requirements:ft. TDH vsGPM Conditions:	(Maximum soil cover shall not exceed 36" above the trench bottom) Aggregate Depth: Aggregate Depth: Z inches above pipe inches total C SYSTEM OR REPAIR AREA.
Maximum Trench Depth of: 18-24 (Trench bottoms shall be level to +/- in all directions) Pump Requirements:ft. TDH vsGPM Conditions:ft. Patio Allowed WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.	(Maximum soil cover shall not exceed 36" above the trench bottom) Aggregate Depth: Z inches above pipe 1/2 inches above pipe inches total C SYSTEM OR REPAIR AREA.
Maximum Trench Depth of: 18-29 (Trench bottoms shall be level to +1/2) in all directions) Pump Requirements:	(Maximum soil cover shall not exceed 36" above the trench bottom) Aggregate Depth: Aggregate Depth: Z inches above pipe inches total C SYSTEM OR REPAIR AREA. The application. I accept the specifications of this permit. Date:
Maximum Trench Depth of: 18-24 (Trench bottoms shall be level to +/- in all directions) Pump Requirements:ft. TDH vsGPM Conditions:ft. TDH vsGPM WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA. **If applicable: / understand the system type specified is different from the type specified on Owner/Legal Representative Signature: This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes.	(Maximum soil cover shall not exceed 36" above the trench bottom) Aggregate Depth: Aggregate Depth: Z inches above pipe inches total C SYSTEM OR REPAIR AREA. The application. I accept the specifications of this permit. Date:
Maximum Trench Depth of: 18-29 (Trench bottoms shall be level to +1/2) in all directions) Pump Requirements:	(Maximum soil cover shall not exceed 36" above the trench bottom) Aggregate Depth: Aggregate Depth: Z inches above pipe inches total C SYSTEM OR REPAIR AREA. The application. I accept the specifications of this permit. Date:
Maximum Trench Depth of: 18-24 (Trench bottoms shall be level to +/- in all directions) Pump Requirements:ft. TDH vsGPM Conditions:ft. TDH vsGPM WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA. **If applicable: / understand the system type specified is different from the type specified on Owner/Legal Representative Signature: This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Dispo	(Maximum soil cover shall not exceed 36" above the trench bottom) Aggregate Depth: Aggregate Depth: Z inches above pipe 1/Z inches total C SYSTEM OR REPAIR AREA. The application. I accept the specifications of this permit. Date: SEE ATTACHED SITE SKETCH
Maximum Trench Depth of: 18-24 (Trench bottoms shall be level to +/- in all directions) Pump Requirements:ft. TDH vsGPM Conditions:ft. TDH vsGPM WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA. **If applicable: / understand the system type specified is different from the type specified on Owner/Legal Representative Signature: This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Dispo	(Maximum soil cover shall not exceed 36" above the trench bottom) Aggregate Depth: Aggregate Depth: Z inches above pipe 1/Z inches total C SYSTEM OR REPAIR AREA. The application. I accept the specifications of this permit. Date: SEE ATTACHED SITE SKETCH
Maximum Trench Depth of: 18-24 (Trench bottoms shall be level to +/- in all directions) Pump Requirements:ft. TDH vsGPM Conditions:ft. TDH vsGPM WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA. **If applicable: / understand the system type specified is different from the type specified on Owner/Legal Representative Signature: This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Dispo	(Maximum soil cover shall not exceed 36" above the trench bottom) Aggregate Depth: Aggregate Depth: Z inches above pipe inches total C SYSTEM OR REPAIR AREA. The application. I accept the specifications of this permit. Date:

Application # 5FD 2104 - 0086

Harnett County Department of Public Health Site Sketch

Property Location: SK1703 RED (+111 CHURCH ZD) Issued To: VICTORIA WILKER Subdivision CANA MILL Estates		Lot # <u>23</u>
2 M 1 LID DOUB	Date: _	5-25-21
A Patio NOT Able to BB permitted Because of AUA	t may	- Space Allowton Educations

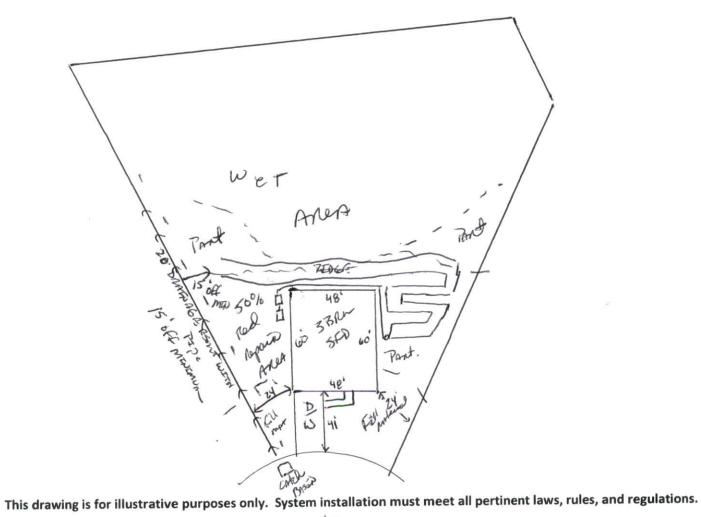

Inolly