
Harnett County Department of Public Health

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

IZAAD D. ILII	PROPERTY LOCATION: 1049 Turlington Road (SR 1/23)	
ISSUED TO: KMB Building LLC	SUBDIVISION LOT # 5	
NEW REPAIR 45x35 sfd, 3 bed	(PANSION	
Proposed Wastewater System Type: 25% Re		
Projected Daily Flow: 360 GPD	duction System	
	of Occupants: 6max	
Basement Yes No	Totalpanis.	
	be required based on final location and elevations of facilities	
	ublic Well Distance from well NAfeet Permit valid for: 🗵 Five years	
Permit conditions:	No expiration	l.
	25	
	Date: 05/25/2021 SEE ATTACHED SITE SKETCH	
Authorized State Agent::		n Thir
	ay guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirement ded use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provis	
the Laws and Rules for Sewage Treatment and Disposal and t		
		-
	Construction Authorization	
	(Required for Building Permit)	
The construction and installation requirements of Rules .1950.	.1952, .1954, .1955, .1956, .1957, .1958. and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in according	dance
with the attached system layout.		
ISSUED TO: KMB Building LLC	PROPERTY LOCATION: 1049 Turlington Road (SR 1723)	
1330ED TO: THIRD DURINING LEG	SUBDIVISION LOT # 5	
Facility Type: 45x35 sfd, 3 beds 2		
, ,,	ent Fixtures? Yes No	
		PD
	eduction System (Initial) Wastewater Flow: 360 G	PD
(See note below, if applicable)		PD
(See note below, if applicable D) Pump	to 25% Reduction Sys. (Repair)	PD
(See note below, if applicable D) Pump Installation Requirements/Conditions	to 25% Reduction Sys. (Repair) Number of trenches 3	PD
(See note below, if applicable D) Pump Pump Installation Requirements/Conditions	to 25% Reduction Sys. (Repair) Number of trenches 3 Exact length of each trench 90 feet Trench Spacing: 9 Feet on Center	PD
(See note below, if applicable D) Pump Installation Requirements/Conditions	Number of trenches 3 Exact length of each trench 90 Trenches shall be installed on contour at a Soil Cover: 12 inches	PD
(See note below, if applicable D) Pump Pump Installation Requirements/Conditions	Number of trenches 3 Exact length of each trench 90 feet Trench Spacing: 9 Feet on Center Trenches shall be installed on contour at a Maximum Trench Depth of: 24 inches (Maximum soil cover shall not exceed)	PD
(See note below, if applicable D) Pump Pump Installation Requirements/Conditions	Number of trenches 3 Exact length of each trench 90 feet Trench Spacing: 9 Feet on Center Trenches shall be installed on contour at a Maximum Trench Depth of: 24 inches (Trench bottoms shall be level to +/-1/4" (Maximum soil cover shall not exceed 36" above the trench bottom)	PD
(See note below, if applicable Pump Pump Installation Requirements/Conditions Septic Tank Size 1000 gallons gallons gallons	Number of trenches 3 Exact length of each trench 90 Trenches shall be installed on contour at a Maximum Trench Depth of: 24 (Trench bottoms shall be level to +/-1/4" in all directions) Number of trenches 3 Feet on Center 5 Soil Cover: 12 inches (Maximum soil cover shall not exceed 36" above the trench bottom)	
(See note below, if applicable D) Pump Pump Installation Requirements/Conditions	Number of trenches 3 Exact length of each trench 90 Trenches shall be installed on contour at a Maximum Trench Depth of: 24inches (Trench bottoms shall be level to +/-1/4" In all directions) GPM NAinches below	pipe
(See note below, if applicable Pump Pump	Number of trenches 3 Exact length of each trench 90 feet Trenches shall be installed on contour at a Maximum Trench Depth of: 24 inches (Trench bottoms shall be level to +/-1/4" Maximum soil cover shall not exceed (Trench bottoms) Maximum Soil Cover Shall not exceed Maximum Shall not exceed Maxim	pipe e pipe
(See note below, if applicable Pump Pump	Number of trenches 3 Exact length of each trench 90 feet Trenches shall be installed on contour at a Maximum Trench Depth of: 24 inches (Trench bottoms shall be level to +/-1/4" Maximum soil cover shall not exceed (Trench bottoms) Maximum Soil Cover Shall not exceed Maximum Shall not exceed Maxim	pipe e pipe
(See note below, if applicable Dump Pump Pump	Number of trenches 3 Exact length of each trench 90 feet Trench Spacing: 9 feet on Center Trenches shall be installed on contour at a Maximum Trench Depth of: 24 inches (Trench bottoms shall be level to +/-1/4" (Maximum soil cover shall not exceed 36" above the trench bottom) In all directions) GPM Aggregate Depth: NA inches above the strench bottom (NA) inches above the strench bottom)	pipe e pipe
(See note below, if applicable D) Pump Installation Requirements/Conditions Septic Tank Size 1000 gallons Pump Tank Size gallons Pump Requirements: ft. TDH vs. Conditions: Gravity to D-Box Equations WATER LINES (INCLUDING IRRIGATION)	Number of trenches 3 Exact length of each trench 90 feet Trench Spacing: 9 Feet on Center Trenches shall be installed on contour at a Maximum Trench Depth of: 24 inches (Trench bottoms shall be level to +/-1/4" 36" above the trench bottom) in all directions) GPM Aggregate Depth: NA inches above the strench of the shall be level to +/-1/4" inches above the strench bottom) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.	pipe e pipe
(See note below, if applicable Dump Pump Pump	Number of trenches 3 Exact length of each trench 90 feet Trench Spacing: 9 Feet on Center Trenches shall be installed on contour at a Maximum Trench Depth of: 24 inches (Trench bottoms shall be level to +/-1/4" 36" above the trench bottom) in all directions) GPM Aggregate Depth: NA inches above the strench of the shall be level to +/-1/4" inches above the strench bottom) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.	pipe e pipe
(See note below, if applicable Demp Pump Pump	Number of trenches 3 Exact length of each trench 90 feet Trench Spacing: 9 Feet on Center Trenches shall be installed on contour at a Maximum Trench Depth of: 24 inches (Trench bottoms shall be level to +/-1/4" 36" above the trench bottom) in all directions) GPM Aggregate Depth: NA inches above the strench of the shall be level to +/-1/4" inches above the strench bottom) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.	pipe e pipe
(See note below, if applicable Demp Pump Pump	Number of trenches 3 Exact length of each trench 90 feet Trench Spacing: 9 Feet on Center Trenches shall be installed on contour at a Maximum Trench Depth of: 24 inches (Trench bottoms shall be level to +/-1/4" 36" above the trench bottom) in all directions) GPM Aggregate Depth: NA inches above the strench Spacing: 9 Feet on Center Trenches Soil Cover: 12 inches (Maximum soil cover shall not exceed 36" above the trench bottom) Aggregate Depth: NA inches above the spacing: 9 Feet on Center Trenches Soil Cover: 12 inches Maximum soil cover shall not exceed 36" above the trench bottom) Aggregate Depth: NA inches above the spacing: 9 Feet on Center Trenches Soil Cover: 12 inches Maximum soil cover shall not exceed 36" above the trench bottom) Aggregate Depth: NA inches above the spacing: 9 Feet on Center Trenches Soil Cover: 12 inches Maximum soil cover shall not exceed 36" above the trench bottom) NA inches Aggregate Depth: NA inches Aggregate Dep	pipe e pipe
(See note below, if applicable Demp Pump Pump	Number of trenches 3 Exact length of each trench 90 feet Trench Spacing: 9 Feet on Center Trenches shall be installed on contour at a Maximum Trench Depth of: 24 inches (Trench bottoms shall be level to +/-1/4" 36" above the trench bottom) in all directions) GPM Aggregate Depth: NA inches above the strench Spacing: 9 Feet on Center Trenches Soil Cover: 12 inches (Maximum soil cover shall not exceed 36" above the trench bottom) Aggregate Depth: NA inches above the spacing: 9 Feet on Center Trenches Soil Cover: 12 inches Maximum soil cover shall not exceed 36" above the trench bottom) Aggregate Depth: NA inches above the spacing: 9 Feet on Center Trenches Soil Cover: 12 inches Maximum soil cover shall not exceed 36" above the trench bottom) Aggregate Depth: NA inches above the spacing: 9 Feet on Center Trenches Soil Cover: 12 inches Maximum soil cover shall not exceed 36" above the trench bottom) NA inches Aggregate Depth: NA inches Aggregate Dep	pipe e pipe
(See note below, if applicable D) Pump Installation Requirements/Conditions Septic Tank Size 1000 gallons Pump Tank Size gallons Pump Requirements: ft. TDH vs. Conditions: Gravity to D-Box Equivalent WATER LINES (INCLUDING IRRIGATION) NO UTILITIES ALLOWED IN INITIAL OR RI **If applicable: I understand the system type Owner/Legal Representative Signature:	Number of trenches 3 Exact length of each trench 90 feet Trench Spacing: 9 Feet on Center Trenches shall be installed on contour at a Maximum Trench Depth of: 24 (Trench bottoms shall be level to +/-1/4" in all directions) GPM Aggregate Depth: NA inches above the trench bottom) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA. PAIR DRAIN FIELD AREA. Pecified is different from the type specified on the application. I accept the specifications of this permit. Date: Date:	pipe e pipe s total
See note below, if applicable Pump	Number of trenches 3 Exact length of each trench 90 Trenches shall be installed on contour at a Maximum Trench Depth of: 24 (Trench bottoms shall be level to +/-1/4" in all directions) GPM Aggregate Depth: MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA. PAIR DRAIN FIELD AREA. Pecified is different from the type specified on the application. I accept the specifications of this permit. Date:	pipe e pipe s total
See note below, if applicable Pump	Number of trenches 3 Exact length of each trench 90 feet Trench Spacing: 9 Feet on Center Trenches shall be installed on contour at a Maximum Trench Depth of: 24 (Trench bottoms shall be level to +/-1/4" in all directions) GPM Aggregate Depth: NA inches above the trench bottom) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA. PAIR DRAIN FIELD AREA. Pair of Septic System or Repair and the specifications of this permit. Date: The plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This	pipe e pipe s total
See note below, if applicable Pump	Number of trenches 3 Exact length of each trench 90 feet Trench Spacing: 9 Feet on Center Trenches shall be installed on contour at a Maximum Trench Depth of: 24 (Trench bottoms shall be level to +/-1/4" in all directions) GPM Aggregate Depth: NA inches above the trench bottom) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA. PAIR DRAIN FIELD AREA. Pair of Septic System or Repair and the specifications of this permit. Date: The plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This	pipe e pipe s total

Harnett County Department of Public Health Site Sketch

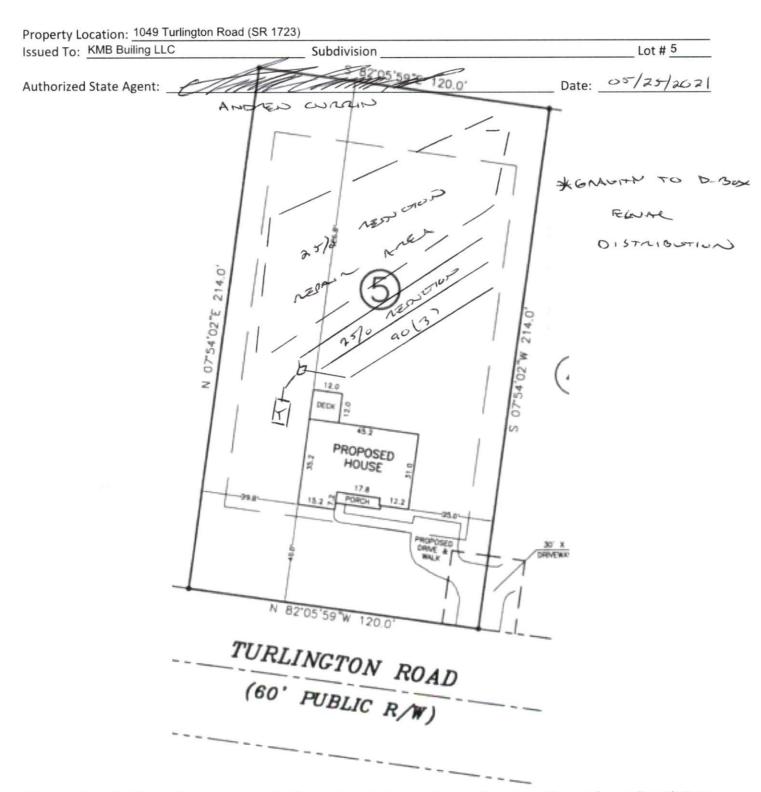

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.