GENERAL NOTES

CODES AND STANDARDS

- 1. ALL WORK SHALL COMPLY WITH 2017 NATIONAL ELECTRIC CODE (NEC), 2018 NORTH CAROLINA BUILDING CODE (NCBC), 2018 NORTH CAROLINA RESIDENTIAL CODE (NCRC), PLUMBING CODE (NCPC), AND ALL STATE AND LOCAL BUILDING, ELECTRICAL, AND PLUMBING CODES
- 2. DRAWINGS HAVE BEEN DETAILED ACCORDING TO UL LISTING REQUIREMENTS.

SITE NOTES / OSHA REGULATION

- 1. A LADDER SHALL BE IN PLACE FOR INSPECTION IN COMPLIANCE WITH OSHA REGULATIONS.
- 2. THE PV MODULES ARE CONSIDERED NON-COMBUSTIBLE AND THIS SYSTEM IS A UTILITY INTERACTIVE SYSTEM WITH NO STORAGE BATTERIES.
- 3. THE SOLAR PV INSTALLATION SHALL NOT OBSTRUCT ANY PLUMBING, MECHANICAL, OR BUILDING ROOF VENTS.
- 4. ROOF COVERINGS SHALL BE DESIGNED, INSTALLED, AND MAINTAINED IN ACCORDANCE WITH THIS CODE AND THE APPROVED MANUFACTURER'S INSTRUCTIONS SUCH THAT THE ROOF COVERING SHALL SERVE TO PROTECT THE BUILDING OR STRUCTURE.
- 5. NO. OF SHINGLE LAYERS: 2

SOLAR CONTRACTOR

- 1. MODULE CERTIFICATIONS WILL INCLUDE UL1703, IEC61646, IEC61730.
- 2. IF APPLICABLE, MODULE GROUNDING LUGS MUST BE INSTALLED AT THE MARKED GROUNDING LUG HOLES PER THE MANUFACTURERS' INSTALLATION REQUIREMENTS.
- 3. AS INDICATED BY DESIGN, OTHER NRTL LISTED MODULE GROUNDING DEVICES MAY BE USED IN PLACE OF STANDARD GROUNDING LUGS AS SHOWN IN MANUFACTURER DOCUMENTATION AND APPROVED BY THE AHJ.
- 4. CONDUIT AND WIRE SPECIFICATIONS ARE BASED ON MINIMUM CODE REQUIREMENTS AND ARE NOT MEANT TO LIMIT UP-SIZING AS REQUIRED BY FIELD CONDITIONS.
- 5. CONDUIT POINT OF PENETRATION FROM EXTERIOR TO INTERIOR TO BE INSTALLED AND SEALED WITH A SUITABLE SEALING COMPOUND.
- 6. DC WIRING LIMITED TO MODULE FOOTPRINT W/ ENPHASE AC SYSTEM.
- 7. ENPHASE WIRING SYSTEMS SHALL BE LOCATED AND SECURED UNDER THE ARRAY W/ SUITABLE WIRING CLIPS.
- 8. MAX DC VOLTAGE CALCULATED USING MANUFACTURER PROVIDED TEMP COEFFICIENT FOR VOC UNLESS NOT AVAILABLE.
- 9. ALL INVERTERS, MOTOR GENERATORS, PHOTOVOLTAIC MODULES, PHOTOVOLTAIC PANELS, AC PHOTOVOLTAIC MODULES, DC COMBINERS, DC-TO-DC CONVERTERS, SOURCE CIRCUIT COMBINERS, AND CHARGE CONTROLLERS INTENDED FOR USE IN A PHOTOVOLTAIC POWER SYSTEM WILL BE IDENTIFIED AND LISTED FOR THE APPLICATION PER 690.4 (B).
- 10. ALL SIGNAGE TO BE PLACED IN ACCORDANCE WITH LOCAL BUILDING CODE
- 11. TERMINALS AND LUGS WILL BE TIGHTENED TO MANUFACTURER TORQUE SPECIFICATIONS (WHEN PROVIDED) IN ACCORDANCE WITH NEC CODE 110.14(D) ON ALL ELECTRICAL CONNECTIONS.

EQUIPMENT LOCATIONS

- 1. PROPER ACCESS AND WORKING CLEARANCE AROUND EXISTING AND PROPOSED ELECTRICAL EQUIPMENT WILL BE PROVIDED AS PER SECTION [NEC 110.26].
- 2. EQUIPMENT INSTALLED IN DIRECT SUNLIGHT MUST BE RATED FOR EXPECTED OPERATING TEMPERATURE AS SPECIFIED BY [NEC 690.31 (A)] AND [NEC TABLE 310.15 (B)].
- 3. ADDITIONAL AC DISCONNECTS SHALL BE PROVIDED WHERE THE INVERTER IS NOT ADJACENT TO THE UTILITY AC DISCONNECT, OR NOT WITHIN SIGHT OF THE UTILITY AC DISCONNECT.
- 4. ALL EQUIPMENT SHALL BE INSTALLED ACCESSIBLE TO QUALIFIED PERSONNEL ACCORDING TO NEC APPLICABLE CODES.
- 5. ALL COMPONENTS ARE LISTED FOR THEIR PURPOSE AND RATED FOR OUTDOOR USAGE WHEN APPROPRIATE.



Revision

AERIAL VIEW



DESIGN CRITERIA
WIND SPEED: 115 MPH
GROUND SNOW LOAD: 15 PSF
WIND EXPOSURE FACTOR: C
SEISMIC DESIGN CATEGORY: B

SITE SPECIFICATIONS CONSTRUCTION - V-B ZONING: RESIDENTIAL

SCOPE OF WORK

INSTALLATION OF UTILITY INTERACTIVE PHOTOVOLTAIC SOLAR SYSTEM

7.6 kW DC PHOTOVOLTAIC SOLAR ARRAY

ROOF TYPE: Comp Shingle

MODULES: (19) REC Solar REC400AA Pure INVERTER(S): Enphase IQ7PLUS-72-2-US,----

RACKING: Unirac SFM Infinity

SHEET INDEX

PV1 - COVER SHEET

PV2 - PROPERTY PLAN

PV3 - SITE PLAN

PV4 - EQUIPMENT & ATTACHMENT DETAIL

PV5 - ELECTRICAL SINGLE LINE DIAGRAM

PV6 - ELECTRICAL CALCULATIONS & ELECTRICAL NOTES

PV7 - MAIN BREAKER DERATE CALCS.
(IF NEEDED)

PV8 - LABELS & LOCATIONS

PV9 - CUSTOM DIRECTORY PLACARD (IF NEEDED - NEC 690.56(B))

UTILITY COMPANY: Duke Energy NC PERMIT ISSUER: Harnett County



1403 N RESEARCH WAY, BUILDING J OREM, UT 84097

800-377-4480 WWW.BLUERAVENSOLAR.COM

CONFIDENTIAL - THE INFORMATION HEREIN CONTAINED SHALL NOT BE USED FOR THE BENEFIT OF ANYONE EXCEPT BLUERAVENSOLAR NOR SHALL IT BE DISCLOSED IN WHOLE OR IN PART TO OTHERS OUTSIDE RECIPIENTS ORGANIZATION, EXCEPT IN CONNEC TION WITH THE SALE AND USE OF THE RESPECTIVE EQUIPMENT, WITHOUT THE WRITTEN PERMISSION OF BLUERAVENSOLAR LLC.



CONTRACTOR: BRS FIELD OPS 385,498,6700

Corrine Charapp
46 Fetch Court
ANGIER, North Carolina 27501
DC SYSTEM SIZE: 7.6 kW DC

Jake Lamb

DATE

INFORMATION

SITE

March 22, 2022

PROJECT NUMBER


376340


....

COVER SHEET

PV1



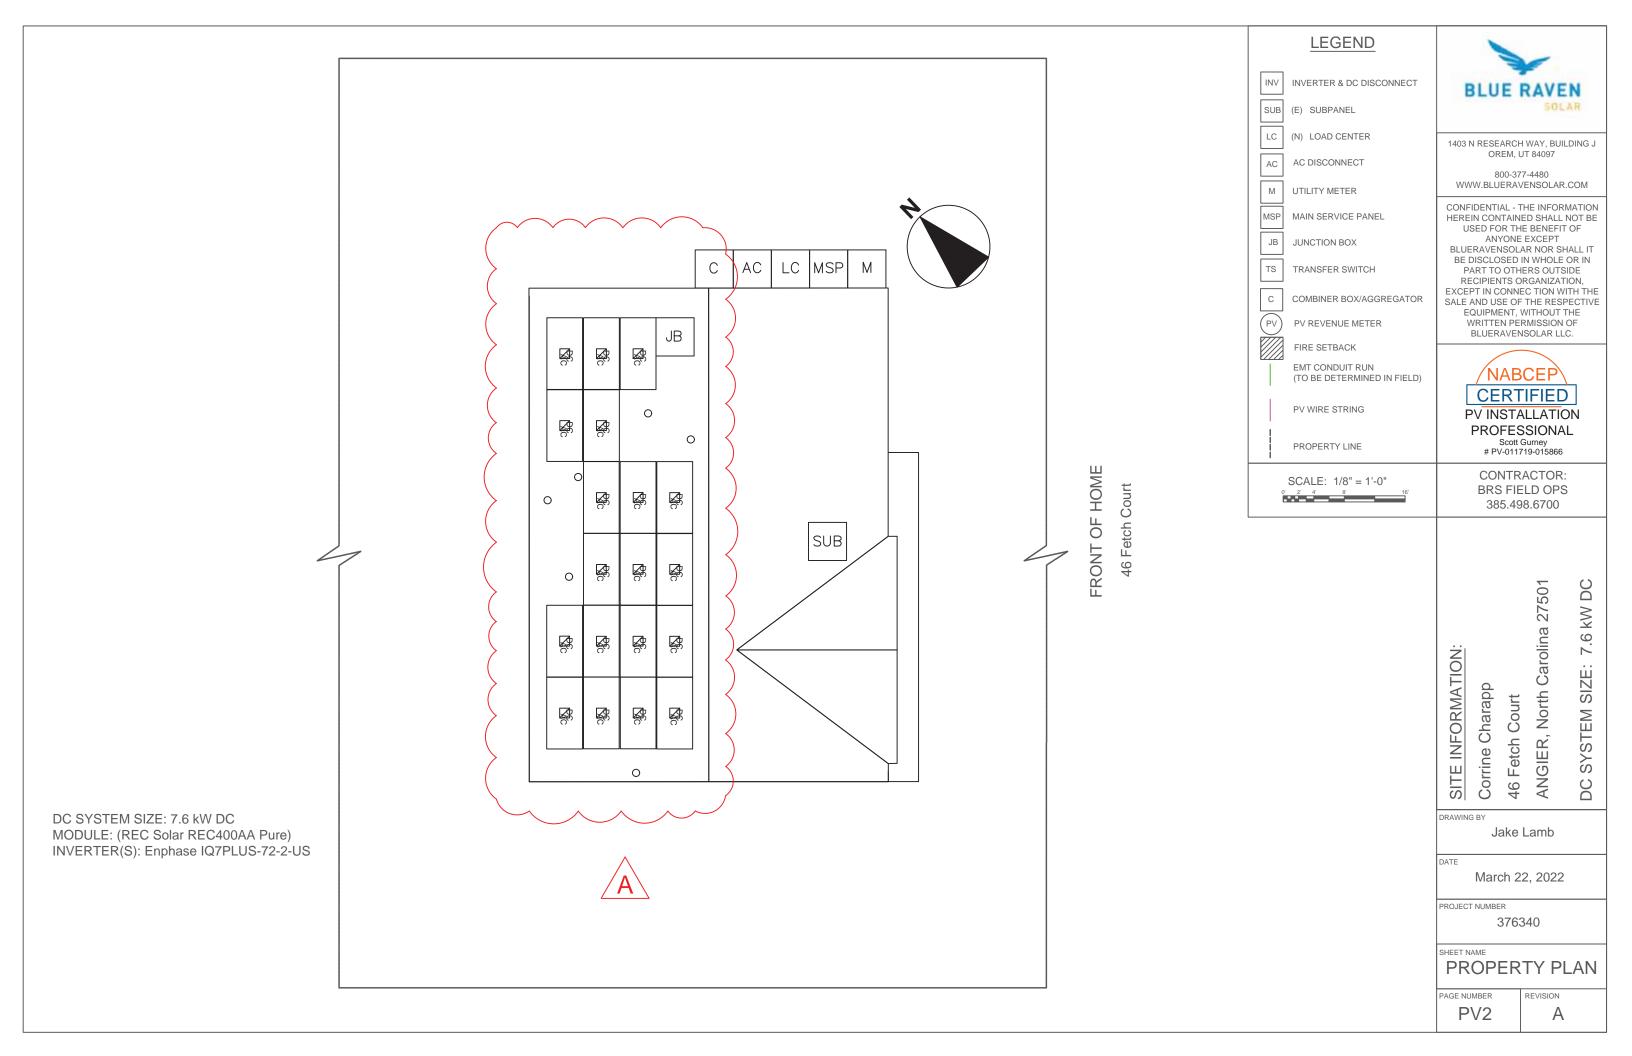

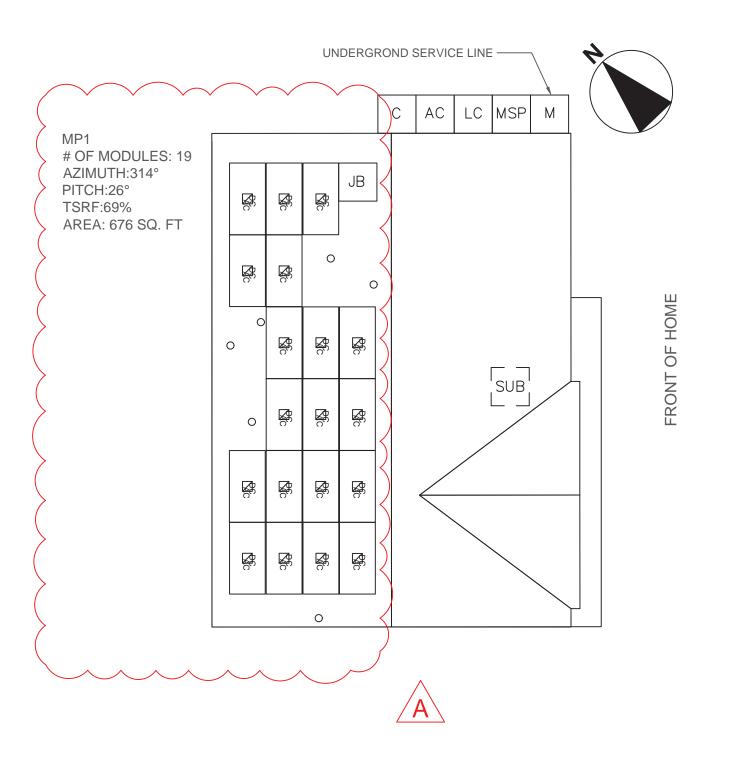

LEGEND INVERTER & DC DISCONNECT (N) LOAD CENTER 1403 N RESEARCH WAY, BUILDING J OREM, UT 84097 800-377-4480 WWW.BLUERAVENSOLAR.COM CONFIDENTIAL - THE INFORMATION USED FOR THE BENEFIT OF ANYONE EXCEPT

SUB (E) SUBPANEL

AC DISCONNECT

UTILITY METER

AC

MSP

JB

TS

HEREIN CONTAINED SHALL NOT BE BLUERAVENSOLAR NOR SHALL IT BE DISCLOSED IN WHOLE OR IN PART TO OTHERS OUTSIDE RECIPIENTS ORGANIZATION, EXCEPT IN CONNEC TION WITH THE SALE AND USE OF THE RESPECTIVE EQUIPMENT, WITHOUT THE WRITTEN PERMISSION OF BLUERAVENSOLAR LLC.

NABCEP **CERTIFIED** PV INSTALLATION **PROFESSIONAL** Scott Gurney # PV-011719-015866

> CONTRACTOR: **BRS FIELD OPS**

385.498.6700

DC Carolina 27501 $\overset{\mathsf{K}}{\geqslant}$ SIZE: North Court SYSTEM 8 ANGIER, DC

March 22, 2022

SITE PLAN

PAGE NUMBER PV3

Α

REVISION

MAIN SERVICE PANEL JUNCTION BOX TRANSFER SWITCH COMBINER BOX/AGGREGATOR PV REVENUE METER FIRE SETBACK EMT CONDUIT RUN (TO BE DETERMINED IN FIELD) PV WIRE STRING PROPERTY LINE SCALE: 1/8" = 1'-0" 0' 2' 4' 8' 16 SITE INFORMATION: Corrine Charapp Fetch (46 DRAWING BY Jake Lamb DATE PROJECT NUMBER 376340 SHEET NAME

DC SYSTEM SIZE: 7.6 kW DC MODULE: (REC Solar REC400AA Pure) INVERTER(S): Enphase IQ7PLUS-72-2-US

PV ARRAY INFORMATION

PV MODULE COUNT: 19 MODULES

OF ATTACHMENT POINTS1: 33

ARRAY AREA: Module Count x 17.51ft² = 332.7ft²


ROOF AREA: 1380.0ft² % OF ARRAY/ROOF: 24.1%


ARRAY WEIGHT: Module Count x 50lbs = 950.0lbs


DISTRIBUTED LOAD: Array Weight ÷ Array Area = 2.86 lbs/ft²

POINT LOAD: Array Weight ÷ Attachments = 28.8lbs/attachment

 Number of attachment points estimated and may vary based on on-site conditions as long as maximum attachment spacing followed per engineered plans.

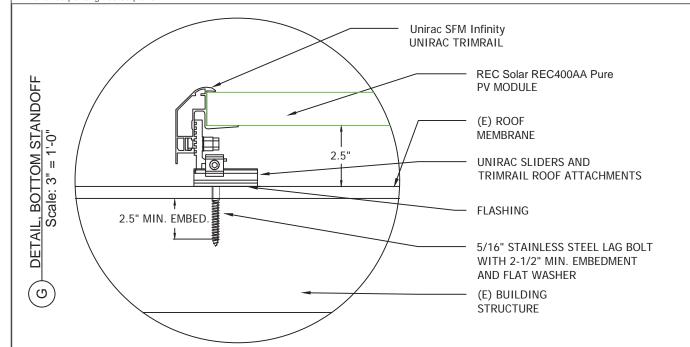

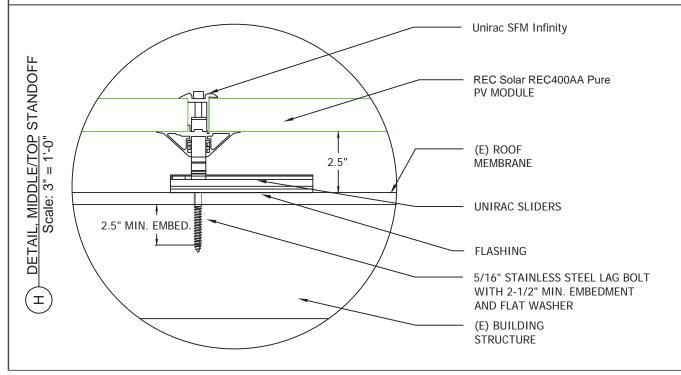

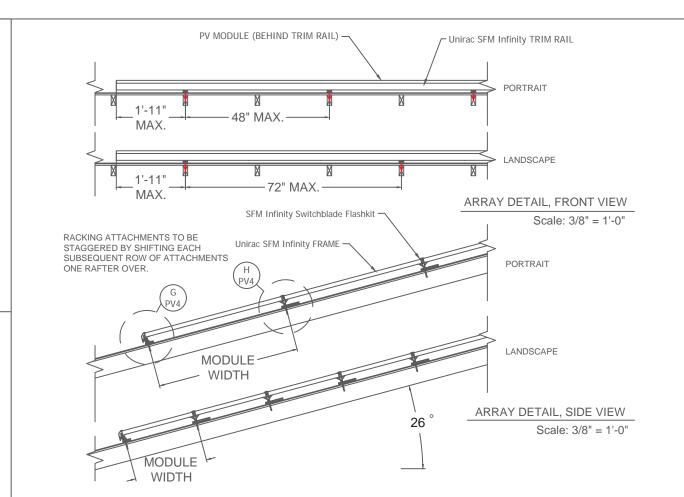

ROOF TYPE: Comp Shingle

ROOF FRAMING TYPE: Manufactured Truss

RAFTER OR TOP CHORD(TRUSS) 2x4 @ 24"O.C. CEILING JOIST OR BOTTOM CHORD(TRUSS) 2x4 @ 24"O.C.



1403 N RESEARCH WAY, BUILDING J OREM, UT 84097

800-377-4480 WWW.BLUERAVENSOLAR.COM

CONFIDENTIAL - THE INFORMATION HEREIN CONTAINED SHALL NOT BE USED FOR THE BENEFIT OF ANYONE EXCEPT BLUERAVENSOLAR NOR SHALL IT BE DISCLOSED IN WHOLE OR IN PART TO OTHERS OUTSIDE RECIPIENTS ORGANIZATION, EXCEPT IN CONNEC TION WITH THE SALE AND USE OF THE RESPECTIVE EQUIPMENT, WITHOUT THE WRITTEN PERMISSION OF BLUERAVENSOLAR LLC.



CONTRACTOR: BRS FIELD OPS 385.498.6700

Corrine Charapp
46 Fetch Court
ANGIER, North Carolina 27501
DC SYSTEM SIZE: 7.6 kW DC

DRAWING BY

SITE INFORMATION:

Jake Lamb

DATE

March 22, 2022


PROJECT NUMBER

376340

SHEET NAME

EQUIP. DETAIL

PAGE NUMBER

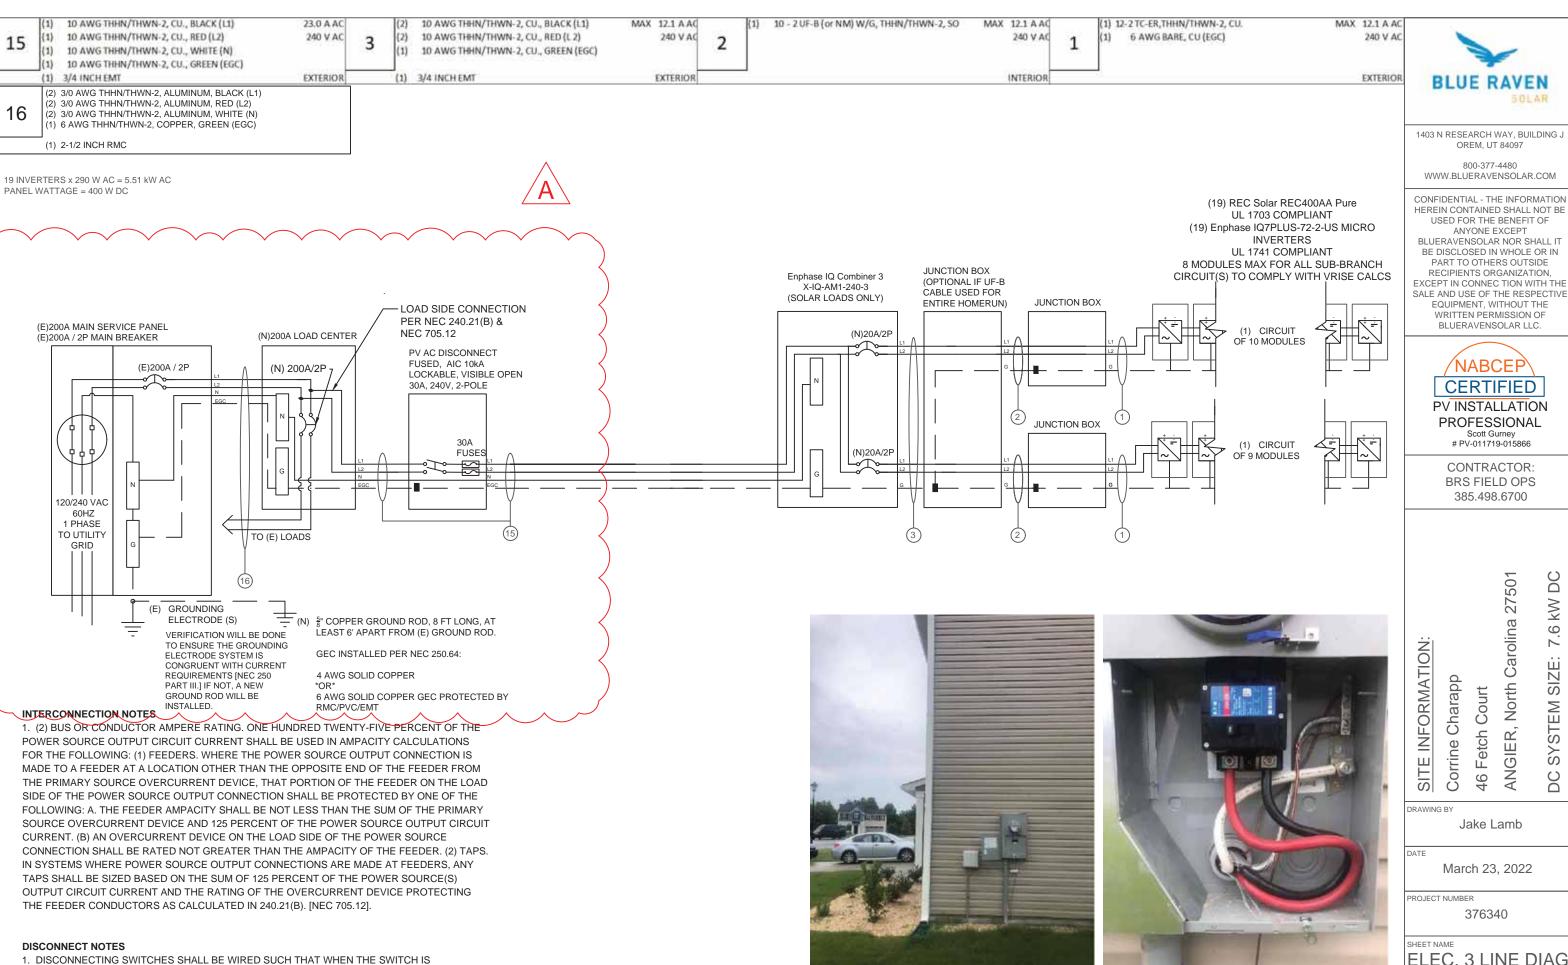

OPENED THE CONDUCTORS REMAINING LIVE ARE CONNECTED TO THE TERMINALS MARKED "LINE SIDE" (TYPICALLY THE UPPER TERMINALS)

LOCKABLE, AND BE A VISIBLE-BREAK SWITCH

2. AC DISCONNECT MUST BE ACCESSIBLE TO QUALIFIED UTILITY PERSONNEL, BE

ELEC. 3 LINE DIAG

REVISION

Α

376340

OREM, UT 84097 800-377-4480

ANYONE EXCEPT

NABCEP

Scott Gurney # PV-011719-015866

385.498.6700

27501

Carolina

North

ANGIER,

Fetch

46

Jake Lamb

DC

SIZE

SYSTEM

DC

PAGE NUMBER

PV₅

MODULE SPECIFICATIONS R	EC Solar REC400AA Pure
RATED POWER (STC)	400 W
MODULE VOC	48.8 V DC
MODULE VMP	42.1 V DC
MODULE IMP	9.51 A DC
MODULE ISC	10.25 A DC
VOC CORRECTION	-0.24 %/°C
VMP CORRECTION	-0.26 %/°C
SERIES FUSE RATING	25 A DC
ADJ. MODULE VOC @ ASHRAE LOW TEMP	52.9 V DC
ADJ. MODULE VMP @ ASHRAE 2% AVG. HIGH	TEMP 37.5 V DC

MICROINVERTER SPECIFICATIONS Enp	hase IQ7+ Microinverter
POWER POINT TRACKING (MPPT) MIN/MAX	22 - 60 V DC
MAXIMUM INPUT VOLTAGE	60 V DC
MAXIMUM DC SHORT CIRCUIT CURRENT	15 A DC
MAXIMUM USABLE DC INPUT POWER	440 W
MAXIMUM OUTPUT CURRENT	1.21 A AC
AC OVERCURRENT PROTECTION	20 A
MAXIMUM OUTPUT POWER	290 W
CEC WEIGHTED EFFICIENCY	97 %

AC PHOTOVOLATIC MODULE MARKING (NEC 690.52)

NOMINAL OPERATING AC VOLTAGE	240 V AC
NOMINAL OPERATING AC FREQUENCY	47 - 68 HZ AC
MAXIMUM AC POWER	240 VA AC
MAXIMUM AC CURRENT	1.2 A AC
MAXIMUM OCPD RATING FOR AC MODULE	20 A AC

DESIGN LOCATION AND TEMPERATURES	
TEMPERATURE DATA SOURCE	ASHRAE 2% AVG, HIGH TEMP
STATE	North Carolina
CITY	ANGIER
WEATHER STATION	SEYMOUR-JOHNSON AFB
ASHRAE EXTREME LOW TEMP (°C)	-10
ASHRAE 2% AVG. HIGH TEMP (°C)	35

SYSTEM ELECTRICAL SPECIFICATIONS	CIR 1	CIR 2	CIR 3	CIR 4	CIR 5	CIR 6
NUMBER OF MODULES PER MPPT	10	9				
DC POWER RATING PER CIRCUIT (STC)	4000	3600				
TOTAL MODULE NUMBER	-	1.1 3.10 - 3	19 MOD	ULES		
STC RATING OF ARRAY	7600W DC					
AC CURRENT @ MAX POWER POINT (IMP)	12.1	10.9				
MAX. CURRENT (IMP X 1.25)	15.125	13.6125				
OCPD CURRENT RATING PER CIRCUIT	20	20				
MAX. COMB. ARRAY AC CURRENT (IMP)			23.	0	fr .	Ö.
MAX. ARRAY AC POWER	5510 W AC					

AC VOLTAGE RISE CALCULATIONS	DIST (FT)	COND.	/RISE(V)	VEND(V	%VRISE
VRISE SEC. 1 (MICRO TO JBOX)	28.8	12 Cu.	0.93	240.93	0.39%
VRISE SEC. 2 (JBOX TO COMBINER BOX)	65	10 Cu.	2.00	242.00	0.83%
VRISE SEC. 3 (COMBINER BOX TO POI)	10	10 Cu.	0.58	240.58	0.24%
TOTAL VRISE			3.51	243.51	

PHOTOVOLTAIC AC DISCONNECT OUTPUT LABEL (NEC 690.54

AC OUTPUT CURRENT	23.0 A AC
NOMINAL AC VOLTAGE	240 V AC

CONDUCTOR SIZE CALCULATIONS

MICROINVERTER TO	MAX. SHORT CIRCUIT CURRRENT (ISC) =	12.1	A AC	
JUNCTION BOX (1)	MAX. CURRENT (ISC X1.25) =	15.1	A AC	
	CONDUCTOR (TC-ER, COPPER (90°C)) =	12	AWG	
	CONDUCTOR RATING =	30	A	
	AMB. TEMP. AMP. CORRECTION =	0.96		
	ADJUSTED AMP. =	28.8	>	15.1
JUNCTION BOX TO	MAX. SHORT CIRCUIT CURRRENT (ISC) =	12.1	A AC	
JUNCTION BOX (2)	MAX. CURRENT (ISC X1.25) =	15.1	A AC	
	CONDUCTOR (UF-B, COPPER (60°C)) =	10	AWG	
	CONDUCTOR RATING =	30	A	
	CONDUIT FILL DERATE =	1		
	AMB. TEMP. AMP. CORRECTION =	0.96		
	ADJUSTED AMP, =	28.8	>	15.1
JUNCTION BOX TO	MAX. SHORT CIRCUIT CURRRENT (ISC) =	12.1	A AC	
COMBINER BOX (3)	MAX. CURRENT (ISC X1.25) =	15.1	A AC	
	CONDUCTOR (UF-B, COPPER (60°C)) =	10	AWG	
	CONDUCTOR RATING =	30	A	
	CONDUIT FILL DERATE =	8.0		
	AMB. TEMP. AMP. CORRECTION =	0.96		
	ADJUSTED AMP. =	23.04	>	15.1
COMBINER BOX TO	INVERTER RATED AMPS =	23.0	AAC	
MAIN PV OCPD (15)	MAX. CURRENT (RATED AMPS X1.25) =	28.74	A AC	
CONDU	JCTOR (THWN-2, COPPER (75°C TERM.)) =	10	AWG	
	CONDUCTOR RATING =		A	
	CONDUIT FILL DERATE =	1		
	AMB. TEMP. AMP. CORRECTION =	0.96		
	ADJUSTED AMP. =	33.6	>	28.7



1403 N RESEARCH WAY, BUILDING J OREM, UT 84097

WWW.BLUERAVENSOLAR.COM

CONFIDENTIAL - THE INFORMATION HEREIN CONTAINED SHALL NOT BE USED FOR THE BENEFIT OF ANYONE EXCEPT BLUERAVENSOLAR NOR SHALL IT BE DISCLOSED IN WHOLE OR IN PART TO OTHERS OUTSIDE RECIPIENTS ORGANIZATION, EXCEPT IN CONNECTION WITH THE SALE AND USE OF THE RESPECTIVE EQUIPMENT, WITHOUT THE WRITTEN PERMISSION OF BLUERAVENSOLAR LLC.



CONTRACTOR: **BRS FIELD OPS** 385.498.6700

27

rolina

Car

North

ER,

G

Ă

 $\tilde{\Box}$

 \overline{S}

EΜ

ST

S

GROUNDING NOTES

- 1. A GROUNDING ELECTRODE SYSTEM IN ACCORDANCE WITH [NEC 690-47] AND [NEC 250-50] THROUGH [NEC 250-60] SHALL BE PROVIDED. PER NEC, GROUNDING ELECTRODE SYSTEM OF EXISTING BUILDING MAY BE USED AND BONDED TO AT THE SERVICE ENTRANCE. IF EXISTING SYSTEM IS INACCESSIBLE, OR INADEQUATE, OR IS ONLY METALLIC WATER PIPING, A SUPPLEMENTAL GROUNDING ELECTRODE WILL BE USED AT THE INVERTER LOCATION CONSISTING OF A UL LISTED 8 FT GROUND ROD WITH ACORN CLAMP.
- 2. THE GROUNDING ELECTRODE CONDUCTOR SHALL BE PROTECTED FROM PHYSICAL DAMAGE BETWEEN THE GROUNDING ELECTRODE AND THE PANEL (OR INVERTER) IF SMALLER THAN #6 AWG COPPER WIRE PER NEC 250-64B. THE GROUNDING ELECTRODE CONDUCTOR WILL BE CONTINUOUS, EXCEPT FOR SPLICES OR JOINTS AT BUSBARS WITHIN LISTED EQUIPMENT PER [NEC 250.64C.].
- 3. GROUNDING ELECTRODE CONDUCTORS SHALL BE NO LESS THAN #8 AWG AND NO GREATER THAN #6 AWG COPPER AND BONDED TO THE EXISTING GROUNDING ELECTRODE TO PROVIDE FOR A COMPLETE SYSTEM.
- 4. PV SYSTEM SHALL BE GROUNDED IN ACCORDANCE TO [NEC 250.21], [NEC TABLE 250.122], AND ALL METAL PARTS OR MODULE FRAMES ACCORDING TO [NEC 690.46].
- 5. MODULE SOURCE CIRCUITS SHALL BE GROUNDED IN ACCORDANCE TO [NEC 690.42].
- 6. THE GROUNDING CONNECTION TO A MODULE SHALL BE ARRANGED SUCH THAT THE REMOVAL OF A MODULE DOES NOT INTERRUPT A GROUNDED CONDUCTOR TO ANOTHER MODULE.
- 7. EACH MODULE WILL BE GROUNDED USING THE SUPPLIED CONNECTIONS POINTS IDENTIFIED IN THE MANUFACTURER'S INSTALLATION INSTRUCTIONS.
- 8. ENCLOSURES SHALL BE PROPERLY PREPARED WITH REMOVAL OF PAINT/FINISH AS APPROPRIATE WHEN GROUNDING EQUIPMENT WITH TERMINATION **GROUNDING LUGS**
- 9. GROUNDING SYSTEM COMPONENTS SHALL BE LISTED FOR THEIR PURPOSE, AND GROUNDING DEVISES EXPOSED TO THE ELEMENTS SHALL BE RATED FOR DIRECT BURIAL. 7. ALL CONDUCTORS AND OCPD SIZES AND TYPES SPECIFIED ACCORDING TO [NEC 10. GROUNDING AND BONDING CONDUCTORS SHALL BE COPPER, SOLID OR

STRANDED, AND BARE WHEN EXPOSED.

- 11. EQUIPMENT GROUNDING CONDUCTORS SHALL BE SIZE ACCORDING TO [NEC 690.45] AND BE A MINIMUM OF #10AWG WHEN NOT EXPOSED TO DAMAGE (#6AWG SHALL BE USED WHEN EXPOSED TO DAMAGE).
- 12. GROUNDING AND BONDING CONDUCTORS, IF INSULATED, SHALL BE COLOR CODED GREEN (OR MARKED GREEN IF #4 AWG OR LARGER)
- 13. ALL CONDUIT BETWEEN THE UTILITY AC DISCONNECT AND THE POINT OF CONNECTION SHALL HAVE GROUNDED BUSHINGS AT BOTH ENDS.
- 14. SYSTEM GEC SIZED ACCORDING TO [NEC 690.47], [NEC TABLE 250.66], DC SYSTEM GEC SIZED ACCORDING TO [NEC 250.166], MINIMUM #8AWG WHEN INSULATED, #6AWG WHEN EXPOSED TO DAMAGE.
- 15. EXPOSED NON-CURRENT CARRYING METAL PARTS OF MODULE FRAMES, EQUIPMENTS, AND CONDUCTOR ENCLOSURES SHALL BE GROUNDED IN ACCORDANCE WITH 250.134 OR 250.136(A) REGARDLESS OF VOLTAGE.

WIRING & CONDUIT NOTES

- 1. ALL CONDUIT SIZES AND TYPES, SHALL BE LISTED FOR ITS PURPOSE AND APPROVED FOR THE SITE APPLICATIONS
- 2. BOLTED CONNECTION REQUIRED IN DC DISCONNECTS ON THE WHITE GROUNDED CONDUCTOR (USE POLARIS BLOCK OR NEUTRAL BAR)
- 3. ANY CONNECTION ABOVE LIVE PARTS MUST BE WATERTIGHT. REDUCING WASHERS DISALLOWED ABOVE LIVE PARTS, MEYERS HUBS RECOMMENDED
- 4. UV RESISTANT CABLE TIES(NOT ZIP TIES) USED FOR PERMANENT WIRE MANAGEMENT OFF THE ROOF SURFACE IN ACCORDANCE WITH NEC 110.2,110.3(A-B). 300.4
- 5. SOLADECK JUNCTION BOXES MOUNTED FLUSH W/ROOF SURFACE TO BE USED FOR WIRE MANAGEMENT AND AS FLASHED ROOF PENETRATIONS FOR INTERIOR CONDUIT
- 6. ALL PV CABLES AND HOMERUN WIRES BE TYPE USE-2, AND SINGLE-CONDUCTOR CABLE LISTED AND IDENTIFIED AS PV WIRE, TYPE TC-ER, OR EQUIVALENT: ROUTED TO SOURCE CIRCUIT COMBINER BOXES AS REQUIRED

690.8] FOR MULTIPLE CONDUCTORS

- 8. ALL PV DC CONDUCTORS IN CONDUIT EXPOSED TO SUNLIGHT SHALL BE INSTALLED AT LEAST 7/8" ABOVE THE ROOF SURFACE AND DERATED ACCORDING TO [NEC TABLE 310.15 (B)(2)(a), NEC TABLE 310.15(B)(3)(a),& NEC 310.15(B)(3)(c)]
- 9. EXPOSED ROOF PV DC CONDUCTORS SHALL BE USE-2, 90°C RATED, WET AND UV RESISTANT, AND UL LISTED RATED FOR 600V, UV RATED SPIRAL WRAP SHALL BE USED TO PROTECT WIRE FROM SHARP EDGES
- 10. PHASE AND NEUTRAL CONDUCTORS SHALL BE DUAL RATED THHN/THWN-2 INSULATED, 90°C RATED, WET AND UV RESISTANT, RATED FOR 600V
- 11. 4-WIRE DELTA CONNECTED SYSTEMS HAVE THE PHASE WITH THE HIGHER VOLTAGE TO GROUND MARKED ORANGE OR IDENTIFIED BY OTHER EFFECTIVE MEANS.
- 12. ALL SOURCE CIRCUITS SHALL HAVE INDIVIDUAL SOURCE CIRCUIT PROTECTION
- 13. VOLTAGE DROP LIMITED TO 2% FOR DC CIRCUITS AND 3% FOR AC CIRCUITS
- 14. NEGATIVE GROUNDED SYSTEMS DC CONDUCTORS SHALL BE COLOR CODED AS FOLLOWS: DC POSITIVE- RED (OR MARKED RED), DC NEGATIVE- GREY (OR MARKED GREY)
- 15. POSITIVE GROUNDED SYSTEMS DC CONDUCTORS COLOR CODED:
- DC POSITIVE- GREY (OR MARKED GREY). DC NEGATIVE- BLACK (OR MARKED BLACK) 16. AC CONDUCTORS >4AWG COLOR CODED OR MARKED:
- PHASE A OR L1- BLACK, PHASE B OR L2- RED, PHASE C OR L3- BLUE, NEUTRAL-
- * USE-2 IS NOT INDOOR RATED BUT PV CABLE IS RATED THWN/THWN-2 AND MAY BE USED INSIDE
- ** USE-2 IS AVAILABLE AS UV WHITE
- 17. RIGID CONDUIT, IF INSTALLED, (AND/OR NIPPLES) MUST HAVE A PULL BUSHING TO PROTECT WIRES.
- 18. IF CONDUIT DETERMINED TO BE RAN THROUGH ATTIC IN FIELD THEN CONDUIT WILL BE EITHER EMT, FMC, OR MC CABLE IF DC CURRENT COMPLYING WITH NEC 690.31, NEC 250.118(10). DISCONNECTING MEANS SHALL COMPLY WITH 690.13 AND 690.15 19. CONDUIT RAN THROUGH ATTIC WILL BE AT LEAST 18" BELOW ROOF SURFACE COMPLYING WITH NEC 230.6(4) AND SECURED NO GREATER THAN 6' APART PER NEC 330.30(B).

Charapp etch Corrine ĬĹ. 46

DRAWING BY

S

Jake Lamb

March 22, 2022

PROJECT NUMBER

376340

ELEC. CALCS.

PAGE NUMBER PV6 REVISION

Α

↑WARNING

ELECTRIC SHOCK HAZARD

TERMINALS ON THE LINE AND LOAD SIDES MAY BE ENERGIZED IN THE OPEN POSITION

DIRECT CURRENT

MAXIMUM VOLTAGE

MAX CIRCUIT CURRENT

PHOTOVOLTAIC POWER SOURCE

VDC

AMPS

FOR PV DISCONNECTING MEANS WHERE ALL TERMINALS OF THE DISCONNECTING MEANS MAY BE ENERGIZED IN THE OPEN POSITION. [NEC 690.13(B), NEC 705.22]

DC DISCONNECT AT THE INVERTER. [NEC 690.53, NEC 690.13(B)]

AT POINT OF INTERCONNECTION, MARKED AT AC

AT EACH DC DISCONNECTING MEANS, INCLUDING THE

WITH RAPID SHUTDOWN TURN RAPID SHUTDOWN

SOLAR PV SYSTEM EQUIPPED

WITH RAPID SHUTDOWN

WARNING: PHOTOVOLTAIC

POWER SOURCE

SWITCH TO THE 'OFF POSITION TO HUT DOWN PV SYSTEM AND REDUCE SHOCK HAZARD IN THE ARRAY

RN RAPID SHUTDOWN SWITCH

TO THE "OFF" POSITION

TO SHUT DOWN CONDUCTORS

OUTSIDE THE ARRAY

CONDUCTORS WITHIN

ENERGIZED IN SUNLIGHT



SOLAR PV SYSTEM EQUIPPED

FOR PV SYSTEMS THAT SHUT DOWN THE ARRAY AND CONDUCTORS LEAVING THE ARRAY: SIGN TO BE LOCATED ON OR NO MORE THAN 3 FT AWAY FROM SERVICE DISCONNECTING MEANS TO WHICH THE PV SYSTEMS ARE CONNECTED AND SHALL INDICATE THE LOCATION OF ALL IDENTIFIED RAPID SHUTDOWN SWITCHES IF NOT AT THE SAME LOCATION.

AT DIRECT-CURRENT EXPOSED RACEWAYS, CABLE

WALLS, PARTITIONS, CEILINGS, OR FLOORS.

AND OTHER WIRING METHODS: SPACED AT MAXIMUM

10FT SECTION OR WHERE SEPARATED BY ENCLOSURES,

TRAYS, COVERS AND ENCLOSURES OF JUNCTION BOXES,

[NEC 690.31(G)(3&4)]

[NEC 690.56(C)(1)(A)]

(8)

(3)&(4)

(11) OR (13)

OR PLACARD

(5)

(ONLY IF PV

NTERCONNECTIO

CONSISTS OF LOAD

SIDE BREAKER)

SIDE BREAKER)

LABELING DIAGRAM FOR STRING INV. / DC OPTIMIZER INV.:

BREAKER USED

FOR PV SYSTEMS THAT ONLY SHUT DOWN CONDUCTORS LEAVING THE ARRAY: SIGN TO BE LOCATED ON OR NO MORE THAN 3 FT AWAY FROM SERVICE DISCONNECTING MEANS TO WHICH THE PV SYSTEMS ARE CONNECTED AND SHALL INDICATE THE LOCATION OF ALL IDENTIFIED RAPID SHUTDOWN SWITCHES IF NOT AT THE SAME LOCATION. [NEC 690.56(C)(1)(B)]

EXISTING SUB PANEL

(IF WHERE POINT OF

INTERCONNECTION

(3)&(4)

BREAKER USED

(ONLY IF PV

ITERCONNECTION

ONSISTS OF LOAI

SIDE BREAKER)

IS MADE)

⚠ WARNING

⚠ WARNING

MAIN DISTRIBUTION UTILITY DISCONNECTISE

POWER TO THIS BUILDING IS ALSO SUPPLIED

FROM A ROOF MOUNTED SOLAR ARRAY WITH A RAPID SHUTDOWN DISCONNECTING MEANS

GROUPED AND LABELED WITHIN LINE OF SITE

AND 10 FT OF THIS LOCATION.

▲ WARNING

POWER TO THIS BUILDING IS ALSO

SUPPLIED FROM MAIN DISTRIBUTION

UTILITY DISCONNECT LOCATED

POWER TO THIS BUILDING IS ALSO SUPPLIED FROM ROOF MOUNTED SOLAR ARRAY, SOLAR ARRAY RAPID SHUTDOWN DISCONNECT IS LOCATED OUTSIDE NEXT TO UTILITY METER

WARNING

AC JUNCTION BOX

OR AC COMBINER BOX

DO NOT ADD LOADS

PERMANENT DIRECTORY TO BE LOCATED AT MAIN SERVICE EQUIPMENT LOCATION IF ALL **ELECTRICAL POWER SOURCE DISCONNECTING** MEANS (SOLAR ARRAY RAPID SHUTDOWN SWITCH) ARE GROUPED AND IN LINE OF SITE OF MAIN SERVICE DISCONNECTING MEANS. [NEC 690.56(C) & NEC 705.10].

PERMANENT DIRECTORY TO BE LOCATED AT SOLAR ARRAY RAPID SHUTDOWN SWITCH DENOTING THE LOCATION OF THE SERVICE EQUIPMENT LOCATION IF SOLAR ARRAY RAPID SHUT DOWN DISCONNECT SWITCH IS NOT GROUPED AND WITHIN LINE OF SITE OF MAIN SERVICE DISCONNECTING MEANS. [NEC 705.10]

PERMANENT DIRECTORY TO BE LOCATED AT MAIN SERVICE EQUIPMENT DENOTING THE LOCATION OF THE PV RAPID SHUTDOWN SYSTEM DISCONNECTING MEANS IF SOLAR ARRAY RAPID SHUT DOWN DISCONNECT SWITCH IS NOT GROUPED AND WITHIN LINE OF SITE OF MAIN SERVICE DISCONNECTING MEANS. [NEC 705.10, NEC 690.56(C)(1)]

PERMANENT DIRECTORY TO BE LOCATED AT AC COMBINER PANEL [NEC 110.21(B)]

PHOTOVOLTAIC SYSTEM AC DISCONNECT

↑ WARNING

DUAL POWER SUPPLY

SOURCES: UTILITY GRID AND

PV SOLAR ELECTRIC SYSTEM

↑WARNING

INVERTER OUTPUT CONNECTION

DO NOT RELOCATE

THIS OVERCURRENT DEVICE

RATED AC OUTPUT CURRENT NOMINAL OPERATING AC VOLTAGE

DISCONNECTING MEANS

[NEC 690.54, NEC 690.13 (B)]

IF INTERCONNECTING ON THE LOAD SIDE, INSTALL THIS LABEL ANYWHERE THAT IS POWERED BY BOTH THE UTILITY AND THE SOLAR PV SYSTEM: THE MAIN SERVICE PANEL AND SUB-PANELS.

[NEC 705.12(B)(3)]

PLACED ADJACENT TO THE BACK-FED BREAKER

RAPID SHUTDOWN SWITCH FOR SOLAR PV SYSTEM

_ _ _ _

SIGN LOCATED AT RAPID SHUT DOWN DISCONNECT SWITCH [NEC 690.56(C)(3)].

AC DISCONNECT

(12) OR

PLACARD

(3)

(10)

PV COMBINER

IF USED TO COMBINE

PV OUTPUT CIRCUITS

(3)

(6)

(11)

(14)

SUBPANEL -

PHOTOVOLTAIC SYSTEM COMBINER PANEL

1403 N RESEARCH WAY, BUILDING J OREM. UT 84097

800-377-4480 WWW.BLUERAVENSOLAR.COM

CONFIDENTIAL - THE INFORMATION HEREIN CONTAINED SHALL NOT BE USED FOR THE BENEFIT OF ANYONE EXCEPT BLUERAVENSOLAR NOR SHALL IT BE DISCLOSED IN WHOLE OR IN PART TO OTHERS OUTSIDE RECIPIENTS ORGANIZATION. EXCEPT IN CONNECTION WITH THE SALE AND USE OF THE RESPECTIVE EQUIPMENT, WITHOUT THE WRITTEN PERMISSION OF BLUERAVENSOLAR LLC.



PV-011719-015866

CONTRACTOR: **BRS FIELD OPS**

385.498.6700

27501 DC $\stackrel{\mathsf{X}}{\geq}$ 9

DC

Carolina 2 SIZE: Corrine Charapp North Court SYSTEM Fetch (ANGIER,

DRAWING BY

SIT

INFORMATION:

Jake Lamb

46

DATE

March 22, 2022

PROJECT NUMBER

376340

SHEET NAME LABELS

PAGE NUMBER

REVISION Α PV8

LABELING DIAGRAM FOR MICRO INV.: MAIN SERVICE PANEL

FROM THE INVERTER IF TIE IN CONSISTS OF LOAD SIDE CONNECTION TO BUSBAR. [NEC 705.12(B)(2)(3)(b)]

AWARNING

SOURCES, TOTAL RATING OF ALL MAIN SUPPLY OVERCURRENT DEVICE. SHALL NOT EXCEED AMPACITY OF BUSBAR.


SIGN LOCATED AT LOAD CENTER IF IT

THIS EQUIPMENT FED BY MULTIPLE OVERCURRENT DEVICES, EXCLUDING

(ONLY IF 3 OR MORE SUPPLY SOURCES TO A BUSBAR)

CONTAINS 3 OR MORE POWER SOURCES. [NEC 705.12(B)(2)(3)(C)]

- LABELS CALLED OUT ACCORDING TO ALL COMMON CONFIGURATIONS. ELECTRICIAN TO DETERMINE EXACT REQUIREMENTS IN THE FIELD PER CURRENT NEC AND LOCAL CODES AND MAKE APPROPRIATE ADJUSTMENTS.
- LABELING REQUIREMENTS BASED ON THE 2017 NATIONAL ELECTRIC CODE, OSHA STANDARD 19010 145 ANSI 7535
- MATERIAL BASED ON THE REQUIREMENTS OF THE AUTHORITY HAVING JURISDICTION.
- LABELS TO BE OF SUFFICIENT DURABILITY TO WITHSTAND THE ENVIRONMENT INVOLVED AND SHALL NOT BE HANDWRITTEN [NEC 110.21]
- LABELS TO BE A MINIMUM LETTER HEIGHT OF 3/8", WHITE ON RED BACKGROUND; REFLECTIVE, AND PERMANENTLY AFFIXED [IFC 605.11.1.1]

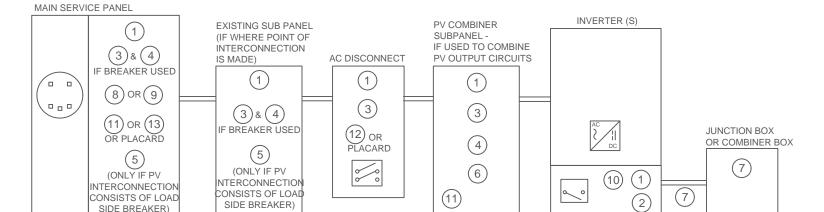

INTEGRATED DC DISCONNECT

*ELECTRICAL DIAGRAM SHOWN ABOVE IS FOR LABELING PURPOSES ONLY. NOT AN ACTUAL REPRESENATION OF EQUIPMENT AND CONNECTIONS TO BE INSTALLED. LABEL LOCATIONS PRESENTED MAY VERY DEPENDING ON TYPE OF INTERCONNECTION METHOD AND LOCATION PRESENTED ON PV5 OF 3 LINE DIAGRAM. PV5 LINE DIAGRAM TO REFLECT ACTUAL REPRESENTATION OF PROPOSED SCOPE OF WORK.

Enphase IQ 7 and IQ 7+ **Microinverters**

The high-powered smart grid-ready Enphase IQ 7 Micro™ and Enphase IQ 7+ Micro™ dramatically simplify the installation process while

achieving the highest system efficiency.

Part of the Enphase IQ System, the IQ 7 and IQ 7+ Microinverters integrate with the Enphase IQ Envoy™, Enphase IQ Battery™, and the Enphase Enlighten™ monitoring and analysis software.

IQ Series Microinverters extend the reliability standards set forth by previous generations and undergo over a million hours of power-on testing, enabling Enphase to provide an industry-leading warranty of up to 25 years.



Easy to Install

- · Lightweight and simple
- · Faster installation with improved, lighter two-wire cabling
- Built-in rapid shutdown compliant (NEC 2014 & 2017)

Productive and Reliable

- · Optimized for high powered 60-cell/120 half-cell and 72cell/144 half-cell* modules
- More than a million hours of testing
- · Class II double-insulated enclosure
- UL listed

Smart Grid Ready

- Complies with advanced grid support, voltage and frequency ride-through requirements
- · Remotely updates to respond to changing grid requirements
- Configurable for varying grid profiles
- Meets CA Rule 21 (UL 1741-SA)

 $^{^{\}star}$ The IQ 7+ Micro is required to support 72-cell/144 half-cell modules.



Enphase IQ 7 and IQ 7+ Microinverters

INPUT DATA (DC)	IQ7-60-2-US		IQ7PLUS-72-2-US		
Commonly used module pairings ¹	235 W - 350 W +		235 W - 440 W +		
Module compatibility	60-cell/120 half-cell PV modules		60-cell/120 half-cell and 72-		
	only		cell/144 half-ce	II PV modules	
Maximum input DC voltage	48 V		60 V		
Peak power tracking voltage	27 V - 37 V		27 V - 45 V		
Operating range	16 V - 48 V		16 V - 60 V		
Min/Max start voltage	22 V / 48 V		22 V / 60 V		
Max DC short circuit current (module Isc)	15 A		15 A		
Overvoltage class DC port	II		II		
DC port backfeed current	0 A		0 A		
PV array configuration	1 x 1 ungrounded array; No additio AC side protection requires max 20				
OUTPUT DATA (AC)	IQ 7 Microinverter		IQ 7+ Microinverter		
Peak output power	250 VA		295 VA		
Maximum continuous output power	240 VA	240 VA			
Nominal (L-L) voltage/range ²	240 V / 211-264 V	208 V / 183-229 V	240 V / 211-264 V	208 V / 183-229 V	
Maximum continuous output current	1.0 A (240 V)	1.15 A (208 V)	1.21 A (240 V)	1.39 A (208 V)	
Nominal frequency	60 Hz		60 Hz		
Extended frequency range	47 - 68 Hz		47 - 68 Hz		
AC short circuit fault current over 3 cycles	5.8 Arms		5.8 Arms		
Maximum units per 20 A (L-L) branch circuit ³	16 (240 VAC)	13 (208 VAC)	13 (240 VAC)	11 (208 VAC)	
Overvoltage class AC port	III		III		
AC port backfeed current	18 mA		18 mA		
Power factor setting	1.0		1.0		
Power factor (adjustable)	0.85 leading 0.85 lagging		0.85 leading 0.85 lagging		
EFFICIENCY	@240 V	@208 V	@240 V	@208 V	
Peak efficiency	97.6 %	97.6 %	97.5 %	97.3 %	
CEC weighted efficiency	97.0 %	97.0 %	97.0 %	97.0 %	
MECHANICAL DATA					

	MECHANICAL DATA
Ī	Ambient temperature range

Relative humidity range	4% to 100% (condensing)
Connector type	MC4 (or Amphenol H4 UTX with additional Q-DCC-5 adapter)
Dimensions (HxWxD)	212 mm x 175 mm x 30.2 mm (without bracket)
Weight	1.08 kg (2.38 lbs)
Cooling	Natural convection - No fans
Approved for wet locations	Yes
Pollution degree	PD3
Enclosure	Class II double-insulated, corrosion resistant polymeric enclosure
Environmental category / UV exposure rating	NEMA Type 6 / outdoor
FEATURES	
Communication	Power Line Communication (PLC)
Monitoring	Enlighten Manager and MyEnlighten monitoring options. Both options require installation of an Enphase IQ Envoy.
Disconnecting means	The AC and DC connectors have been evaluated and approved by UL for use as the load-break disconnect required by NEC 690.
Compliance	CA Rule 21 (UL 1741-SA) UL 62109-1, UL1741/IEEE1547, FCC Part 15 Class B, ICES-0003 Class B, CAN/CSA-C22.2 NO. 107.1-01 This product is UL Listed as PV Rapid Shut Down Equipment and conforms with NEC 2014, NEC 2017, and NEC 2020 section 690.12 and C22.1-2015 Rule 64-218 Rapid Shutdown of PV Systems, for AC and DC conductors, when installed according manufacturer's instructions.

1. No enforced DC/AC ratio. See the compatibility calculator at https://enphase.com/en-us/support/module-compatibility.

-40°C to +65°C

2. Nominal voltage range can be extended beyond nominal if required by the utility.
3. Limits may vary. Refer to local requirements to define the number of microinverters per branch in your area.



ENPHASE

Enphase Enlighten, Enphase IQ Envoy, and other trademarks or service names are the trademarks of Enphase Energy, Inc. Data subject to change. 2020-08-12

1403 N RESEARCH WAY, BUILDING J OREM, UT 84097

800-377-4480 WWW.BLUERAVENSOLAR.COM

CONFIDENTIAL - THE INFORMATION HEREIN CONTAINED SHALL NOT BE USED FOR THE BENEFIT OF ANYONE EXCEPT BLUE RAVEN SOLAR NOR SHALL IT BE DISCLOSED IN WHOLE OR IN PART TO OTHERS OUTSIDE RECIPIENTS ORGANIZATION, EXCEPT IN CONNECTION WITH THE SALE AND USE OF THE RESPECTIVE EQUIPMENT, WITHOUT THE WRITTEN PERMISSION OF BLUE RAVEN SOLAR LLC.




CONTRACTOR: **BRS FIELD OPS** 385.498.6700

SPEC SHEET

PAGE NUMBER REVISION SS

0



Enphase IQ Combiner 3

(X-IQ-AM1-240-3)

IQ Envoy[™] consolidates interconnection equipment into a single enclosure and streamlines PV and storage installations by providing a consistent, pre-wired solution for residential applications. It offers up to four 2-pole input circuits and Eaton BR series busbar assembly.

The **Enphase IQ Combiner 3**™ with Enphase



Smart

- Includes IQ Envoy for communication and control
- · Flexible networking supports Wi-Fi, Ethernet, or cellular
- Optional AC receptacle available for PLC
- · Provides production metering and optional consumption monitoring

Simple

- · Reduced size from previous combiner
- · Centered mounting brackets support single stud mounting
- · Supports back and side conduit entry
- Up to four 2-pole branch circuits for 240 VAC plug-in breakers (not included)
- 80 A total PV or storage branch circuits

Reliable

- Durable NRTL-certified NEMA type 3R enclosure
- · Five-year limited warranty
- UL listed



MODEL NUMBER

IQ Combiner 3	IQ Combiner 3 with Enphase IQ Envoy™ printed circuit board for integrated revenue grade PV
X-IQ-AM1-240-3	production metering (ANSI C12.20 +/- 0.5%) and optional* consumption monitoring (+/- 2.5%).

ACCESSORIES and REPLACEMENT PARTS (not included, order separately)

Enphase Mobile Connect™ CELLMODEM-03 (4G/12-year data plan) Plug and play industrial grade cellular modem with data plan for systems up to 60 CELLMODEM-01 (3G/5-year data plan) microinverters. (Available in the US, Canada, Mexico, Puerto Rico, and the US Virgin Islands, CELLMODEM-M1 (4G based LTE-M/5-year data plan) where there is adequate cellular service in the installation area.) Split core current transformers enable whole home consumption metering (+/- 2.5%). Consumption Monitoring* CT CT-200-SPLIT * Consumption monitoring is required for Enphase Storage Systems

Wireless USB adapter Installed at the IQ Envoy. For communications with Enphase Encharge™ storage and Enphase COMMS-KIT-01 Enpower™ smart switch. Includes USB cable for connection to IQ Envoy or Enphase IQ Combiner™ and allows redundant wireless communication with Encharge and Enpower Supports Eaton BR210, BR215, BR220, BR230, BR240, BR250, and BR260 circuit breakers.

Circuit Breakers BRK-10A-2-240 Circuit breaker, 2 pole, 10A, Eaton BR210 BRK-15A-2-240 Circuit breaker, 2 pole, 15A, Eaton BR215 BRK-20A-2P-240 Circuit breaker, 2 pole, 20A, Eaton BR220

Power line carrier (communication bridge pair), quantity - one pair XA-PLUG-120-3 Accessory receptacle for Power Line Carrier in IQ Combiner 3 (required for EPLC-01)

Replacement IQ Envoy printed circuit board (PCB) for Combiner 3 XA-ENV-PCBA-3

ELECTRICAL SPECIFICATIONS

EPLC-01

	Rating	Continuous duty
	System voltage	120/240 VAC, 60 Hz
	Eaton BR series busbar rating	125 A
	Max. continuous current rating (output to grid)	65 A
	Max. fuse/circuit rating (output)	90 A
	Branch circuits (solar and/or storage)	Up to four 2-pole Eaton BR series Distributed Generation (DG) breakers only (not included)
	Max. continuous current rating (input from PV)	64 A
	Max. total branch circuit breaker rating (input)	80A of distributed generation / 90A with IQ Envoy breaker included
	Production Metering CT	200 A solid core pre-installed and wired to IQ Envoy

MECHANICAL DATA	
Dimensions (WxHxD)	49.5 x 37.5 x 16.8 cm (19.5" x 14.75" x 6.63"). Height is 21.06" (53.5 cm with mounting brackets)
Weight	7.5 kg (16.5 lbs)
Ambient temperature range	-40° C to +46° C (-40° to 115° F)
Cooling	Natural convection, plus heat shield
Enclosure environmental rating	Outdoor, NRTL-certified, NEMA type 3R, polycarbonate construction
Wire sizes	 20 A to 50 A breaker inputs: 14 to 4 AWG copper conductors 60 A breaker branch input: 4 to 1/0 AWG copper conductors Main lug combined output: 10 to 2/0 AWG copper conductors Neutral and ground: 14 to 1/0 copper conductors Always follow local code requirements for conductor sizing.
Altitude	To 2000 meters (6,560 feet)

INTERNET CONNECTION OPTIONS

Integrated Wi-Fi	802.11b/g/n
Ethernet	Optional, 802.3, Cat5E (or Cat 6) UTP Ethernet cable (not included)
Cellular	Optional, CELLMODEM-01 (3G) or CELLMODEM-03 (4G) or CELLMODEM-M1 (4G based LTE-M) (not included)
COMPLIANCE	

COMPLIANCE

Compliance, Combiner	UL 1741, CAN/CSA C22.2 No. 107.1, 47 CFR, Part 15, Class B, ICES 003 Production metering: ANSI C12.20 accuracy class 0.5 (PV production)
Compliance, IQ Envoy	UL 60601-1/CANCSA 22.2 No. 61010-1

To learn more about Enphase offerings, visit enphase.com

© 2018 Enphase Energy. All rights reserved. Enphase, the Enphase logo, IQ Combiner 3, and other trademarks or service names are the



1403 N RESEARCH WAY, BUILDING J OREM, UT 84097

800-377-4480 WWW.BLUERAVENSOLAR.COM

CONFIDENTIAL - THE INFORMATION HEREIN CONTAINED SHALL NOT BE USED FOR THE BENEFIT OF ANYONE EXCEPT BLUE RAVEN SOLAR NOR SHALL IT BE DISCLOSED IN WHOLE OR IN PART TO OTHERS OUTSIDE RECIPIENTS ORGANIZATION, EXCEPT IN CONNECTION WITH THE SALE AND USE OF THE RESPECTIVE EQUIPMENT, WITHOUT THE WRITTEN PERMISSION OF BLUE RAVEN SOLAR LLC.



CONTRACTOR: **BRS FIELD OPS** 385.498.6700

SPEC SHEET

SS








REC ALPHA PURE SERIES PRODUCT SPECIFICATIONS



GENERAL DATA 132 half-cut REC heterojunction cells with lead-free, gapless technology, 6 strings of 22 cells in series Cell type: 3.2 mm solar glass with anti-reflective surface treatment in accordance with EN 12150 Backsheet Highly resistant polymer (black) Frame: Anodized aluminum (black) 3-part, 3 bypass diodes, lead-free Junction box Stäubli MC4 PV-KBT4/KST4 (4 mm²) in accordance with IEC 62852, IP68 only when connected Connectors: 4 mm² solar cable, 1.1 m + 1.2 m Cable: 1821 x 1016 x 30 mm (1.85 m²) Weight: 20.5 kg Made in Singapore Origin:



ELECTRICAL DATA		Prod	duct Code*: R	ECxxxAA	Pure	
Power Output - P _{MAX} (Wp)	385	390	395	400	405	410
Watt Class Sorting - (W)	0/+5	0/+5	0/+5	0/+5	0/+5	0/+5
Nominal Power Voltage - $V_{MPP}(V)$	41.2	41.5	41.8	42.1	42.4	42.7
Nominal Power Current - I _{MPP} (A)	9.35	9.40	9.45	9.51	9.56	9.61
Open Circuit Voltage - $V_{oc}(V)$	48.5	48.6	48.7	48.8	48.9	49.0
$ShortCircuitCurrent-I_{SC}(A)$	10.18	10.19	10.20	10.25	10.30	10.35
Power Density (W/m²)	208	211	214	216	219	222
Panel Efficiency (%)	20.8	21.1	21.4	21.6	21.9	22.2
Power Output - P _{MAX} (Wp)	293	297	301	305	309	312
Nominal Power Voltage - $V_{MPP}(V)$	38.8	39.1	39.4	39.7	40.0	40.2
${\sf NominalPowerCurrent-I}_{\sf MPP}({\sf A})$	7.55	7.59	7.63	7.68	7.72	7.76
Open Circuit Voltage - $V_{OC}(V)$	45.7	45.8	45.9	46.0	46.1	46.2
$ShortCircuitCurrent-I_{SC}(A)$	8.16	8.20	8.24	8.28	8.32	8.36

Values at standard test conditions (STC: air mass AM 1.5, irradiance 1000 W/m², temperature 25°C), based on a production spread with a tolerance of P_{Max} , V_{Ce} M_{Se} M_{Se} within one watt class. Nominal module operating temperature (NMOT: air mass AM 1.5, irradiance 800 W/m², temperature 20°C, windspeed 1 m/s).* Where xxx indicates the nominal power class (P_{Max}) at STC above.

MAXIMUM RATINGS		
Operational temperature:	-40+85°C	
Maximum system voltage:	1000 \	
Maximum test load (front):	+7000 Pa (713 kg/m²)	
Maximum test load (rear):	-4000 Pa (407 kg/m²)	
Max series fuse rating:	25 <i>F</i>	
Max reverse current:	25 <i>F</i>	
* See installation manual for mounting instructio Design load = Test load / 1.5 (safety fact		

Standard	REC	ProTrust
No	Yes	Yes
All	≤25 kW	25-500 kW
20	25	25
25	25	25
0	25	10
98%	98%	98%
0.25%	0.25%	0.25%
92%	92%	92%
	No All 20 25 0 98% 0.25%	No Yes All <25 kW 20 25 25 25 0 25 98% 98% 0.25% 0.25%

Founded in 1996, REC Group is an international pioneering solar energy company dedicated to empowering consumers with clean, affordable solar power. As Solar's Most Trusted, REC is committed to high quality, innovation, and a low carbon footprint in the solar materials and solar panels it manufactures.

Headquartered in Norway with operational headquarters in Singapore, REC also has regional hubs in North America, Europe, and Asia-Pacific.

CERTIFICATIONS	
IEC 61215:2016, IEC	61730:2016, UL 61730
IEC 62804	PID
IEC 61701	Salt Mist
IEC 62716	Ammonia Resistance
ISO 11925-2	Ignitability (Class E)
IEC 62782	Dynamic Mechanical Load
IEC 61215-2:2016	Hailstone (35mm)
IEC 62321	Lead-free acc. to RoHS EU 863/2015
ISO 14001 ISO 0001	IEC 45001 IEC 62041








TEMPERATURE RATINGS*		
Nominal Module Operating Temperature:	44°C (±2°C)	
Temperature coefficient of P _{MAX} :	-0.26 %/°C	
Temperature coefficient of V _{oc} :	-0.24 %/°C	
Temperature coefficient of I _{sc} : 0.04 %/°C		
*The temperature coefficients stated are linear values		

DELIVERY INFORMATION	
Panels per pallet:	33
Panels per 40 ft GP/high cube container:	792 (24 pallets)
Panels per 13.6 m truck:	924 (28 pallets)
Panels per 53 ft truck:	891 (27 pallets)



SHEET NAME:

REVISION:

SPEC SHEET

BLUE RAVEN

1403 N. Research Way Orem, UT 84097 800.377.4480

WWW.BLUERAVENSOLAR.COM

CONFIDENTIAL- THE INFORMATION

HEREIN CONTAINED SHALL NOT BE

USED FOR THE BENEFIT OF ANYONE

EXCEPT BLUE RAVEN SOLAR NOR

SHALL IT BE DISCLOSED IN WHOLE OR IN PART TO OTHERS OUTSIDE

RECIPIENTS ORGANIZATION, EXCEPT

IN CONNECTION WITH THE SALE AND

USE OF THE RESPECTIVE EQUIPMENT

WITHOUT THE WRITTEN PERMISSION

OF BLUE RAVEN SOLAR LLC

NABCEP

CERTIFIED

PV INSTALLATION **PROFESSIONAL** Scott Gurney #PV-011719-015866 CONTRACTOR: **BRS FIELD OPS** 385-498-6700

PAGE NUMBER: SS

Product data sheet Characteristics

D221NRB

Safety switch, general duty, fusible, 30A, 2 poles, 7.5 hp, 120 VAC, NEMA 3R, bolt-on provision, neutral factory installed

Product availability: Stock - Normally stocked in distribution facility





Price*: 188.00 USD



Main

Product	Single Throw Safety Switch	
Current Rating	30 A	
Certifications	UL listed file E2875	
Enclosure Rating	NEMA 3R	
Disconnect Type	Fusible disconnect switch	
Factory Installed Neutral	Neutral (factory installed)	
Short Circuit Current Rating	100 kA maximum depending on fuse H, K or R	
Mounting Type	Surface	
Number of Poles	2	
Electrical Connection	Lugs	
Duty Rating	General duty	
Voltage Rating	240 V AC	
Wire Size	AWG 14AWG 6 copper AWG 12AWG 6 aluminium	

Complementary				
Maximum Horse Power Rating	1.5 hp 240 V AC 60 Hz 1 phase NEC 240.6 3 hp 240 V AC 60 Hz 3 phase NEC 240.6 3 hp 240 V AC 60 Hz 1 phase NEC 430.52 7.5 hp 240 V AC 60 Hz 3 phase NEC 430.52	Popular		
Tightening torque	30 lbf.in (3.39 N.m) 0.000.02 in² (2.0813.3 mm²) AWG 14AWG 6)			
Height	9.25 in (234.95 mm)			
Width	7.25 in (184.15 mm)			
Depth 3.63 in (92.20 mm)				

^{*} Price is "List Price" and may be subject to a trade discount - check with your local distributor or retailer for actual price.

Apr 21, 2021 Link the Schneider

Ordering and shipping details

Catagonia	00400 D 0 DU GWAIGMARD 20 2004			
Category	00106 - D & DU SW,NEMA3R, 30-200A			
Discount Schedule	DE1A			
GTIN	00785901460589			
Nbr. of units in pkg.	10			
Package weight(Lbs)	.bs) 4.75 lb(US) (2.15 kg)			
Returnability Yes				
Country of origin	MX			

Packing Units

a district of the second		
Unit Type of Package 1	PCE	
Package 1 Height	5.30 in (13.462 cm)	
Package 1 width	7.80 in (19.812 cm)	
Package 1 Length	10.00 in (25.4 cm)	
Unit Type of Package 2	CAR	
Number of Units in Package 2	5	
Package 2 Weight	25.10 lb(US) (11.385 kg)	
Package 2 Height	10.60 in (26.924 cm)	
Package 2 width	23.70 in (60.198 cm)	
Package 2 Length	10.20 in (25.908 cm)	
Unit Type of Package 3	PAL	
Number of Units in Package 3	150	
Package 3 Weight	767.00 lb(US) (347.905 kg)	
Package 3 Height	40.00 in (101.6 cm)	
Package 3 width	40.00 in (101.6 cm)	
Package 3 Length	48.00 in (121.92 cm)	

Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACh Regulation	REACh Declaration
REACh free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.
Environmental Disclosure	Product Environmental Profile
PVC free	Yes

Life is On Schneider

Contractual warranty

Warranty	18 months



1403 N. Research Way Orem, UT 84097

800.377.4480 WWW.BLUERAVENSOLAR.COM

CONFIDENTIAL- THE INFORMATION HEREIN CONTAINED SHALL NOT BE USED FOR THE BENEFIT OF ANYONE EXCEPT BLUE RAVEN SOLAR NOR SHALL IT BE DISCLOSED IN WHOLE OR IN PART TO OTHERS OUTSIDE RECIPIENTS ORGANIZATION, EXCEPT IN CONNECTION WITH THE SALE AND USE OF THE RESPECTIVE EQUIPMENT. WITHOUT THE WRITTEN PERMISSION
OF BLUE RAVEN SOLAR LLC.



PV INSTALLATION PROFESSIONAL

Scott Gurney #PV-011719-015866

CONTRACTOR: BRS FIELD OPS 385-498-6700

SHEET NAME:

SPEC SHEETS

REVISION: 0

PAGE NUMBER:

Specification Sheet

PV Junction Box for Composition/Asphalt Shingle Roofs

A. System Specifications and Ratings

- Maximum Voltage: 600 Volts
 Maximum Current: 60 Amps
- o Allowable Wire: 14 AWG 6 AWG
- Spacing: Please maintain a spacing of at least ½" between uninsulated live parts and fittings for conduit, armored cable, and uninsulated lie parts of opposite polarity.
- o Enclosure Rating: Type 3R
- Roof Slope Range: 2.5 12:12
 Max Side Wall Fitting Size: 1"
- o Max Floor Pass-Through Fitting Size: 1"
- o Ambient Operating Conditions: -35°C +75°C
- Compliance:
 - JB-1: UL1741
 - Approved wire connectors: must conform to UL1741
- System Marking: Intertek Symbol and File # 5015705
- Periodic Re-inspections: If re-inspections yield loose components, loose fasteners, or any corrosion between components, components that are found to be affected are to be replaced immediately.

Table 1: Typical Wire Size, Torque Loads and Ratings


			Torque					
	1 Conductor	2 Conductor	Туре	NM	Inch Lbs	Voltage	Current	
ABB ZS6 terminal block	10-24 awg	16-24 awg	Sol/Str	0.5-0.7	6.2-8.85	600V	30 amp	
ABB ZS10 terminal block	6-24 awg	12-20 awg	Sol/Str	1.0-1.6	8.85-14.16	600V	40 amp	
ABB ZS16 terminal bock	4-24 awg	10-20 awg	Sol/Str	1.6-2.4	14.6-21.24	600V	60 amp	
ABB M6/8 terminal block	8-22 awg		Sol/Str	.08-1	8.85	600V	50 amp	
Ideal 452 Red WING-NUT Wire Connector	8-18 awg		Sol/Str			600V		
Ideal 451 Yellow WING-NUT Wire Connector	10-18 awg		Sol/Str			600V		
Ideal, In-Sure Push-In Connector Part #39	10-14 awg		Sol/Str			600V		
International Hudraulies 253/0	10-14 awg		Sol/Str	4	35			
International Hydraulics 252/0	8 awg		Sol/Str	4.5	40			
D	4-6 awg		Sol/Str		45	200	00V	
Brumall 4-5,3	10-14 awg		Sol/Str		35	200	JUV	
Blackburn LL414	4-14 awg		Sol/Str					

Table 2: Minimum wire-bending space for conductors through a wall opposite terminals in mm (inches)

Wire size, AWG or		Wires per terminal (pole)							
187		1		2		3		4 or More	
kcmil	(mm2)	mm	(inch)	mm	(inch)	mm	(inch)	mm	(inch)
14-10	(2.1-5.3)	Not sp	ecified		-				-
8	(8.4)	38.1	(1-1/2)			9	-		-
6	(13.3)	50.8	(2)						

www.ezsolarproducts.com

Aug-2019, Rev 1

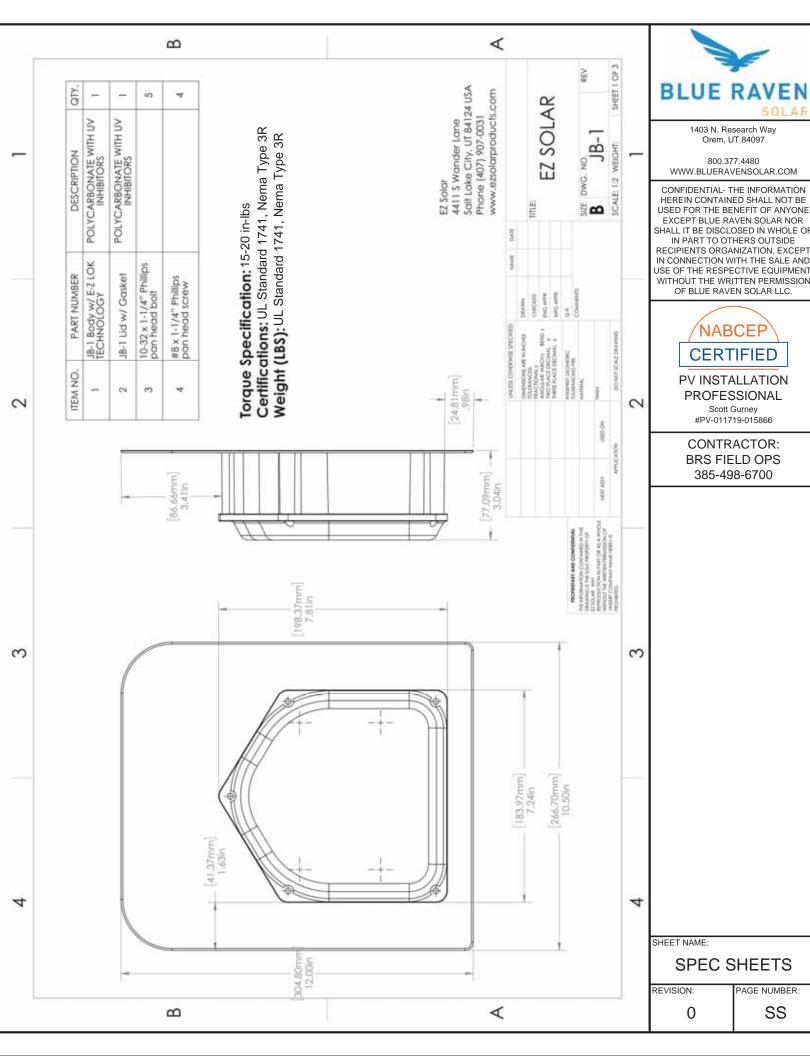

Carlon

Carlon' Non-Metallic Junction Boxes

Molded Non-Metallic Junction Boxes — 6P Rated

Non-metallic junction boxes are UL® Listed with a NEMA 6P rating per Section 314.28 of the National Electrical Code® and CSA Certified per Section 12 of the Canadian Electrical Code. Manufactured from PVC or PPO thermoplastic molding compound and featuring foam-in-place gasketed lids attached with stainless steel screws, these rugged enclosures offer all the corrosion resistance and physical properties you need for direct burial applications.


Type 6P enclosures are intended for indoor or outdoor use, primarily to provide a degree of protection against contact with enclosed equipment, falling dirt, hosedirected water, entry of water during prolonged submersion at a limited depth and external ice formation.

- All Carlon® Junction Boxes are UL® Listed/CSA Certified and maintain a minimum of a NEMA Type 4/4x Rating
- Part numbers with an asterisk (*) are UL[®] Listed and maintain a NEMA Type 6P Rating and Type 4/4X Rating









CAT. NO.	SIZE (IN.)	STD.				ONS (IN.)			MATERIAL		
GAT. NO.	HxWxD	CTN.	MIN	MIN As	MIN B	MIN	T _a	Tc	PVC	THERMO- PLASTIC	STD. WT. (LBS.)
E989NNJ*	4x4x2	10	311/4	3%	N/A	2	.160	:155	X		3
E987N*	4×4×4	10	37/4	3%	N/A	4	.160	.155	X		4
E989NNR*1	4x4x6	10	311/4	3%	N/A	6	.160	200	X		5
E989PPJ*	5×5×2	10	41%	456	N/A	2	.110	.150		X	3
E987R-CAR*	6x6x4	2	6	5%	N/A	4	.190	.190		X	3
E989RRR-UPC*	6x6x6	8	5%	514	N/A	6	.160	150		X	14
E989N-CAR	8x8x4	1	8	8	N/A	4	.185	.190		Х	2
E989SSX-UPC	8x8x7	2	7º/a	75%	N/A	7	.160	.150		X	6
E989UUN	12 x 12 x 4	3	11%	11%	11%	4	.160	.150		X	12
E989R-UPC	12 x 12 x 6	2	11%	11%	115%	6	265	.185		X	10

^{*} U.L. Listed

NEC and National Electrical Code are registered trademarks of the National Fire Protection Association, Inc.

www.tnb.com

United States
Tel: 901.252.8000
800.816.7809
Fax: 901.252.1354

Technical Services Tel: 888.862.3289

Thomas@Betts


A-269



Enclosures

200

Junction Boxes

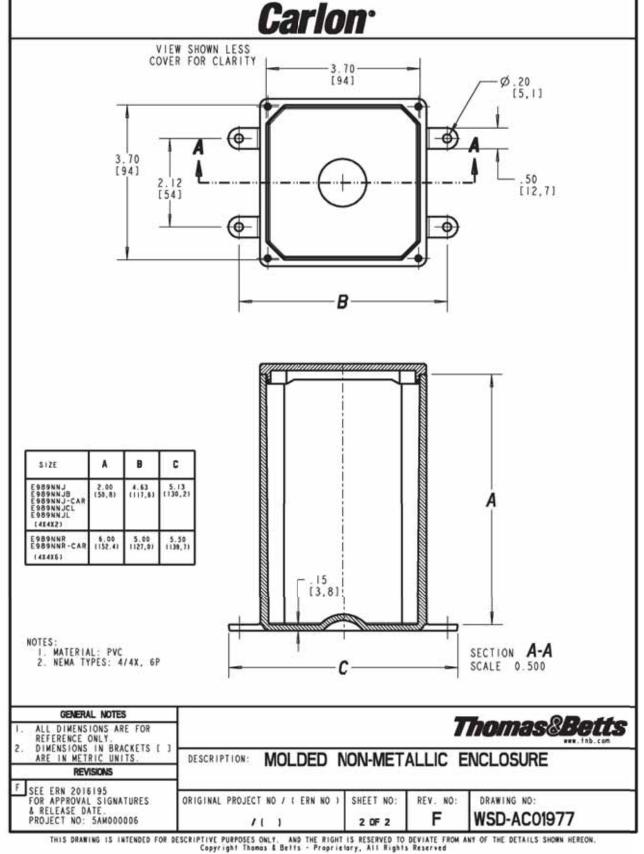

BLUE RAVEN

1403 N. Research Way Orem, UT 84097

800.377.4480 WWW.BLUERAVENSOLAR.COM

CONFIDENTIAL- THE INFORMATION HEREIN CONTAINED SHALL NOT BE USED FOR THE BENEFIT OF ANYONE EXCEPT BLUE RAVEN SOLAR NOR SHALL IT BE DISCLOSED IN WHOLE OR IN PART TO OTHERS OUTSIDE RECIPIENTS ORGANIZATION, EXCEPT IN CONNECTION WITH THE SALE AND USE OF THE RESPECTIVE EQUIPMENT, WITHOUT THE WRITTEN PERMISSION OF BLUE RAVEN SOLAR LLC.



PV INSTALLATION PROFESSIONAL

Scott Gurney #PV-011719-015866

CONTRACTOR: BRS FIELD OPS 385-498-6700

SHEET NAME:

SPEC SHEETS


REVISION: PAGE NUMBER:

0

^{*} Not CSA Certified



SYSTEM BONDING & GROUNDING | SINSTALLATION GUIDE | PAGE

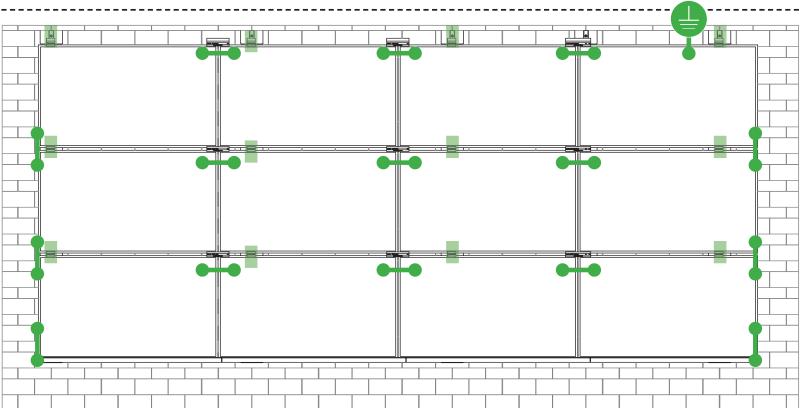

Star Washer is Single Use Only


TERMINAL TORQUE. **Install Conductor and** torque to the following:

4-6 AWG: 35in-lbs 8 AWG: 25 in-lbs 10-14 AWG: 20 in-lbs

LUG DETAIL & TORQUE INFO

Ilsco Lay-In Lug (GBL-4DBT)

- 10-32 mounting hardware
- Torque = 5 ft-lb
- AWG 4-14 Solid or Stranded



TERMINAL TORQUE, **Install Conductor and** torque to the following: 4-14 AWG: 35in-lbs

LUG DETAIL & TORQUE INFO

Ilsco Flange Lug(SGB-4)

- 1/4" mounting hardware
- Torque = 75 in-lb
- AWG 4-14 Solid or Stranded

WEEBLUG Single Use Only



TERMINAL TORQUE **Install Conductor and** torque to the following: 6-14 AWG: 7ft-lbs


LUG DETAIL & TORQUE INFO

Wiley WEEBLug (6.7)

- 1/4" mounting hardware
- Torque = 10 ft-lb
- AWG 6-14 Solid or Stranded


NOTE: ISOLATE COPPER FROM ALUMINUM CONTACT TO PREVENT CORROSION


System bonding is accomplished through modules. System grounding accomplished by attaching a ground lug to any module at a location on the module specified by the module manufacturer.

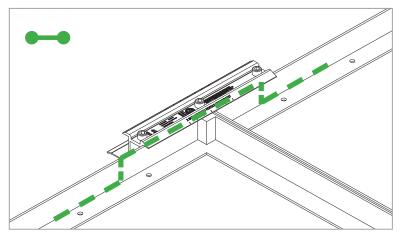

E-W BONDING PATH:


E-W module to module bonding is accomplished with 2 pre-installed bonding pins which engage on the secure side of the MicrorailTM and splice.





N-S BONDING PATH:

N-S module to module bonding is accomplished with bonding clamp with 2 integral bonding pins. (refer also to alternate method)





TRIMRAIL BONDING PATH:

Trimrail to module bonding is accomplished with bonding clamp with integral bonding pin and bonding T-bolt. (refer also to alternate method)



1403 N. Research Way

HEREIN CONTAINED SHALL NOT BE USED FOR THE BENEFIT OF ANYON EXCEPT BLUE RAVEN SOLAR NOR USE OF THE RESPECTIVE EQUIPMENT WITHOUT THE WRITTEN PERMISSIO OF BLUE RAVEN SOLAR LLC.



PV INSTALLATION **PROFESSIONAL**

Scott Gurney #PV-011719-015866

CONTRACTOR: **BRS FIELD OPS** 385-498-6700

DRAWING BY:

PLOT DATE:

PROJECT NUMBER:

SHEET NAME:

SPEC SHEET





SYSTEM LEVEL FIRE CLASSIFICATION

The system fire class rating requires installation in the manner specified in the SUNFRAME MICRORAIL (SFM) Installation Guide. SFM has been classified to the system level fire portion of UL 1703. This UL 1703 classification has been incorporated into the UL 2703 product certification. SFM has achieved Class A, B & C system level performance for low slope & steep sloped roofs when used in conjunction with type 1 and type 2 modules. Class A, B & C system level fire

performance is inherent in the SFM design, and no additional mitigation measures are required. The fire classification rating is valid for any roof pitch. There is no required minimum or maximum height limitation above the roof deck to maintain the Class A, B & C fire rating for SFM. SUNFRAME MICRORAILTM components shall be mounted over a fire resistant roof covering rated for the application.

Module Type	Roof Slope	System Level Fire Rating	Microrail Direction	Module Orientation	Mitigation Required
Type 1 and Type 2	Steep Slope & Low Slope	Class A, B & C	East-West	Landscape OR Portrait	None Required

UL2703 TEST MODULES

See pages V and W for a list of modules that were electrically and mechanically tested or qualified with the SUNFRAME MICRORAIL (SFM) components outlined within this Installation Guide.

- Maximum Area of Module = 27.76 sqft
- UL2703 Design Load Ratings:
 - a) Downward Pressure 113 PSF / 5400 Pa
 - b) Upward Pressure 50 PSF / 2400 Pa
 - c) Down-Slope Load 21.6 PSF / 1034 Pa
- Tested Loads:
 - a) Downward Pressure 170 PSF / 8000 Pa
 - b) Upward Pressure 75 PSF / 3500 Pa
 - c) Down-Slope Load 32.4 PSF / 1550 Pa
- Maximum Span = 6ft
- Use with a maximum over current protection device OCPD of 30A
- System conforms to UL Std 2703, certified to LTR AE-001-2012
- Rated for a design load of 2400 Pa / 5400 Pa with 24 inch span
- PV modules may have a reduced load rating, independent of the SFM load rating. Please consult the PV module manufacturer's installation guide for more information
- Down-Slope design load rating of 30 PSF/ 1400 Pa for module areas of 22.3 sq ft or less



1403 N. Research Way Orem, UT 84097

800.377.4480 W BLUFRAVENSOLAR COM

CONFIDENTIAL- THE INFORMATION HEREIN CONTAINED SHALL NOT BE USED FOR THE BENEFIT OF ANYONE EXCEPT BLUE RAVEN SOLAR NOR SHALL IT BE DISCLOSED IN WHOLE OR IN PART TO OTHERS OUTSIDE RECIPIENTS ORGANIZATION, EXCEPT IN CONNECTION WITH THE SALE AND USE OF THE RESPECTIVE EQUIPMENT, WITHOUT THE WRITTEN PERMISSION OF BLUE RAVEN SOLAR LLC.



PV INSTALLATION PROFESSIONAL

Scott Gurney #PV-011719-015866

CONTRACTOR: BRS FIELD OPS 385-498-6700

DRAWING BY:

PLOT DATE:

PROJECT NUMBER:

SHEET NAME

SPEC SHEET

REVISION:



TESTED / CERTIFIED MODULE LIST | VINSTALLATION GUIDE | PAGE

Manufacture	Module Model / Series
Aleo	P-Series
Astronergy	CHSM6612P, CHSM6612P/HV, CHSM6612M, CHSM6612M/HV, CHSM6610M (BL)(BF)/(HF), CHSM72M-HC
Auxin	AXN6M610T, AXN6P610T, AXN6M612T & AXN6P612T
Axitec	AXIblackpremium 60 (35mm), AXIpower 60 (35mm), AXIpower 72 (40mm), AXIpremium 60 (35mm), AXIpremium 72 (40mm).
Aptos	DNA-120-(BF/MF)26 DNA-144-(BF/MF)26
Boviet	BVM6610, BVM6612
BYD	P6K & MHK-36 Series
Canadian Solar	CS1(H/K/U/Y)-MS CS3(K/L/U), CS3K-MB-AG, CS3K-(MS/P) CS3N-MS, CS3U-MB-AG, CS3U-(MS/P), CS3W CS5A-M, CS6(K/U), CS6K-(M/P), CS6K-MS CS6P-(M/P), CS6U-(M/P), CS6V-M, CS6X-P
Centrosolar America	C-Series & E-Series
CertainTeed	CT2xxMxx-01, CT2xxPxx-01, CTxxxMxx-02, CTxxxM-03, CTxxxMxx-04, CTxxxHC11-04
Dehui	DH-60M

Manufacture	Module Model / Series
Eco Solargy	Orion 1000 & Apollo 1000
ET Solar	ET-M672BHxxxTW
FreeVolt	Mono PERC
GCL	GCL-P6 & GCL-M6 Series
Hansol	TD-AN3, TD-AN4, UB-AN1, UD-AN1
Heliene	36M, 60M, 60P, 72M & 72P Series
HT Solar	HT60-156(M) (NDV) (-F), HT 72-156(M/P)
Hyundai	KG, MG, TG, RI, RG, TI, MI, HI & KI Series HiA-SxxxHG
ITEK	iT, iT-HE & iT-SE Series
Japan Solar	JPS-60 & JPS-72 Series
JA Solar	JAP6 60-xxx, JAM6-60-xxx/SI, JAM6(K)-60/xxx, JAP6(k)-72-xxx/4BB, JAP72SYY-xxx/ZZ, JAP6(k)-60-xxx/4BB, JAP60SYY-xxx/ZZ, JAM6(k)-72-xxx/ZZ, JAM72SYY-xxx/ZZ, JAM6(k)-60-xxx/ZZ, JAM60SYY-xxx/ZZ. i. YY: 01, 02, 03, 09, 10 ii. ZZ: SC, PR, BP, HiT, IB, MW, MR
Jinko	JKM & JKMS Series Eagle JKMxxxM JKMxxxM-72HL-V
Kyocera	KU Series

Manufacture	Module Model / Series
	LGxxxN2T-A4
	LGxxx(A1C/E1C/E1K/N1C/N1K/N2T/N2W/
	Q1C/Q1K/S1C/S2W)-A5
	LGxxxN2T-B5
	LGxxxN1K-B6
	LGxxx(A1C/M1C/M1K/N1C/N1K/Q1C/Q1K/
LG Electronics	QAC/QAK)-A6
	LGxxx(N1C/N1K/N2T/N2W)-E6
	LGxxx(N1C/N1K/N2W/S1C/S2W)-G4
	LGxxxN2T-J5
	LGxxx(N1K/N1W/N2T/N2W)-L5
	LGxxx(N1C/Q1C/Q1K)-N5
	LGxxx (N1C/N1K/N2W/Q1C/Q1K)-V5
	LR4-60(HIB/HIH/HPB/HPH)-xxxM
	LR4-72(HIH/HPH)-xxxM
	LR6-60(BP/HBD/HIBD)-xxxM (30mm)
	LR6-60(BK)(PE)(HPB)(HPH)-xxxM (35mm)
LONGi	LR6-60(BK)(PE)(PB)(PH)-xxxM (40mm)
	LR6-72(BP)(HBD)(HIBD)-xxxM (30mm)
	LR6-72(HV)(BK)(PE)(PH)(PB)(HPH)-xxxM
	(35mm)
	LR6-72(BK)(HV)(PE)(PB)(PH)-xxxM (40mm)
Mission Solar Energy	MSE Series
Mitsubishi	MJE & MLE Series
Neo Solar Power Co.	D6M & D6P Series

- Unless otherwise noted, all modules listed above include all wattages and specific models within that series. Variable wattages are represented as "xxx"
- Items in parenthesis are those that may or may not be present in a compatible module's model ID
- Slashes "/" between one or more items indicates that either of those items may be the one that is present in a module's model ID
- Please see the SFM UL2703Construction Data Report at Unirac.com to ensure the exact solar module selected is approved for use with SFM
- SFM Infinity is not compatible with module frame height of less than 30mm and more than 40mm. See Module Mounting section, page L for further information



1403 N. Research Way Orem, UT 84097

800.377.4480 WWW.BLUERAVENSOLAR.COM

CONFIDENTIAL- THE INFORMATION HEREIN CONTAINED SHALL NOT BE USED FOR THE BENEFIT OF ANYONE EXCEPT BLUE RAVEN SOLAR NOR SHALL IT BE DISCLOSED IN WHOLE OF IN PART TO OTHERS OUTSIDE RECIPIENTS ORGANIZATION, EXCEPT IN CONNECTION WITH THE SALE AND USE OF THE RESPECTIVE EQUIPMENT WITHOUT THE WRITTEN PERMISSION OF BLUE RAVEN SOLAR LLC.



PV INSTALLATION PROFESSIONAL

Scott Gurney #PV-011719-015866

CONTRACTOR: BRS FIELD OPS 385-498-6700

DRAWING BY:

PLOT DATE:

PROJECT NUMBER:

SHEET NAME:

SPEC SHEET

REVISION:

--- | SS

AGE NUMBER:



TESTED / CERTIFIED MODULE LIST | W INSTALLATION GUIDE | PAGE

Manufacture	Module Model / Series
	VBHNxxxSA15 & SA16,
	VBHNxxxSA17 & SA18,
Panasonic	VBHNxxxSA17(E/G) & SA18E,
Pariasoriic	VBHNxxxKA01 & KA03 & KA04,
	VBHNxxxZA01, VBHNxxxZA02,
	VBHNxxxZA03, VBHNxxxZA04
Peimar	SGxxxM (FB/BF)
Phono Solar	PS-60, PS-72
Prism Solar	P72 Series
	Plus, Pro, Peak, G3, G4, G5, G6(+), G7, G8(+)
	Pro, Peak L-G2, L-G4, L-G5, L-G6, L-G7
	Q.PEAK DUO BLK-G6+
	Q.PEAK DUO BLK-G6+/TS
O.Cells	Q.PEAK DUO (BLK)-G8(+)
0.0013	Q.PEAK DUO L-G8.3/BFF
	Q.PEAK DUO (BLK) ML-G9(+)
	Q.PEAK DUO XL-G9/G9.2/G9.3
	Q.PEAK DUO (BLK) ML-G10(+)
	Q.PEAK DUO XL-G(10/10.2/10.3/10.c/10.d)
	Alpha (72) (Black) (Pure)
	N-Peak (Black)
REC	N-Peak 2 (Black)
NEO .	PEAK Energy Series
	PEAK Energy BLK2 Series
	PEAK Energy 72 Series

Manufacture	Module Model / Series	
	TwinPeak Series	
	TwinPeak 2 Series	
DEC (cont.)	TwinPeak 2 BLK2 Series	
REC (cont.)	TwinPeak 2S(M)72(XV)	
	TwinPeak 3 Series (38mm)	
	TP4 (Black)	
Renesola	Vitrus2 Series & 156 Series	
Risen	RSM72-6 (MDG) (M), RSM60-6	
S-Energy	SN72 & SN60 Series (40mm)	
Seraphim	SEG-6 & SRP-6 Series	
Sharp	NU-SA & NU-SC Series	
Cilfob	SLA, SLG, BC Series & SILxxx(BL/NL/NT/HL	
Silfab	ML/BK/NX/NU/HC)	
	PowerXT-xxxR-(AC/PD/BD)	
Solaria	PowerXT-xxxC-PD	
	PowerXT-xxxR-PM (AC)	
SolarWorld	Sunmodule Protect,	
Solal World	Sunmodule Plus	
Sonali	SS 230 - 265	
Suntech	STP	
Suniva	MV Series & Optimus Series	
Sun Edison/Flextronics	F-Series, R-Series & FLEX FXS Series	
SunPower	X-Series, E-Series & P-Series	
Talesun	TP572, TP596, TP654, TP660,	
iaicsuii	TP672, Hipor M, Smart	

Manufacture	Module Model / Series
T1-	SC, SC B, SC B1, SC B2
Tesla	TxxxS
	PA05, PD05, DD05, DE06, DD06, PE06,
Trina	PD14, PE14, DD14, DE09.05, DE14, DE15,
	PE15H
Lincolor	UP-MxxxP(-B),
Upsolar	UP-MxxxM(-B)
	D7MxxxH7A, D7(M/K)xxxH8A
URE	FAKxxx(C8G/E8G), FAMxxxE7G-BB
	FAMxxxE8G(-BB)
	Eldora,
Vikram	Solivo,
	Somera
Waaree	AC & Adiya Series
Winaico	WST & WSP Series
Yingli	YGE & YLM Series
ZN Shine	ZXM6-72

- Unless otherwise noted, all modules listed above include all wattages and specific models within that series. Variable wattages are represented as "xxx"
- Items in parenthesis are those that may or may not be present in a compatible module's model ID
- Slashes "/" between one or more items indicates that either of those items may be the one that is present in a module's model ID
- Please see the SFM UL2703Construction Data Report at Unirac.com to ensure the exact solar module selected is approved for use with SFM
- SFM Infinity is not compatible with module frame height of less than 30mm and more than 40mm. See Module Mounting section, page L for further information



1403 N. Research Way Orem, UT 84097

800.377.4480 WWW.BLUERAVENSOLAR.COM

CONFIDENTIAL- THE INFORMATION HEREIN CONTAINED SHALL NOT BE USED FOR THE BENEFIT OF ANYONE EXCEPT BLUE RAVEN SOLAR NOR SHALL IT BE DISCLOSED IN WHOLE OF IN PART TO OTHERS OUTSIDE RECIPIENTS ORGANIZATION, EXCEPT IN CONNECTION WITH THE SALE AND USE OF THE RESPECTIVE EQUIPMENT WITHOUT THE WRITTEN PERMISSION OF BLUE RAVEN SOLAR LLC.



PV INSTALLATION PROFESSIONAL

Scott Gurney #PV-011719-015866

CONTRACTOR: BRS FIELD OPS 385-498-6700

DRAWING BY:

PLOT DATE:

PROJECT NUMBER:

SHEET NAME:

SPEC SHEET

REVISION:

___ | __

AGE NUMBER:



AUTHORIZATION TO MARK

AUTHORIZATION TO MARK

This authorizes the application of the Certification Mark(s) shown below to the models described in the Product(s) Covered section when made in accordance with the conditions set forth in the Certification Agreement and Listing Report. This authorization also applies to multiple listee model(s) identified on the correlation page of the Listing Report.

This document is the property of Intertek Testing Services and is not transferable. The certification mark(s) may be applied only at the location of the Party Authorized To Apply Mark.

Applicant: Unirac, Inc Manufacturer:

1411 Broadway Blvd NE Address:

Address: Albuquerque, NM 87102

USA Country: Country:

Party Authorized To Apply Mark: Same as Manufacturer

Report Issuing Office: Intertek Testing Services NA, Inc., Lake Forest, CA

Control Number: *5003705* Authorized by: for L. Matthew Snyder, Certification Manager



This document supersedes all previous Authorizations to Mark for the noted Report Number.

This Authorization to Mark is for the exclusive use of Intertek's Client and is provided pursuant to the Certification agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this Authorization to Mark. Only the Client is authorized to permit copying or distribution of this Authorization to Mark and then only in its entirety. Use of Intertek's Certification mark is restricted to the conditions laid out in the agreement and in this Authorization to Mark. Any further use of the Intertek name for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. Initial Factory Assessments and Follow up Services are for the purpose of assuring appropriate usage of the Certification mark in accordance with the agreement, they are not for the purposes of production quality control and do not relieve the Client of their obligations in this respect.

> Intertek Testing Services NA Inc. 545 East Algonquin Road, Arlington Heights, IL 60005 Telephone 800-345-3851 or 847-439-5667 Fax 312-283-1672

Mounting Systems, Mounting Devices, Clamping/Retention Devices, and Ground Lugs for Use with Flat-Plate Photovoltaic Modules and Panels [UL 2703:2015 Ed.1+R:29May2019] Standard(s): PV Module and Panel Racking Mounting System and Accessories [CSA TIL No. A-40:2020] Photovoltaic Mounting System, Sun Frame Microrail Installation Guide, PUB2021NOV29 Product: Brand Name: Unirac Models: Unirac SFM

This authorizes the application of the Certification Mark(s) shown below to the models described in the Product(s) Covered section when made in accordance with the conditions set forth in the Certification Agreement and Listing Report. This authorization also applies to multiple listee model(s) identified on the correlation page of the Listing Report.

This document is the property of Intertek Testing Services and is not transferable. The certification mark(s) may be applied only at the location of the Party Authorized To Apply Mark.

Applicant: Unirac, Inc Manufacturer:

1411 Broadway Blvd NE Address: Address: Albuquerque, NM 87102

USA Country: Country:

Party Authorized To Apply Mark: Same as Manufacturer

Report Issuing Office: Intertek Testing Services NA, Inc., Lake Forest, CA sovary Control Number: *5014989* Authorized by:

for L. Matthew Snyder, Certification Manager



This document supersedes all previous Authorizations to Mark for the noted Report Number.

This Authorization to Mark is for the exclusive use of Intertek's Client and is provided pursuant to the Certification agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this Authorization to Mark. Only the Client is authorized to permit copying or distribution of this Authorization to Mark and then only in its entirety. Use of Intertek's Certification mark is restricted to the conditions laid out in the agreement and in this Authorization to Mark. Any further use of the Intertek name for the sale or advertisement of the tested material, product or service must list be approved in writing by Intertek. Initial Factory Assessments and Follow up Services are for the purpose of assuring appropriate usage of the Certification mark in accordance with the agreement, they are not for the purposes of production quality control and do not relieve the Client of their obligations in this respect.

> Intertek Testing Services NA Inc. 545 East Algonquin Road, Arlington Heights, IL 60005 Telephone 800-345-3851 or 847-439-5667 Fax 312-283-1672

Mounting Systems, Mounting Devices, Clamping/Retention Devices, and Ground Lugs for Use with Flat-Plate Photovoltaic Modules and Panels [UL 2703:2015 Ed.1+R:29May2019] Standard(s): PV Module and Panel Racking Mounting System and Accessories [CSA TIL No. A-40:2020]

Photovoltaic Mounting System, Sun Frame Microrail Installation Guide, PUB2021NOV29 Product:

Brand Name: Unirac

Unirac SFM Models:

1403 N. Research Way Orem. UT 84097

800.377.4480 WWW BLUERAVENSOLAR COM

CONFIDENTIAL- THE INFORMATION HEREIN CONTAINED SHALL NOT BE USED FOR THE BENEFIT OF ANYONE EXCEPT BLUE RAVEN SOLAR NOR SHALL IT BE DISCLOSED IN WHOLE OF IN PART TO OTHERS OUTSIDE RECIPIENTS ORGANIZATION, EXCEPT IN CONNECTION WITH THE SALE AND USE OF THE RESPECTIVE EQUIPMENT WITHOUT THE WRITTEN PERMISSION OF BLUE RAVEN SOLAR LLC



PV INSTALLATION **PROFESSIONAL**

Scott Gurney #PV-011719-015866

CONTRACTOR: **BRS FIELD OPS** 385-498-6700

DRAWING BY

PLOT DATE:

PROJECT NUMBER:

SHEET NAME:

SPEC SHEET

REVISION:

AGE NUMBER: SS

ATM Issued: 7-Jan-2022



AUTHORIZATION TO MARK

AUTHORIZATION TO MARK

for L. Matthew Snyder, Certification Manager

This authorizes the application of the Certification Mark(s) shown below to the models described in the Product(s) Covered section when made in accordance with the conditions set forth in the Certification Agreement and Listing Report. This authorization also applies to multiple listee model(s) identified on the correlation page of the Listing Report.

This document is the property of Intertek Testing Services and is not transferable. The certification mark(s) may be applied only at the location of the Party Authorized To Apply Mark.

Applicant: Unirac, Inc Manufacturer:

1411 Broadway Blvd NE Address:

ATM for Report 102393982LAX-002

Address: Albuquerque, NM 87102

USA Country: Country:

Party Authorized To Apply Mark: Same as Manufacturer

Report Issuing Office: Intertek Testing Services NA, Inc., Lake Forest, CA

many Control Number: 5019851 Authorized by: for L. Matthew Snyder, Certification Manager



This document supersedes all previous Authorizations to Mark for the noted Report Number.

This Authorization to Mark is for the exclusive use of Intertek's Client and is provided pursuant to the Certification agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this Authorization to Mark. Only the Client is authorized to permit copying or distribution of this Authorization to Mark and then only in its entirety. Use of Intertek's Certification mark is restricted to the conditions laid out in the agreement and in this Authorization to Mark. Any further use of the Intertek name for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. Initial Factory Assessments and Follow up Services are for the purpose of assuring appropriate usage of the Certification mark in accordance with the agreement, they are not for the purposes of production quality control and do not relieve the Client of their obligations in this respect.

> Intertek Testing Services NA Inc. 545 East Algonquin Road, Arlington Heights, IL 60005 Telephone 800-345-3851 or 847-439-5667 Fax 312-283-1672

Mounting Systems, Mounting Devices, Clamping/Retention Devices, and Ground Lugs for Use with Flat-Plate Photovoltaic Modules and Panels [UL 2703:2015 Ed.1+R:29May2019] Standard(s): PV Module and Panel Racking Mounting System and Accessories [CSA TIL No. A-40:2020] Photovoltaic Mounting System, Sun Frame Microrail Installation Guide, PUB2021NOV29 Product: Brand Name: Unirac Models: Unirac SFM

Page 3 of 4

This authorizes the application of the Certification Mark(s) shown below to the models described in the Product(s) Covered section when made in accordance with the conditions set forth in the Certification Agreement and Listing Report. This authorization also applies to multiple listee model(s) identified on the correlation page of the Listing Report.

This document is the property of Intertek Testing Services and is not transferable. The certification mark(s) may be applied only at the location of the Party Authorized To Apply Mark.

Applicant: Unirac, Inc Manufacturer:

1411 Broadway Blvd NE Address: Address: Albuquerque, NM 87102

USA Country: Country:

Party Authorized To Apply Mark: Same as Manufacturer

Report Issuing Office: Intertek Testing Services NA, Inc., Lake Forest, CA

Morary **Control Number:** *5021866* Authorized by:



This document supersedes all previous Authorizations to Mark for the noted Report Number.

This Authorization to Mark is for the exclusive use of Intertek's Client and is provided pursuant to the Certification agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this Authorization to Mark. Only the Client is authorized to permit copying or distribution of this Authorization to Mark and then only in its entirety. Use of Intertek's Certification mark is restricted to the conditions laid out in the agreement and in this Authorization to Mark. Any further use of the Intertek name for the sale or advertisement of the tested material, product or service must list be approved in writing by Intertek. Initial Factory Assessments and Follow up Services are for the purpose of assuring appropriate usage of the Certification mark in accordance with the agreement, they are not for the purposes of production quality control and do not relieve the Client of their obligations in this respect.

> Intertek Testing Services NA Inc. 545 East Algonquin Road, Arlington Heights, IL 60005 Telephone 800-345-3851 or 847-439-5667 Fax 312-283-1672

Standard(s):	Mounting Systems, Mounting Devices, Clamping/Retention Devices, and Ground Lugs for Use with Flat- Plate Photovoltaic Modules and Panels [UL 2703:2015 Ed.1+R:29May2019] PV Module and Panel Racking Mounting System and Accessories [CSA TIL No. A-40:2020]	
Product:	Photovoltaic Mounting System, Sun Frame Microrail Installation Guide, PUB2021NOV29	
Brand Name:	e: Unirac	
Models:	Unirac SFM	

1403 N. Research Way Orem, UT 84097

800.377.4480 WWW BLUERAVENSOLAR COM

CONFIDENTIAL- THE INFORMATION HEREIN CONTAINED SHALL NOT BE USED FOR THE BENEFIT OF ANYONE EXCEPT BLUE RAVEN SOLAR NOR SHALL IT BE DISCLOSED IN WHOLE OF IN PART TO OTHERS OUTSIDE RECIPIENTS ORGANIZATION, EXCEPT IN CONNECTION WITH THE SALE AND USE OF THE RESPECTIVE EQUIPMENT WITHOUT THE WRITTEN PERMISSION OF BLUE RAVEN SOLAR LLC



PV INSTALLATION **PROFESSIONAL** Scott Gurney

#PV-011719-015866

CONTRACTOR: **BRS FIELD OPS** 385-498-6700

DRAWING BY

PLOT DATE:

PROJECT NUMBER:

SHEET NAME:

ATM Issued: 7-Jan-2022

ED 16.3.15 (16-Oct-2021) Mandatory

SPEC SHEET

REVISION:

AGE NUMBER: SS



Country

Contact

Phone

FAX

Listing Constructional Data Report (CDR)

Total Quality. Assure	d.		J		
1.0 Reference a	1.0 Reference and Address				
Report Number	102393982LAX-002	Original	11-Apr-2016	Revised: 2-Jan-2022	
Standard(s)	with Flat-Plate Photovo	oltaic Modules an	nd Panels [UL 270	on Devices, and Ground Lugs for Use 3:2015 Ed.1+R:29May2019] cessories [CSA TIL No. A-40:2020]	
Applicant	Unirac, Inc		Manufacturer 2		
Address	1411 Broadway Blvd N Albuquerque, NM 8710		Address		
Country	USA		Country		
Contact	Klaus Nicolaedis Todd Ganshaw		Contact		
Phone	505-462-2190 505-843-1418		Phone		
FAX	NA		FAX		
Email	klaus.nicolaedis@unira toddg@unirac.com	ac.com	Email		
Manufacturer 3			Manufacturer 4		
Address			Address		
Country			Country		
Contact			Contact		
Phone			Phone		
FAX			FAX		
Email			Email		
Manufacturer 5					
Address					

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.



Listing Constructional Data Report (CDR)

1.0 Reference and Address				
Report Number	102393982LAX-002	Original 11-Ap	or-2016	Revised: 2-Jan-2022
Email				

1403 N. Research Way Orem, UT 84097

WWW.BLUERAVENSOLAR.COM

CONFIDENTIAL- THE INFORMATION HEREIN CONTAINED SHALL NOT BE USED FOR THE BENEFIT OF ANYONE EXCEPT BLUE RAVEN SOLAR NOR SHALL IT BE DISCLOSED IN WHOLE OR IN PART TO OTHERS OUTSIDE RECIPIENTS ORGANIZATION, EXCEPT IN CONNECTION WITH THE SALE AND USE OF THE RESPECTIVE EQUIPMENT WITHOUT THE WRITTEN PERMISSION OF BLUE RAVEN SOLAR LLC.



PV INSTALLATION **PROFESSIONAL**

Scott Gurney #PV-011719-015866

CONTRACTOR: **BRS FIELD OPS** 385-498-6700

PLOT DATE:

Page 2 of 136

PROJECT NUMBER:

DRAWING BY:

SHEET NAME:

SPEC SHEET

REVISION:

SS

AGE NUMBER:

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material product or service must be the controlled the confidence or receives. material, product, or service is or has ever been under an Intertek certification program.

Report No. 102393982LAX-002 Unirac, Inc

Unirac

document.

engage cable.

2.0 Product Description

Product

Brand name

Description

Page 3 of 136

Photovoltaic Mounting System, Sun Frame Microrail Installation Guide, PUB2021NOV29

The product covered by this report is the Sun Frame Micro Rail roof mounted Photovoltaic

that are roof mounted using the slider, outlined in section 4 of this report. There are no rails

The Micro Rails are installed onto the module frame by using a stainless steel bolt anodized with black oxide with a stainless type 300 bonding pin, torqued to 20 ft-lbs, retaining the modules to the bracket. The bonding pin of the Micro Rail when bolted and torqued, penetrate

the anodized coating of the photovoltaic module frame (at bottom flange) to contact the metal,

The grounding of the entire system is intended to be in accordance with the latest edition of the

Photovoltaic Systems or the Canadian Electrical Code, CSA C22.1 Part 1 in accordance to the

revision in effect in the jurisdiction in which the project resides. Any local electrical codes must

be adhered in addition to the national electrical codes. The Grounding Lug is secured to the

Other optional grounding includes the use of the Enphase UL2703 certified grounding system, which requires a minimum of 2 micro-inverters mounted to the same rail, and using the same

photovoltaic module, torqued in accordance with the installation manual provided in this

National Electrical Code, including NEC 250: Grounding and Bonding, and NEC 690: Solar

photovoltaic modules. The mounting system employs anodized or mill finish aluminum brackets

Rack Mounting System. This system is designed to provide bonding and grounding to

within this product, whereas the 3" Micro Rail, Floating Splice, and 9" Attached Splice

electrically bond the modules together forming the path to ground.

creating a bonded connection from module to module.

Issued: 11-Apr-2016 Revised: 2-Jan-2022 Report No. 102393982LAX-002 Unirac, Inc Page 4 of 136 Issued: 11-Apr-2016 Revised: 2-Jan-2022

2.0 Product Des	cription
Models	Unirac SFM
Model Similarity	NA
Models	Unirac SFM
	See section 7.0 illustractions # 1, 1a, 1b, and 1c for a complete list of PV modules evaluated with these racking systems
Other Patings	I NA
Other Ratings	NA NA

BLUE RAVEN SOLAR

> 1403 N. Research Way Orem, UT 84097

800.377.4480 WWW.BLUERAVENSOLAR.COM

CONFIDENTIAL- THE INFORMATION HEREIN CONTAINED SHALL NOT BE USED FOR THE BENEFIT OF ANYONE EXCEPT BLUE RAVEN SOLAR NOR SHALL IT BE DISCLOSED IN WHOLE OR IN PART TO OTHERS OUTSIDE RECIPIENTS ORGANIZATION, EXCEPT IN CONNECTION WITH THE SALE AND USE OF THE RESPECTIVE EQUIPMENT, WITHOUT THE WRITTEN PERMISSION OF BLUE RAVEN SOLAR LLC.



PV INSTALLATION PROFESSIONAL

Scott Gurney #PV-011719-015866

CONTRACTOR: BRS FIELD OPS 385-498-6700

DRAWING BY:

PLOT DATE:

PROJECT NUMBER:

SHEET NAME:

SPEC SHEET

REVISION:

SS

AGE NUMBER:

ED 16.3.15 (16-Oct-2021) Mandatory

021) Mandatory ED 16.3.15 (16-Oct-2021) Mandatory

Report No. 102393982LAX-002 Unirac, Inc Page 42 of 136

Issued: 11-Apr-2016 Revised: 2-Jan-2022 Report No. 102393982LAX-002 Page 43 of 136 Unirac, Inc

Issued: 11-Apr-2016 Revised: 2-Jan-2022

7.0 Illustrations

Illustration 1a - Approved PV Modules Continue

Manufacture	Module Model / Series	Manufacture	Module Model / Series
.G Electronics	LGxxxN2T-A4 LGxxx(A1C/E1C/E1K/N1C/N1K/N2T/N2W/ Q1C/Q1K/S1C/S2W)-A5 LGxxxN2T-B5 LGxxxN1K-B6 LGxxx(A1C/M1C/M1K/N1C/N1K/Q1C/Q1K/ QAC/QAK)-A6 LGxxx(N1C/N1K/N2T/N2W)-E6 LGxxx(N1C/N1K/N2T/N2W)-G4	Panasonic Peimar Phono Solar	VBHNxxxSA15 & SA16, VBHNxxxSA17 & SA18, VBHNxxxSA17(E/G) & SA18E, VBHNxxxSA17(E/G) & SA18E, VBHNxxxZA01 & KA03 & KA04, VBHNxxxZA01, VBHNxxxZA02, VBHNxxxZA03, VBHNxxxZA04 SGxxxM (FB/BF) PS-60, PS-72
	LGxxxN2T-J5 LGxxx(N1K/N1W/N2T/N2W)-L5	Prism Solar	P72 Series
	LGxxx(N1C/Q1C/Q1K)-N5 LGxxx (N1C/N1K/N2W/Q1C/Q1K)-V5 LR4-60(HIB/HIH/HPB/HPH)-xxxM LR4-72(HIH/HPH)-xxxM	_	Pro, Peak L-G2, L-G4, L-G5, L-G6, L-G7 Q.PEAK DUO BLK-G6+ Q.PEAK DUO BLK-G6+/TS Q.PEAK DUO (BLK)-G8(+)
LONGi	LR6-60(BP/HBD/HIBD)-xxxxM (30mm) LR6-60(BK)(PE)(HPB)(HPH)-xxxxM (35mm) LR6-60(BK)(PE)(PB)(PH)-xxxxM (40mm) LR6-72(BP)(HBD)(HIBD)-xxxxM (30mm) LR6-72(HV)(BK)(PE)(PH)(PB)(HPH)-xxxxM	Q.Cells	Q.PEAK DUO L-G8.3/BFF Q.PEAK DUO (BLK) ML-G9(+) Q.PEAK DUO (BLK) ML-G9,3 Q.PEAK DUO (BLK) ML-G10(+) Q.PEAK DUO (BLK) ML-G10,10.2/10.3/10.c/10.d
	(35mm) LR6-72(BK)(HV)(PE)(PB)(PH)-xxxM (40mm)		Alpha (72) (Black) (Pure) N-Peak (Black)
Mission Solar Energy	r Energy MSE Series]	N-Peak 2 (Black)
Mitsubishi	MJE & MLE Series	REC	PEAK Energy Series
Neo Solar Power Co.	D6M & D6P Series]	PEAK Energy BLK2 Series PEAK Energy 72 Series

3	1
BLUE	RAVEN

1403 N. Research Way Orem, UT 84097

800.377.4480 WWW.BLUERAVENSOLAR.COM

CONFIDENTIAL- THE INFORMATION HEREIN CONTAINED SHALL NOT BE USED FOR THE BENEFIT OF ANYONE EXCEPT BLUE RAVEN SOLAR NOR SHALL IT BE DISCLOSED IN WHOLE OR IN PART TO OTHERS OUTSIDE RECIPIENTS ORGANIZATION, EXCEPT IN CONNECTION WITH THE SALE AND USE OF THE RESPECTIVE EQUIPMENT, WITHOUT THE WRITTEN PERMISSION OF BLUE RAVEN SOLAR LLC.



PV INSTALLATION PROFESSIONAL

Scott Gurney #PV-011719-015866

CONTRACTOR: BRS FIELD OPS 385-498-6700

DRAWING BY:

PLOT DATE:

PROJECT NUMBER:

SHEET NAME:

SPEC SHEET

REVISION:

PAGE NUMBER:

7.0 Illustrations
Illustration 1 - Approved PV Modules

Manufacture	Module Model / Series
Aleo	P-Series
	CHSM6612P, CHSM6612P/HV, CHSM6612M,
Astronergy	CHSM6612M/HV, CHSM6610M (BL)(BF)/(HF)
	CHSM72M-HC
	AXN6M610T, AXN6P610T,
Auxin	AXN6M612T & AXN6P612T
	AXIblackpremium 60 (35mm),
	AXIpower 60 (35mm),
Axitec	AXIpower 72 (40mm),
	AXIpremium 60 (35mm),
	AXIpremium 72 (40mm).
Antos	DNA-120-(BF/MF)26
Aptos	DNA-144-(BF/MF)26
Boviet	BVM6610,
poviet	BVM6612
BYD	P6K & MHK-36 Series
	CS1(H/K/U/Y)-MS
	CS3(K/L/U), CS3K-MB-AG, CS3K-(MS/P)
Canadian Solar	CS3N-MS, CS3U-MB-AG, CS3U-(MS/P), CS3W
	CS5A-M, CS6(K/U), CS6K-(M/P), CS6K-MS
	CS6P-(M/P), CS6U-(M/P), CS6V-M, CS6X-P
Centrosolar America	C-Series & E-Series
	CT2xxMxx-01, CT2xxPxx-01,
CertainTeed	CTxxxMxx-02, CTxxxM-03,
	CTxxxMxx-04, CTxxxHC11-04
Dehui	DH-60M

	Manufacture	Module Model / Series
	Eco Solargy	Orion 1000 & Apollo 1000
	ET Solar	ET-M672BHxxxTW
	FreeVolt	Mono PERC
	GCL	GCL-P6 & GCL-M6 Series
Π	Hansol	TD-AN3, TD-AN4,
ΙL	narisot	UB-AN1, UD-AN1
	Heliene	36M, 60M, 60P, 72M & 72P Series
	HT Solar	HT60-156(M) (NDV) (-F),
	ni sotal	HT 72-156(M/P)
	Hyundai	KG, MG, TG, RI, RG, TI, MI, HI & KI Series
↓ L	nyunuai	HiA-SxxxHG
	ITEK	iT, iT-HE & iT-SE Series
 	Japan Solar	JPS-60 & JPS-72 Series
		JAP6 60-xxx, JAM6-60-xxx/SI, JAM6(K)-60/
+		xxx, JAP6(k)-72-xxx/4BB, JAP72SYY-xxx/ZZ,
+		JAP6(k)-60-xxx/4BB, JAP60SYY-xxx/ZZ,
	JA Solar	JAM6(k)-72-xxx/ZZ, JAM72SYY-xxx/ZZ,
		JAM6(k)-60-xxx/ZZ, JAM60SYY-xxx/ZZ.
		i. YY: 01, 02, 03, 09, 10
		ii. ZZ: SC, PR, BP, HiT, IB, MW, MR
+		JKM & JKMS Series
†	Jinko	Eagle JKMxxxM
		JKMxxxM-72HL-V
	Kyocera	KU Series
4 -		

ED 16.3.15 (16-Oct-2021) Mandatory

ED 16.3.15 (16-Oct-2021) Mandatory

Report No. 102393982LAX-002 Unirac, Inc Page 44 of 136

Issued: 11-Apr-2016 Revised: 2-Jan-2022

7.0 Illustrations

Illustration 1b - Approved PV Modules Continue

Manufacture	Module Model / Series
	TwinPeak Series
	TwinPeak 2 Series
REC (cont.)	TwinPeak 2 BLK2 Series
REC (COIIC.)	TwinPeak 2S(M)72(XV)
	TwinPeak 3 Series (38mm)
	TP4 (Black)
Renesola	Vitrus2 Series & 156 Series
Risen	RSM72-6 (MDG) (M), RSM60-6
S-Energy	SN72 & SN60 Series (40mm)
Seraphim	SEG-6 & SRP-6 Series
Sharp	NU-SA & NU-SC Series
Silfab	SLA, SLG, BC Series & SILxxx(BL/NL/NT/HL/
SILTAD	ML/BK/NX/NU/HC)
	PowerXT-xxxR-(AC/PD/BD)
Solaria	PowerXT-xxxC-PD
	PowerXT-xxxR-PM (AC)
SolarWorld	Sunmodule Protect,
Solarworld	Sunmodule Plus
Sonali	SS 230 - 265
Suntech	STP
Suniva	MV Series & Optimus Series
Sun Edison/Flextronics	F-Series, R-Series & FLEX FXS Series
SunPower	X-Series, E-Series & P-Series
	TP572, TP596, TP654, TP660,
Talesun	TP672, Hipor M, Smart

Manufacture	Module Model / Series
Tesla	SC, SC B, SC B1, SC B2 TxxxS
Trina	PA05, PD05, DD05, DE06, DD06, PE06, PD14, PE14, DD14, DE09.05, DE14, DE15, PE15H
Upsolar	UP-MxxxP(-B), UP-MxxxM(-B)
URE	D7MxxxH7A, D7(M/K)xxxH8A FAKxxx(C8G/E8G), FAMxxxE7G-BB FAMxxxE8G(-BB)
Vikram	Eldora, Solivo, Somera
Waaree	AC & Adiya Series
Winaico	WST & WSP Series
Yingli	YGE & YLM Series
ZN Shine	ZXM6-72



1403 N. Research Way Orem, UT 84097

800.377.4480 WWW.BLUERAVENSOLAR.COM

CONFIDENTIAL- THE INFORMATION HEREIN CONTAINED SHALL NOT BE USED FOR THE BENEFIT OF ANYONE EXCEPT BLUE RAVEN SOLAR NOR SHALL IT BE DISCLOSED IN WHOLE OR IN PART TO OTHERS OUTSIDE RECIPIENTS ORGANIZATION, EXCEPT IN CONNECTION WITH THE SALE AND USE OF THE RESPECTIVE EQUIPMENT, WITHOUT THE WRITTEN PERMISSION OF BLUE RAVEN SOLAR LLC.



PV INSTALLATION PROFESSIONAL

Scott Gurney #PV-011719-015866

CONTRACTOR: BRS FIELD OPS 385-498-6700

DRAWING BY:

PLOT DATE:

PROJECT NUMBER:

SHEET NAME:

SPEC SHEET

REVISION:

PAGE NUMBER:

ED 16.3.15 (16-Oct-2021) Mandatory







1403 N RESEARCH WAY, BUILDING J


800-377-4480 WWW.BLUERAVENSOLAR.COM

CONFIDENTIAL - THE INFORMATION HEREIN CONTAINED SHALL NOT BE USED FOR THE BENEFIT OF ANYONE EXCEPT BLUE RAVEN SOLAR NOR SHALL IT BE DISCLOSED IN WHOLE OR IN PART TO OTHERS OUTSIDE RECIPIENTS ORGANIZATION, EXCEPT IN CONNECTION WITH THE SALE AND USE OF THE RESPECTIVE EQUIPMENT, WITHOUT THE WRITTEN PERMISSION OF BLUE RAVEN SOLAR LLC.



Scott Gurney # PV-011719-015866

CONTRACTOR: BRS FIELD OPS 385.498.6700



Trimrail™ and Module Clips

Sub-Components:

- 1. Trim Rail
- 2. Module Clip
- 3. T-Bolt
- 4. Tri-Drive Nut

Trimrail™

Functions:

- Required front row structural support (with module clips)
- Module mounting
- Installation aid
- Aesthetic trim

Features:

- Mounts directly to L-feet
- Aligns and captures module leading edge
 - Supports discrete module thicknesses from 32, 33, 35, 38, and 40mm


Module Clips


Functions:

- Required front row structural support (with trimrail)
- Module mounting

Features:

- Mounts to Trimrail[™] with T-bolt and tri-drive nut
- Manually adjustable to fit module thicknesses 32, 33, 35, 38, and 40mm.

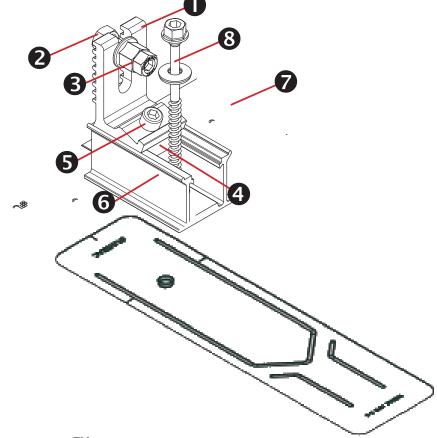



Sub-Components:

L-Foot

Hex bolt

Tri-drive nut

Channel Nut

Scocket Head Cap Screw

3"Channel/Slider w/grommet

3" Wide Flashing

Structural Screw & SS EPDM Washer

Functions:

- Attach TrimrailTM to roof attachment / flashing
- Patented roof sealing technology at roof attachment point

Features:

- Slot provides vertical adjustments to level array
- Slider provides north/south adjustment along the slope of the roof
- Shed and Seal Technology

Trimrail[™] Splice

Sub-Components:

- 1. Structural Splice Extrusion
- 2. Bonding Clip

Functions:

- Front row structural support
- Installation aid
- Structurally connects 2 pieces of Trimrail™
- Electrically bonds 2 pieces of Trimrail™

Features:

- Aligns and connects Trimrail[™] pieces
- Tool-less installation

SHEET NAME

SPEC SHEET

PAGE NUMBER

0






1403 N RESEARCH WAY, BUILDING J

800-377-4480 WWW.BLUERAVENSOLAR.COM

CONFIDENTIAL - THE INFORMATION HEREIN CONTAINED SHALL NOT BE USED FOR THE BENEFIT OF ANYONE EXCEPT BLUE RAVEN SOLAR NOR SHALL IT BE DISCLOSED IN WHOLE OR IN PART TO OTHERS OUTSIDE RECIPIENTS ORGANIZATION, EXCEPT IN CONNECTION WITH THE SALE AND USE OF THE RESPECTIVE EQUIPMENT, WITHOUT THE WRITTEN PERMISSION OF BLUE RAVEN SOLAR LLC.



CONTRACTOR: BRS FIELD OPS 385.498.6700




Module-to-Module N-S Bonding

Sub-Components:

- 1. Clamp
- 2. Bonding Pins (2)
- 3. 5/16" Socket Head Cap Screw
- 4. Clamp Base

Functions/ Features:

- Row to row bonding
- Single Use Only
- Fits module sizes 32-40mm




Trim -to- Module Bonding Clamp and Floating Trim Clamp

Sub-Components:

- 1. Wedge
- 2. Bonding Pin
- 3. T-Bolt
- 4. Nut
- . Cast Base

Functions/ Features:

- Module to Trimrail™ bonding single use only
- Attaches Trimrail[™] to module when fewer than
 2 rafter attachment points are available
- Fits module sizes 32-40mm
- Fits module sizes 32-40mm




Wire Bonding Clip w/ 8AWG

Functions:

- Row to row bonding
- Module to Trimrail™ bonding
- Single Use Only

Features:

Tool-less installation



MLPE Mounting Assembly

Sub-Components:

- 1. MLPE Mount Base
- 2. 5/16 Socket Head Cap Screw
- 3. Bonding Pin

Functions:

- Securely mounts MLPE to module frames
- MLPE to module bonding

Features:

- Mounts easily to typical module flange
- UL2703 Recognized

MLPE = Module Level Power Electronics, e.g. microinverter or power optimizer

Functions:

- Patented Shed & Seal roof sealing technology at roof attachment point
- For use with compatible 2" Microrail or 8" Attached Splices

Features:

- Slider provides north/south adjustment along the slope of the roof
- Shed and Seal Technology

SFM Slider Flashkit

2. Structural Screw & SS EPDM washer

Sub-Components:

1. Slider w/grommet

3" Wide Flashing

SHEET NAME

SPEC SHEET

PAGE NUMBER

0



3" FLASHING & SLIDERS | GINSTALLATION GUIDE | PAGE






1403 N RESEARCH WAY, BUILDING J

800-377-4480 WWW.BLUERAVENSOLAR.COM

CONFIDENTIAL - THE INFORMATION HEREIN CONTAINED SHALL NOT BE USED FOR THE BENEFIT OF ANYONE EXCEPT BLUE RAVEN SOLAR NOR SHALL IT BE DISCLOSED IN WHOLE OR IN PART TO OTHERS OUTSIDE RECIPIENTS ORGANIZATION, EXCEPT IN CONNECTION WITH THE SALE AND USE OF THE RESPECTIVE EQUIPMENT, WITHOUT THE WRITTEN PERMISSION OF BLUE RAVEN SOLAR LLC.





CONTRACTOR: BRS FIELD OPS 385.498.6700




PILOT HOLES:

Drill pilot holes for lag screws or structural screws (as necessary) at marked attachement points





FLASHINGS: Place flashings




INSTALL SLIDERS AND TRIMRAIL ROOF ATTACHMENTS:

Insert flashings per manufacturer instructions

NOTE: Use Lag screw or structural fastener with a maximum diameter of 5/16"

- Attach sliders to rafters
- Verify proper row to row spacing for module size (Mod NS + 1")
- Ensure that TrimrailTM roof attachments in each row have sufficient engagement with slider dovetails for proper attachment.

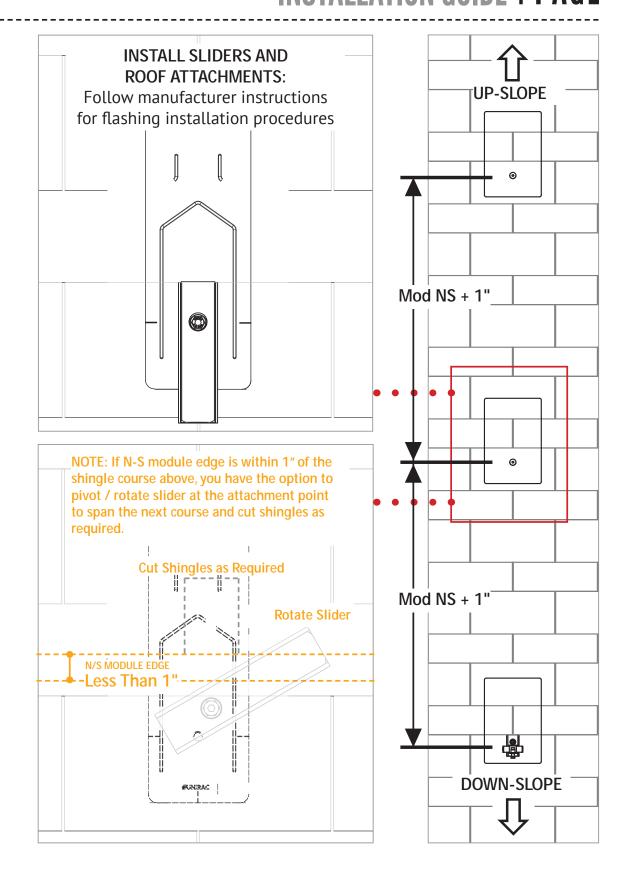

SPEC SHEET

AGE NUMBER SS

0