## Harnett County Department of Public Health


## Improvement Permit

A building permit cannot be issued with only an Improvement Permit

		ser Pillinan Ru (S	107 4 2
ISSUED TO: Weaver Homes	SUBDIVISION Miriam Ring		LOT # 2
NEW REPAIR EXPANSION	Site Improvements rec	quired prior to Construction Auth	orization issuance:
Type of Structure: 45' x 35' SFD	A /		
Proposed Wastewater System Type: 25% reduction			
Projected Daily Flow: 360 GPD			
Number of bedrooms: 3 Number of Occupants: 6	max		
Basement Yes 🗵 No			
Pump Required: Yes No May be required based on final lo			<b>.</b>
Type of Water Supply: Community Public Well Distan	ce from well feet	Permit valid for:	Five years
Permit conditions:			■ No expiration
Mal Al	Date: 08-27-21	SEE A	TTACHED SITE SKETCH
Authorized State Agent::  The issuance of this permit by the Health Department in no way guarantees the issuance of other			
site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement	Permit shall not be affected by a change in own	ership of the site. This permit is subject	to compliance with the provisions of
the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.			
Constr	uction Authorization		
	uired for Building Permit)		
The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957,		into this permit and shall be met. Syste	ems shall be installed in accordance
with the attached system layout.			
Wasyer Hamas	PROPERTY LOCATION FOAL	Possor Pittman P	od (SD1215)
ISSUED TO: Weaver Homes	PROPERTY LOCATION: 5944		
	SUBDIVISION Miriam Rin	1 <u>g</u>	LUI # Z
Facility Type: 45' x 35' SFD   New	Expansion Repair		
Basement? Yes No Basement Fixtures? Yes	⊠ No		
Type of Wastewater System** 25% reduction		(Initial) Wastewater Flow	: 360 GPD
(See note below, if applicable )			
25% reduction	(Repair)		
Installation Requirements/Conditions Number of trend			
	each trench 75 feet	Trench Spacing: 9	Feet on Center
	e installed on contour at a	Soil Cover: 6	
	installed on Contour at a		inches
		PERSONAL LANGUAGES OF THE PERSON OF THE PERS	
	Depth of: 18" - 24" inches	(Maximum soil cover shall	I not exceed
		PERSONAL LANGUAGES OF THE PERSON OF THE PERS	I not exceed
	Depth of: 18" - 24" inches	(Maximum soil cover shall	I not exceed
(Trench bottoms in all directions)	Depth of: 18" - 24" inches	(Maximum soil cover shall	I not exceed
(Trench bottoms in all directions)	Depth of: 18" - 24" inches	(Maximum soil cover shal 36" above the trench b	l not exceed ottom)
(Trench bottoms in all directions)  Pump Requirements:ft. TDH vsGPM	Depth of: 18" - 24" inches shall be level to +/-1/4"	(Maximum soil cover shall	ll not exceed ottom) inches below pipe
(Trench bottoms in all directions)	Depth of: 18" - 24" inches shall be level to +/-1/4"	(Maximum soil cover shal 36" above the trench b	I not exceed ottom) inches below pipe inches above pipe
(Trench bottoms in all directions)  Pump Requirements:ft. TDH vsGPM  Conditions:	Depth of: 18" - 24" inches shall be level to +/-1/4"	(Maximum soil cover shal 36" above the trench b Aggregate Depth:	I not exceed ottom) inches below pipe inches above pipe
(Trench bottoms in all directions)  Pump Requirements:ft. TDH vsGPM  Conditions:  WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM A	Depth of: 18" - 24" inches shall be level to +/-1/4"  NY PART OF SEPTIC SYSTEM OR	(Maximum soil cover shal 36" above the trench b Aggregate Depth:	I not exceed ottom) inches below pipe inches above pipe
(Trench bottoms in all directions)  Pump Requirements:ft. TDH vsGPM  Conditions:	Depth of: 18" - 24" inches shall be level to +/-1/4"  NY PART OF SEPTIC SYSTEM OR	(Maximum soil cover shal 36" above the trench b Aggregate Depth:	I not exceed ottom) inches below pipe inches above pipe
(Trench bottoms in all directions)  Pump Requirements:ft. TDH vsGPM  Conditions:  WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM A NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA	Depth of: 18" - 24" inches shall be level to +/-1/4"  NY PART OF SEPTIC SYSTEM OR A.	(Maximum soil cover shal 36" above the trench b  Aggregate Depth:	Il not exceed ottom) inches below pipe inches above pipe inches total
(Trench bottoms in all directions)  Pump Requirements:ft. TDH vsGPM  Conditions:  WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM A	Depth of: 18" - 24" inches shall be level to +/-1/4"  NY PART OF SEPTIC SYSTEM OR A.	(Maximum soil cover shal 36" above the trench b  Aggregate Depth:	Il not exceed ottom) inches below pipe inches above pipe inches total
(Trench bottoms in all directions)  Pump Requirements:ft. TDH vsGPM  Conditions:  WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM A NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD ARE.  **If applicable:	Depth of: 18" - 24" inches shall be level to +/-1/4"  NY PART OF SEPTIC SYSTEM OR A.  the type specified on the application	(Maximum soil cover shal 36" above the trench b  Aggregate Depth:  REPAIR AREA.	Il not exceed ottom) inches below pipe inches above pipe inches total
(Trench bottoms in all directions)  Pump Requirements:ft. TDH vsGPM  Conditions:  WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM A NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD ARE.  **If applicable:	Depth of: 18" - 24" inches shall be level to +/-1/4"  NY PART OF SEPTIC SYSTEM OR A.  the type specified on the application	(Maximum soil cover shal 36" above the trench b  Aggregate Depth:  REPAIR AREA.	Il not exceed ottom) inches below pipe inches above pipe inches total
(Trench bottoms in all directions)  Pump Requirements:ft. TDH vsGPM  Conditions:  WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM A NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA	Depth of: 18" - 24" inches shall be level to +/-1/4"  NY PART OF SEPTIC SYSTEM OR A.  the type specified on the application shall not	(Maximum soil cover shal 36" above the trench be Aggregate Depth:  REPAIR AREA.  Date:  Date:  be transferred when there is a change is a change in the content of the cont	Il not exceed ottom) inches below pipe inches above pipe inches total
(Trench bottoms in all directions)  Pump Requirements:ft. TDH vsGPM  Conditions:  WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM A NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD ARE.  **If applicable:	Depth of: 18" - 24" inches shall be level to +/-1/4"  NY PART OF SEPTIC SYSTEM OR A.  the type specified on the application shall not	(Maximum soil cover shal 36" above the trench be Aggregate Depth:  REPAIR AREA.  Date:  Date:  be transferred when there is a change is a change in the content of the cont	Il not exceed ottom) inches below pipe inches above pipe inches total of this permit.
Pump Requirements:ft. TDH vsGPM  Conditions:	Depth of: 18" - 24" inches shall be level to +/-1/4"  NY PART OF SEPTIC SYSTEM OR A.  the type specified on the application shall not Sewage Treatment and Disposal and to the condi-	(Maximum soil cover shal 36" above the trench be Aggregate Depth:  REPAIR AREA.  Date:  Date:  be transferred when there is a change is the transferred when	Il not exceed ottom) inches below pipe inches above pipe inches total of this permit.
Pump Requirements:	Depth of: 18" - 24" inches shall be level to +/-1/4"  NY PART OF SEPTIC SYSTEM OR A.  the type specified on the application shall not Sewage Treatment and Disposal and to the condi-	(Maximum soil cover shal 36" above the trench be Aggregate Depth:  REPAIR AREA.  Date:  be transferred when there is a change it tions of this permit.  SE	Il not exceed ottom) inches below pipe inches above pipe inches total of this permit.

## Harnett County Department of Public Health Site Sketch

Property Location: 5944 Rosser Pittman	Rd (SR1215)	
Issued To: Weaver Homes	Subdivision Miriam Ring	Lot # 2
Authorized State Agent:	L & 1648	Date: 08-27-21

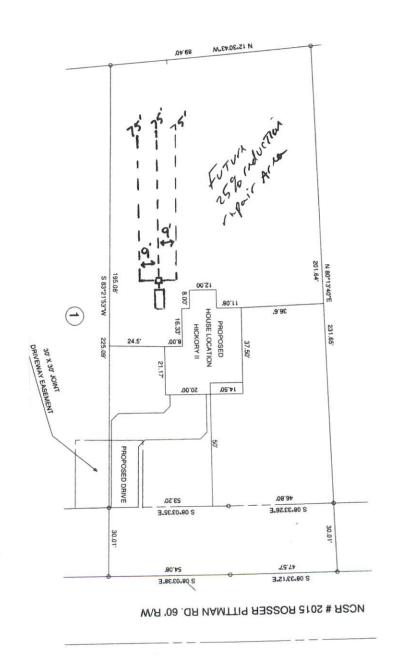

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.