

Lucent Engineering, P.C. 814 E 1475 N Lehi, UT 84043 m: (309) 645-0999

admin@lucenteng.co

January 7, 2022

Encōr Solar, LLC 3401 N. Thanksgiving Way, Ste 450 Lehi, UT 84043

RE: Engineering Services Bousquet Residence 172 Bird Dog Dr, Angier, NC 6 kW System Solo Job #1751863

To Whom It May Concern,

We have reviewed the following information regarding the solar panel installation for this project. Alterations to these documents or plans shall not be made without direct written consent of the Engineer of Record.

A. Assumptions from Field Observation provided by Encor Solar, LLC

The following structural design regarding the proposed alterations have been prepared from these assumptions. The verification of the field observations is the responsibility of the contractor. **Prior to** commencement of work, the contractor shall verify the framing sizes, spacings, and spans noted in the sealed plans, calculations, and/or certification letter and notify the Engineer of Record of any discrepancies.

Roof Finish : Roof Underlayment : Roof Profile : Roof Structural System : Truss Top Chord/Setup : Chord/Rafter Wood Grade : Truss/Rafter Spacing : Roof Slope : Max Top Chord/Rafter Span : Bearing Wall Type :	Roof Asphalt Shingle OSB Gable Metal Plate Trusses 2 x 4 / Fink Southern Pine #2 or better 16" o.c. 25 deg 7.16 ft Convl Lt-Frame Constr
Bearing Wall Type :	Convl Lt-Frame Constr
Foundation :	Permanent Concrete
Stories :	Single

B. Building Design Criteria

Code :	2018 NCRC (ASCE 7-10)	Risk Category :	II
Roof Live Load :	20 psf (0 psf at panels)	Occupancy Class :	R-3
Ground Snow Load :	15 psf	Roof Dead Load :	6.5 psf
Ult Wind Speed :	120 mph	PV Dead Load :	<u>3 psf</u>
Exposure Category :	С	Total Dead Load :	9.5 psf

C. Summary of Existing Structure Results

<u>Roof</u>

After review of the field observations and based on our calculations and in accordance with the applicable building codes and current industry standards, the existing roof structure supporting the proposed alterations consisting of the solar array has been determined to be:

- Adaquate to support the additional imposed loads. No structural upgrades are required.



1-

Initial Application Date: Application #	
CU#	
COUNTY OF HARNETT RESIDENTIAL LAND USE APPLICATION Central Permitting 108 E. Front Street, Lillington, NC 27546 Phone: (910) 893-7525 ext:2 Fax: (910) 893-2793 www	w.harnett.org/permits
A RECORDED SURVEY MAP, RECORDED DEED (OR OFFER TO PURCHASE) & SITE PLAN ARE REQUIRED WHEN SUBMITTING A LAND US	E APPLICATION
LANDOWNER: Kelly Bousquet Mailing Address: 172 Bird Dog Dr	
City: Angier State: NC Zip: 27501 Contact No: (704) 254-3086 Email: ezrib4m	ne@gmail.com
APPLICANT*: Encor Solar LLC Mailing Address: 3401 N. Thanksgiving Way	
City: Lehi State: UT Zip: 84043 Contact No: (512) 489-9919 Email: permits	@encorsolar.com
CONTACT NAME APPLYING IN OFFICE: Encor Solar LLC Phone # (512) 489-9919	
ADDRESS: 3574 Neills Creek Rd, Lillington, NC 27546 PIN: 0662-61-1986.000	
DEED OR OTP:	
PROPOSED USE:	
SFD: (Sizex) # Bedrooms: # Baths: Basement(w/wo bath): Garage: Deck: Crawl Space: S (Is the bonus room finished? () yes () no w/ a closet? () yes () no (if yes add in with # bedrooms)	
Mod: (Sizex) # Bedrooms # BathsBasement (w/wo bath) Garage: Site Built Deck: On Fram (Is the second floor finished? (()) yes () no Any other site built additions? () yes () no	e Off Frame
Manufactured Home: SW DW TW (Size x_) # Bedrooms: Garage: (site built? Deck: s	site built?
Duplex: (Sizex) No. Buildings: No. Bedrooms Per Unit:	
Home Occupation: # Rooms: Use: Hours of Operation: #	Employees:
Addition/Accessory/Other: (Sizex) Use: Installation of PV Solar / SIZE: 6.4 kW DC Closets in additio	vn? (🔲) yes (🗡) no
Water Supply: County Existing Well New Well (# of dwellings using well) *Must have operable water (Need to Complete New Well Application at the same time as New Tank)	er before final
Sewage Supply: New Septic Tank Expansion Relocation Existing Septic Tank County Sewer (Complete Environmental Health Checklist on other side of application if Septic)	
Does owner of this tract of land, own land that contains a manufactured home within five hundred feet (500') of tract listed above? ()	yes () no
Does the property contain any easements whether underground or overhead () yes () no	
Structures (existing or proposed): Single family dwellings: Manufactured Homes: Other (specify):	
If permits are granted I agree to conform to all ordinances and laws of the State of North Carolina regulating such work and the specific I hereby state that foregoing statements are accurate and correct to the best of my knowledge. Permit subject to revocation if false info	
Signature of Owner or Owner's Agent	ncluding but not limited

*It is the owner/applicants responsibility to provide the county with any applicable information about the subject property, including but not limited to: boundary information, house location, underground or overhead easements, etc. The county or its employees are not responsible for any incorrect or missing information that is contained within these applications.*** *This application expires 6 months from the initial date if permits have not been issued**

APPLICATION CONTINUES ON BACK

strong roots • new growth

Application #_____

Harnett County Central F PO Box 65 Lillington, NC 27546 - Ph: 910-893-7525 - Fx: 9 Certification of Work Performed By (Individual Trade Applic	10-893-2793 - www.harnett.org/permits Owner/Contractor cation)
Owner (s) of Structure: Kelly Bousquet	Phone: (704) 254-3086
Owner (s) Mailing Address: <u>172 Bird Dog Dr</u>	
Angier, NC 27501	
Land Owner Name (s): <u>Kelly Bousquet</u>	Phone: (704) 254-3086
Construction or Site Address: 172 Bird Dog Dr	
PIN # 0662-61-1986.000 Parcel # 11066	2 0009 38
Job Cost: <u>30976.55</u> Description of Work to be done <u>Install</u>	
Mechanical: New Unit With Ductwork New Unit Without Du	
Electrical*: 200 Amp <200 Amp Service Change * For Progress Energy customers we need the pren	
Plumbing: Water/Sewer Tap Number of Baths	Water Heater
Specific Directions to Job from Lillington: Head north on McKinney Pkwy, Turn left onto US-401 N Turn left onto NC-210 N, Turn left onto Harnett Centr Turn left onto English Springer Dr, Turn right onto E	ral Rd,
Subdivision:I	Lot #:
I <u>Encor Solar LLC</u> will provide the <u>electrical</u> (Contractors Name)	labor on this structure. (Trade)
I am the building owner or my NC state license number is 1.3283	30, which entitles me to
perform such work on the above structure legally. All work shall c	comply with the State Building Code and all
other applicable State and local laws, ordinances and regulations.	
Encor Solar LLC	(512) 489-9919
Contractor's Company Name	Telephone
3401 N. Thanksgiving Way Lehi, UT 84043	Lehi, UT 84043
Address	Email Address
<u>1.32830</u> License #	
Structure Owner / Contractor Signature:	Date:
Desire the definition of the desire desired by the second state of	Parte de la des altres d'Arte d'Para a la la la s

By signing this application you affirm that you have obtained permission from the above listed license holder to purchase permits on their behalf. If doing the work as owner you understand that you cannot rent, lease or sell the listed property for 12 months after completion of the listed work.

*Company name, address, & phone must match information on license

DocuSign^{*}

		_ · · · · · · · · · · · · · · · · · · ·			
Certificate Of Completion					
Envelope Id: 58F7B671927F4B8DB1B770494D2I	03976	Status: Completed			
Subject: Kelly Bousquet: Harnett County - Building	Permit Application				
Source Envelope:					
Document Pages: 2	Signatures: 0	Envelope Originator:			
Certificate Pages: 1	Initials: 0	Docs Team			
AutoNav: Enabled		3401 N Thanksgiving Way Ste 450			
Envelopeld Stamping: Enabled		Lehi, UT 84043			
Time Zone: (UTC-07:00) Mountain Time (US & Ca	anada)	daas@gosolo.io			
		IP Address: 98.245.0.150			
Record Tracking					
Status: Original	Holder: Docs Team	Location: DocuSign			
12/22/2021 5:43:11 PM	daas@gosolo.io	U U			
Signer Events	Signature	Timestamp			
Daas	Completed	Sent: 12/27/2021 12:52:08 PM			
daas@gosolo.io	Completed	Viewed: 12/27/2021 12:52:30 PM			
Team		Signed: 12/27/2021 12:52:31 PM			
Solo	Using IP Address: 98.245.0.150	e.g			
Security Level: Email, Account Authentication (None)					
Electronic Record and Signature Disclosure: Not Offered via DocuSign					
In Person Signer Events	Signature	Timestamp			
Editor Delivery Events	Status	Timestamp			
Agent Delivery Events	Status	Timestamp			
Intermediary Delivery Events	Status	Timestamp			
Certified Delivery Events	Status	Timestamp			
Carbon Copy Events	Status	Timestamp			
Witness Events	Signature	Timestamp			
Notary Events	Signature	Timestamp			
Envelope Summary Events	Status	Timestamps			
Envelope Sent	Hashed/Encrypted	12/27/2021 12:52:08 PM			
Certified Delivered	Security Checked	12/27/2021 12:52:30 PM			
Signing Complete	Security Checked	12/27/2021 12:52:31 PM			
Completed	Security Checked	12/27/2021 12:52:31 PM			
	, ·				
Payment Events	Status	Timestamps			



Lucent Engineering, P.C. 814 E 1475 N Lehi, UT 84043 m: (309) 645-0999

admin@lucenteng.co

January 7, 2022

Encōr Solar, LLC 3401 N. Thanksgiving Way, Ste 450 Lehi, UT 84043

RE: Engineering Services Bousquet Residence 172 Bird Dog Dr, Angier, NC 6 kW System Solo Job #1751863

To Whom It May Concern,

We have reviewed the following information regarding the solar panel installation for this project. Alterations to these documents or plans shall not be made without direct written consent of the Engineer of Record.

A. Assumptions from Field Observation provided by Encor Solar, LLC

The following structural design regarding the proposed alterations have been prepared from these assumptions. The verification of the field observations is the responsibility of the contractor. **Prior to** commencement of work, the contractor shall verify the framing sizes, spacings, and spans noted in the sealed plans, calculations, and/or certification letter and notify the Engineer of Record of any discrepancies.

Roof Finish : Roof Underlayment : Roof Profile : Roof Structural System : Truss Top Chord/Setup : Chord/Rafter Wood Grade : Truss/Rafter Spacing : Roof Slope : Max Top Chord/Rafter Span : Bearing Wall Type :	Roof Asphalt Shingle OSB Gable Metal Plate Trusses 2 x 4 / Fink Southern Pine #2 or better 16" o.c. 25 deg 7.16 ft Convl Lt-Frame Constr
Bearing Wall Type :	Convl Lt-Frame Constr
Foundation :	Permanent Concrete
Stories :	Single

B. Building Design Criteria

Code :	2018 NCRC (ASCE 7-10)	Risk Category :	II
Roof Live Load :	20 psf (0 psf at panels)	Occupancy Class :	R-3
Ground Snow Load :	15 psf	Roof Dead Load :	6.5 psf
Ult Wind Speed :	120 mph	PV Dead Load :	<u>3 psf</u>
Exposure Category :	С	Total Dead Load :	9.5 psf

C. Summary of Existing Structure Results

<u>Roof</u>

After review of the field observations and based on our calculations and in accordance with the applicable building codes and current industry standards, the existing roof structure supporting the proposed alterations consisting of the solar array has been determined to be:

- Adaquate to support the additional imposed loads. No structural upgrades are required.

D. Solar Panel Support Bracket Anchorage

- 1. Solar panels shall be designed, mounted, and installed in accordance with the most recent "UniRac Installation Manual", which can be found on the UniRac website (http://unirac.com/).
- 2. <u>Manufacturer's Panel Bracket Connection to Roof Chord/Rafter Member:</u>


Fastener :	(1) 5/16" Lag Screw per Bracket
NDS Withdrawl Value :	307 lbs/inch
Min. Thread Length and Pentration Depth :	2.5"

- 3. Considering the existing roof's slope, size, spacing, condition, and calculated loads, the panel bracket supports shall be placed no greater than 64 in. o/c.
- 4. Panel supports connections shall be staggered to distribute load to adjacent trusses.

E. Overall Summary

Based on the information supplied to us at the time of this report, on the evaluation of the existing structure, and solar array panel bracket connection, it is our opinion that the roof system will adequately support the additional loads imposed by the solar array. This evaluation conforms to 2018 NCRC and current industry standards.

Should you have any questions regarding this letter or if you require further information, do not hesitate to contact me.



John H. Leesman, PE License No. 52255

Limits of Scope of Work and Liablity

The existing structure is assumed to have been designed and constructed following appropriate codes at the time of erection and assumed to have appropriated permits. The calculations performed are only for the roof framing supporting the solar array installation referenced in the stamped plans and were completed according to generally recognized structural analysis standards and procedures, professional engineering, and design experience opinions and judgements. Existing deficiencies which are unknown or were not observed during the time the site observation are not included in this scope of work. All solar panel modules, racking, and mounting equipment shall be designed and installed per the manufacturer's approved installation specifications. The Engineer of Record and the engineering consulting firm assume no responsibility for misuse or improper installation. This analysis is not stamped for water leakage. Framing was determined on information in provided plans and/or photos, along with engineering judgement. Prior to commencement of work, the contractor shall verify the framing sizes, spacings, and spans noted in the stamped plans, calculations, and/or certification letter and notify the Engineer of Record of any discrepancies prior to starting construction. If during solar panel installation, the roof framing members appear unstable or deflect non-uniformly, our office should be notified before proceeding with the installation. The contactor shall also verify that there are no damage/deficiencies (i.e., dry rot, water damage, termite damage, framing member/connection damage, etc.) to framing that was not addressed in the stamped plans, calculations, and/or certification letter and notify the Engineer of Record of any concerns prior to starting construction.





GENERAL NOTES

- 1. INSTALLATION OF SOLAR PHOTOVOLTAIC SYSTEM SHALL BE IN ACCORDANCE WITH NEC ARTICLE 690, AND ALL OTHER APPLICABLE NEC CODES WHERE NOTED OR EXISTING.
- 2. PROPER ACCESS AND WORKING CLEARANCE AROUND EXISTING AND PROPOSED ELECTRICAL EQUIPMENT WILL COMPLY WITH NEC ARTICLE 110.
- 3. ALL WIRES, INCLUDING THE GROUNDING ELECTRODE CONDUCTOR SHALL BE PROTECTED FROM PHYSICAL DAMAGE IN ACCORDANCE WITH NEC ARTICLE 250
- 4. THE PV MODULES ARE CONSIDERED NON-COMBUSTIBLE; THIS SYSTEM IS UTILITY INTERACTIVE PER UL 1741 AND DOES NOT INCLUDE STORAGE BATTERIES OR OTHER ALTERNATIVE STORAGE SOURCES.
- 5. ALL DC WIRES SHALL BE SIZED ACCORDING TO [NEC 690.8]
- 6. DC CONDUCTORS SHALL BE WITHIN PROTECTED RACEWAYS IN ACCORDANCE WITH [NEC 690.31]
- 7. ALL SIGNAGE TO BE PLACED IN ACCORDANCE WITH LOCAL JURISDICTIONAL BUILDING CODE.





2017 NEC	OCCUPANCY: R-3
2018 IRC	ZONING: RESIDENTIAL
2018 IFC	
2018 IBC	
2018 NC RBC	

DRAWN BY: SoloCAD


DATE: January 6, 2022


COVER PAGE - PV01

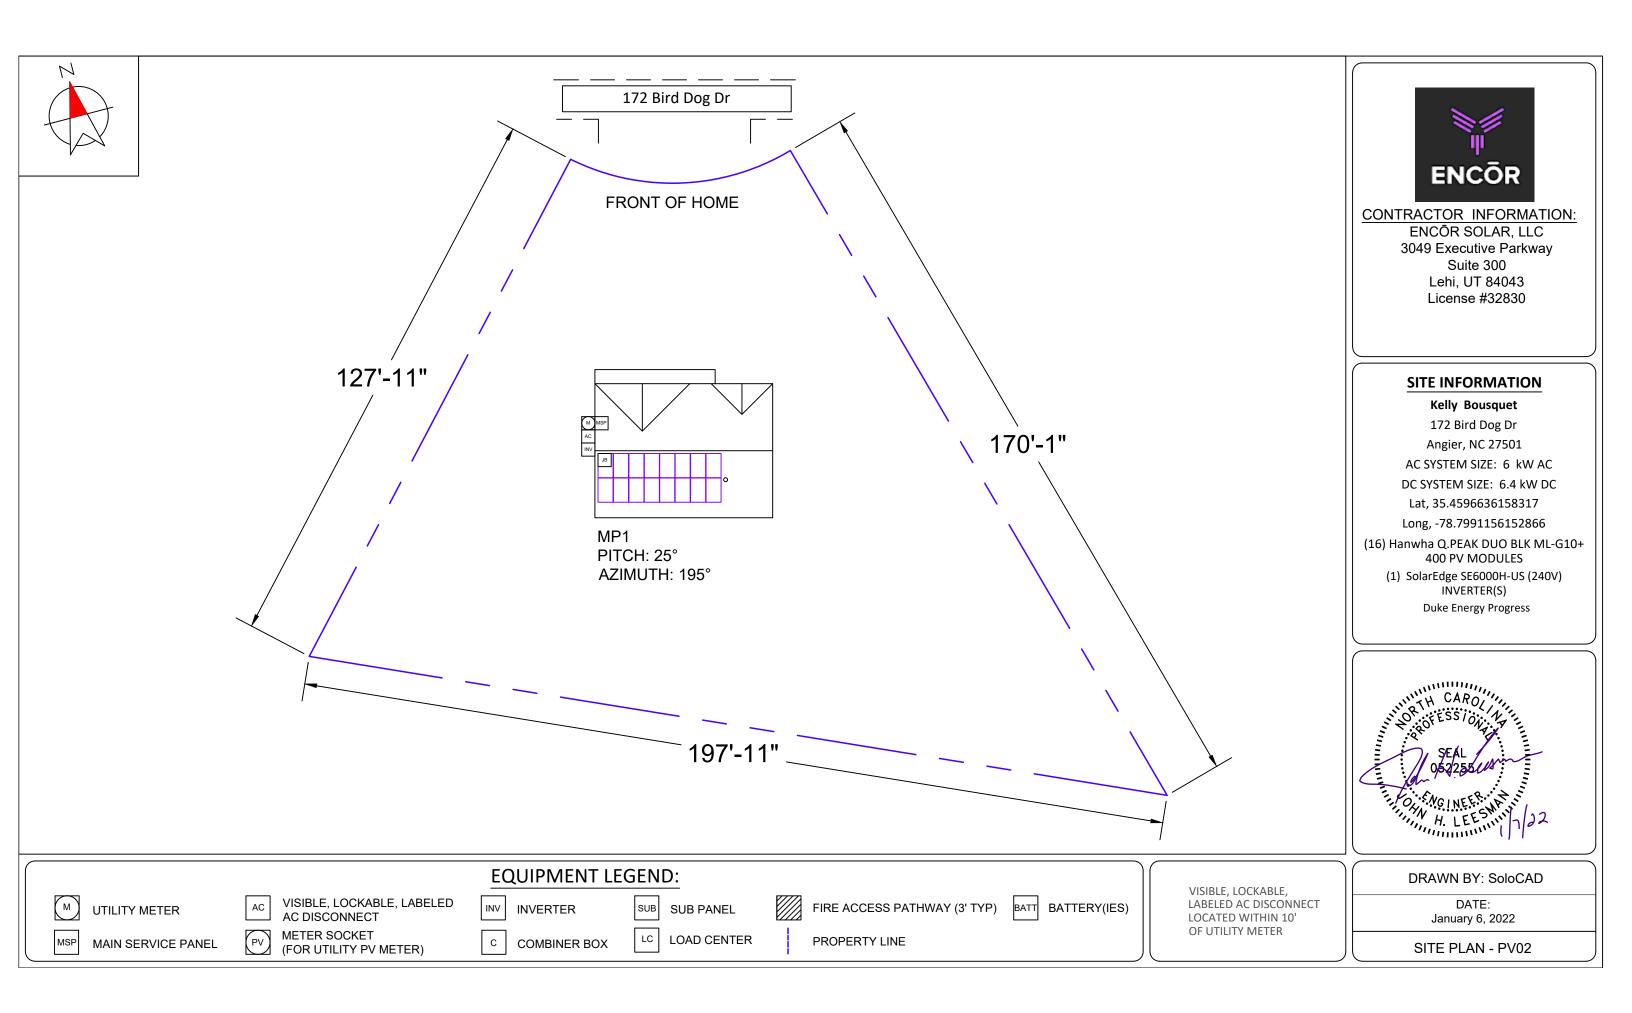

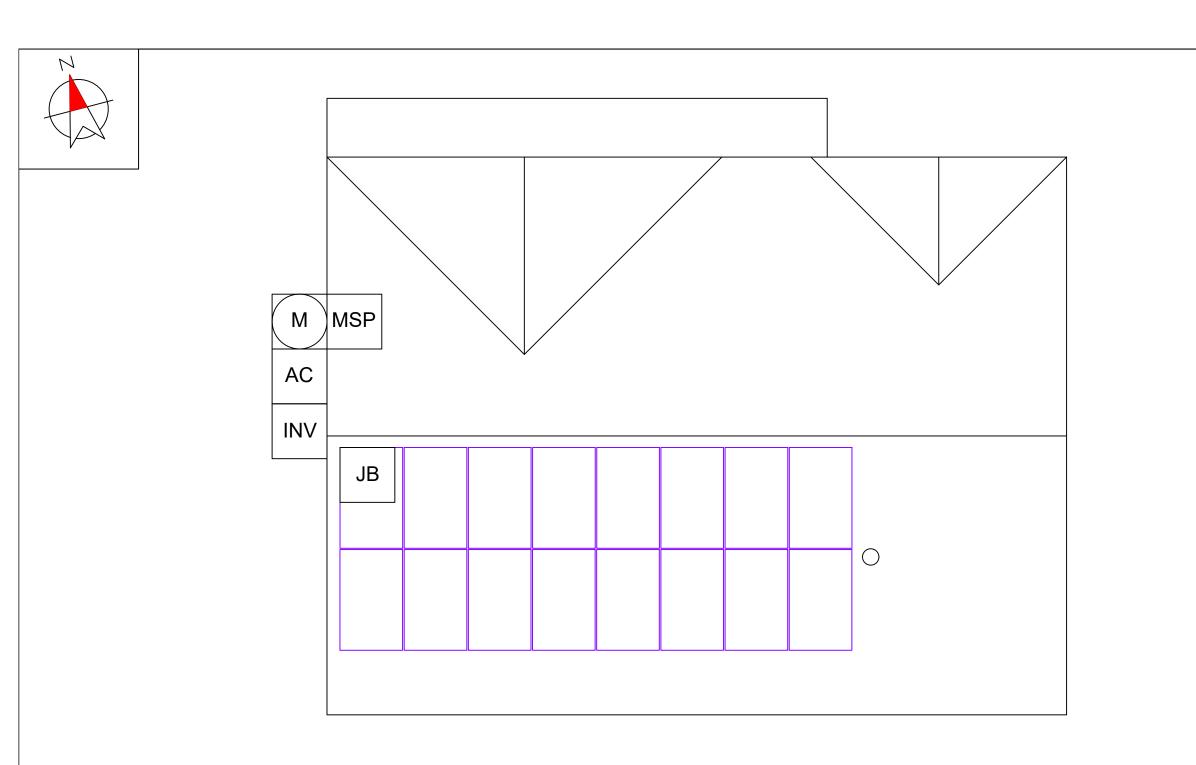


EQUIPM	ENT INFORMATION:		ROOF INFO:	PHOTOVOLTAIC	ARRAY STRUCTURAL	
RAIL MANUFACTURER	SnapNrack	ROOF TYPE	asphalt_shingle	PV MODULE COUNT:	16	
RAIL PART NUMBER	Standard Rail	ROOF FRAMING	manufactured_truss	ARRAY AREA:	MODULE COUNT *	
ATTACHMENTS	Unirac - FLASHKIT PRO	RAFTER/TOP CHORD SIZE	2x4	ROOF AREA:	1328	
ATTACHMENT QTY	24	RAFTER/TOP CHORD SPACING	16"	PERCENT OF ROOF COVERED:	229	
SPLICE QTY	8	ATTACHMENT SPACING	64	ARRAY WEIGHT:	MODULE COUN	
MIDCLAMP QTY	28			DISTRIBUTED LOAD:	ARRAY LBS/ATTAC	
ENDCLAMP QTY	8			POINT LOAD: (lbs/ft²)	(ARRAY) WEIGHT/A	

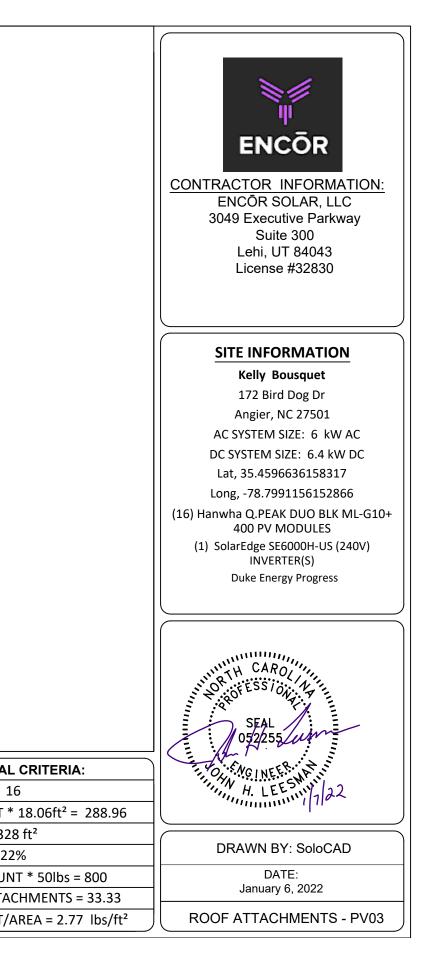

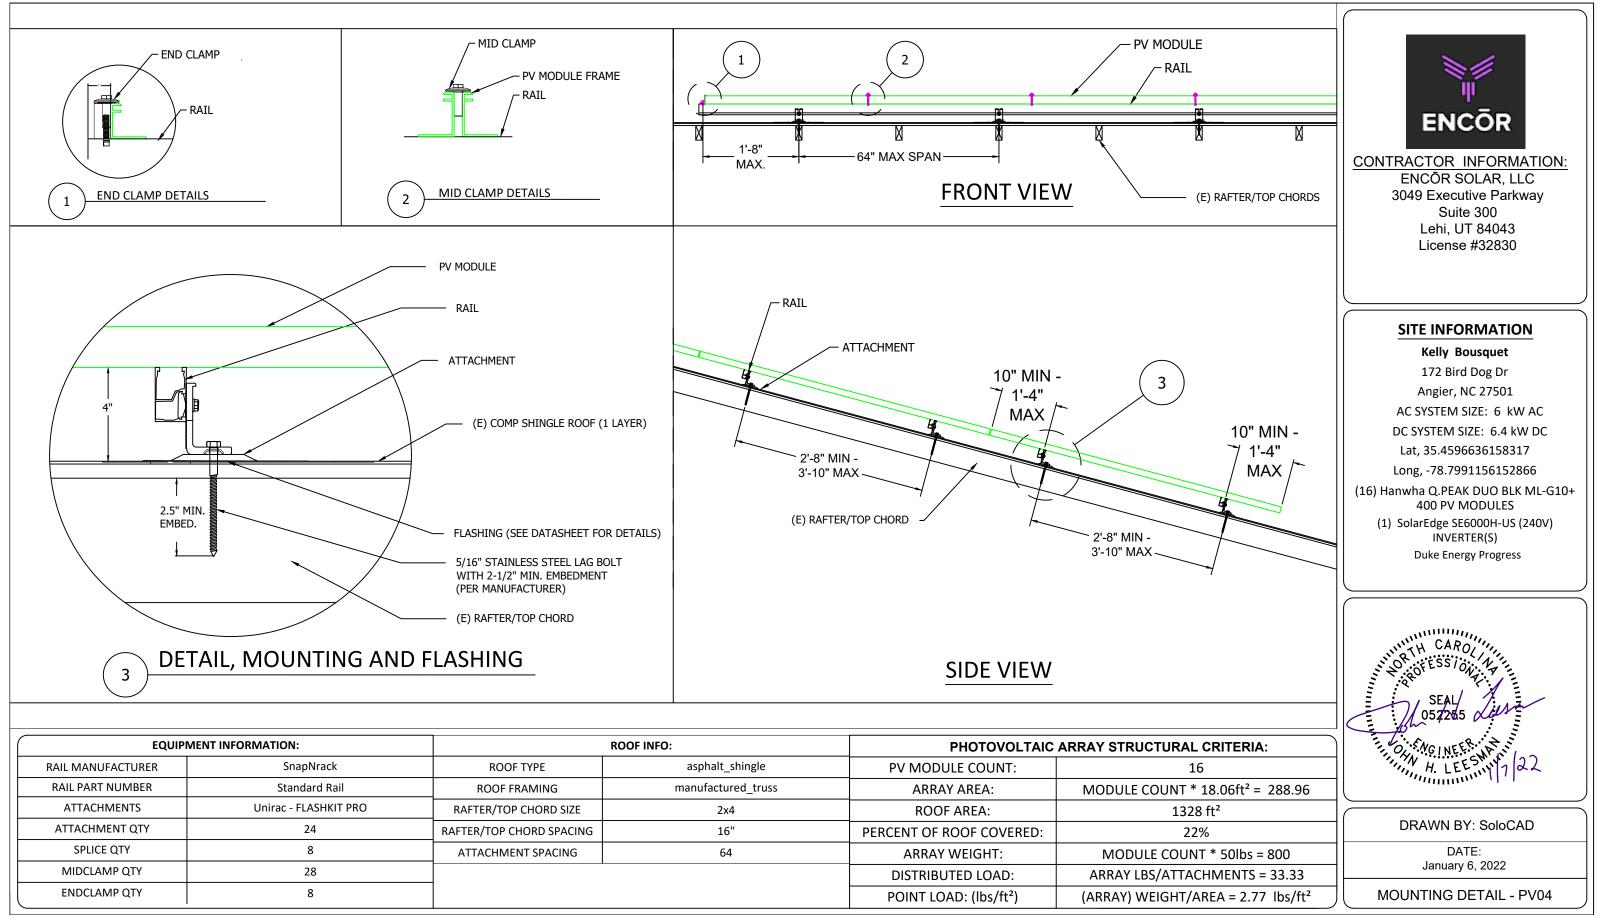

EQUIPMEN	NT INFORMATION:	A I	ROOF INFO:	PHOTOVOLTAIC ARRAY STRUC		
RAIL MANUFACTURER	SnapNrack	ROOF TYPE	asphalt_shingle	PV MODULE COUNT:	16	
RAIL PART NUMBER	Standard Rail	ROOF FRAMING	manufactured_truss	ARRAY AREA:	MODULE COUNT * :	
ATTACHMENTS	Unirac - FLASHKIT PRO	RAFTER/TOP CHORD SIZE	2x4	ROOF AREA:	1328	
ATTACHMENT QTY	24	RAFTER/TOP CHORD SPACING	16"	PERCENT OF ROOF COVERED:	229	
SPLICE QTY	8	ATTACHMENT SPACING	64	ARRAY WEIGHT:	MODULE COUNT	
MIDCLAMP QTY	28			DISTRIBUTED LOAD:	ARRAY LBS/ATTAC	
ENDCLAMP QTY	8			POINT LOAD: (lbs/ft ²)	(ARRAY) WEIGHT/A	

		EQUIPMENT SCHEDULE:		Conduit & Conductor Schedule								
TYPE:	QTY:	DESCRIPTION:	RATING:	TAG	WIRE GAUGE	DESCRIPTION	QTY	CONDUIT SIZE	CONDUCTOR RATING	# OF CONDUCTORS DERATE	TEMP. DERATE	CONDUCTOR RAT W/DERATES
MODULES:	(16)	Hanwha Q.PEAK DUO BLK ML-G10+ 400	400 W	1	10 AWG	PV-WIRE , USE-2, COPPER (L 1, L 2)	(2)	N/A - FREE AIR	40A	N/A - FREE AIR	0.91	36.4A
INVERTERS:	(1)	SolarEdge SE6000H-US (240V)	6000 W		6 AWG	BARE, COPPER (GROUND)	(1)		40A	N/A - I'REE AIR	0.91	50.4A
AC DISCONNECT(S):	: (1)	PV AC DISCONNECT, 240V, 2-POLE	60A		10 AWG	THWN-2, or THHN, or 10/2 NM-B COPPER - (L 1, L 2)	(2)	3/4" EMT	40A	1	0.91	36.4A
		, ,			10 AWG	THWN-2, or THHN, or 10/2 NM-B COPPER - (GROUND)	(1)	- 3/4 LIVII	40A	1	0.91	50.4A
DC OPTIMIZERS:	(16)	SolarEdge P400	15 Adc		10 AWG	THHN/THWN-2, COPPER - (L1, L2)	(4)	3/4" EMT	404	0.0	0.01	20.124
				3	10 AWG	THHN/THWN-2 - (GROUND)	(1)	3/4 EIVIT	40A	0.8	0.91	29.12A
					8 AWG	THWN-2 COPPER - (L1, L2, NEUTRAL)	(3)	3/4" EMT	50A	1	0.91	45.5A
	-	1	1	4	10 AWG	THWN-2 COPPER - (GROUND)	(1)	5/4 EIVIT	50A		0.91	45.5A

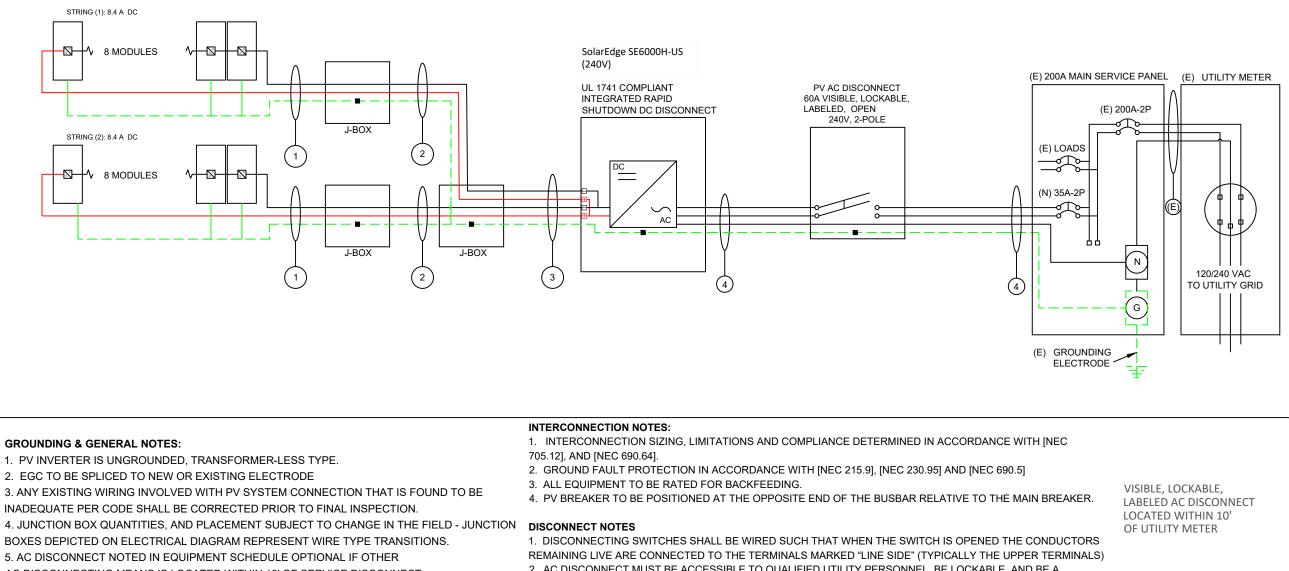


GROUNDING & GENERAL NOTES:

- AC DISCONNECTING MEANS IS LOCATED WITHIN 10' OF SERVICE DISCONNECT.

2. AC DISCONNECT MUST BE ACCESSIBLE TO QUALIFIED UTILITY PERSONNEL, BE LOCKABLE, AND BE A VISIBLE-BREAK SWITCH






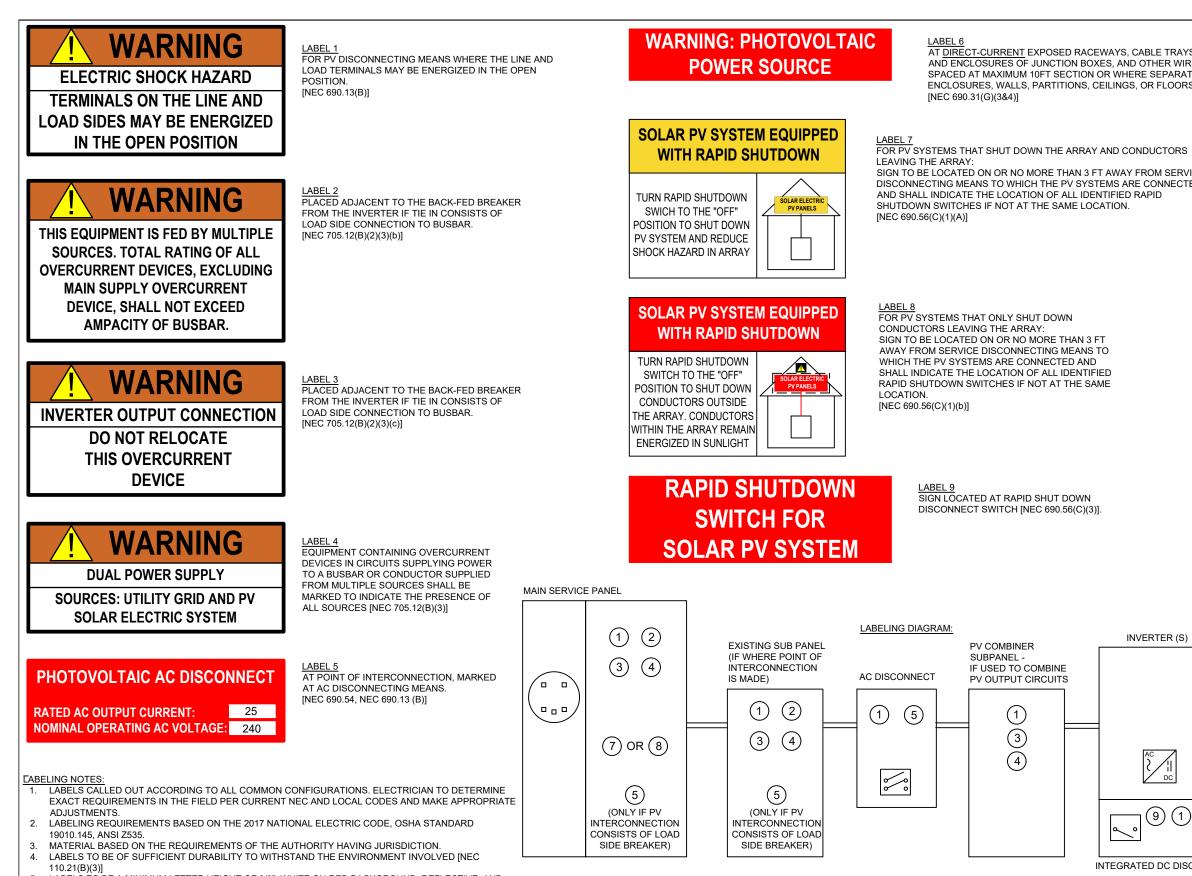

5. LABELS TO BE A MINIMUM LETTER HEIGHT OF 3/8", WHITE ON RED BACKGROUND; REFLECTIVE, AND PERMANENTLY AFFIXED [IFC 605.11.1.1]

*ELECTRICAL DIAGRAM SHOWN ABOVE IS FOR LABELING PURPOSES ONLY. NOT AN ACTUAL REPRESENATION OF EQUIPMENT AND CONNECTIONS TO BE I LOCATIONS PRESENTED MAY VERY DEPENDING ON TYPE OF INTERCONNECTION METHOD AND LOCATION PRESENTED ON THE ELECTRICAL DIAGRAM


S, COVERS ING METHODS; TED BY S.	ENCOR CONTRACTOR INFORMATION: ENCOR SOLAR, LLC 3049 Executive Parkway Suite 300 Lehi, UT 84043 License #32830
	SITE INFORMATION Kelly Bousquet 172 Bird Dog Dr Angier, NC 27501 AC SYSTEM SIZE: 6 kW AC DC SYSTEM SIZE: 6.4 kW DC Lat, 35.4596636158317 Long, -78.7991156152866 (16) Hanwha Q.PEAK DUO BLK ML-G10+
	400 PV MODULES (1) SolarEdge SE6000H-US (240V) INVERTER(S) Duke Energy Progress
JUNCTION BOX OR COMBINER BOX	
CONNECT	DRAWN BY: SoloCAD
S TO BE INSTALLED. LABEL NAGRAM PAGE.	January 6, 2022
	LABELS - PV06

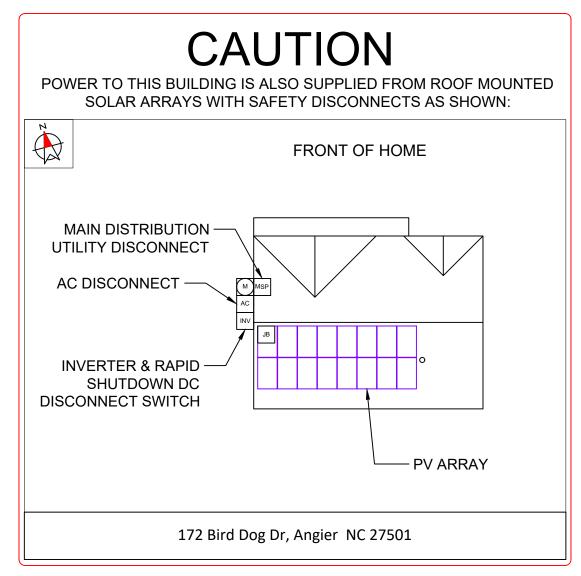

DIRECTORY

PERMANENT PLAQUE OR DIRECTORY PROVIDING THE LOCATION OF THE SERVICE DISCONNECTING MEANS AND THE PHOTOVOLTAIC SYSTEM.

(ALL PLAQUES AND SIGNAGE WILL BE INSTALLED AS OUTLINED WITHIN: NEC 690.56(B)&(C), [NEC 705.10])

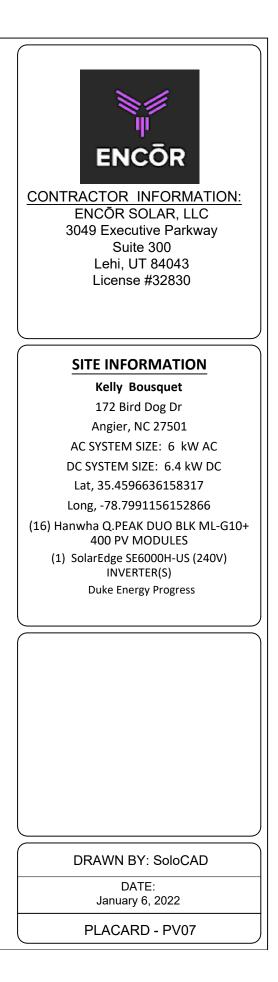





SITE PHOTOS:






Format	74.0 in × 41.1 in × 1.26 in (including frame) (1879 mm × 1045 mm × 32 mm)
Weight	48.5 lbs (22.0 kg)
Front Cover	0.13 in (3.2 mm) thermally pre-stressed glass with anti-reflection technology
Back Cover	Composite film
Frame	Black anodized aluminum
Cell	6 × 22 monocrystalline Q.ANTUM solar half cells
Junction Box	2.09-3.98 in × 1.26-2.36 in × 0.59-0.71 in (53-101 mm × 32-60 mm × 15-18 mm), IP67, with bypass diodes
Cable	4 mm² Solar cable; (+) ≥49.2 in (1250 mm), (–) ≥49.2 in (1250 mm)
Connector	Stäubli MC4; IP68

ELECTRICAL CHARACTERISTICS

PO۱	WER CLASS			385	390	395	400	405
MIN	NIMUM PERFORMANCE AT STANDA	RD TEST CONDITIC	NS, STC ¹ (PO	WER TOLERANCE +	5W/-0W)			
	Power at MPP ¹	P _{MPP}	[W]	385	390	395	400	405
E	Short Circuit Current ¹	Isc	[A]	11.04	11.07	11.10	11.14	11.17
Minimum	Open Circuit Voltage ¹	V _{oc}	[V]	45.19	45.23	45.27	45.30	45.34
	Current at MPP	I _{MPP}	[A]	10.59	10.65	10.71	10.77	10.83
	Voltage at MPP	V _{MPP}	[V]	36.36	36.62	36.88	37.13	37.39
	Efficiency1	η	[%]	≥19.6	≥19.9	≥20.1	≥20.4	≥20.6
MIN	IIMUM PERFORMANCE AT NORMA	L OPERATING CONI	DITIONS, NM	OT ²				
	Power at MPP	P _{MPP}	[W]	288.8	292.6	296.3	300.1	303.8
Ę	Short Circuit Current	I _{sc}	[A]	8.90	8.92	8.95	8.97	9.00
Minimum	Open Circuit Voltage	V _{oc}	[V]	42.62	42.65	42.69	42.72	42.76
Ξ	Current at MPP	I _{MPP}	[A]	8.35	8.41	8.46	8.51	8.57
	Voltage at MPP	V _{MPP}	[V]	34.59	34.81	35.03	35.25	35.46

Q CELLS PERFORMANCE WARRANTY



At least 98% of nominal power during first year. Thereafter max. 0.5% degradation per year. At least 93.5% of nominal power up to 10 years. At least 86% of nominal power up to 25 vears.

All data within measurement tolerances. Full warranties in accordance with the warranty terms of the Q CELLS sales organisation of your respective country.

TEMPERATURE COEFFICIENTS							
Temperature Coefficient of I _{sc}	α	[%/K]	+0.04	Temperature Coefficient of V_{oc}	β	[%/K]	-0.27
Temperature Coefficient of P _{MPP}	Ŷ	[%/K]	-0.34	Nominal Module Operating Temperature	NMOT	[°F]	109±5.4 (43±3°C)

PROPERTIES FOR SYSTEM DESIGN

Maximum System Voltage V _{SYS}	[V]	1000 (IEC)/1000 (UL)	PV module classification	Class II
Maximum Series Fuse Rating	[A DC]	20	Fire Rating based on ANSI/UL 61730	TYPE 2
Max. Design Load, Push/Pull ³	[lbs/ft2]	75 (3600Pa)/55 (2660Pa)	Permitted Module Temperature	-40°F up to +185°F
Max. Test Load, Push/Pull ³	[lbs/ft ²]	113 (5400Pa)/84 (4000Pa)	on Continuous Duty	(–40°C up to +85°C)
³ See Installation Manual				

QUALIFICATIONS AND CERTIFICATES

SP

UL 61730, CE-compliant, Quality Controlled PV - TÜV Rheinland IEC 61215:2016, IEC 61730:2016, U.S. Patent No. 9,893,215 (solar cells), QCPV Certification ongoing



Note: Installation instructions must be followed. See the installation and operating manual or contact our technical service department for further information on approved installation and use of this product.

Hanwha Q CELLS America Inc.

400 Spectrum Center Drive, Suite 1400, Irvine, CA 92618, USA | TEL +1 949 748 59 96 | EMAIL inquiry@us.q-cells.com | WEB www.q-cells.us



A RELIABLE INVESTMENT

linear performance warranty².

² See data sheet on rear for further information.



Engineered in Germany

Technology¹, Hot-Spot Protect and Traceable Quality Tra.Q™. EXTREME WEATHER RATING

High-tech aluminum alloy frame, certified for high snow (5400 Pa) and wind loads (4000 Pa).

Long-term yield security with Anti LID Technology, Anti PID


ENDURING HIGH PERFORMANCE




Inclusive 25-year product warranty and 25-year

¹ APT test conditions according to IEC/TS 62804-1:2015, method A (-1500V, 96h)


MECHANICAL SPECIFICATION

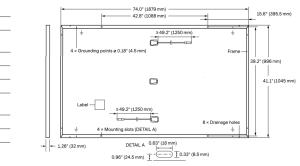

PERFORMANCE AT LOW IRRADIANCE



Typical module performance under low irradiance conditions in comparison to STC conditions (25 °C, 1000 W/m²)



Single Phase Inverter with HD-Wave Technology

for North America

SE3000H-US / SE3800H-US / SE5000H-US / SE6000H-US / SE7600H-US / SE10000H-US / SE11400H-US



Optimized installation with HD-Wave technology

- Specifically designed to work with power optimizers
- Record-breaking efficiency
- **/** Fixed voltage inverter for longer strings
- / Integrated arc fault protection and rapid shutdown for / Optional: Revenue grade data, ANSI C12.20 NEC 2014 and 2017, per article 690.11 and 690.12
- / UL1741 SA certified, for CPUC Rule 21 grid compliance

- Extremely small
- Built-in module-level monitoring
- Outdoor and indoor installation
- Class 0.5 (0.5% accuracy)



INVERTERS

/ Single Phase Inverter with HD-Wave Technology for North America

SE3000H-US / SE3800H-US / SE5000H-US / SE6000H-US/ SE7600H-US / SE10000H-US / SE11400H-US

	SE3000H-US	SE3800H-US	SE5000H-US	SE6000H-US	SE7600H-US	SE10000H-US	SE11400H-US				
OUTPUT											
Rated AC Power Output	3000	3800 @ 240V 3300 @ 208V	5000	6000 @ 240V 5000 @ 208V	7600	10000	11400 @ 240V 10000 @ 208V	VA			
Maximum AC Power Output	3000	3800 @ 240V 3300 @ 208V	5000	6000 @ 240V 5000 @ 208V	7600	10000	11400 @ 240V 10000 @ 208V	VA			
AC Output Voltage MinNomMax. (211 - 240 - 264)	~	~	~	~	~	~	~	Vac			
AC Output Voltage MinNomMax. (183 - 208 - 229)	-	~	-	- ✓ -			~	Vac			
AC Frequency (Nominal)				59.3 - 60 - 60.5(1)				Hz			
Maximum Continuous Output Current @240V	12.5	16	21	25	32	42	47.5	A			
Maximum Continuous Output Current @208V	-	16	-	24		-	48.5	A			
GFDI Threshold		1									
Utility Monitoring, Islanding Protection, Country Configurable Thresholds				Yes							
INPUT											
Maximum DC Power @240V	4650	5900	7750	9300	11800	15500	17650	W			
Maximum DC Power @208V	-	5100	- 1	7750		-	15500	W			
Transformer-less, Ungrounded		Yes									
Maximum Input Voltage		480									
Nominal DC Input Voltage		380 400									
Maximum Input Current @240V ⁽²⁾	8.5	10.5	13.5	16.5	20	27	30.5	Adc			
Maximum Input Current @208V ⁽²⁾	-	9	-	13.5	-	Ξ.	27	Adc			
Max. Input Short Circuit Current				45				Adc			
Reverse-Polarity Protection		Yes									
Ground-Fault Isolation Detection				600kΩ Sensitivity							
Maximum Inverter Efficiency	99			S	99.2			%			
CEC Weighted Efficiency			9	99			99 @ 240V 98.5 @ 208V	%			
Nighttime Power Consumption				< 2.5				W			
ADDITIONAL FEATURES											
Supported Communication Interfaces			RS485, Etherne	et, ZigBee (optional), (Cellular (optional)						
Revenue Grade Data, ANSI C12.20				Optional ⁽³⁾							
Rapid Shutdown - NEC 2014 and 2017 690.12			Automatic Rap	id Shutdown upon AC	C Grid Disconnect						
STANDARD COMPLIANCE											
Safety		UL1741	, UL1741 SA, UL1699B	, CSA C22.2, Canadia	n AFCI according to T.	I.L. M-07					
Grid Connection Standards			IEE	E1547, Rule 21, Rule 1-	4 (HI)						
Emissions				FCC Part 15 Class B							
INSTALLATION SPECIFICATIO	ONS										
AC Output Conduit Size / AWG Range		1	" Maximum / 14-6 AW	/G		1" Maximur	n /14-4 AWG				
DC Input Conduit Size / # of Strings / AWG Range		1" Maxi	mum / 1-2 strings / 14	l-6 AWG		1" Maximum / 1-3	strings / 14-6 AWG				
Dimensions with Safety Switch (HxWxD)		17.7 x	14.6 x 6.8 / 450 x 37	0 x 174		21.3 x 14.6 x 7.3	/ 540 x 370 x 185	in / mm			
Weight with Safety Switch	22	/ 10	25.1 / 11.4	26.2	! / 11.9	38.8	/ 17.6	lb / kg			
Noise		<	25			< 50		dBA			
Cooling				Natural Convection	1						
Operating Temperature Range			-13 to +140 /	-25 to +60 ⁽⁴⁾ (-40°F /	-40°C option)(5)			°F / °(
Protection Rating			NEMA	4X (Inverter with Safe	ty Switch)						

For other regional settings please contact SolarEdge support
 A higher current source may be used; the inverter will limit its input current to the values stated
 Revenue grade inverter P/N: SExxxH-US000NNC2
 For power de-rating information refer to: https://www.solaredge.com/sites/default/files/se-temperature-derating-note-na.pdf
 -40 version P/N: SExxxH-US000NNU4

© SolarEdge Technologies, Inc. All rights reserved. SOLAREDGE, the SolarEdge logo, OPTIMIZED BY SOLAREDGE are trademarks or registered trademarks of SolarEdge Technologies, Inc. All other trademarks mentioned herein are trademarks of their respective owners. Date: 03/2019/V01/ENG NAM. Subject to change without notice.

solaredge.com

140011-05	00-03	п-03
-----------	-------	------

RoHS

Power Optimizer

For North America

P320 / P340 / P370 / P400 / P401 / P405 / P485 / P505



PV power optimization at the module-level

- Specifically designed to work with SolarEdge inverters
- / Up to 25% more energy
- Superior efficiency (99.5%)
- Mitigates all types of module mismatch losses, from manufacturing tolerance to partial shading
- Flexible system design for maximum space utilization

- **/** Fast installation with a single bolt
- I Next generation maintenance with modulelevel monitoring
- Meets NEC requirements for arc fault protection (AFCI) and Photovoltaic Rapid Shutdown System (PVRSS)
- / Module-level voltage shutdown for installer and firefighter safety



POWER OPTIMIZE

フ

/ Power Optimizer For North America

P320 / P340 / P370 / P400 / P401 / P405 / P485 / P505

Optimizer model (typical module compatibility)	P320 (for 60-cell modules)	P340 (for high- power 60-cell modules)	P370 (for higher- power 60 and 72- cell modules)	P400 (for 72 & 96-cell modules)	P401 (for high power 60 and 72 cell modules)	P405 (for high- voltage modules)	P485 (for high- voltage modules)	P505 (for higher current modules)		
INPUT										
Rated Input DC Power ⁽¹⁾	320	350	370	400	4()5	485	505	W	
Absolute Maximum Input Voltage (Voc at lowest temperature)	4	8	60	80	60	12	5(2)	83(2)	Vdc	
MPPT Operating Range	8 -	48	8 - 60	8 - 80	8-60	12.5	- 105	12.5 - 83	Vdc	
Maximum Short Circuit Current (Isc)	11 11.02 11 10.1 11.75 11					14	Adc			
Maximum DC Input Current		13.75		12.5	14.65	12	2.5	17.5	Adc	
Maximum Efficiency				99.	5				%	
Weighted Efficiency				98.8				98.6	%	
Overvoltage Category										
OUTPUT DURING OPER	ATION (POW	er optimiz	ER CONNECT	ED TO OPER	RATING SOL	AREDGE INV	'ERTER)			
Maximum Output Current				15					Adc	
Maximum Output Voltage	60 85								Vdc	
OUTPUT DURING STAND	DBY (POWER	OPTIMIZER	DISCONNECT	ED FROM SO	LAREDGE IN	VERTER OR S	SOLAREDGE	INVERTER O	FF)	
Safety Output Voltage per Power Optimizer		1 ± 0.1								
STANDARD COMPLIANC	E									
EMC			FCC Pa	rt15 Class B, IEC61	1000-6-2, IEC6100	D-6-3				
Safety	IEC62109-1 (dass II safety), UL1741									
Material	UL94 V-0, UV Resistant									
RoHS	Yes									
INSTALLATION SPECIFIC	ATIONS									
Maximum Allowed System Voltage				100	0				Vdc	
Compatible inverters			All SolarEo	dge Single Phase	and Three Phase i	nverters				
Dimensions (W x L x H)	129 :	< 153 x 27.5 / 5.1 x	6 x 1.1	129 x 153 x 33.5 / 5.1 x 6 x 1.3	129 x 153 x 29.5 / 5.1 x 6 x 1.16	129 x 159 x 49.5	i / 5.1 x 6.3 x 1.9	129 x 162 x 59 / 5.1 x 6.4 x 2.3	mm / in	
Weight (including cables)		630 / 1.4		750 / 1.7	655 / 1.5	845	/ 1.9	1064 / 2.3	gr/lb	
Input Connector			MC4	4 (3)			Single or dual MC4 ⁽³⁾⁽⁴⁾	MC4 ⁽³⁾		
Input Wire Length		0.16	/ 0.52		0.16 or 0.9 /0.52 or 2.95 ⁽⁵⁾		0.16 / 0.52		m / ft	
Output Wire Type / Connector				Double Insul	ated / MC4					
Output Wire Length	0.9 /	2.95			1.2 /	3.9			m / ft	
Operating Temperature Range ⁽⁶⁾				-40 to +85 /					°C / °F	
Protection Rating				IP68 / NI						
Relative Humidity	<u> </u>			0 - 1					%	
 Rated power of the module at STC will NEC 2017 requires max input voltage b For other connector types please cont For dual version for parallel connection one PV module. When connecting a 	pe not more than 80 tact SolarEdge n of two modules us	v e P485-4NMDMRM.	In the case of an odd n	umber of PV module			version power optim	izer connected to		

(6) For ambient temperature above +85°C / +185°F power de-rating is applied. Refer to Power Optimizers Temperature De-Rating Technical Note for more details

PV System Design Usin SolarEdge Inverter ⁽⁷⁾⁽⁸⁾	/ System Design Using a IarEdge Inverter ⁽⁷⁾⁽⁸⁾		Single Phase HD-Wave Single phase		Three Phase for 277/480V grid	
Minimum String Length	P320, P340, P370, P400, P401	8		10	18	
(Power Optimizers)	P405, P485, P505	6		8	14	
Maximum String Length (Power	laximum String Length (Power Optimizers)		5	25	50 ⁽⁹⁾	
Maximum Power per String		5700 (6000 with SE7600-US - SE11400- US) 5250		6000(10)	12750 ⁽¹¹⁾	W
Parallel Strings of Different Lend	gths or Orientations		١	res		

(7) For detailed string sizing information refer to: http://www.solaredge.com/sites/default/files/string_sizing_na.pdf
(8) It is not allowed to mix P405/P485/P505 with P320/P340/P370/P400/P401 in one string
(9) A string with more than 30 optimizers does not meet NEC rapid shutdown requirements; safety voltage will be above the 30V requirement (0) For 2089 yrid: it is allowed to install up to 6.500W per string when the maximum power difference between each string is 1.000W
(11) For 277/480V grid: it is allowed to install up to 15,000W per string when the maximum power difference between each string is 2,000W

© SolarEdge Technologies Ltd. All rights reserved. SOLAREDGE, the SolarEdge logo, OPTIMIZED BY SOLAREDGE are trademarks or registered trademarks of SolarEdge Technologies, Inc. All other trademarks mentioned herein are trademarks of their respective owners. Date: 08/2021 DS-000044-1.2-NA. Subject to change without notice.

solaredge.com



SERIES 100 UL ROOF MOUNT SYSTEM

SnapNrack Solar Mounting Solutions

The SnapNrack line of solar mounting solutions is designed to reduce total installation costs. The system's technical innovations have been proven to drive down costs and improve installation quality on more than 350 MW of solar installations.

Pitched Roof Arrays Simplified

The SnapNrack Series 100 UL Roof Mount System is an efficient, visually appealing, photovoltaic (PV) module installation system. Series 100 UL is Listed to the UL Standard 2703 for Bonding, meaning that all system components have been Certified by UL for electrical continuity, eliminating the need for additional grounding hardware. The System's components provide an adequate bonding path which has eliminated the need for grounding lugs and washers at each module, and bonding jumpers between splices. The UL 2703 Listing ensures that SnapNrack partners can provide the best in class installations in quality, safety, and efficiency.

- All bonding hardware is fully integrated into the components
- No grounding lugs required for modules
- Rail splices bond rails together, no rail jumpers required
- Proprietary SnapNrack grounding lug snaps in the rail channel, no drilling of rail or reaching for other tools required (One Lug per individual row of modules)
- Class A Fire Rating Type 1 and 2 modules


Patent Pending



Roof System in 4 Simple Steps:

1) Go to the online Series 100 Configuration Tool (configure.snapnrack.com) and select "Yes" for UL 2703 Listed

- 2) Identify Site Conditions (Array Tilt, Building Height, Roof Type, Wind and Snow Loads)
- Build array in the online Configuration Tool and automatically generate a Bill of Materials.
- 4) Place order with your distributor. Purchase material for a single project or order in bulk for additional savings

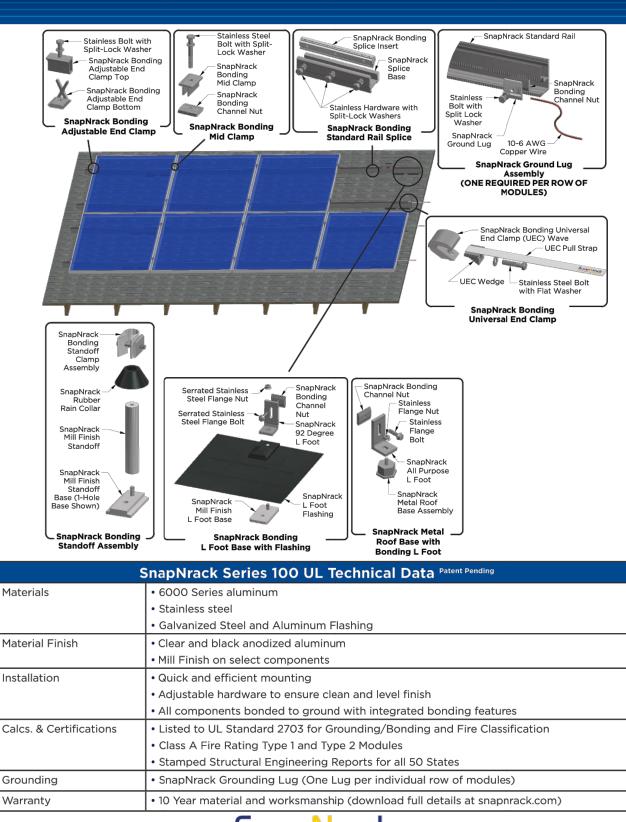



Solar Mounting Solutions
 (877) 732-2860 www.SnapNrack.com
 Printed on recycled paper using soy based inks.
 © 2015 by SnapNrack PV Mounting System. All rights reserved.

SnapNrack[®]

FLASHKIT PRO



FLASHKIT PRO is the complete attachment solution for composition shingle roofs. Featuring Unirac's patented **SHED & SEAL** technology, a weather proof system which provides the ultimate protection against roof leaks. Kitted in 10 packs for maximum convenience, flashings and hardware are available in Mill or Dark finishes. With **FLASH**KIT pro, you have everything you need for a quick, professional installation.



FEATURING O SHED & SEAL TECHNOLOGY

Flashings, lags, continuous slot L-Feet and hardware

Packaged for speed and ease of handling

THE COMPLETE ROOF ATTACHMENT SOLUTION

FOR QUESTIONS OR CUSTOMER SERVICE VISIT UNIRAC.COM OR CALL (505) 248-2702

FLASHKIT PRO **INSTALLATION GUIDE**

FLASHKIT PRO IS THE COMPLETE FLASHING AND ATTACHMENT SOLUTION FOR COMPOSITION ROOFS.



INSTALL **FLASH**KIT PRO FLASHING

INSTALL L-FOOT

PRE-INSTALL

- · Locate roof rafters and snap chalk lines to mark the installation point for each roof attachment.
- Drill a 7/32" pilot hole at each roof attachment. Fill each pilot hole with sealant.

STEP 1 INSTALL **FLASH**KIT PRO FLASHING

• Add a U-shaped bead of roof sealant to the underside of the flashing with the open side of the U pointing down the roof slope. Slide the aluminum flashing underneath the row of shingles directly up slope from the pilot hole as shown. Align the indicator marks on the lower end of the flashing with the chalk lines on the roof to center the raised hole in the flashing over the pilot hole in the roof. When installed correctly, the flashing will extend under the two courses of shingles above the pilot hole.

STEP 2 INSTALL L-FOOT

• Fasten L-foot and Flashing into place by passing the included lag bolt and pre-installed stainless steel-backed EPDM washer through the L-foot EPDM grommet, and the raised hole in the flashing, into the pilot hole in the roof rafter.







ATTACH L-FOOT TO RAIL

• Drive the lag bolt down until the L-foot is held firmly in place. It is normal for the EPDM on the underside of the stainless steel backed EPDM washer to compress and expand beyond the outside edge of the steel washer when the proper torque is applied.

TIP:

- Use caution to avoid over-torqueing the lag bolt if using an impact driver.
- Repeat Steps 1 and 2 at each roof attachment point.

STEP 3 ATTACH I-FOOT TO RAI

- Insert the included 3/8"-16 T-bolts into the lower slot on the Rail (sold separately), spacing the bolts to match the spacing between the roof attachments.
- Position the Rail against the L-Foot and insert the threaded end of the T-Bolt through the continuous slot in the L-Foot. Apply anti-seize to bolt threads to prevent galling of the T-bolt and included 3/8" serrated flange nut. Place the 3/8" flange nut on the T-bolt and finger tighten, Repeat STEP 3 until all L-Feet are secured to the Rail with a T-bolt. Adjust the level and height of the Rail and torque each bolt to 30ft-lbs.

