



76 Stone Wood Ln.  
Sanford N.C. 27330

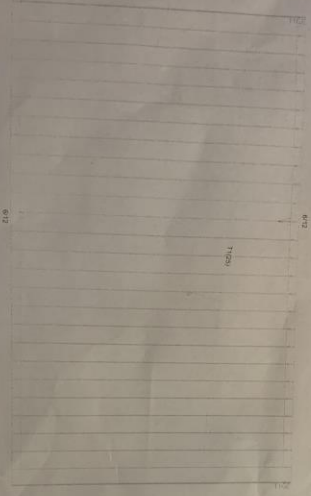

David Peutz  
1 OH, 2 OC  
04.04.00

THIS LAYOUT IS TO BE USED AS A TRUSS PLACEMENT GUIDE ONLY.  
PLEASE REFER TO BUILDING PLANS FOR BUILDING CONSTRUCTION AND DETAILS,  
SUCH AS PLUMBING OR DUCT DROPS.



PROPOSED TRUSS  
CONSTRUCTION  
1. Truss  
2. Truss  
3. Truss  
4. Truss  
5. Truss  
6. Truss  
7. Truss  
8. Truss  
9. Truss  
10. Truss  
11. Truss  
12. Truss  
13. Truss  
14. Truss  
15. Truss  
16. Truss  
17. Truss  
18. Truss  
19. Truss  
20. Truss  
21. Truss  
22. Truss  
23. Truss  
24. Truss  
25. Truss  
26. Truss  
27. Truss  
28. Truss  
29. Truss  
30. Truss  
31. Truss  
32. Truss  
33. Truss  
34. Truss  
35. Truss  
36. Truss  
37. Truss  
38. Truss  
39. Truss  
40. Truss  
41. Truss  
42. Truss  
43. Truss  
44. Truss  
45. Truss  
46. Truss  
47. Truss  
48. Truss  
49. Truss  
50. Truss  
51. Truss  
52. Truss  
53. Truss  
54. Truss  
55. Truss  
56. Truss  
57. Truss  
58. Truss  
59. Truss  
60. Truss  
61. Truss  
62. Truss  
63. Truss  
64. Truss  
65. Truss  
66. Truss  
67. Truss  
68. Truss  
69. Truss  
70. Truss  
71. Truss  
72. Truss  
73. Truss  
74. Truss  
75. Truss  
76. Truss  
77. Truss  
78. Truss  
79. Truss  
80. Truss  
81. Truss  
82. Truss  
83. Truss  
84. Truss  
85. Truss  
86. Truss  
87. Truss  
88. Truss  
89. Truss  
90. Truss  
91. Truss  
92. Truss  
93. Truss  
94. Truss  
95. Truss  
96. Truss  
97. Truss  
98. Truss  
99. Truss  
100. Truss


Peak Truss  
Builders, LLC  
100 West 300 Street, Sanford, NC 27332

Lowe's Sanford (3508)  
3015 S. Homer Blvd.  
Sanford, NC  
27332

Date Quoted:  
Designer:  
Aron Meeks

56 David Peutz  
Stone Wood Ln  
Sanford NC  
27330

Job #  
Q-2102297

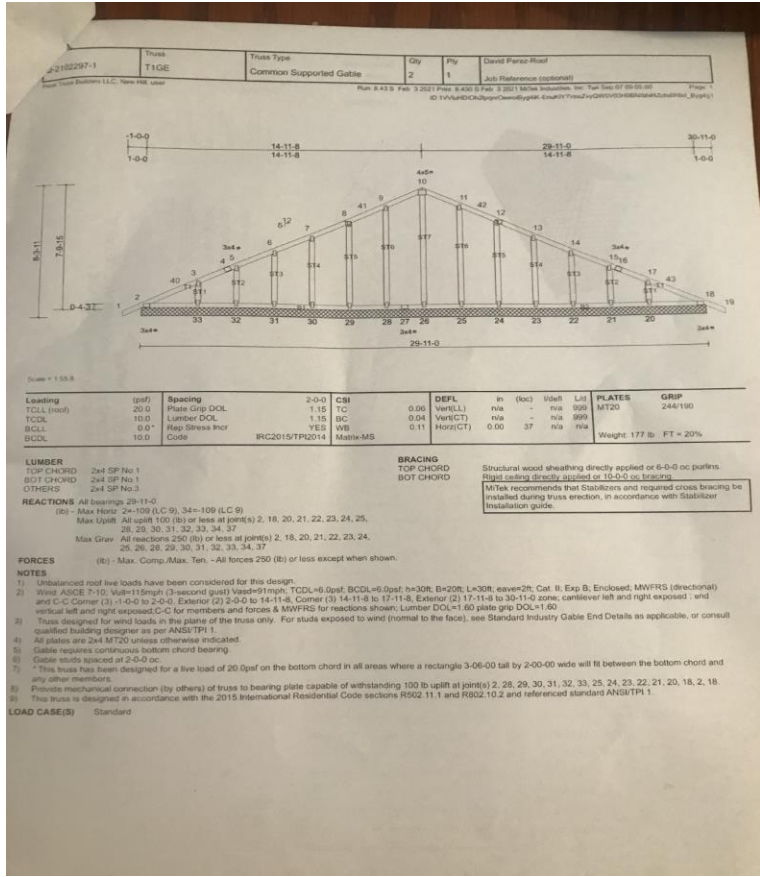

Truss	Truss Type	Qty	Fly	David Perez Roof
TIGE	Common Supported Gable	2	1	Job Reference (optional)

Leading	Spacing	2'-0" CSI	DEFL	in (kx)	Wdth	Lth	PLATES	GRIP	
TCL (hoof)	20.0	Plate Grip DCL	1.15	TC	0.06	Ver(CT)	n/a	n/a	999
TCL	10.0	Lumber DCL	1.15	BC	0.08	Ver(CT)	n/a	n/a	999
BCL	0.0*	Max Stress Incr	YES	WB	0.11	Hor(CT)	0.00	37	n/a
BCCL	10.0	Code	IRC2015/TPQ2014	Metals-MS					

LUMBER		BRACING	
TOP CHORD	2x4 SP No.1	TOP CHORD	Structural wood sheathing directly applied or 6'-0" oc joists.
BOT CHORD	2x4 SP No.1	BOT CHORD	Diagonal bracing directly applied or 16'-0" oc bracing.
OTHERS	2x4 SP No.3		MITek recommends that Stabilizers and required cross bracing be installed during truss erection, in accordance with Stabilizer installation guide.

**REACTIONS** All bearings 29'-11.0"  
 (c) - Max Horiz. 2'-10.0" (LC 9), 34"-10.0" (LC 9)  
 Max Uplift All uplift 100 (lb) or less at joints) 2, 18, 20, 21, 22, 23, 24, 25, 26, 28, 30, 31, 32, 33, 34, 37  
 Max Grav All reactions 250 (lb) or less at joints) 2, 18, 20, 21, 22, 23, 24, 25, 26, 28, 29, 30, 31, 32, 33, 34, 37

- FORCES**  
 (c) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
- NOTES**
- Unbalanced roof live loads have been considered for this design.
  - Wind ASCE 7-10; Vel=115 mph; (3-second gust) Vex=115 mph; TCCL=0.0psf, BCCL=0.0psf, h=30R, B=20R, L=30R, eave=2ft; Cat. II, Exp. B, Enclosed; MWFRS (directional) and C-C Corner (3) 1'-0" to 2'-0", Exterior (2) 2'-0" to 14'-11.8", Corner (3) 14'-11.8" to 17'-11.8", Exterior (2) 17'-11.8" to 30'-11.0" zone; cantilever left and right exposed; and vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DCL=1.60 plate grip DCL=1.60
  - Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSITP1.
  - All plates are 2x4 MT20 unless otherwise indicated.
  - Gable requires continuous bottom chord bearing.
  - Gable studs spaced at 2'-0" oc.
  - This truss has been designed for a live load of 20 Dpsf on the bottom chord in all areas where a rectangle 3'-06-00 tall by 2'-00-00 wide will fit between the bottom chord and any other members.
  - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2, 28, 29, 30, 31, 32, 33, 25, 24, 23, 22, 21, 20, 18, 2, 18.
  - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R502.10.2 and referenced standard ANSITP1.

**LOAD CASE(S)** Standard

