
THIS LAYOUT IS INTENDED FOR THE PURPOSE OF TRUSS LOCATION AND PLACEMENT ONLY. REFER TO THE BUILDING PLANS FOR ACTUAL BUILDING CONSTRUCTION.

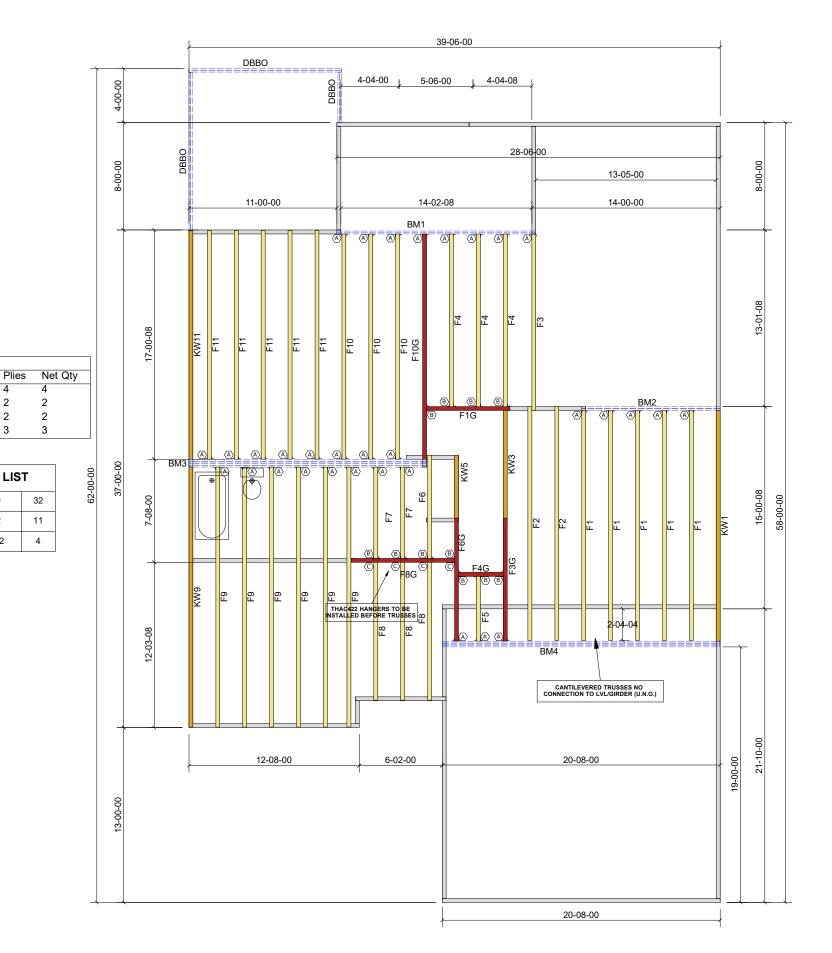

DEDICATED TO QUALITY AND EXCELLENCE 200 EMMETT ROAD DUNN, NORTH CAROLINA 28334 PHONE: 910-892-8400 N.T.S **PLACE** avidson Homes BES 10 PRINCE \Box Ash 10/21/2021 LOT 28587A TOP LIVE LOAD: 40.0 lb/ft² TOP DEAD LOAD: 10.0 lb/ft² BOTTOM LIVE LOAD: BOTTOM DEAD LOAD: 5.0 lb/ft2 - DO NOT CUT OR MODIFY TRUSSES

- TRUSSES ARE SPACED 24" ON CENTER UNLESS OTHERWISE NOTED

- REFER TO THE INDIVIDUAL TRUSS DESIGN DRAWINGS FOR THE LOCATION
OF LATERAL BRACING AND MULTI-PLY CONNECTION REQUIREMENTS.

- PER ANSI TPI 1-2002 THE TRUSS ENGINEER IS RESPONSIBILE FOR TRUSS
TO TRUSS CONNECTIONS AND TRUSS PLY TO PLY CONNECTIONS THIS
TRUSS PLACEMENT PLAN RECOMMENDS TRUSS TO BEAM CONNECTIONS AND TRUSS TO BEAM CONNECTIONS WHICH SHALL BE REVIEWED BY THE
BUILDING DESIGNER. IT IS THE RESPONSIBILITY OF THE BUILDING DESIGNER
TO RESOLVE ALL ROOF FORCES ADEQUATELY TO THE FOUNDATION.

2nd Level Floor Area 1st Level Floor Area

PlotID Length

ВМ2

ВМ1

ВМ4

18-00-00

12-00-00

16-00-00

22-00-00

Products

1-3/4" x 14" LVL BY OTHERS

1-3/4" x 14" LVL BY OTHERS

1-3/4" x 18" LVL BY OTHERS

1-3/4" x 20" LVL BY OTHERS

2

3

HANGER LIST

LUS410

THA422

THAC422

Product