



BM1 Kerto-S LVL 1.750" X 14.000" 3-Ply - PASSED

Level: Level

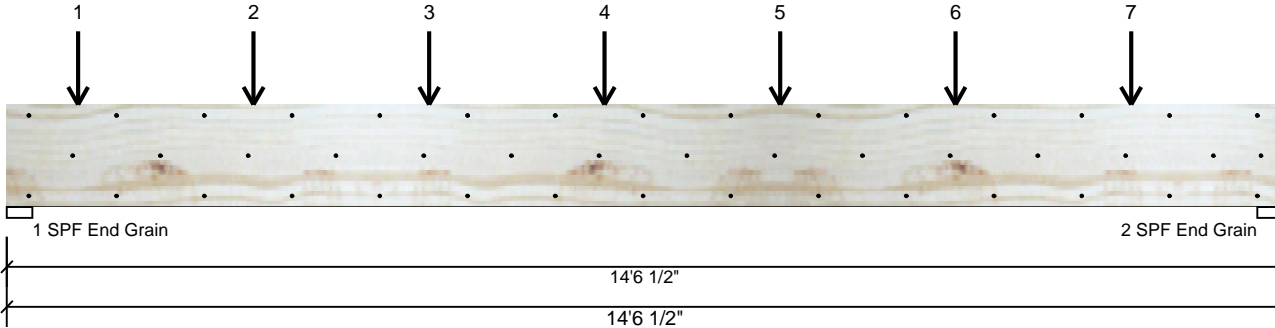

Member Information

Type: Girder	Application: Floor
Plies: 3	Design Method: ASD
Moisture Condition: Dry	Building Code: IBC 2012
Deflection LL: 480	Load Sharing: Yes
Deflection TL: 360	Deck: Not Checked
Importance: Normal - II	
Temperature: Temp <= 100°F	

Reactions UNPATTERNED Ib (Uplift)

Brg	Direction	Live	Dead	Snow	Wind	Const
1	Vertical	0	3528	3410	0	0
2	Vertical	0	3165	3046	0	0

Bearings

Bearing	Length	Dir.	Cap.	React D/L lb	Total	Ld. Case	Ld. Comb.
1 - SPF End Grain	3.500"	Vert	45%	3528 / 3410	6938	L	D+S
2 - SPF End Grain	3.500"	Vert	40%	3165 / 3046	6212	L	D+S

Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	24580 ft-lb	6'9 3/4"	48437 ft-lb	0.507 (51%)	D+S	L
Unbraced	24580 ft-lb	6'9 3/4"	24672 ft-lb	0.996 (100%)	D+S	L
Shear	6207 lb	13'1"	18032 lb	0.344 (34%)	D+S	L
LL Defl inch	0.195 (L/866)	7'2 11/16"	0.352 (L/480)	0.554 (55%)	S	L
TL Defl inch	0.397 (L/426)	7'2 11/16"	0.469 (L/360)	0.845 (85%)	D+S	L

Design Notes

- Provide support to prevent lateral movement and rotation at the end bearings. Lateral support may also be required at the interior bearings by the building code.
- Fasten all plies using 3 rows of 10d Box nails (.128x3") at 12" o.c. Maximum end distance not to exceed 6".
- Refer to last page of calculations for fasteners required for specified loads.
- Girders are designed to be supported on the bottom edge only.
- Top loads must be supported equally by all plies.
- Top must be laterally braced at a maximum of 6'2 1/4" o.c.
- Bottom must be laterally braced at end bearings.
- Lateral slenderness ratio based on single ply width.

ID	Load Type	Location	Trib Width	Side	Dead 0.9	Live 1	Snow 1.15	Wind 1.6	Const. 1.25	Comments
1	Point	0-9-12		Top	918 lb	0 lb	918 lb	0 lb	0 lb	A6
	Bearing Length	0-3-8								
2	Point	2-9-12		Top	695 lb	0 lb	695 lb	0 lb	0 lb	A5
	Bearing Length	0-3-8								

Continued on page 2...

Notes

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

Lumber

- Dry service conditions, unless noted otherwise
- LVL not to be treated with fire retardant or corrosive chemicals

Handling & Installation

- LVL beams must not be cut or drilled
- Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
- Damaged Beams must not be used
- Design assumes top edge is laterally restrained
- Provide lateral support at bearing points to avoid lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

This design is valid until 11/3/2024

Manufacturer Info


Metsä Wood
 301 Merritt 7 Building, 2nd Floor
 Norwalk, CT 06851
 (800) 622-5850
www.metsawood.com/us

Comtech, Inc.
 1001 S. Reilly Road, Suite #639
 Fayetteville, NC
 USA
 28314
 910-864-TRUS



BM1 Kerto-S LVL 1.750" X 14.000" 3-Ply - PASSED

Level: Level

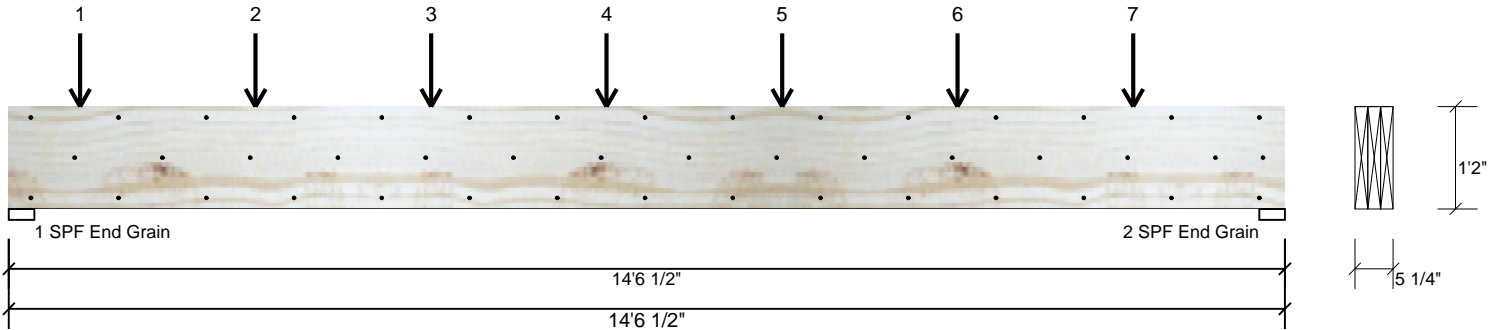

...Continued from page 1

ID	Load Type	Location	Trib Width	Side	Dead 0.9	Live 1	Snow 1.15	Wind 1.6	Const. 1.25	Comments
3	Point	4-9-12		Top	1035 lb	0 lb	1035 lb	0 lb	0 lb	A4
	Bearing Length	0-3-8								
4	Point	6-9-12		Top	1035 lb	0 lb	1035 lb	0 lb	0 lb	A4
	Bearing Length	0-3-8								
5	Point	8-9-12		Top	1035 lb	0 lb	1035 lb	0 lb	0 lb	A4
	Bearing Length	0-3-8								
6	Point	10-9-12		Top	869 lb	0 lb	869 lb	0 lb	0 lb	A3
	Bearing Length	0-3-8								
7	Point	12-9-12		Top	869 lb	0 lb	869 lb	0 lb	0 lb	A3
	Bearing Length	0-3-8								
	Self Weight				16 PLF					

Notes

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

Lumber

1. Dry service conditions, unless noted otherwise
2. LVL not to be treated with fire retardant or corrosive chemicals

Handling & Installation

1. LVL beams must not be cut or drilled
2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
3. Damaged Beams must not be used
4. Design assumes top edge is laterally restrained
5. Provide lateral support at bearing points to avoid lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

This design is valid until 11/3/2024

Manufacturer Info

Metsä Wood
 301 Merritt 7 Building, 2nd Floor
 Norwalk, CT 06851
 (800) 622-5850
www.metsawood.com/us

Comtech, Inc.
 1001 S. Reilly Road, Suite #639
 Fayetteville, NC
 USA
 28314
 910-864-TRUS

