



RESIDENTIAL DESIGN, INC.

4810 GLENMIST CT. | RALEIGH, NC 27612 WWW.RRDCAROLINA.COM The art of transforming your vision into rea

RENAISSANCE RESIDENTIAL DESIGN, INC..
RESERVES THE RIGHT TO MAKE
MODIFICATIONS TO FLOOR PLANS,
DIMENSIONS, MATERIALS, AND
SPECIFICATIONS WITHOUT NOTICE.
THESE DRAWINGS ARE FOR THE
PURPOSE OF CONVEYING AN
ARCHITECTURAL CONCEPT ONLY.

RENAISSANCE RESIDENTIAL DESIGN, INC., HEREBY EXPRESSLY RESERVES ITS COMMON LAW COPYRIGHT AND OTHER PROPERTY RIGHTS IN THESE PLANS. THESE PLANS AND DRAWINGS ARE NOT TO BE REPRODUCED, CHANGED, OR COPIED IN ANY FORM OR MANNER WITHOUT FIRST OBTAINING THE EXPRESS WRITTEN CONSENT OF RENAISSANCE RESIDENTIAL DESIGNS, INC., NOR ARE THEY TO BE ASSIGNED TO ANY THIRD PARTY WITHOUT FIRST OBTAINING SAID WRITTEN PERMISSION AND CONSENT.

J.S.THOMPSON ENGINEERING, INC 606 WADE AVE., SUITE 104 RALEIGH, NC 27605 PHONE: (919) 788-9919

FAX: (919) 789-9921 N.C. LICENSE NO.: C-1733

WESTAN HOMES JAMES

DATE: JANUARY 26, 2019


SCALE: 1/4" = 1'-0"

DRAWN BY: WG ENGINEERED BY: ZHH

REVIEWED BY: MGS

FIRST FLOOR PLAN OPTIONS

A-4.1

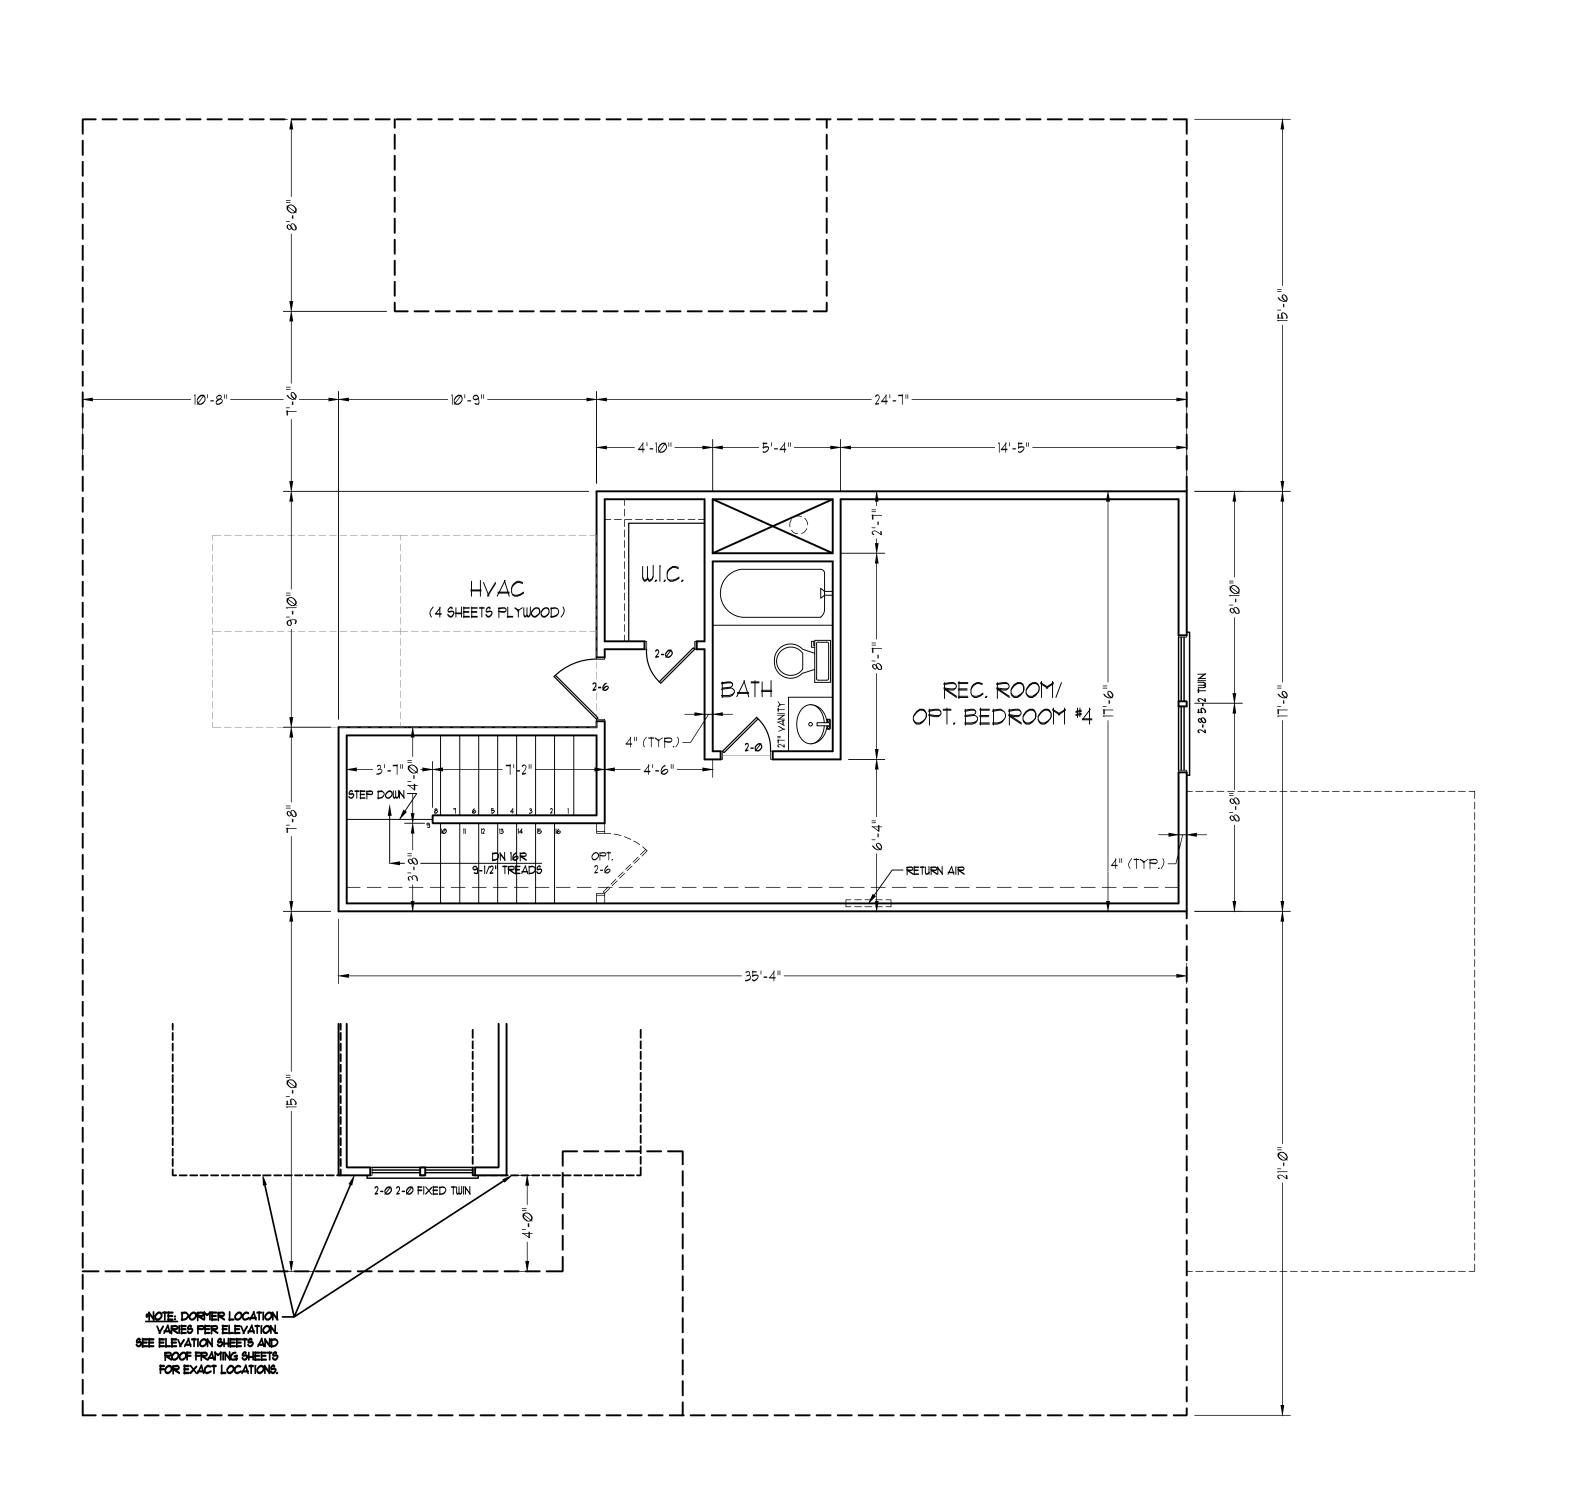



RENAISSANCE | RESIDENTIAL DESIGN, INC. 4810 GLENMIST CT. | RALEIGH, NC 27612

(919) 649-4128 WWW.RRDCAROLINA.COM "The art of transforming your vision into reality

RENAISSANCE RESIDENTIAL DESIGN, INC...
RESERVES THE RIGHT TO MAKE
MODIFICATIONS TO FLOOR PLANS,
DIMENSIONS, MATERIALS, AND
SPECIFICATIONS WITHOUT NOTICE.
THESE DRAWINGS ARE FOR THE
PURPOSE OF CONVEYING AN
ARCHITECTURAL CONCEPT ONLY.

ARCHITECTURAL CONCEPT ONLY.

RENAISSANCE RESIDENTIAL DESIGN, INC.,
HEREBY EXPRESSLY RESERVES ITS
COMMON LAW COPYRIGHT AND OTHER
PROPERTY RIGHTS IN THESE PLANS.
THESE PLANS AND DRAWINGS ARE NOT
TO BE REPRODUCED, CHANGED, OR
COPIED IN ANY FORM OR MANNER
WITHOUT FIRST OBTAINING THE EXPRESS
WRITTEN CONSENT OF RENAISSANCE
RESIDENTIAL DESIGNS, INC., NOR ARE
THEY TO BE ASSIGNED TO ANY THIRD
PARTY WITHOUT FIRST OBTAINING SAID
WRITTEN PERMISSION AND CONSENT.

J.S.THOMPSON ENGINEERING, INC 606 WADE AVE., SUITE 104 RALEIGH, NC 27605 PHONE: (919) 789-9919 FAX: (919) 789-9921 N.C. LICENSE NO.: C-1733



WESTAN HOMES JAMES

DATE: JANUARY 26, 2019

REV.:


SCALE: 1/4" = 1'-0" DRAWN BY: WG

ENGINEERED BY: ZHH

REVIEWED BY: MGS

SECOND FLOOR PLAN

A-5

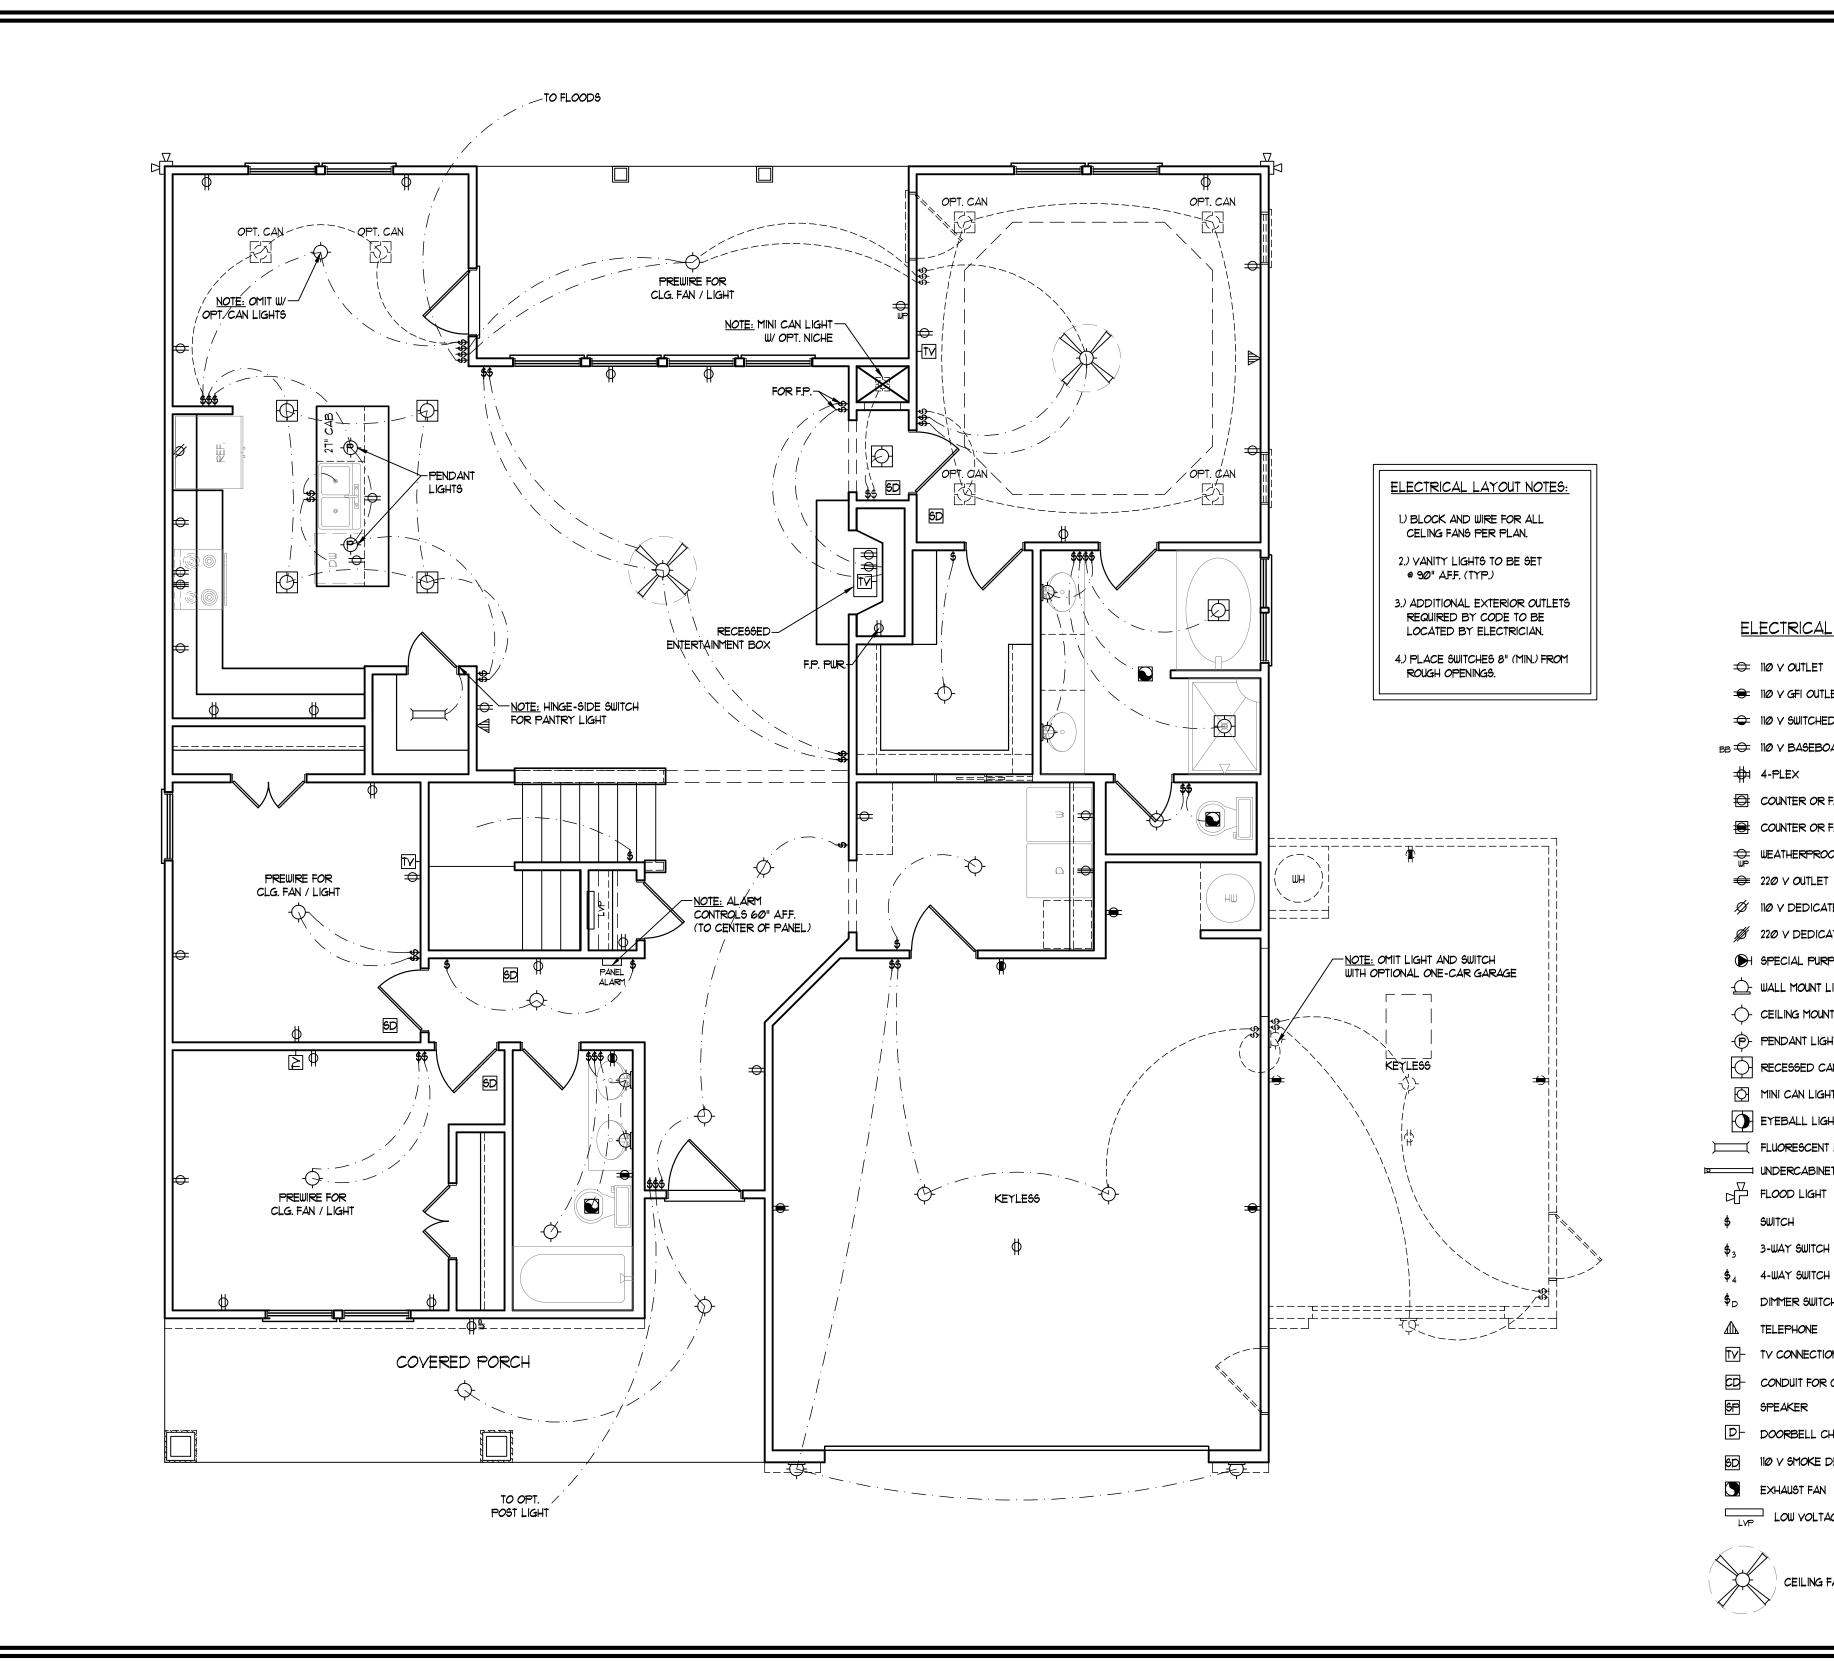



RENAISSANCE RESIDENTIAL DESIGN, INC. 4810 GLENMIST CT. | RALEIGH, NC 27612

(919) 649-4128 WWW.RRDCAROLINA.COM The art of transforming your vision into re

RENAISSANCE RESIDENTIAL DESIGN, INC..
RESERVES THE RIGHT TO MAKE
MODIFICATIONS TO FLOOR PLANS,
DIMENSIONS, MATERIALS, AND
SPECIFICATIONS WITHOUT NOTICE.
THESE DRAWINGS ARE FOR THE
PURPOSE OF CONVEYING AN
ARCHITECTURAL CONCEPT ONLY.

RENAISSANCE RESIDENTIAL DESIGN, INC., HEREBY EXPRESSLY RESERVES ITS COMMON LAW COPYRIGHT AND OTHER PROPERTY RIGHTS IN THESE PLANS. THESE PLANS AND DRAWINGS ARE NOT TO BE REPRODUCED, CHANGED, OR COPIED IN ANY FORM OR MANNER WITHOUT FIRST OBTAINING THE EXPRESS WRITTEN CONSENT OF RENAISSANCE RESIDENTIAL DESIGNS, INC., NOR ARE THEY TO BE ASSIGNED TO ANY THIRD PARTY WITHOUT FIRST OBTAINING SAID WRITTEN PERMISSION AND CONSENT.

j.s.Thompson ENGINEERING, INC 606 WADE AVE., SUITE 104 RALEIGH, NC 27605 PHONE: (919) 789-9919

FAX: (919) 789-9921 N.C. LICENSE NO.: C-1733

WESTAN HOME JAMES

DATE: JANUARY 26, 2019

SCALE: 1/4" = 1'-0" DRAWN BY: WG

ENGINEERED BY: ZHH

REVIEWED BY: MGS

FIRST FLOOR ELECTRICAL PLAN

E-1

ELECTRICAL LEGEND

→ IIØ Y OUTLET

= 110 Y GFI OUTLET

= 110 Y SWITCHED OUTLET

BB 🗢 110 Y BASEBOARD OUTLET

4-PLEX

COUNTER OR FLOOR MOUNTED

COUNTER OR FLOOR MOUNTED 110V GF1

₩EATHERPROOF

⇒ 22Ø ∨ OUTLET

Ø 110 Y DEDICATED CIRCUIT

Ø 22Ø ∨ DEDICATED CIRCUIT

PH SPECIAL PURPOSE (240 V, ETC.)

- WALL MOUNT LIGHT

-O- CEILING MOUNT LIGHT

-P- PENDANT LIGHT

RECESSED CAN LIGHT

MINI CAN LIGHT

EYEBALL LIGHT FLUORESCENT LIGHT

UNDERCABINET LIGH FLOOD LIGHT

\$ SWITCH

\$ 3-WAY SWITCH

\$D DIMMER SWITCH

1 TELEPHONE

TY- TY CONNECTION

CD- CONDUIT FOR COMPONENT WIRING

SPEAKER


D- DOORBELL CHIME

110 V SMOKE DETECTOR

EXHAUST FAN

LOW YOLTAGE PANEL



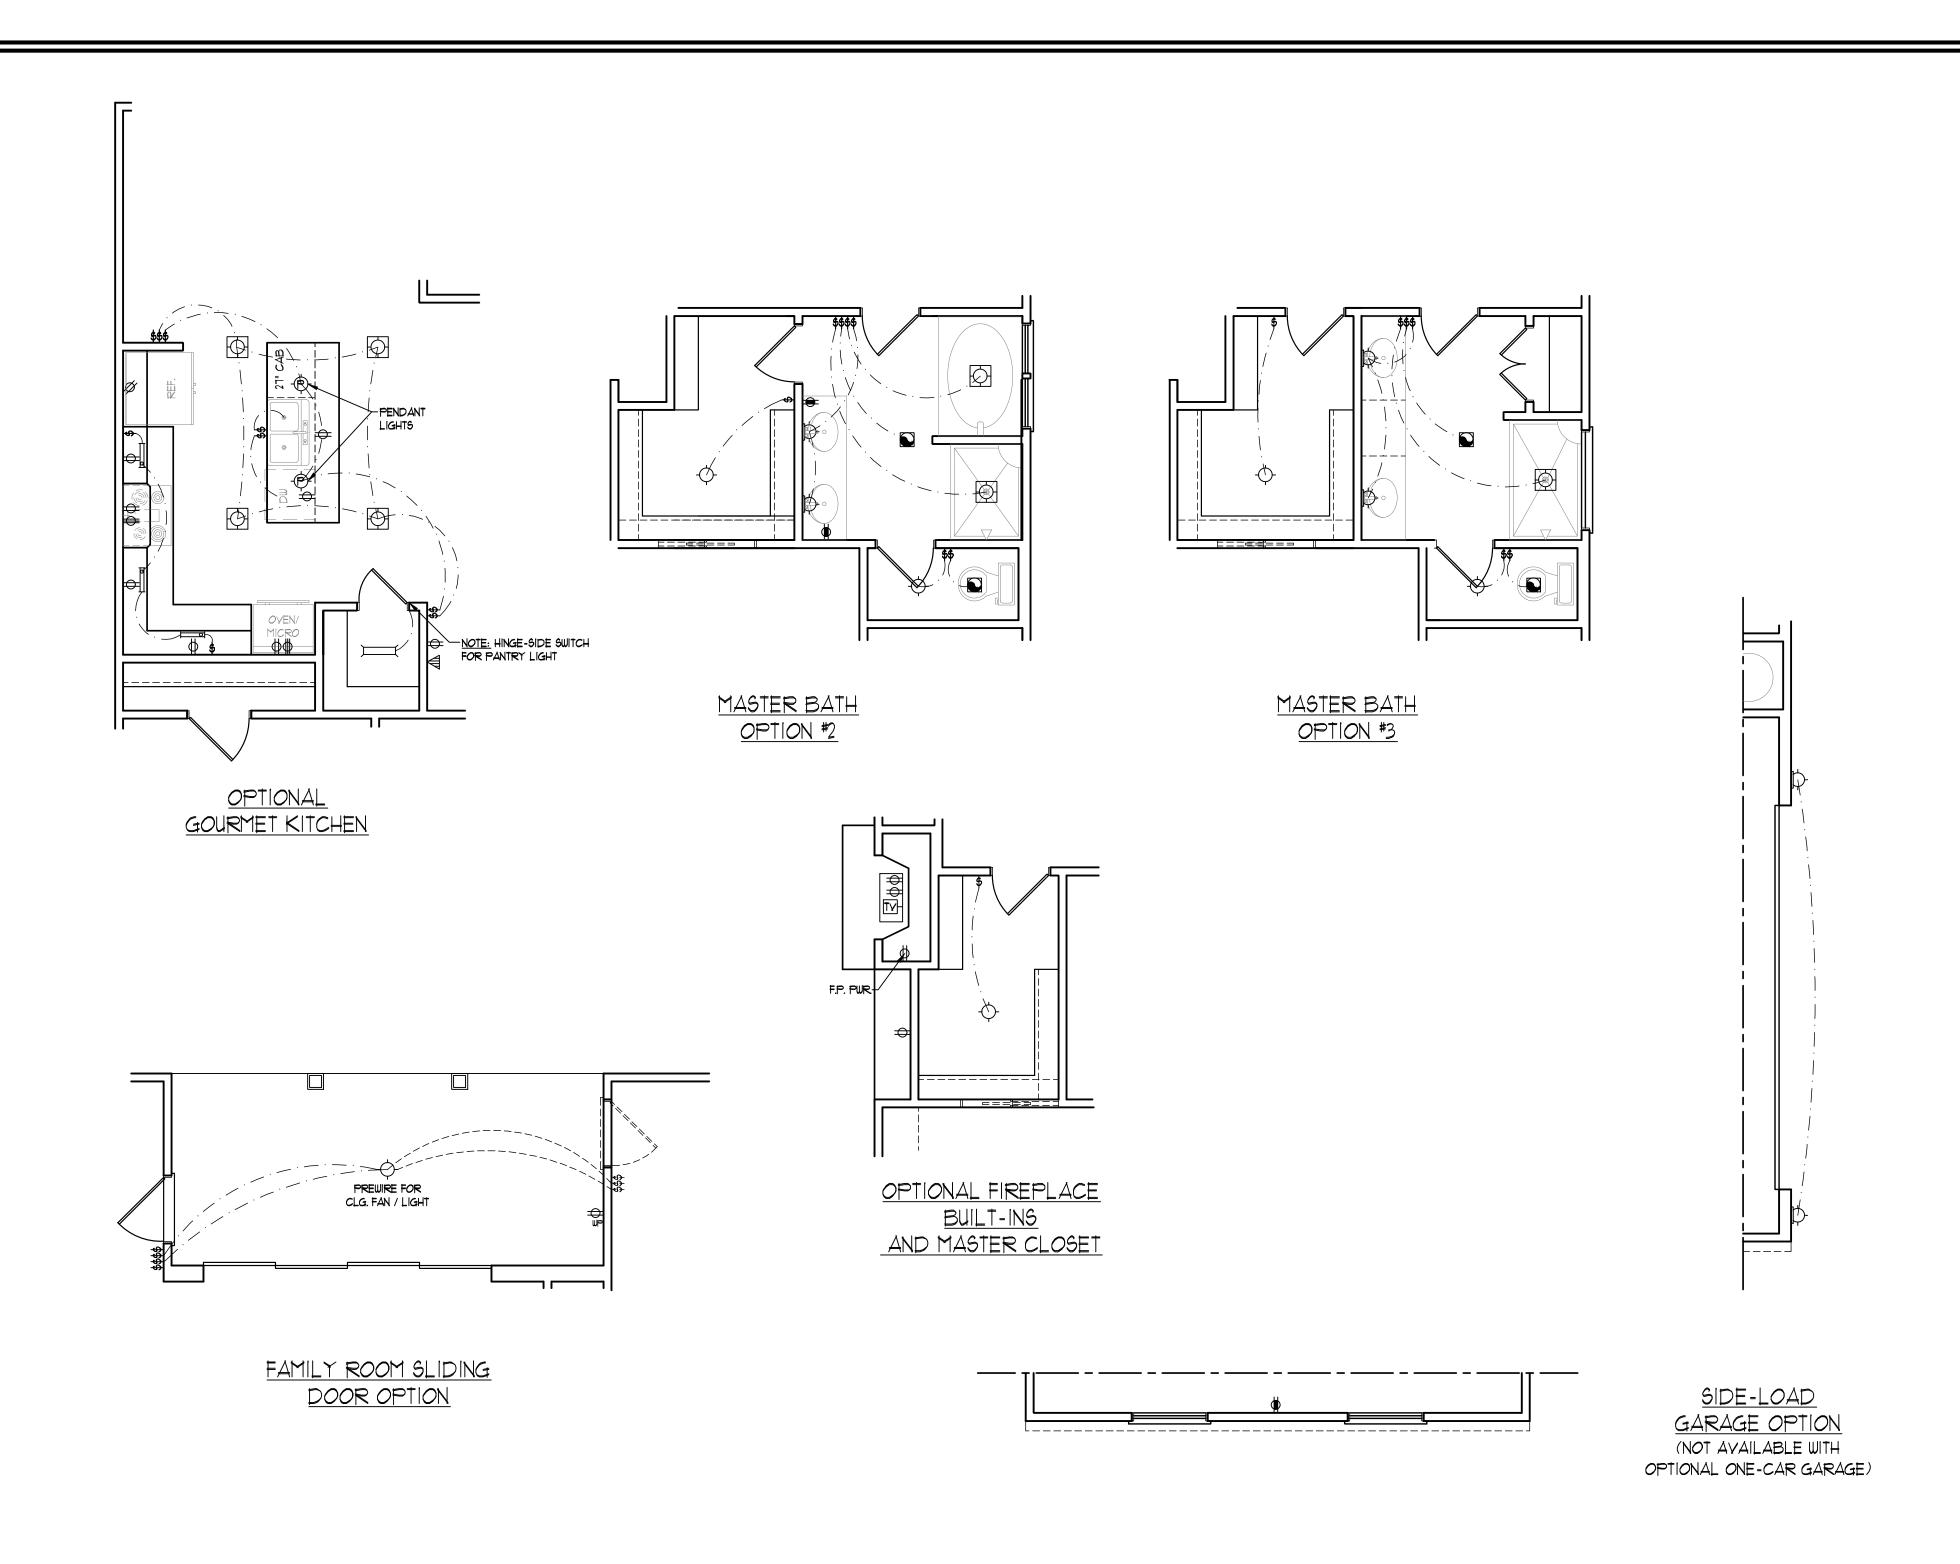



RENAISSANCE RESIDENTIAL DESIGN, INC. 4810 GLENMIST CT. | RALEIGH, NC 27612

> WWW.RRDCAROLINA.COM The art of transforming your vision into rea

RENAISSANCE RESIDENTIAL DESIGN, INC..
RESERVES THE RIGHT TO MAKE
MODIFICATIONS TO FLOOR PLANS,
DIMENSIONS, MATERIALS, AND
SPECIFICATIONS WITHOUT NOTICE.
THESE DRAWINGS ARE FOR THE
PURPOSE OF CONVEYING AN
ARCHITECTURAL CONCEPT ONLY.

RENAISSANCE RESIDENTIAL DESIGN, INC.,
HEREBY EXPRESSLY RESERVES ITS
COMMON LAW COPYRIGHT AND OTHER
PROPERTY RIGHTS IN THESE PLANS.
THESE PLANS AND DRAWINGS ARE NOT
TO BE REPRODUCED, CHANGED, OR
COPIED IN ANY FORM OR MANNER
WITHOUT FIRST OBTAINING THE EXPRESS
WRITTEN CONSENT OF RENAISSANCE
RESIDENTIAL DESIGNS, INC., NOR ARE
THEY TO BE ASSIGNED TO ANY THIRD
PARTY WITHOUT FIRST OBTAINING SAID
WRITTEN PERMISSION AND CONSENT.

J.S.THOMPSON ENGINEERING, INC 606 WADE AVE., SUITE 104 RALEIGH, NC 27605 PHONE: (919) 789-9919 FAX: (919) 789-9921 N.C. LICENSE NO.: C-1733





WESTAN HOMES JAMES

DATE: JANUARY 26, 2019

SCALE: 1/4" = 1'-0"


DRAWN BY: WG


ENGINEERED BY: ZHH

REVIEWED BY: MGS

FF OPTIONS ELECTRICAL PLAN

E-1.1

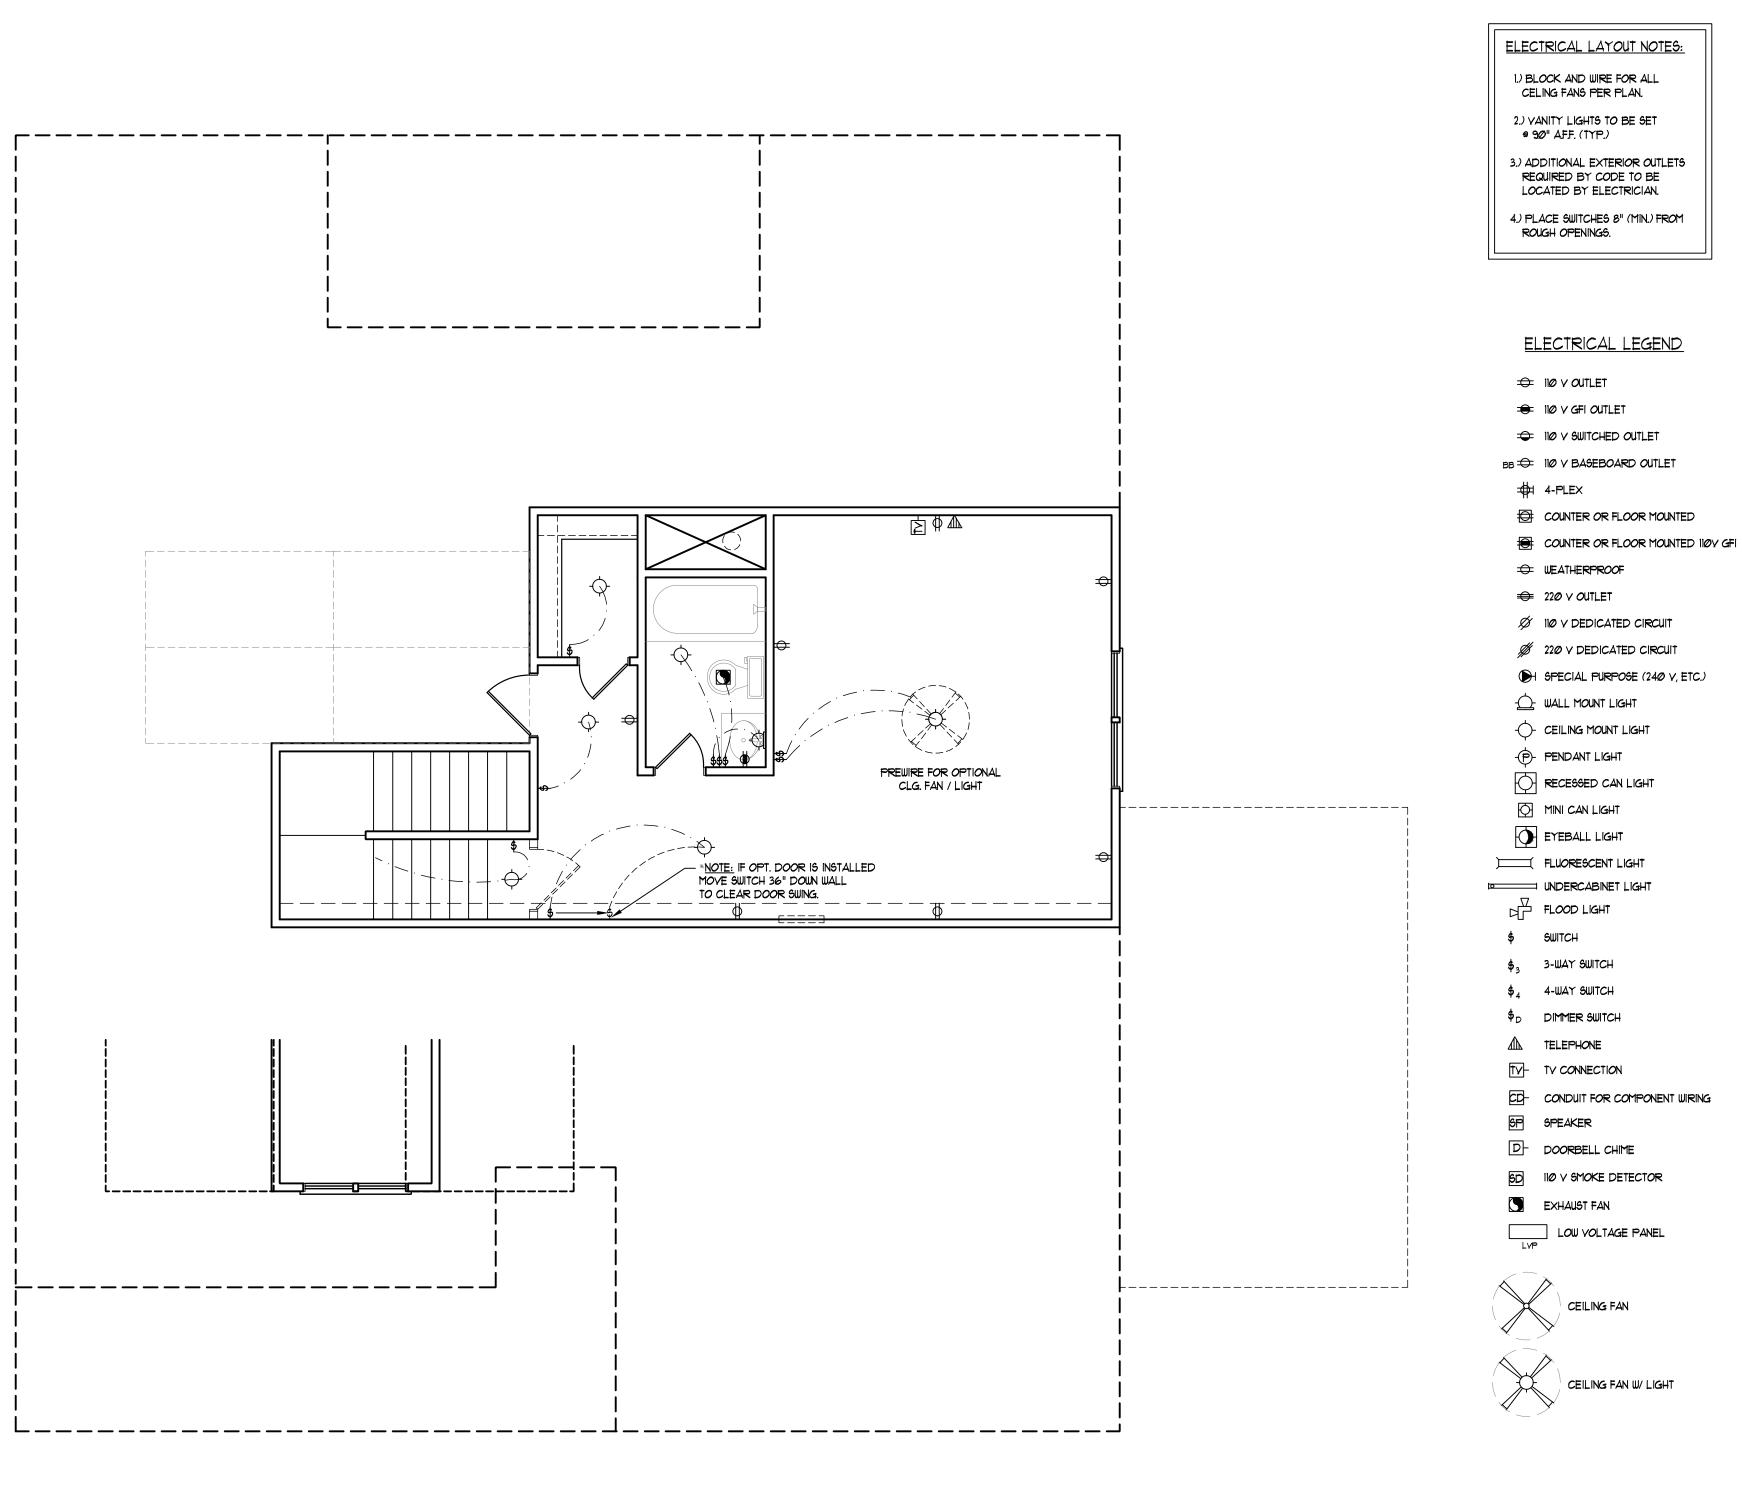



RENAISSANCE RESIDENTIAL DESIGN, INC. 4810 GLENMIST CT. | RALEIGH, NC 27612

(919) 649-4128 WWW.RRDCAROLINA.COM The art of transforming your vision into real

- RENAISSANCE RESIDENTIAL DESIGN, INC..
 RESERVES THE RIGHT TO MAKE
 MODIFICATIONS TO FLOOR PLANS,
 DIMENSIONS, MATERIALS, AND
 SPECIFICATIONS WITHOUT NOTICE.
 THESE DRAWINGS ARE FOR THE
 PURPOSE OF CONVEYING AN
 ARCHITECTURAL CONCEPT ONLY.
- RENAISSANCE RESIDENTIAL DESIGN, INC..
 HEREBY EXPRESSLY RESERVES ITS
 COMMON LAW COPYRIGHT AND OTHER
 PROPERTY RIGHTS IN THESE PLANS.
 THESE PLANS AND DRAWNINGS ARE NOT
 TO BE REPRODUCED, CHANGED, OR
 COPIED IN ANY FORM OR MANNER
 WITHOUT FIRST OBTAINING THE EXPRESS
 WRITTEN CONSENT OF RENAISSANCE
 RESIDENTIAL DESIGNS, INC.. NOR ARE
 THEY TO BE ASSIGNED TO ANY THIRD
 PARTY WITHOUT FIRST OBTAINING SAID
 WRITTEN PERMISSION AND CONSENT.





WESTAN HOMES JAMES

DATE: JANUARY 26, 2019

REV.:


SCALE: 1/4" = 1'-0" DRAWN BY: WG

ENGINEERED BY: ZHH


REVIEWED BY: MGS SECOND FLOOR ELCTRICAL

E-2


PLAN




BATHROOM TRANSOM WINDOW OVER SHOWER DETAIL WITH 9-0 CEILING SCALE: 1/4" = 1'-0"

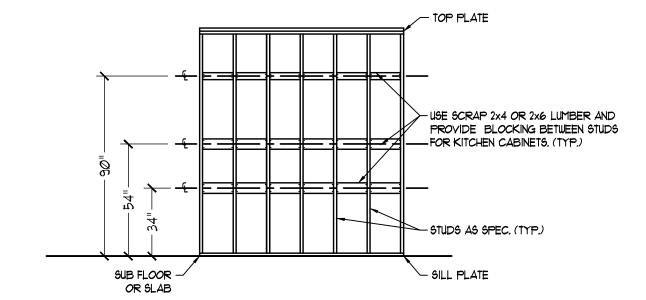


KITCHEN WALL CABINET BLOCKING DETAIL SCALE: 1/4" = 1'-0"

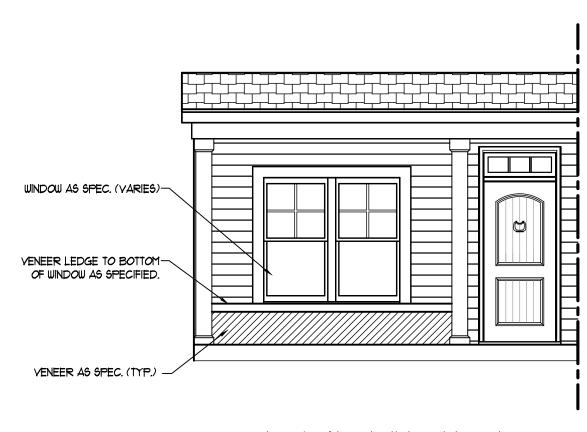

TYPICAL VENEER LEDGE UNDER FRONT WINDOW DETAIL SCALE: 1/4" = 1'-0"

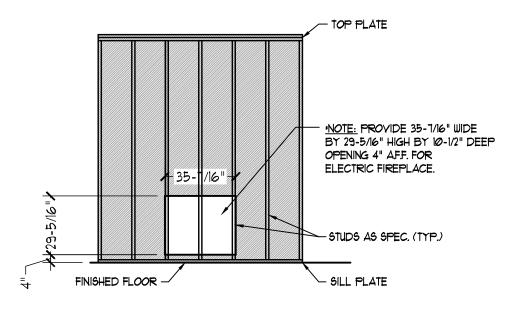

33" ELECTRIC FIREPLACE OPENING DETAIL SCALE: 1/4" = 1'-0"

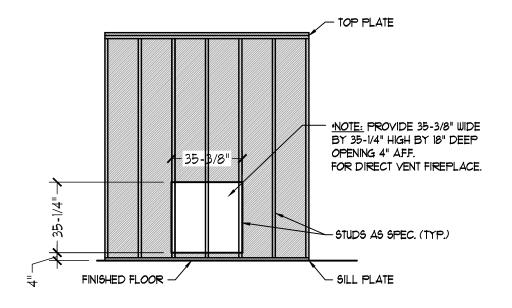

35" DIRECT VENT FIREPLACE OPENING DETAIL SCALE: 1/4" = 1'-0"



RESIDENTIAL DESIGN, INC. 4810 GLENMIST CT. | RALEIGH, NC 27612

> WWW.RRDCAROLINA.COM The art of transforming your vision into real

RENAISSANCE RESIDENTIAL DESIGN, INC..
RESERVES THE RIGHT TO MAKE
MODIFICATIONS TO FLOOR PLANS,
DIMENSIONS, MATERIALS, AND
SPECIFICATIONS WITHOUT NOTICE.
THESE DRAWINGS ARE FOR THE
PURPOSE OF CONVEYING AN
ARCHITECTURAL CONCEPT ONLY.

RENAISSANCE RESIDENTIAL DESIGN, INC..
HEREBY EXPRESSLY RESERVES ITS
COMMON LAW COPYRIGHT AND OTHER
PROPERTY RIGHTS IN THESE PLANS.
THESE PLANS AND DRAWNINGS ARE NOT
TO BE REPRODUCED, CHANGED, OR
COPIED IN ANY FORM OR MANNER
WITHOUT FIRST OBTAINING THE EXPRESS
WRITTEN CONSENT OF RENAISSANCE
RESIDENTIAL DESIGNS, INC.. NOR ARE
THEY TO BE ASSIGNED TO ANY THIRD
PARTY WITHOUT FIRST OBTAINING SAID
WRITTEN PERMISSION AND CONSENT.

J.S.THOMPSON ENGINEERING, INC 606 WADE AVE., SUITE 104

RALEIGH, NC 27605 PHONE: (919) 789-9919 FAX: (919) 789-9921 N.C. LICENSE NO.: C-1733



WESTAN HOMES JAMES

DATE: JANUARY 26, 2019

REV.:


SCALE: 1/4" = 1'-0"


DRAWN BY: WG ENGINEERED BY: ZHH


REVIEWED BY: MGS

STANDARD DETAILS

D-1

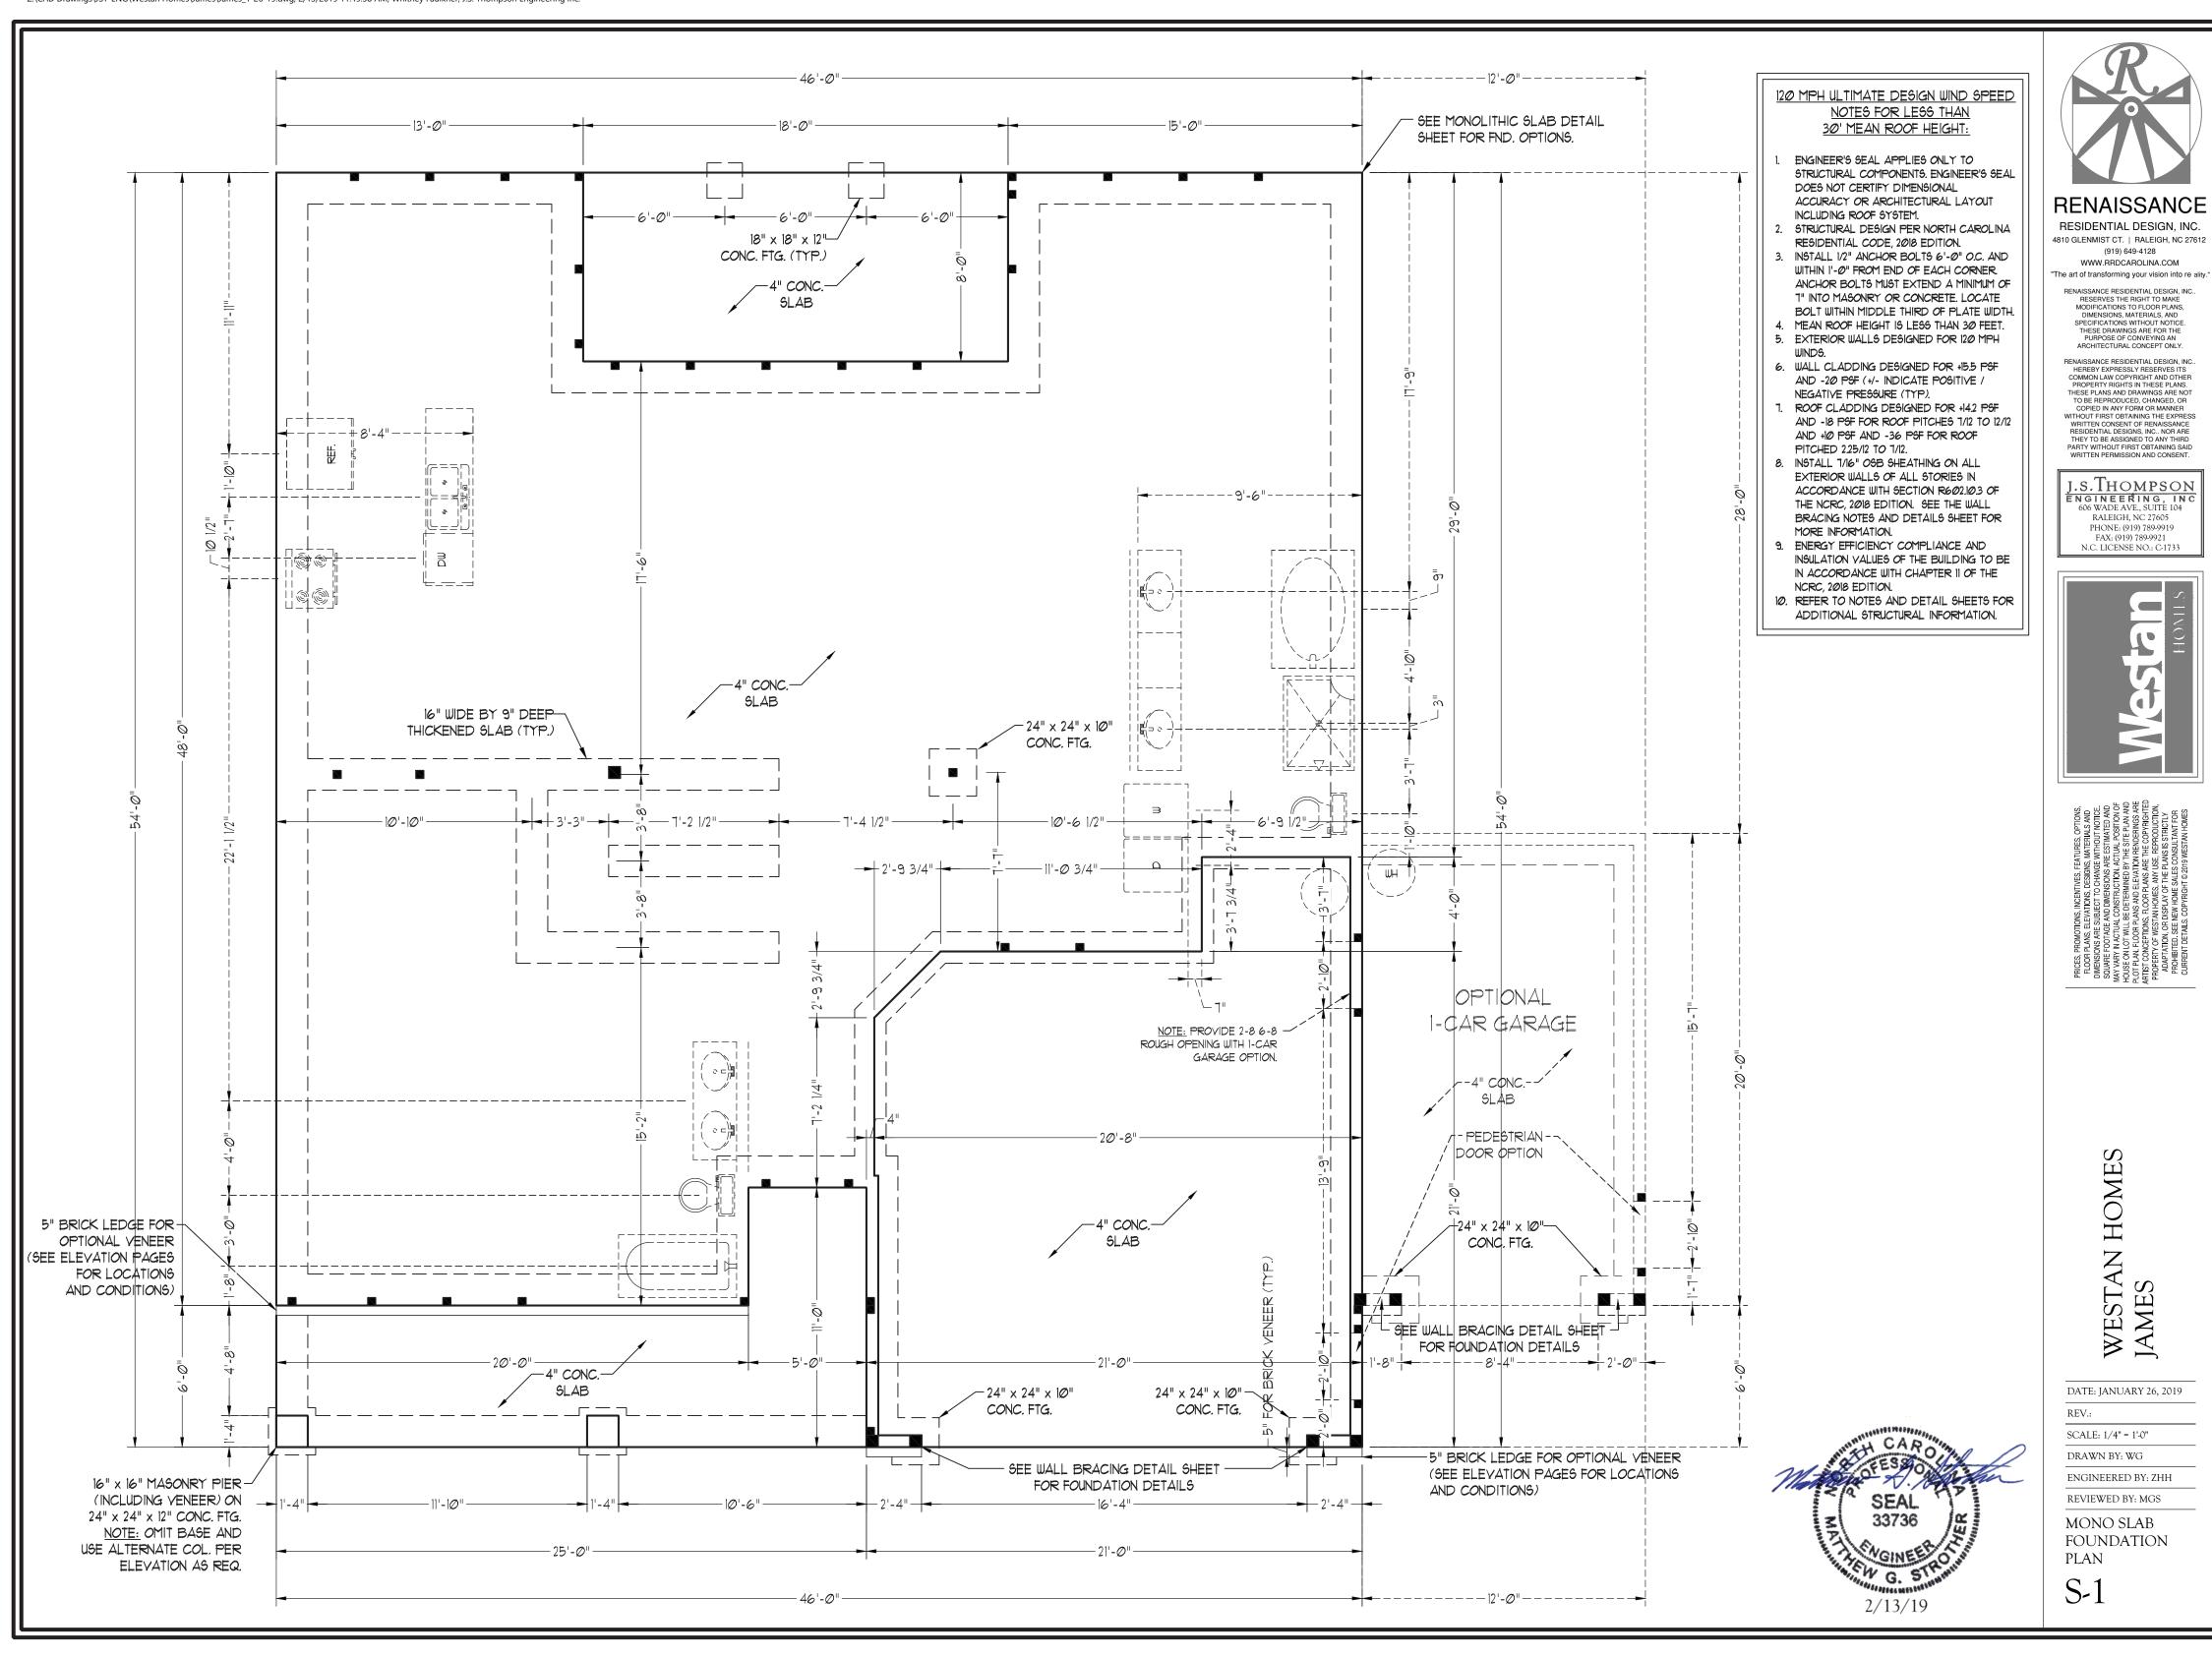

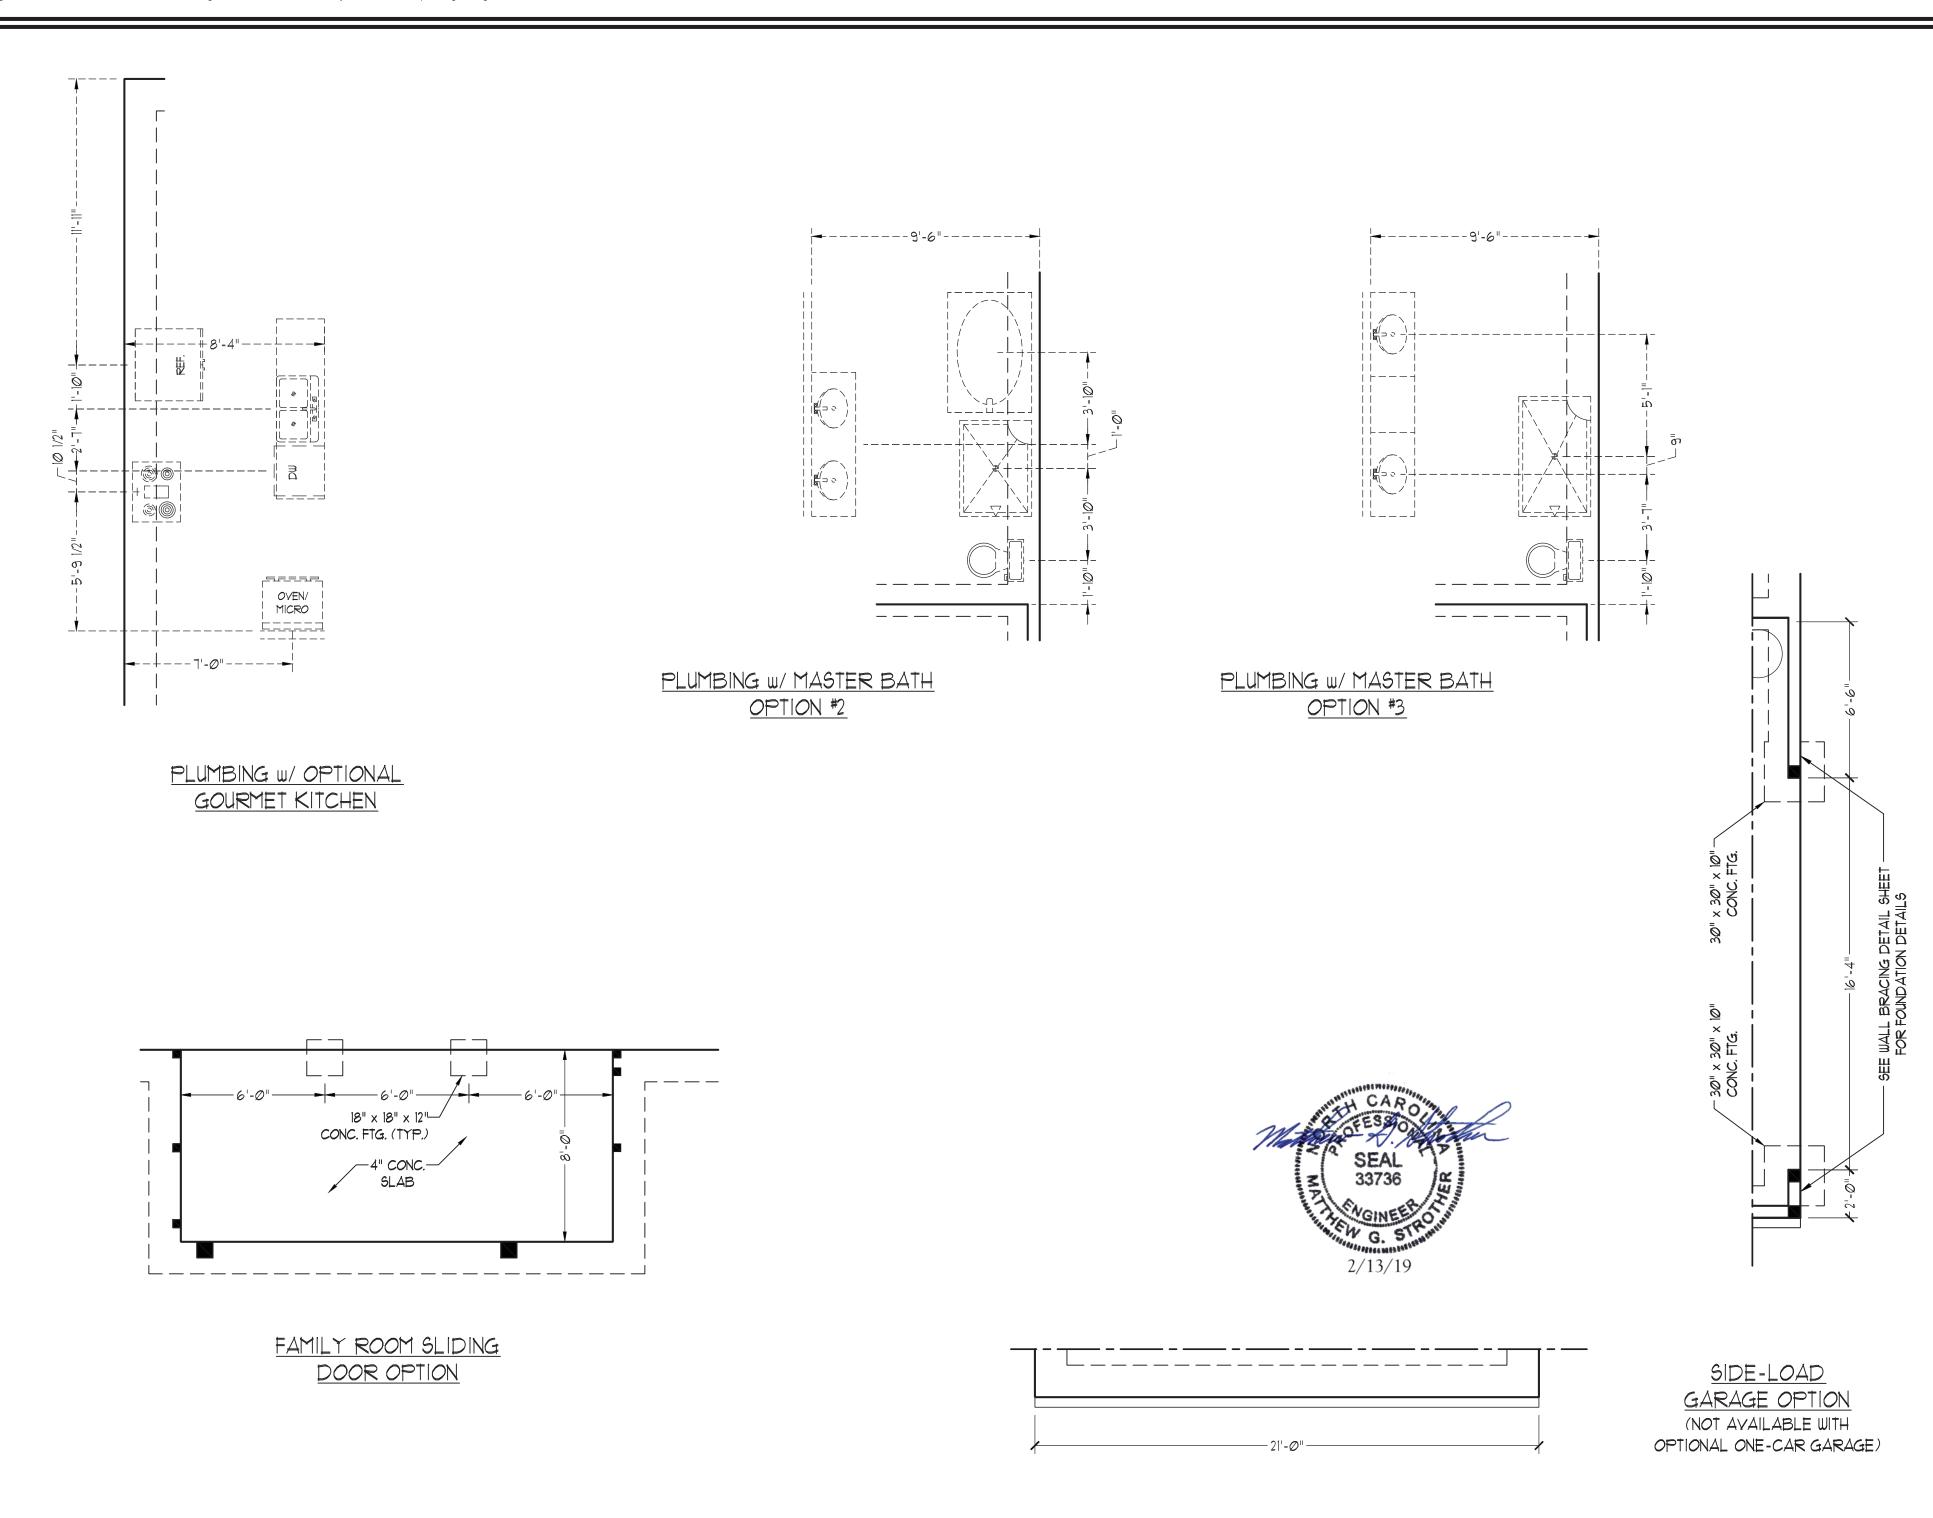



RENAISSANCE RESIDENTIAL DESIGN, INC.

4810 GLENMIST CT. | RALEIGH, NC 27612 (919) 649-4128 WWW.RRDCAROLINA.COM

"The art of transforming your vision into re aling RENAISSANCE RESIDENTIAL DESIGN, INC... RESERVES THE RIGHT TO MAKE MODIFICATIONS TO FLOOR PLANS, DIMENSIONS, MATERIALS, AND SPECIFICATIONS WITHOUT NOTICE. THESE DRAWINGS ARE FOR THE PURPOSE OF CONVEYING AN ARCHITECTURAL CONCEPT ONLY.

RENAISSANCE RESIDENTIAL DESIGN, INC.,
HEREBY EXPRESSLY RESERVES ITS
COMMON LAW COPYRIGHT AND OTHER
PROPERTY RIGHTS IN THESE PLANS.
THESE PLANS AND DRAWINGS ARE NOT
TO BE REPRODUCED, CHANGED, OR
COPIED IN ANY FORM OR MANNER
WITHOUT FIRST OBTAINING THE EXPRESS
WRITTEN CONSENT OF RENAISSANCE
RESIDENTIAL DESIGNS, INC., NOR ARE
THEY TO BE ASSIGNED TO ANY THIRD
PARTY WITHOUT FIRST OBTAINING SAID
WRITTEN PERMISSION AND CONSENT.

J.S.THOMPSON ENGINEERING, INC 606 WADE AVE., SUITE 104 RALEIGH, NC 27605 PHONE: (919) 789-9919 FAX: (919) 789-9921 N.C. LICENSE NO.: C-1733



ES, PROMOTIONS, INCENTIVES, FEATURES, OPTIONS, OOR PLANS, ELEVATTONS, DESIGNS, MATERIALS AND NISNOSNOS ARE SUBJECT TO CHANGE WITHOUT NOTICE. ARE POOT AGE AND DIMENSIONS ARE ESTIMATED AND MARY IN ACTUAL CONSTRUCTION, ACTUAL POSITION OF EON LOT WILL BE DETERMINED BY THE SITE PLAN AND PLAN, ELOOR PLANS AND ELEVATTON REDDERINGS ARE CONCEPTIONS, FLOOR PLANS ARE THE COPYRIGHTED ENTRY OF WESTAN HOMES. ANY USE, REPRODUCTION, APPTATION, OR DISPLAY OF THE PLANS IS STRICTLY AMPTATION, OR DISPLAY OF THE PLANS IS STRICTLY AMPTATION, DETAILS, COPYRIGHT © 2019 WESTAN HOMES.

WESTAN HOMES JAMES

DATE: JANUARY 26, 2019

REV.:

SCALE: 1/4" = 1'-0"


DRAWN BY: WG


ENGINEERED BY: ZHH

REVIEWED BY: MGS


MONO SLAB FOUNDATION PLAN OPTIONS

S-1.1

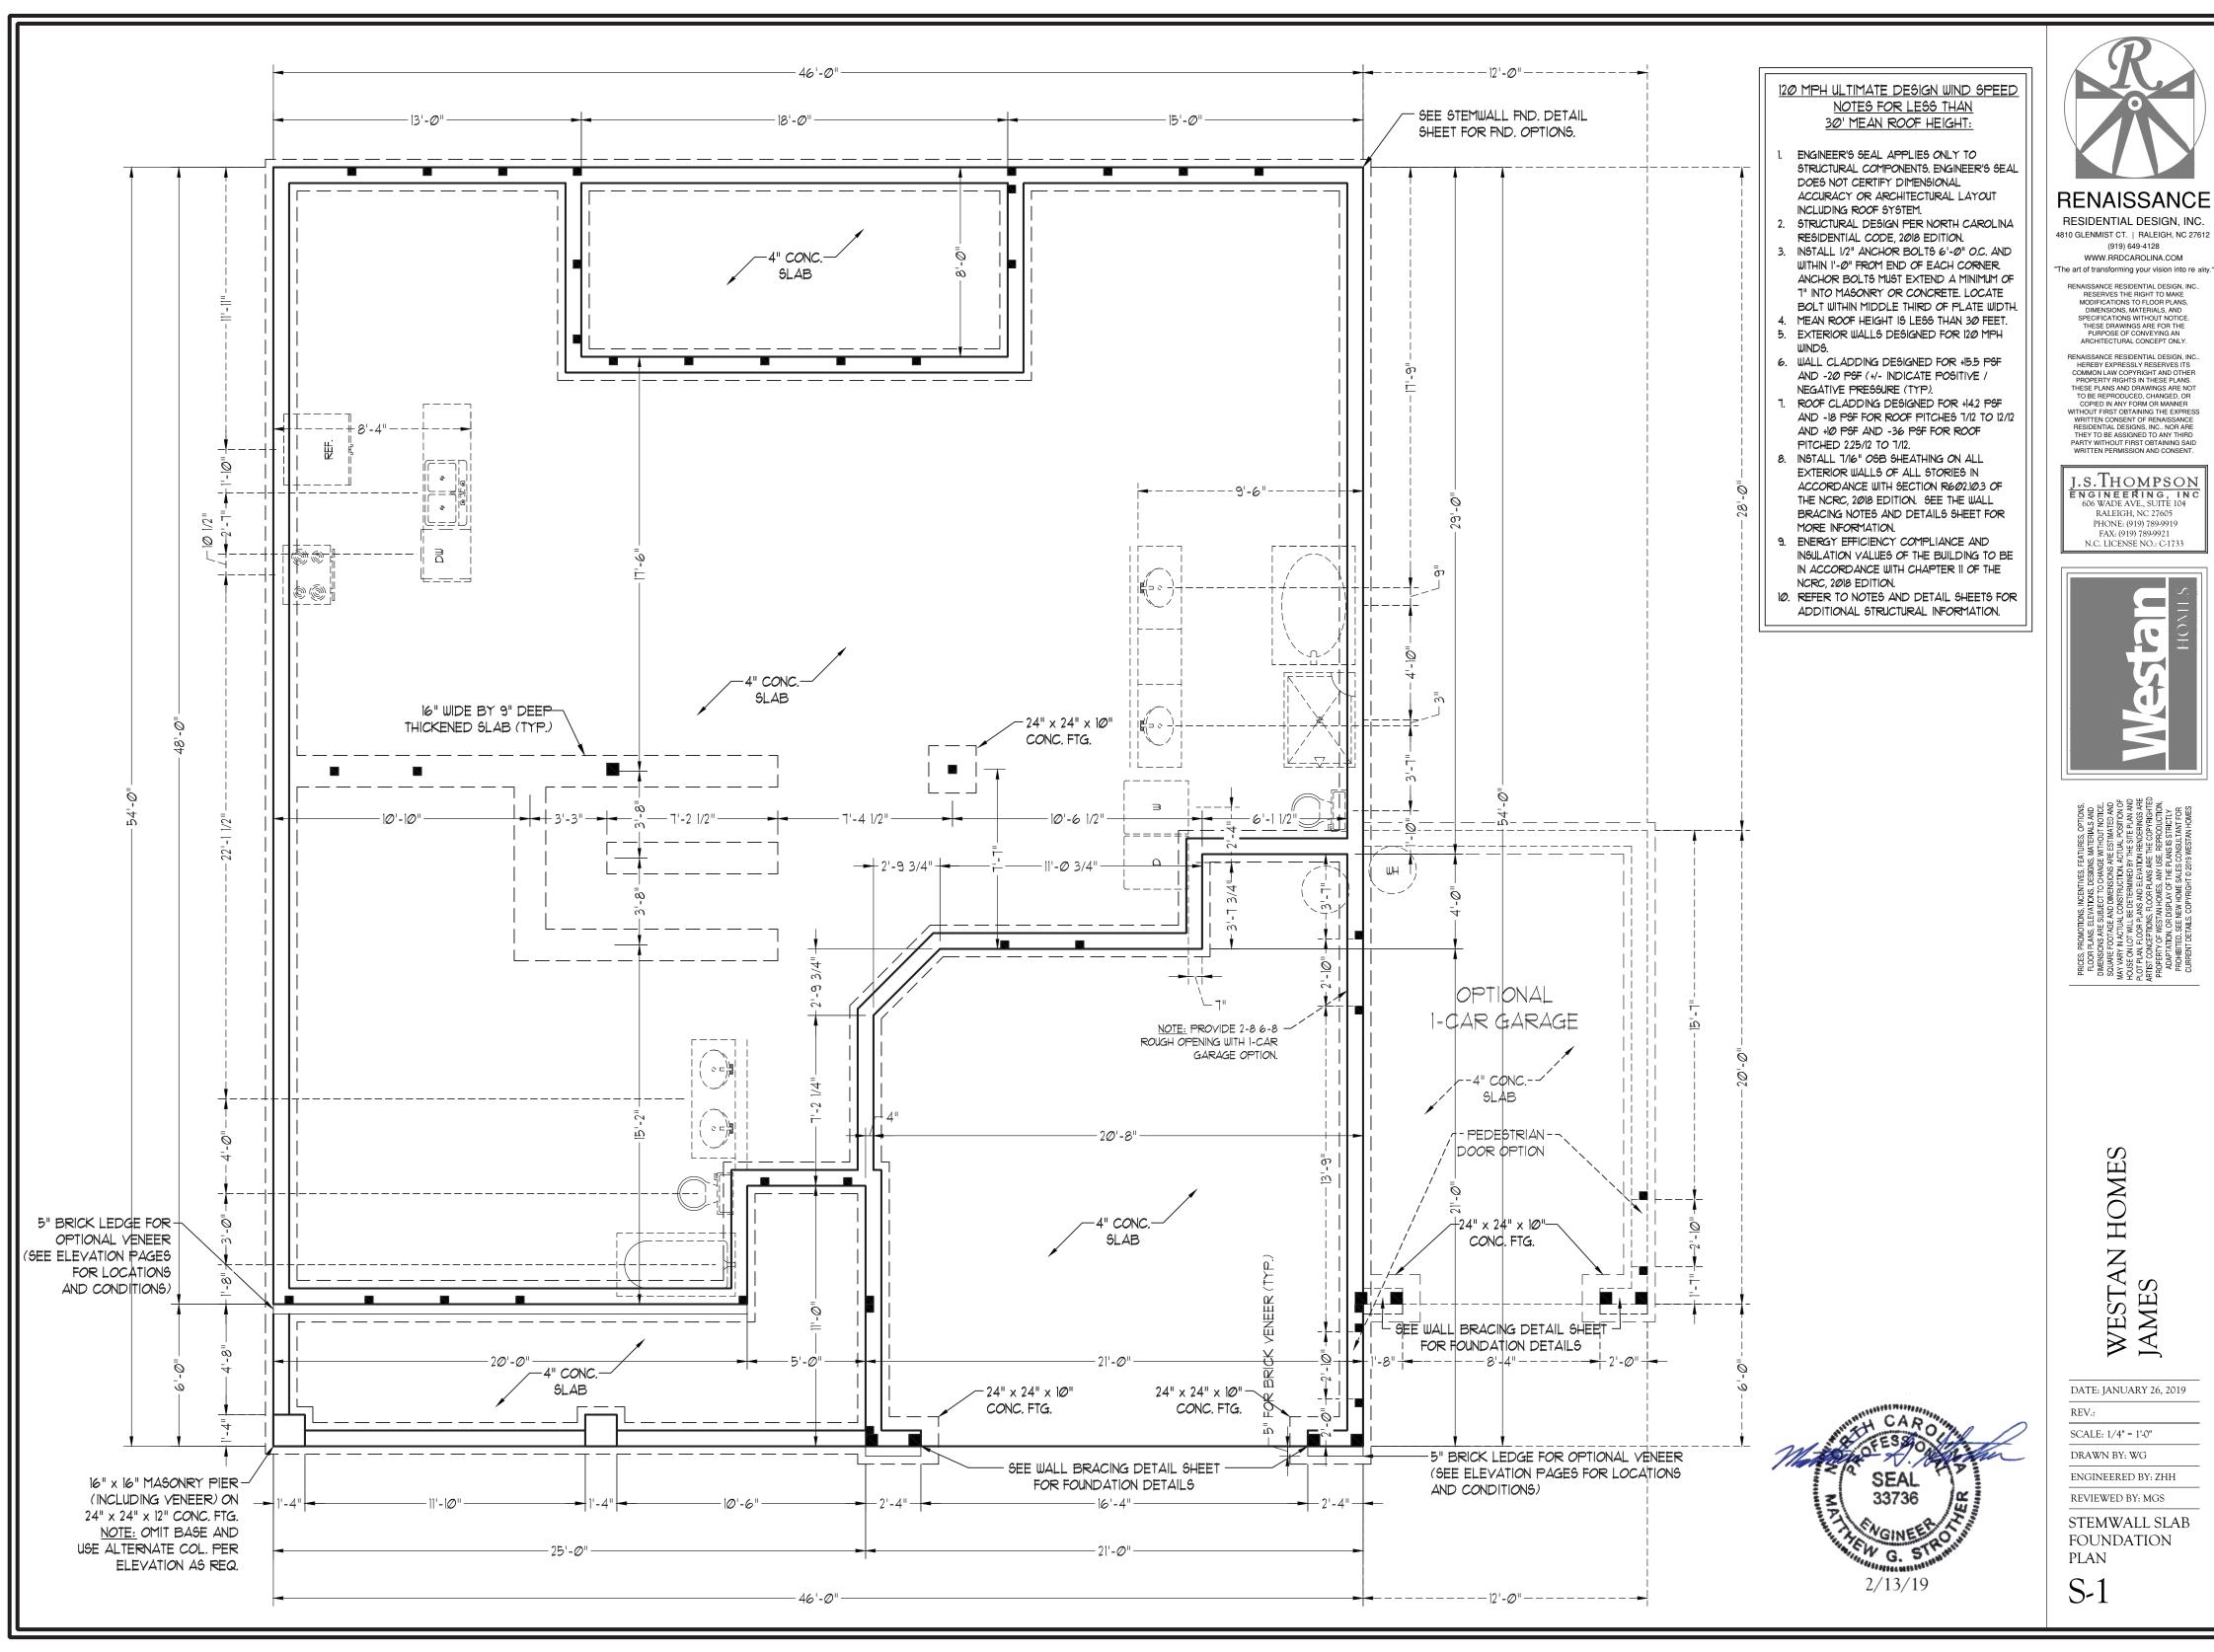


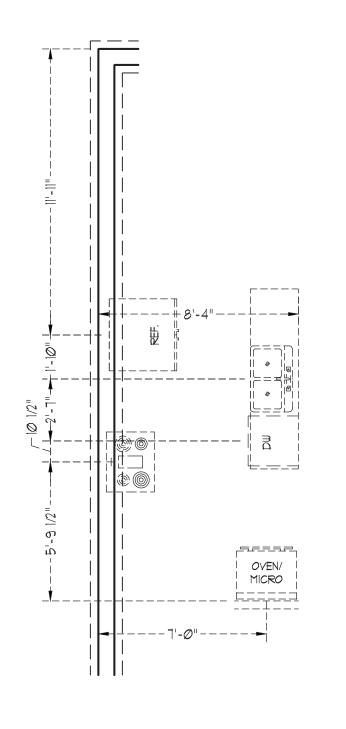


PLUMBING W/ OPTIONAL GOURMET KITCHEN

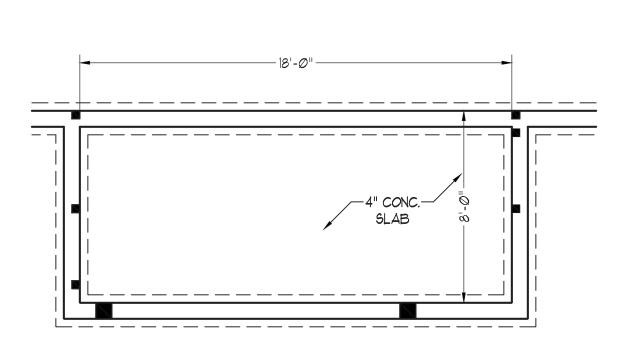


FAMILY ROOM SLIDING DOOR OPTION

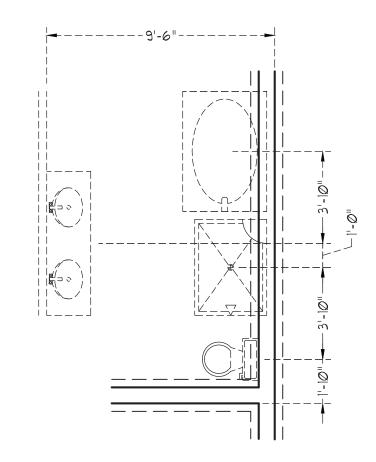


PLUMBING W/ MASTER BATH OPTION #2

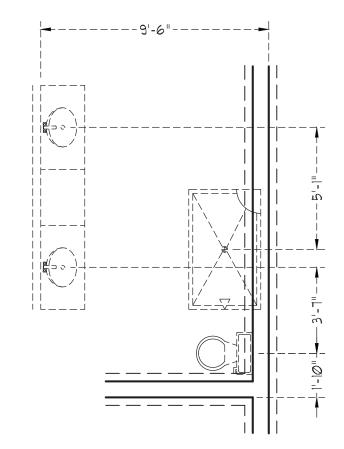

PLUMBING W/ MASTER BATH OPTION #3

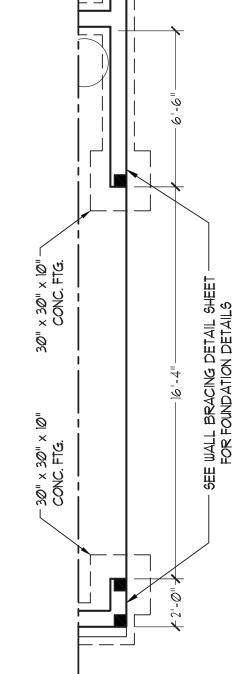



SIDE-LOAD GARAGE OPTION (NOT AVAILABLE WITH

2/13/19

REV.: OPTIONAL ONE-CAR GARAGE) SCALE: 1/4" = 1'-0" DRAWN BY: WG

> ENGINEERED BY: ZHH REVIEWED BY: MGS

DATE: JANUARY 26, 2019

STEMWALL SLAB FOUNDATION PLAN OPTIONS

S-1.1



RESIDENTIAL DESIGN, INC.

4810 GLENMIST CT. | RALEIGH, NC 27612 (919) 649-4128 WWW.RRDCAROLINA.COM


"The art of transforming your vision into re ality RENAISSANCE RESIDENTIAL DESIGN, INC...
RESERVES THE RIGHT TO MAKE
MODIFICATIONS TO FLOOR PLANS,
DIMENSIONS, MATERIALS, AND
SPECIFICATIONS WITHOUT NOTICE.
THESE DRAWINGS ARE FOR THE
PURPOSE OF CONVEYING AN
ARCHITECTURAL CONCEPT ONLY.

RENAISSANCE RESIDENTIAL DESIGN, INC.,
HEREBY EXPRESSLY RESERVES ITS
COMMON LAW COPYRIGHT AND OTHER
PROPERTY RIGHTS IN THESE PLANS.
THESE PLANS AND DRAWINGS ARE NOT
TO BE REPRODUCED, CHANGED, OR
COPIED IN ANY FORM OR MANNER
WITHOUT FIRST OBTAINING THE EXPRESS
WRITTEN CONSENT OF RENAISSANCE
RESIDENTIAL DESIGNS, INC., NOR ARE
THEY TO BE ASSIGNED TO ANY THIRD
PARTY WITHOUT FIRST OBTAINING SAID
WRITTEN PERMISSION AND CONSENT.

J.S.THOMPSON ENGINEERING, INC 606 WADE AVE., SUITE 104 RALEIGH, NC 27605 PHONE: (919) 789-9919 FAX: (919) 789-9921 N.C. LICENSE NO.: C-1733



WESTAN HOMES JAMES

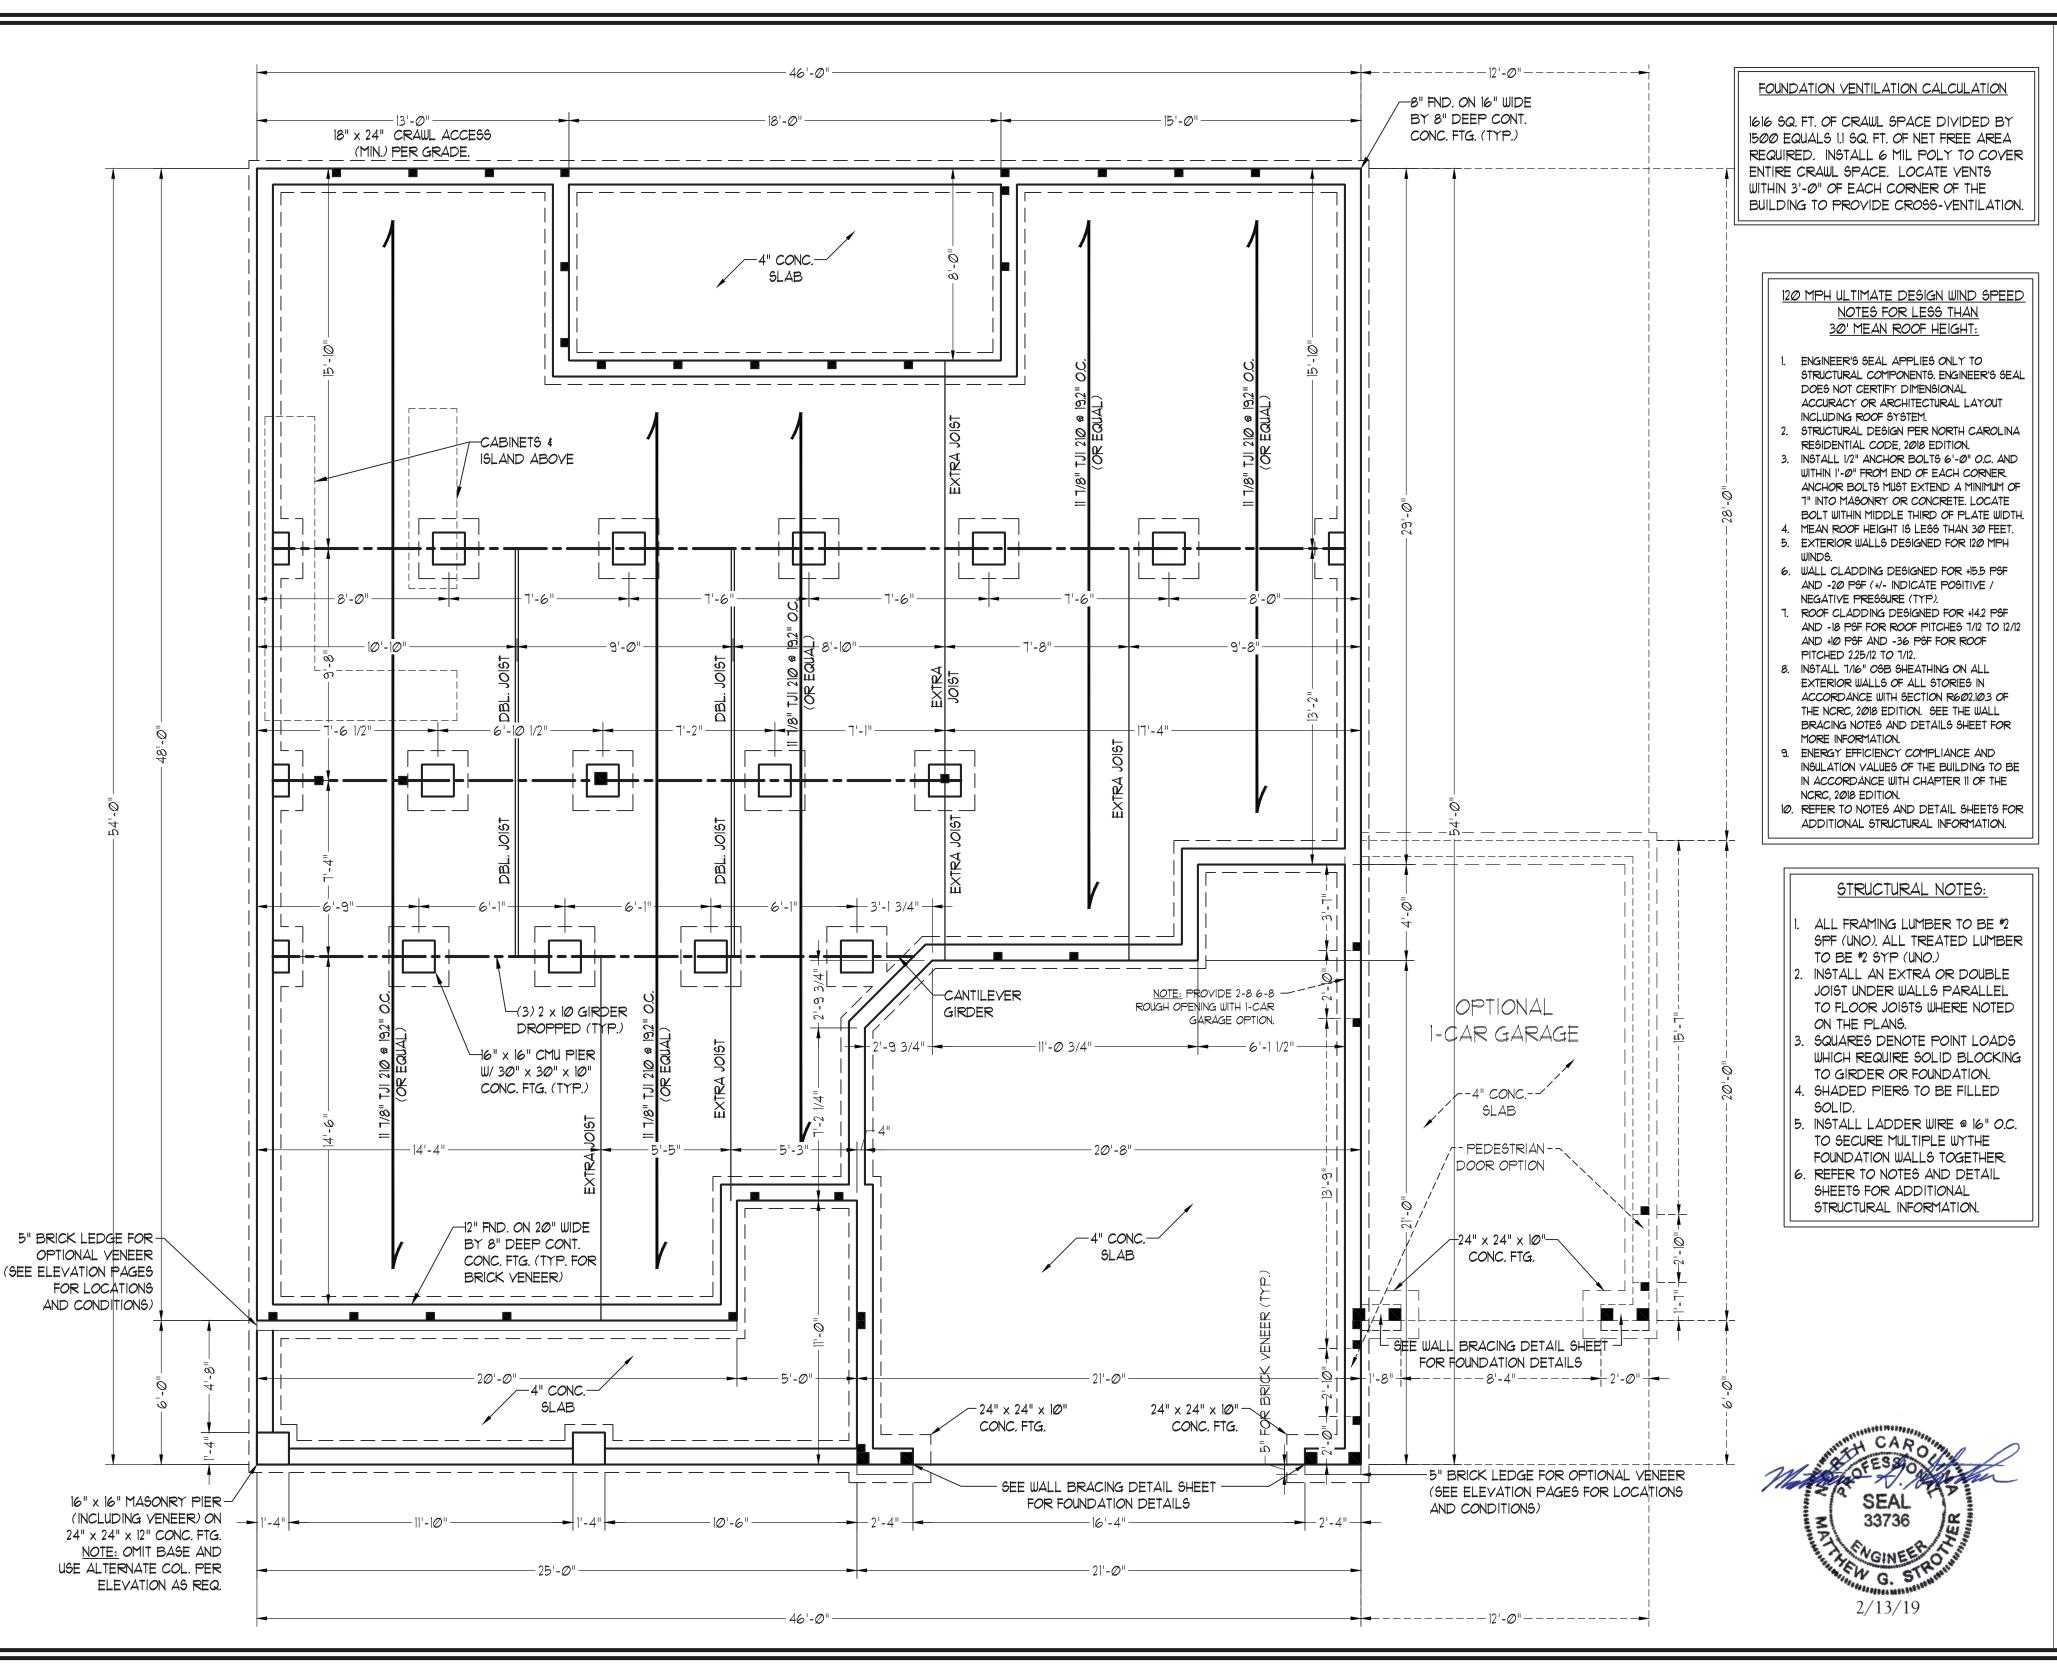

WESTAN HOME JAMES

DATE: JANUARY 26, 2019

REV.: SCALE: 1/4" = 1'-0"

DRAWN BY: WG

ENGINEERED BY: ZHH

REVIEWED BY: MGS

CRAWL **FOUNDATION** PLAN

S-1



RESIDENTIAL DESIGN, INC. 4810 GLENMIST CT. | RALEIGH, NC 27612 (919) 649-4128 WWW.RRDCAROLINA.COM

he art of transforming your vision into re al

RESERVES THE RIGHT TO MAKE MODIFICATIONS TO FLOOR PLANS, DIMENSIONS, MATERIALS, AND SPECIFICATIONS WITHOUT NOTICE. THESE DRAWINGS ARE FOR THE PURPOSE OF CONVEYING AN ARCHITECTURAL CONCEPT ONLY.


RENAISSANCE RESIDENTIAL DESIGN, INC.
HEREBY EXPRESSLY RESERVES ITS
COMMON LAW COPYRIGHT AND OTHER
PROPERTY RIGHTS IN THESE PLANS.
THESE PLANS AND DRAWINGS ARE NOT
TO BE REPRODUCED, CHANGED, OR
COPIED IN ANY FORM OR MANNER
WITHOUT FIRST OBTAINING THE EXPRESS
WRITTEN CONSENT OF RENAISSANCE
RESIDENTIAL DESIGNS, INC., NOR ARE
THEY TO BE ASSIGNED TO ANY THIRD
PARTY WITHOUT FIRST OBTAINING SAID
WRITTEN PERMISSION AND CONSENT.

.s.Thompson ENGINEERING, INC 606 WADE AVE., SUITE 104 RALEIGH, NC 27605 PHONE: (919) 789-9919

FAX: (919) 789-9921


N.C. LICENSE NO.: C-1733



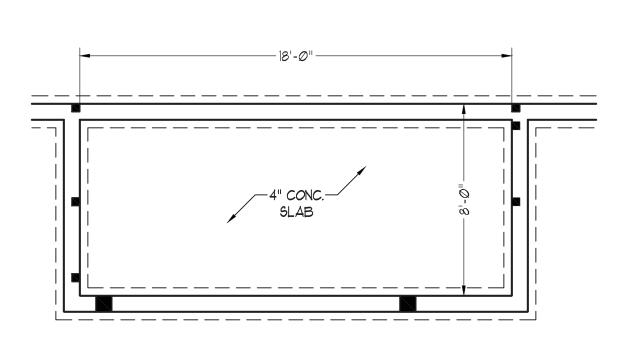

FAMILY ROOM SLIDING
DOOR OPTION





SIDE-LOAD

GARAGE OPTION

(NOT AVAILABLE WITH

OPTIONAL ONE-CAR GARAGE)

× 30" × 10" CONC. FTG.



RENAISSANCE
RESIDENTIAL DESIGN, INC.
4810 GLENMIST CT. | RALEIGH, NC 27612

(919) 649-4128 WWW.RRDCAROLINA.COM

"The art of transforming your vision into re ality
RENAISSANCE RESIDENTIAL DESIGN, INC..
RESERVES THE RIGHT TO MAKE
MODIFICATIONS TO FLOOR PLANS,
DIMENSIONS, MATERIALS, AND
SPECIFICATIONS WITHOUT NOTICE.
THESE DRAWINGS ARE FOR THE
PURPOSE OF CONVEYING AN
ARCHITECTURAL CONCEPT ONLY.

RENAISSANCE RESIDENTIAL DESIGN, INC...
HEREBY EXPRESSLY RESERVES ITS
COMMON LAW COPYRIGHT AND OTHER
PROPERTY RIGHTS IN THESE PLANS.
THESE PLANS AND DRAWNINGS ARE NOT
TO BE REPRODUCED, CHANGED, OR
COPIED IN ANY FORM OR MANNER
WITHOUT FIRST OBTAINING THE EXPRESS
WHITTEN CONSENT OF RENAISSANCE
RESIDENTIAL DESIGNS, INC.. NOR ARE
THEY TO BE ASSIGNED TO ANY THIRD
PARTY WITHOUT FIRST OBTAINING SAID
WRITTEN PERMISSION AND CONSENT.

J.S.THOMPSON ENGINEERING, INC 606 WADE AVE., SUITE 104 RALEIGH, NC 27605 PHONE: (919) 789-9919 FAX: (919) 789-9921 N.C. LICENSE NO.: C-1733



LOOR PLANS, ELEVATIONS, DESIGNS, MATERIALS AND JUAR FOOTAGE WITHOUT NOTICE. JUAR FOOTAGE AND DIMENSIONS ARE ESTIMATED AND JUAR FOOTAGE AND DIMENSIONS ARE ESTIMATED AND VARY IN ACTUAL CONSTRUCTION, ACTUAL POSITION OF PISC ON LOT WILL BE DETERMINED BY THE SITE PLAN AND PLAN FLOOP PLANS AND ELEVATION RENDERINGS ARE ST CONCEPTIONS, FLOOP PLANS ARE THE COPYRIGHTED SPERTY ON WESTAIN HOMES, ANY USE, REPRODUCTION, ADAPATION, OR DISPLAY OF THE PLANS IS STRICTLY ROHBITED. SEE NEW HOME SALES CONSULTANT FOR HIBITED. SEE NEW HOME SALES CONSULTANT FOR HIBITED.

WESTAN HOMES JAMES

DATE: JANUARY 26, 2019

REV.:

SCALE: 1/4" = 1'-0"


DRAWN BY: WG

ENGINEERED BY: ZHH

REVIEWED BY: MGS

CRAWL FOUNDATION PLAN OPTIONS

S-1.1

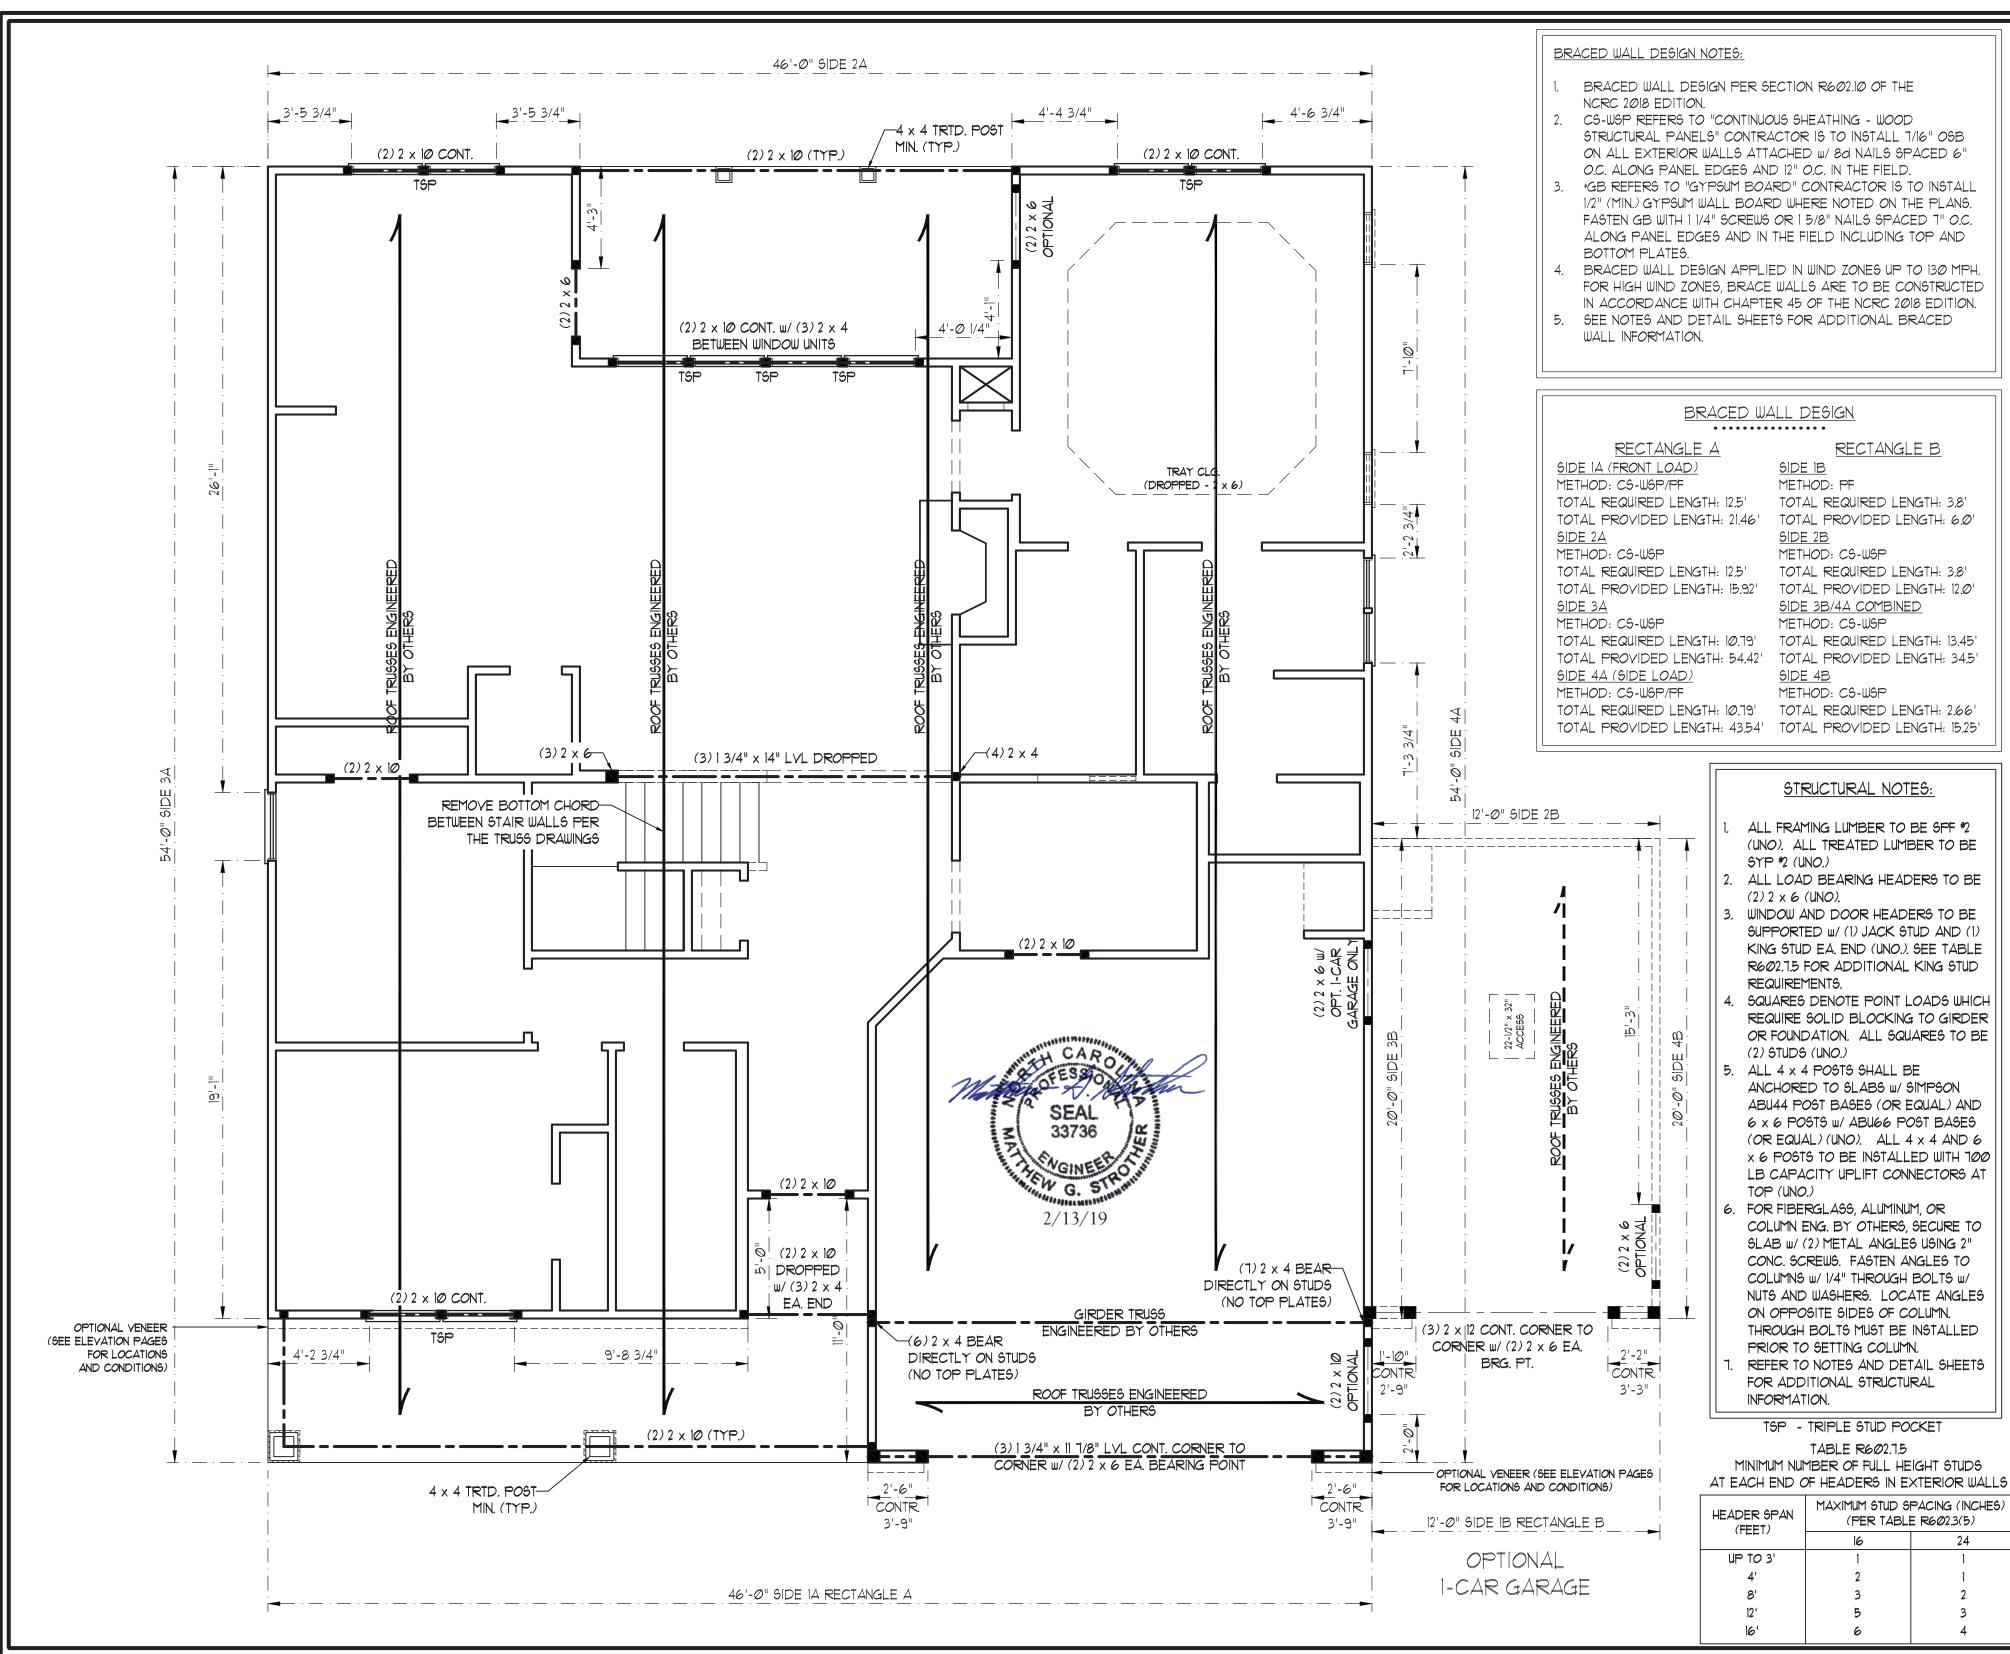

- BRACED WALL DESIGN PER SECTION R602.10 OF THE
- CS-WSP REFERS TO "CONTINUOUS SHEATHING WOOD STRUCTURAL PANELS" CONTRACTOR IS TO INSTALL 7/16" OSB ON ALL EXTERIOR WALLS ATTACHED W/8d NAILS SPACED 6" O.C. ALONG PANEL EDGES AND 12" O.C. IN THE FIELD.
- *GB REFERS TO "GYPSUM BOARD" CONTRACTOR IS TO INSTALL 1/2" (MIN.) GYPSUM WALL BOARD WHERE NOTED ON THE PLANS. FASTEN GB WITH 1 1/4" SCREWS OR 1 5/8" NAILS SPACED 1" O.C. ALONG PANEL EDGES AND IN THE FIELD INCLUDING TOP AND
- BRACED WALL DESIGN APPLIED IN WIND ZONES UP TO 130 MPH FOR HIGH WIND ZONES, BRACE WALLS ARE TO BE CONSTRUCTED IN ACCORDANCE WITH CHAPTER 45 OF THE NCRC 2018 EDITION.
- SEE NOTES AND DETAIL SHEETS FOR ADDITIONAL BRACED

BRACED WALL DESIGN

• • • • • • • • • • • • • • RECTANGLE B

TOTAL REQUIRED LENGTH: 12.5'

TOTAL REQUIRED LENGTH: 12.5'

TOTAL REQUIRED LENGTH: 10.79'

TOTAL PROVIDED LENGTH: 54.42'

TOTAL REQUIRED LENGTH: 10.79' TOTAL REQUIRED LENGTH: 2.66' TOTAL PROVIDED LENGTH: 43.54' TOTAL PROVIDED LENGTH: 15.25'

SIDE IB METHOD: PF TOTAL REQUIRED LENGTH: 3.8

TOTAL PROVIDED LENGTH: 6.0 SIDE 2B

METHOD: CS-WSP TOTAL REQUIRED LENGTH: 3.8' TOTAL PROVIDED LENGTH: 12.0'

SIDE 3B/4A COMBINED METHOD: CS-WSP TOTAL REQUIRED LENGTH: 13.45' TOTAL PROVIDED LENGTH: 34.5

SIDE 4B METHOD: CS-WSP

STRUCTURAL NOTES:

- ALL FRAMING LUMBER TO BE SPF #2 (UNO). ALL TREATED LUMBER TO BE SYP 12 (UNO.)
- 2. ALL LOAD BEARING HEADERS TO BE $(2) 2 \times 6 (UNO)$.
- 3. WINDOW AND DOOR HEADERS TO BE SUPPORTED w/(1) JACK STUD AND (1) KING STUD EA. END (UNO.). SEE TABLE R602.7.5 FOR ADDITIONAL KING STUD REQUIREMENTS.
- SQUARES DENOTE POINT LOADS WHICH REQUIRE SOLID BLOCKING TO GIRDER OR FOUNDATION. ALL SQUARES TO BE (2) STUDS (UNO.)
- 5. ALL 4 x 4 POSTS SHALL BE ANCHORED TO SLABS W/ SIMPSON ABU44 POST BASES (OR EQUAL) AND 6 x 6 POSTS w/ ABU66 POST BASES (OR EQUAL) (UNO). ALL 4 x 4 AND 6 × 6 POSTS TO BE INSTALLED WITH 700 LB CAPACITY UPLIFT CONNECTORS AT TOP (UNO.)
- 6. FOR FIBERGLASS, ALUMINUM, OR COLUMN ENG. BY OTHERS, SECURE TO SLAB w/ (2) METAL ANGLES USING 2" CONC. SCREWS. FASTEN ANGLES TO COLUMNS w/ 1/4" THROUGH BOLTS w/ NUTS AND WASHERS. LOCATE ANGLES ON OPPOSITE SIDES OF COLUMN. THROUGH BOLTS MUST BE INSTALLED PRIOR TO SETTING COLUMN. REFER TO NOTES AND DETAIL SHEETS
- FOR ADDITIONAL STRUCTURAL INFORMATION. TSP - TRIPLE STUD POCKET

TABLE R602.7.5 MINIMUM NUMBER OF FULL HEIGHT STUDS

MAXIMUM STUD SPACING (INCHES) (PER TABLE R602.3(5)		
16	24	
1	1	
2	1	
3	2	
5	3	
6	4	
	(PER TABLI	



RENAISSANCE RESIDENTIAL DESIGN, INC. 4810 GLENMIST CT. | RALEIGH, NC 27612

(919) 649-4128 WWW.RRDCAROLINA.COM The art of transforming your vision into re

RESERVES THE RIGHT TO MAKE MODIFICATIONS TO FLOOR PLANS, DIMENSIONS, MATERIALS, AND SPECIFICATIONS WITHOUT NOTICE. THESE DRAWINGS ARE FOR THE PURPOSE OF CONVEYING AN ARCHITECTURAL CONCEPT ONLY.

RENAISSANCE RESIDENTIAL DESIGN, INC...
HEREBY EXPRESSLY RESERVES ITS
COMMON LAW COPYRIGHT AND OTHER
PROPERTY RIGHTS IN THESE PLANS.
THESE PLANS AND DRAWINGS ARE NOT
TO BE REPRODUCED, CHANGED, OR
COPIED IN ANY FORM OR MANNER
WITHOUT FIRST OBTAINING THE EXPRESS
WRITTEN CONSENT OF RENAISSANCE
RESIDENTIAL DESIGNS, INC... NOR ARE
THEY TO BE ASSIGNED TO ANY THIRD
PARTY WITHOUT FIRST OBTAINING SAID
WRITTEN PERMISSION AND CONSENT.

.s.Thompson 606 WADE AVE., SUITE 104 RALEIGH, NC 27605 PHONE: (919) 789-9919 FAX: (919) 789-9921

N.C. LICENSE NO.: C-1733



WESTAN HOMES JAMES


DATE: JANUARY 26, 2019

REV.: SCALE: 1/4" = 1'-0"

DRAWN BY: WG

ENGINEERED BY: ZHH REVIEWED BY: MGS

SECOND FLOOR FRAMING PLAN

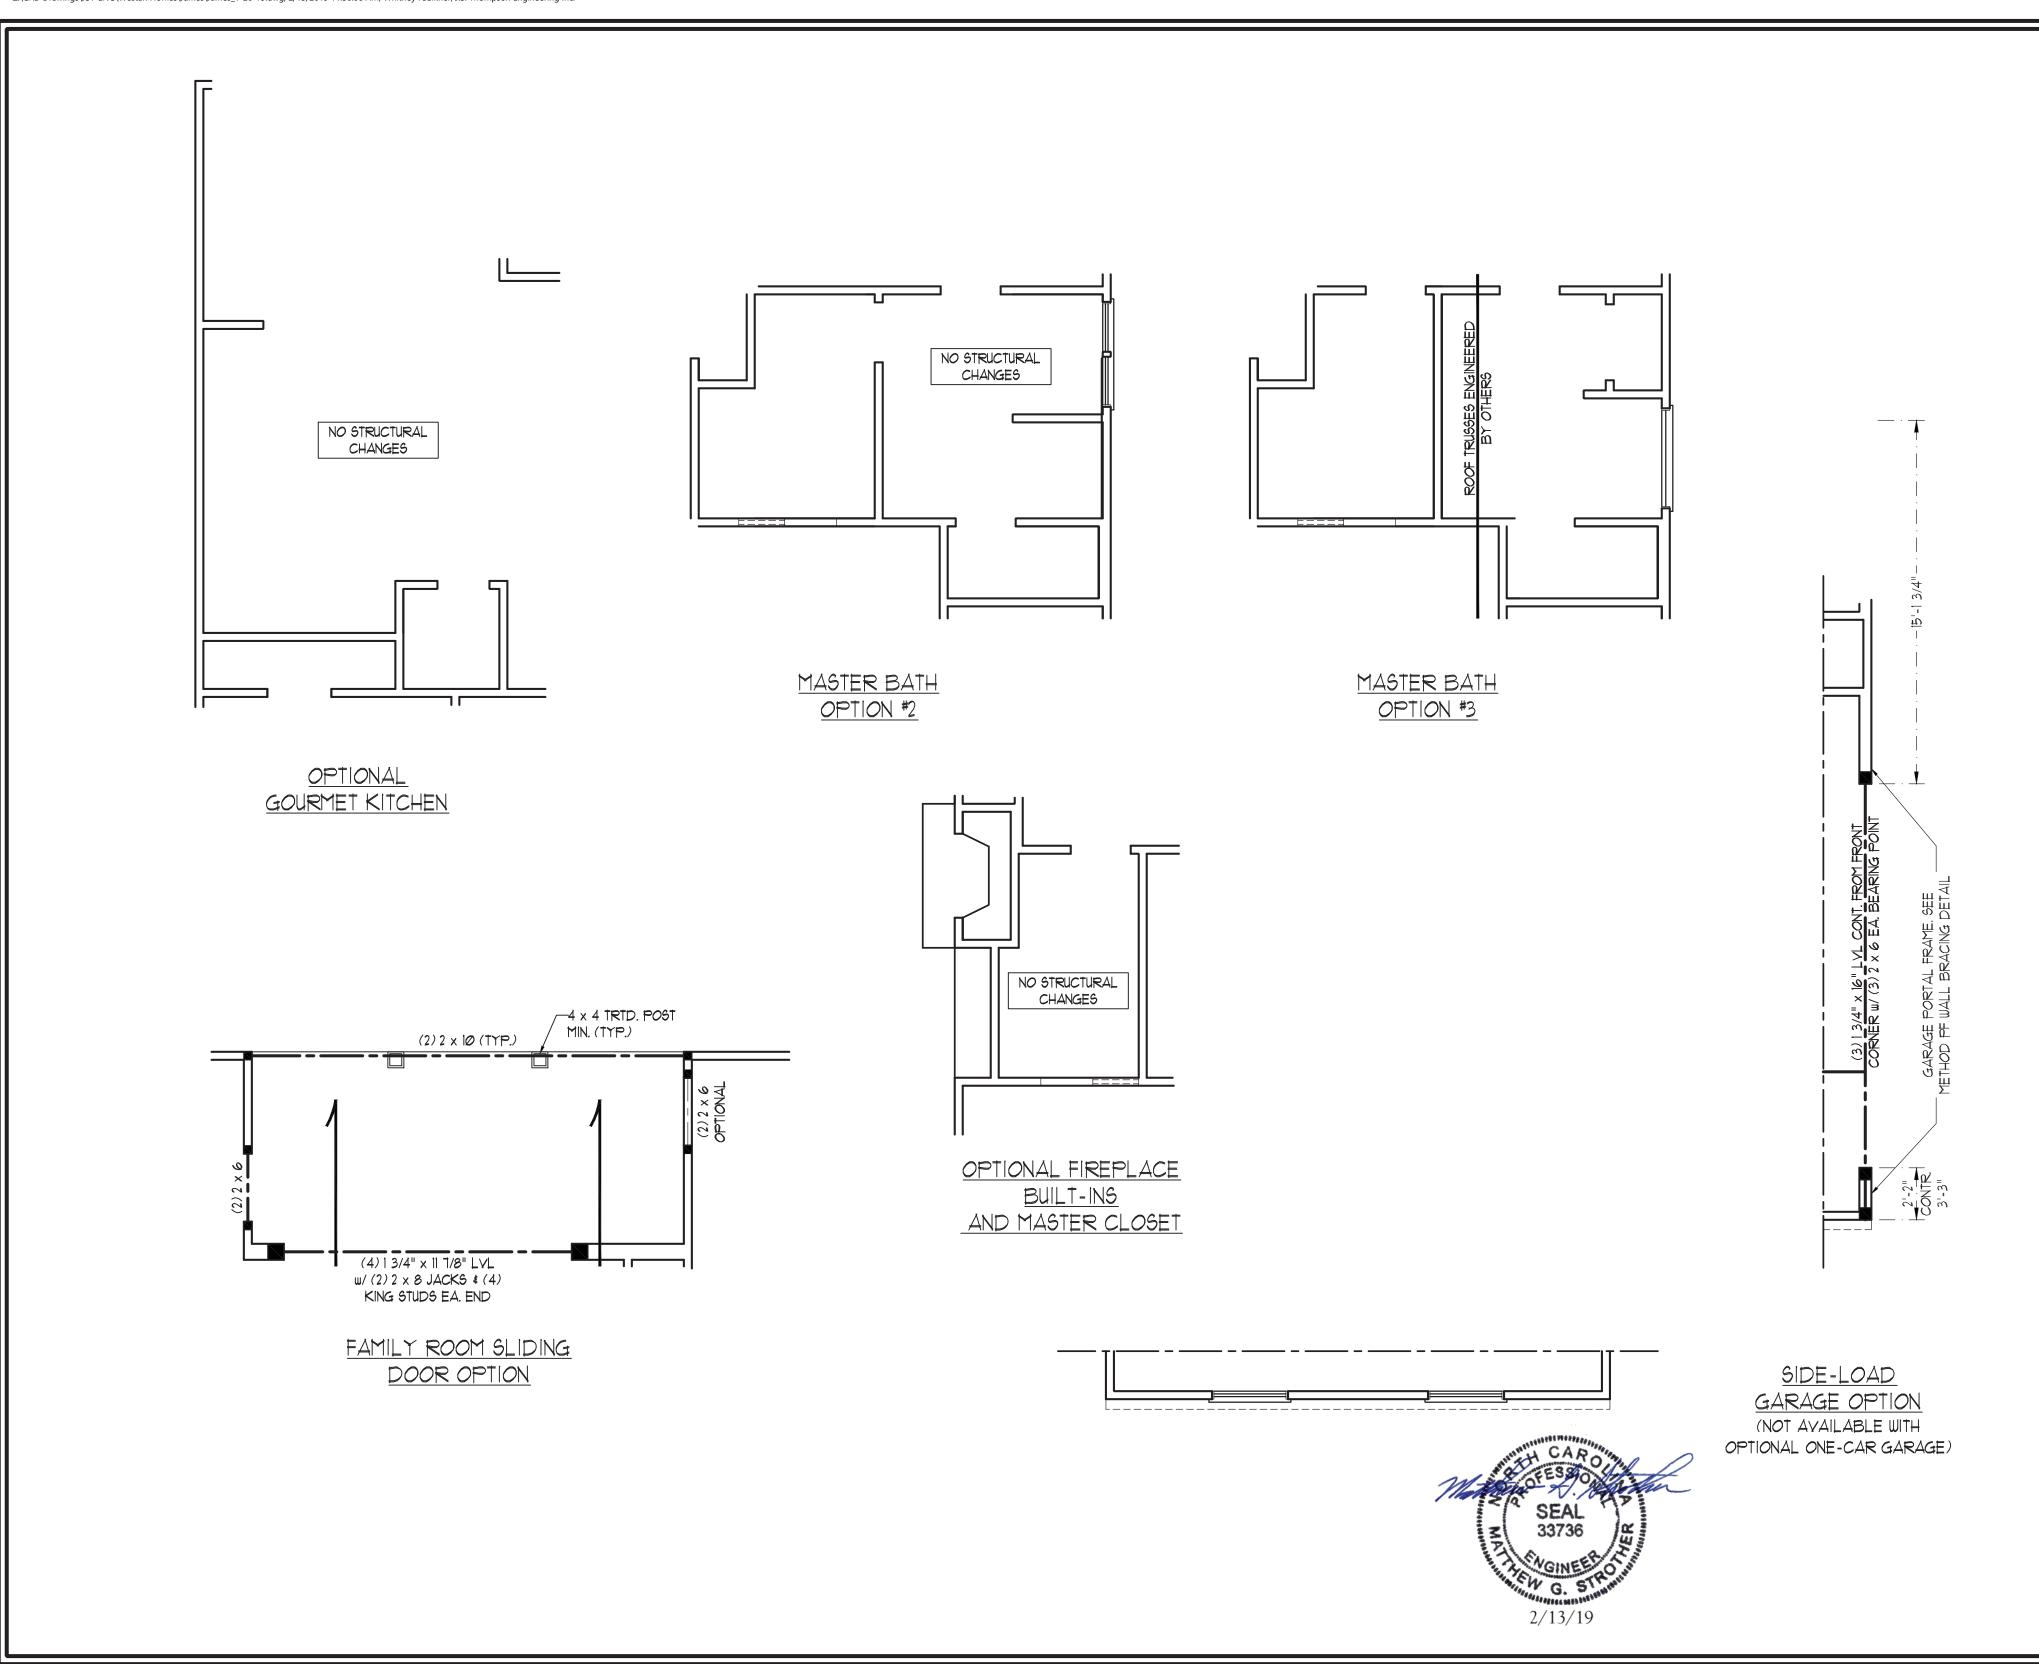



RENAISSANCE

RESIDENTIAL DESIGN, INC. 4810 GLENMIST CT. | RALEIGH, NC 27612 (919) 649-44128

WWW.RRDCAROLINA.COM
"The art of transforming your vision into re ality

RENAISSANCE RESIDENTIAL DESIGN, INC...
RESERVES THE RIGHT TO MAKE
MODIFICATIONS TO FLOOR PLANS,
DIMENSIONS, MATERIALS, AND
SPECIFICATIONS WITHOUT NOTICE.
THESE DRAWINGS ARE FOR THE
PURPOSE OF CONVEYING AN
ARCHITECTURAL CONCEPT ONLY.

RENAISSANCE RESIDENTIAL DESIGN, INC...
HEREBY EXPRESSLY RESERVES ITS
COMMON LAW COPYRIGHT AND OTHER
PROPERTY RIGHTS IN THESE PLANS.
THESE PLANS AND DRAWINGS ARE NOT
TO BE REPRODUCED, CHANGED, OR
COPIED IN ANY FORM OR MANNER
WITHOUT FIRST OBTAINING THE EXPRESS
WRITTEN CONSENT OF RENAISSANCE
RESIDENTIAL DESIGNS, INC.. NOR ARE
THEY TO BE ASSIGNED TO ANY THIRD
PARTY WITHOUT FIRST OBTAINING SAID
WRITTEN PERMISSION AND CONSENT.

J.S.THOMPSON ENGINEERING, INC 606 WADE AVE., SUITE 104 RALEIGH, NC 27605 PHONE: (919) 789-9919 FAX: (919) 789-9921 N.C. LICENSE NO.: C-1733



FLOOR PLANS, ELEVATIONS, DESIGNS, MATERIALS AND DIMENSIONS ARE SUBLECT TO CHANGE WITHOUT NOTICE SOUGHE FOOTAGE AND DIMENSIONS ARE ESTIMATED AN ANY YARY IN ACTUAL CONSTRUCTION, ACTUAL POSITION, 40USE ON LOT WILL BE DETERMINED BY THE SITE PLAN A U.OT PLAN FLOOR PLANS AND ELEVATION RENDERINGS A RITS CONCEPTIONS, FLOOR PRANS ARE THE COPYRIGHT PROPERTY OF WESTAN HOMES, ANY USE, REPRODUCTIO ADAPTATION, OR DISPLAY OF THE PLANS IS STRICTLY PROHIBITED. SEE NEW HOME SALES CONSULTANT FOR CURRENT DETAILS, COPYRIGHT© 2019 WESTAN HOMES

WESTAN HOMES JAMES

DATE: JANUARY 26, 2019

REV.:


SCALE: 1/4" = 1'-0"

DRAWN BY: WG
ENGINEERED BY: ZHH

REVIEWED BY: MGS

SECOND FLOOR FRAMING PLAN OPTIONS

S-2.1

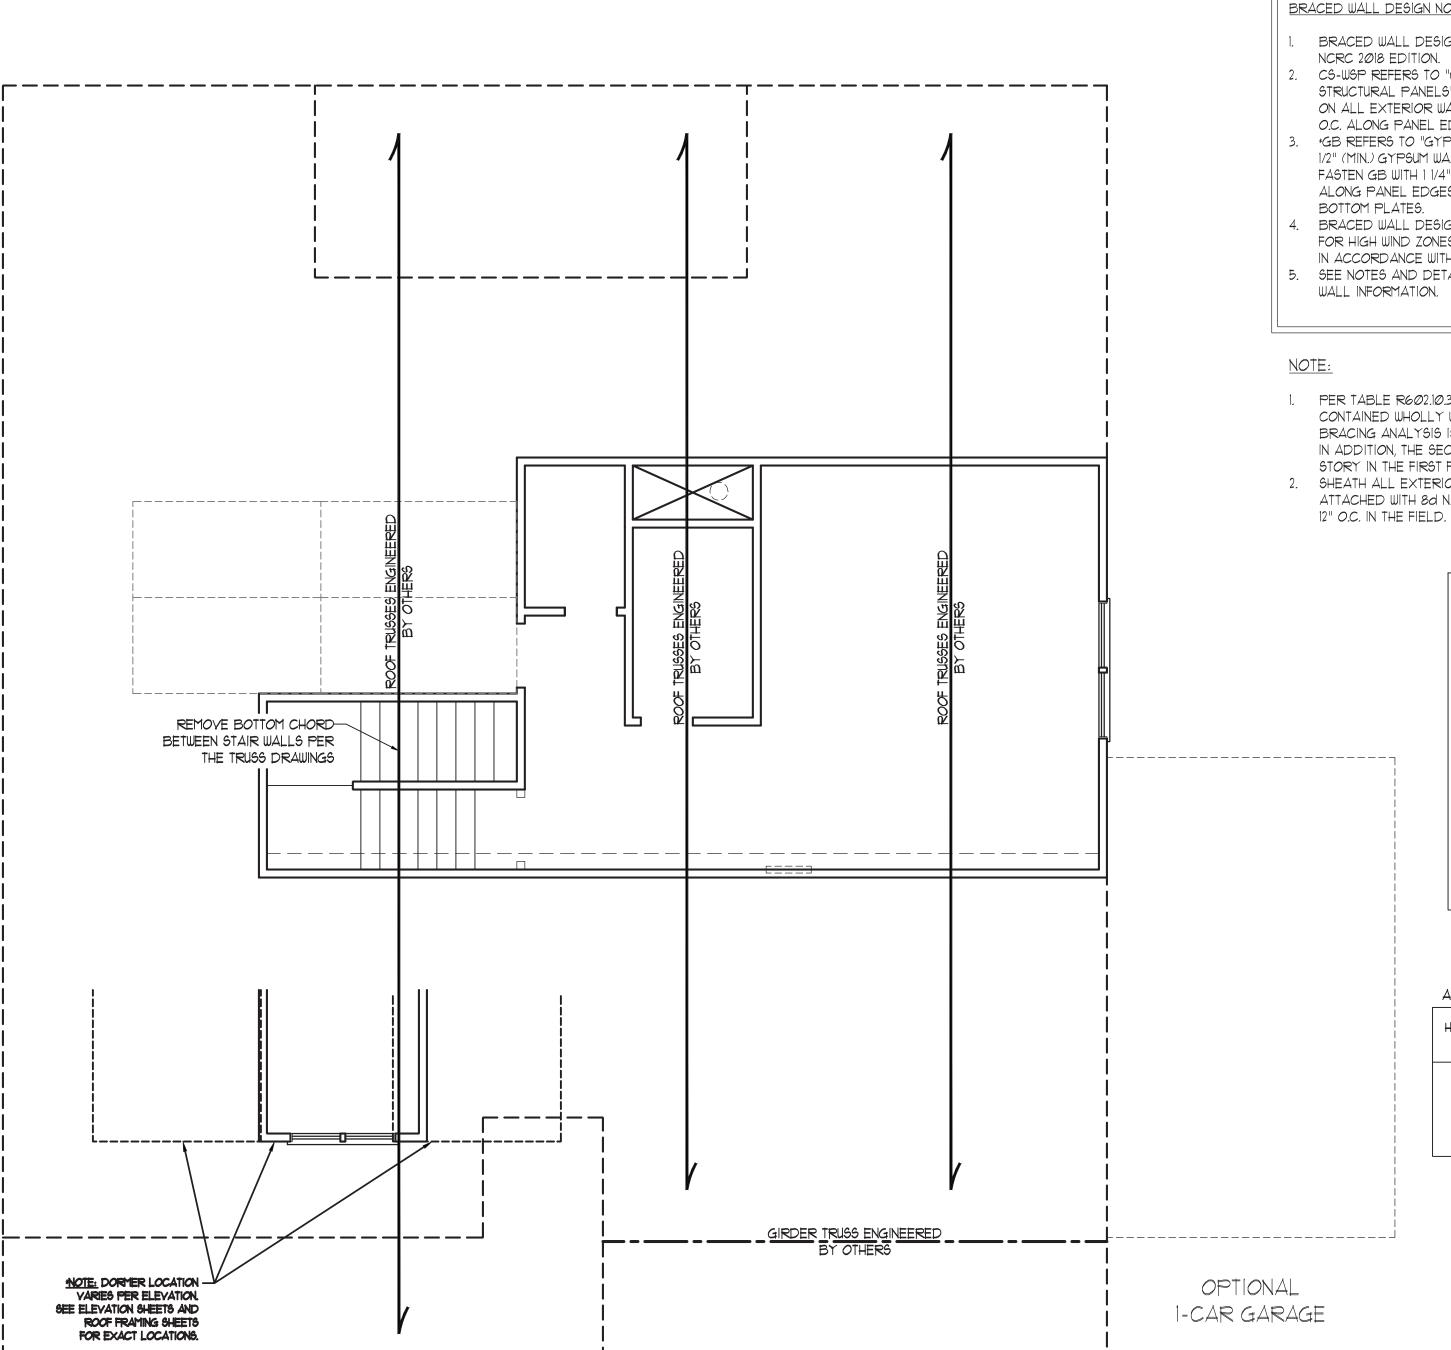

BRACED WALL DESIGN NOTES:

- BRACED WALL DESIGN PER SECTION R602.10 OF THE
- CS-WSP REFERS TO "CONTINUOUS SHEATHING WOOD STRUCTURAL PANELS" CONTRACTOR IS TO INSTALL 1/16" OSB ON ALL EXTERIOR WALLS ATTACHED w/ 8d NAILS SPACED 6" O.C. ALONG PANEL EDGES AND 12" O.C. IN THE FIELD.
- *GB REFERS TO "GYPSUM BOARD" CONTRACTOR IS TO INSTALL 1/2" (MIN.) GYPSUM WALL BOARD WHERE NOTED ON THE PLANS. FASTEN GB WITH 1 1/4" SCREWS OR 1 5/8" NAILS SPACED 7" O.C. ALONG PANEL EDGES AND IN THE FIELD INCLUDING TOP AND
- BRACED WALL DESIGN APPLIED IN WIND ZONES UP TO 130 MPH. FOR HIGH WIND ZONES, BRACE WALLS ARE TO BE CONSTRUCTED IN ACCORDANCE WITH CHAPTER 45 OF THE NCRC 2018 EDITION.
- 5. SEE NOTES AND DETAIL SHEETS FOR ADDITIONAL BRACED
- PER TABLE R602.10.3 OF THE 2018 NCRC, THE 2ND FLOOR IS CONTAINED WHOLLY WITHIN THE ROOF SYSTEM AND WALL BRACING ANALYSIS IS NOT REQUIRED ON THE SECOND FLOOR. IN ADDITION, THE SECOND FLOOR NEED NOT BE CONSIDERED A STORY IN THE FIRST FLOOR WALL BRACING ANALYSIS.
- 2. SHEATH ALL EXTERIOR WALLS WITH 1/16" OSB SHEATHING ATTACHED WITH 8d NAILS AT 6" O.C. ALONG PANEL EDGES AND

STRUCTURAL NOTES:

- ALL FRAMING LUMBER TO BE #2 SPF (UNO).
- 2. ALL LOAD BEARING HEADERS TO BE $(2) 2 \times 6 \text{ (UNO)}.$
- 3. WINDOW AND DOOR HEADERS TO BE SUPPORTED w/(1) JACK STUD AND (1) KING STUD EA. END (UNO.). SEE TABLE R602.7.5 FOR ADDITIONAL KING STUD REQUIREMENTS.
- SQUARES DENOTE POINT LOADS WHICH REQUIRE SOLID BLOCKING TO GIRDER OR FOUNDATION. SQUARES TO BE (2) STUDS (UNO.)
- 5. REFER TO NOTES AND DETAIL SHEETS FOR ADDITIONAL STRUCTURAL INFORMATION.

TABLE R602.7.5 MINIMUM NUMBER OF FULL HEIGHT STUDS AT EACH END OF HEADERS IN EXTERIOR WALLS

HEADER SPAN (FEET)	MAXIMUM STUD SPACING (INCHES) (PER TABLE R602.3(5)		
\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	16	24	
UP TO 3'	1	1	
4'	2	1	
8'	3	2	
12'	5	3	
16'	6	4	





RENAISSANCE RESIDENTIAL DESIGN, INC.

4810 GLENMIST CT. | RALEIGH, NC 27612 (919) 649-4128 WWW.RRDCAROLINA.COM

"The art of transforming your vision into re ality

RENAISSANCE RESIDENTIAL DESIGN, INC RESERVES THE RIGHT TO MAKE MODIFICATIONS TO FLOOR PLANS, DIMENSIONS, MATERIALS, AND SPECIFICATIONS WITHOUT NOTICE. THESE DRAWINGS ARE FOR THE PURPOSE OF CONVEYING AN ARCHITECTURAL CONCEPT ONLY. RENAISSANCE RESIDENTIAL DESIGN, INC..
HEREBY EXPRESSLY RESERVES ITS
COMMON LAW COPYRIGHT AND OTHER
PROPERTY RIGHTS IN THESE PLANS.
THESE PLANS AND DRAWINGS ARE NOT
TO BE REPRODUCED, CHANGED, OR
COPIED IN ANY FORM OR MANNER
WITHOUT FIRST OBTAINING THE EXPRESS
WRITTER CONSENT OF RENAISSANCE
RESIDENTIAL DESIGNS, INC.. NOR ARE
THEY TO BE ASSIGNED TO ANY THIRD
PARTY WITHOUT FIRST OBTAINING SAID
WRITTEN PERMISSION AND CONSENT.

j.s.Thompson ENGINEERING, INC 606 WADE AVE., SUITE 104

RALEIGH, NC 27605 PHONE: (919) 789-9919 FAX: (919) 789-9921 N.C. LICENSE NO.: C1733



WESTAN HOMES

DATE: JANUARY 26, 2019


REV.:

SCALE: 1/4" = 1'-0" DRAWN BY: WG

ENGINEERED BY: ZHH

REVIEWED BY: MGS

ATTIC FLOOR FRAMING PLAN

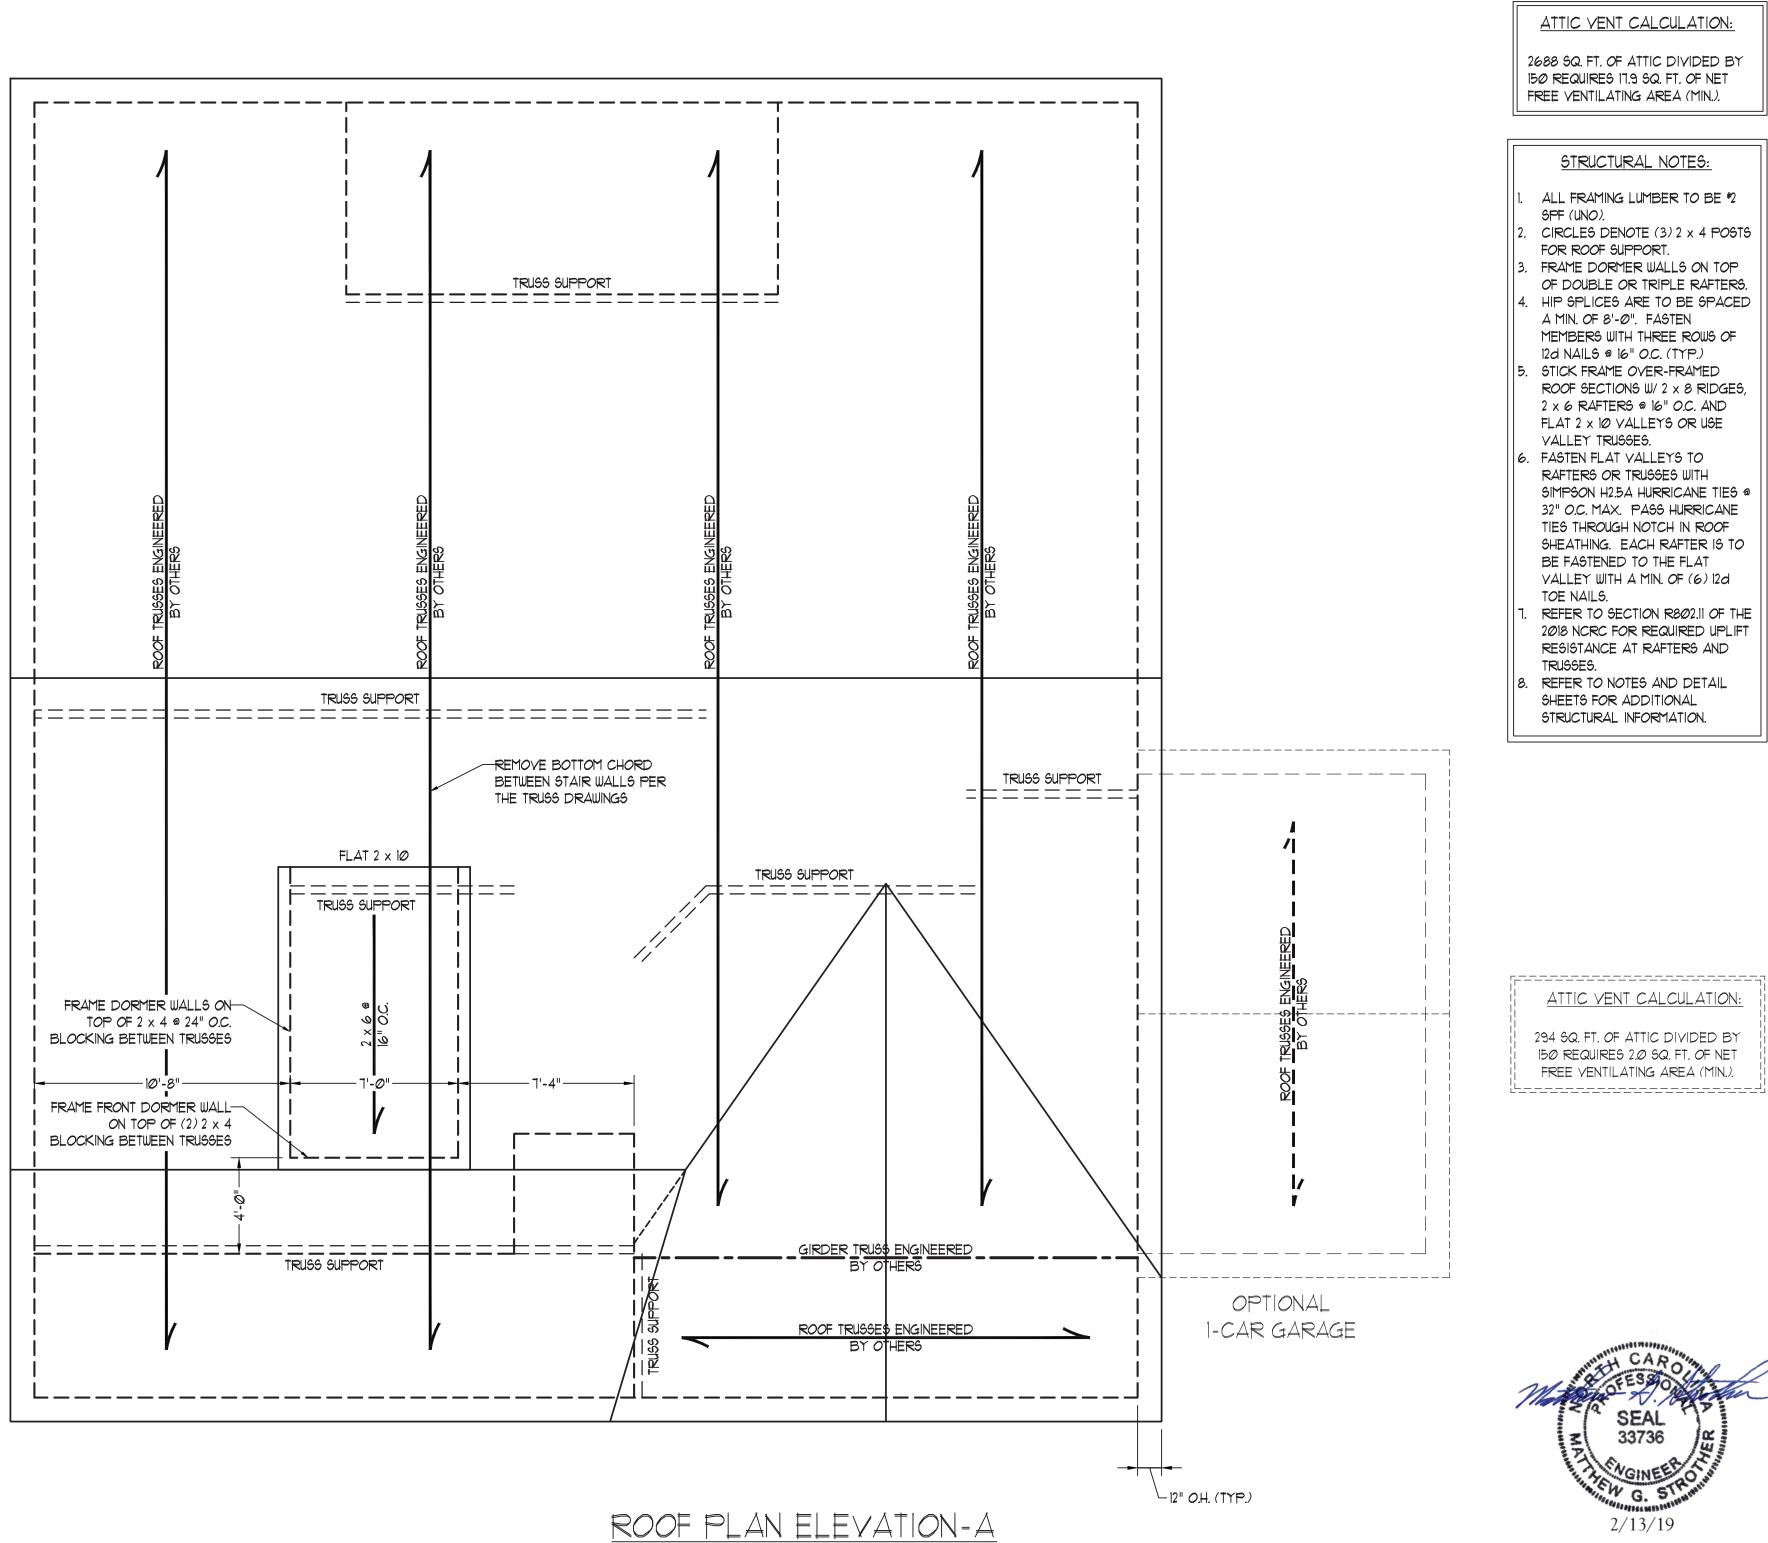

ATTIC VENT CALCULATION:

2688 SQ. FT. OF ATTIC DIVIDED BY 150 REQUIRES 17.9 SQ. FT. OF NET FREE VENTILATING AREA (MIN.).

STRUCTURAL NOTES:

- ALL FRAMING LUMBER TO BE #2 SPF (UNO).
- CIRCLES DENOTE (3) 2 x 4 POSTS FOR ROOF SUPPORT.
- FRAME DORMER WALLS ON TOP
- OF DOUBLE OR TRIPLE RAFTERS. HIP SPLICES ARE TO BE SPACED A MIN. OF 8'-0". FASTEN MEMBERS WITH THREE ROWS OF 12d NAILS @ 16" O.C. (TYP.)
- STICK FRAME OVER-FRAMED ROOF SECTIONS W/ 2 x 8 RIDGES, 2 x 6 RAFTERS @ 16" O.C. AND FLAT 2 x 10 VALLEYS OR USE VALLEY TRUSSES.
- 6. FASTEN FLAT VALLEYS TO RAFTERS OR TRUSSES WITH SIMPSON H2.5A HURRICANE TIES @ 32" O.C. MAX. PASS HURRICANE TIES THROUGH NOTCH IN ROOF SHEATHING. EACH RAFTER IS TO BE FASTENED TO THE FLAT VALLEY WITH A MIN. OF (6) 12d TOE NAILS.
- REFER TO SECTION R802.11 OF THE 2018 NCRC FOR REQUIRED UPLIFT RESISTANCE AT RAFTERS AND TRUSSES.
- REFER TO NOTES AND DETAIL SHEETS FOR ADDITIONAL STRUCTURAL INFORMATION.

ATTIC VENT CALCULATION

294 SQ. FT. OF ATTIC DIVIDED BY 150 REQUIRES 2.0 SQ. FT. OF NET FREE VENTILATING AREA (MIN.).





RESIDENTIAL DESIGN, INC. 4810 GLENMIST CT. | RALEIGH, NC 27612 (919) 649-4128

WWW.RRDCAROLINA.COM The art of transforming your vision into re ali

RESERVES THE RIGHT TO MAKE MODIFICATIONS TO FLOOR PLANS, DIMENSIONS, MATERIALS, AND SPECIFICATIONS WITHOUT NOTICE. THESE DRAWINGS ARE FOR THE PURPOSE OF CONVEYING AN ARCHITECTURAL CONCEPT ONLY.

RENAISSANCE RESIDENTIAL DESIGN, INC..
HEREBY EXPRESSLY RESERVES ITS
COMMON LAW COPYRIGHT AND OTHER
PROPERTY RIGHTS IN THESE PLANS,
THESE PLANS AND DRAWNIGS ARE NOT
TO BE REPRODUCED, CHANGED, OR
COPIED IN ANY FORM OR MANNER
WITHOUT FIRST OBTAINING THE EXPRESS
WRITTEN CONSENT OF RENAISSANCE
RESIDENTIAL DESIGNS, INC.. NOR ARE
THEY TO BE ASSIGNED TO ANY THIRD
PARTY WITHOUT FIRST OBTAINING SAID
WRITTEN PERMISSION AND CONSENT.

j.s.Thompson ENGINEERING, INC 606 WADE AVE., SUITE 104 RALEIGH, NC 27605 PHONE: (919) 789-9919 N.C. LICENSE NO.: C-1733



WESTAN HOMES JAMES


DATE: JANUARY 26, 2019

REV.:

SCALE: 1/4" = 1'-0" DRAWN BY: WG

ENGINEERED BY: ZHH REVIEWED BY: MGS

ROOF PLAN ELEVATION - A

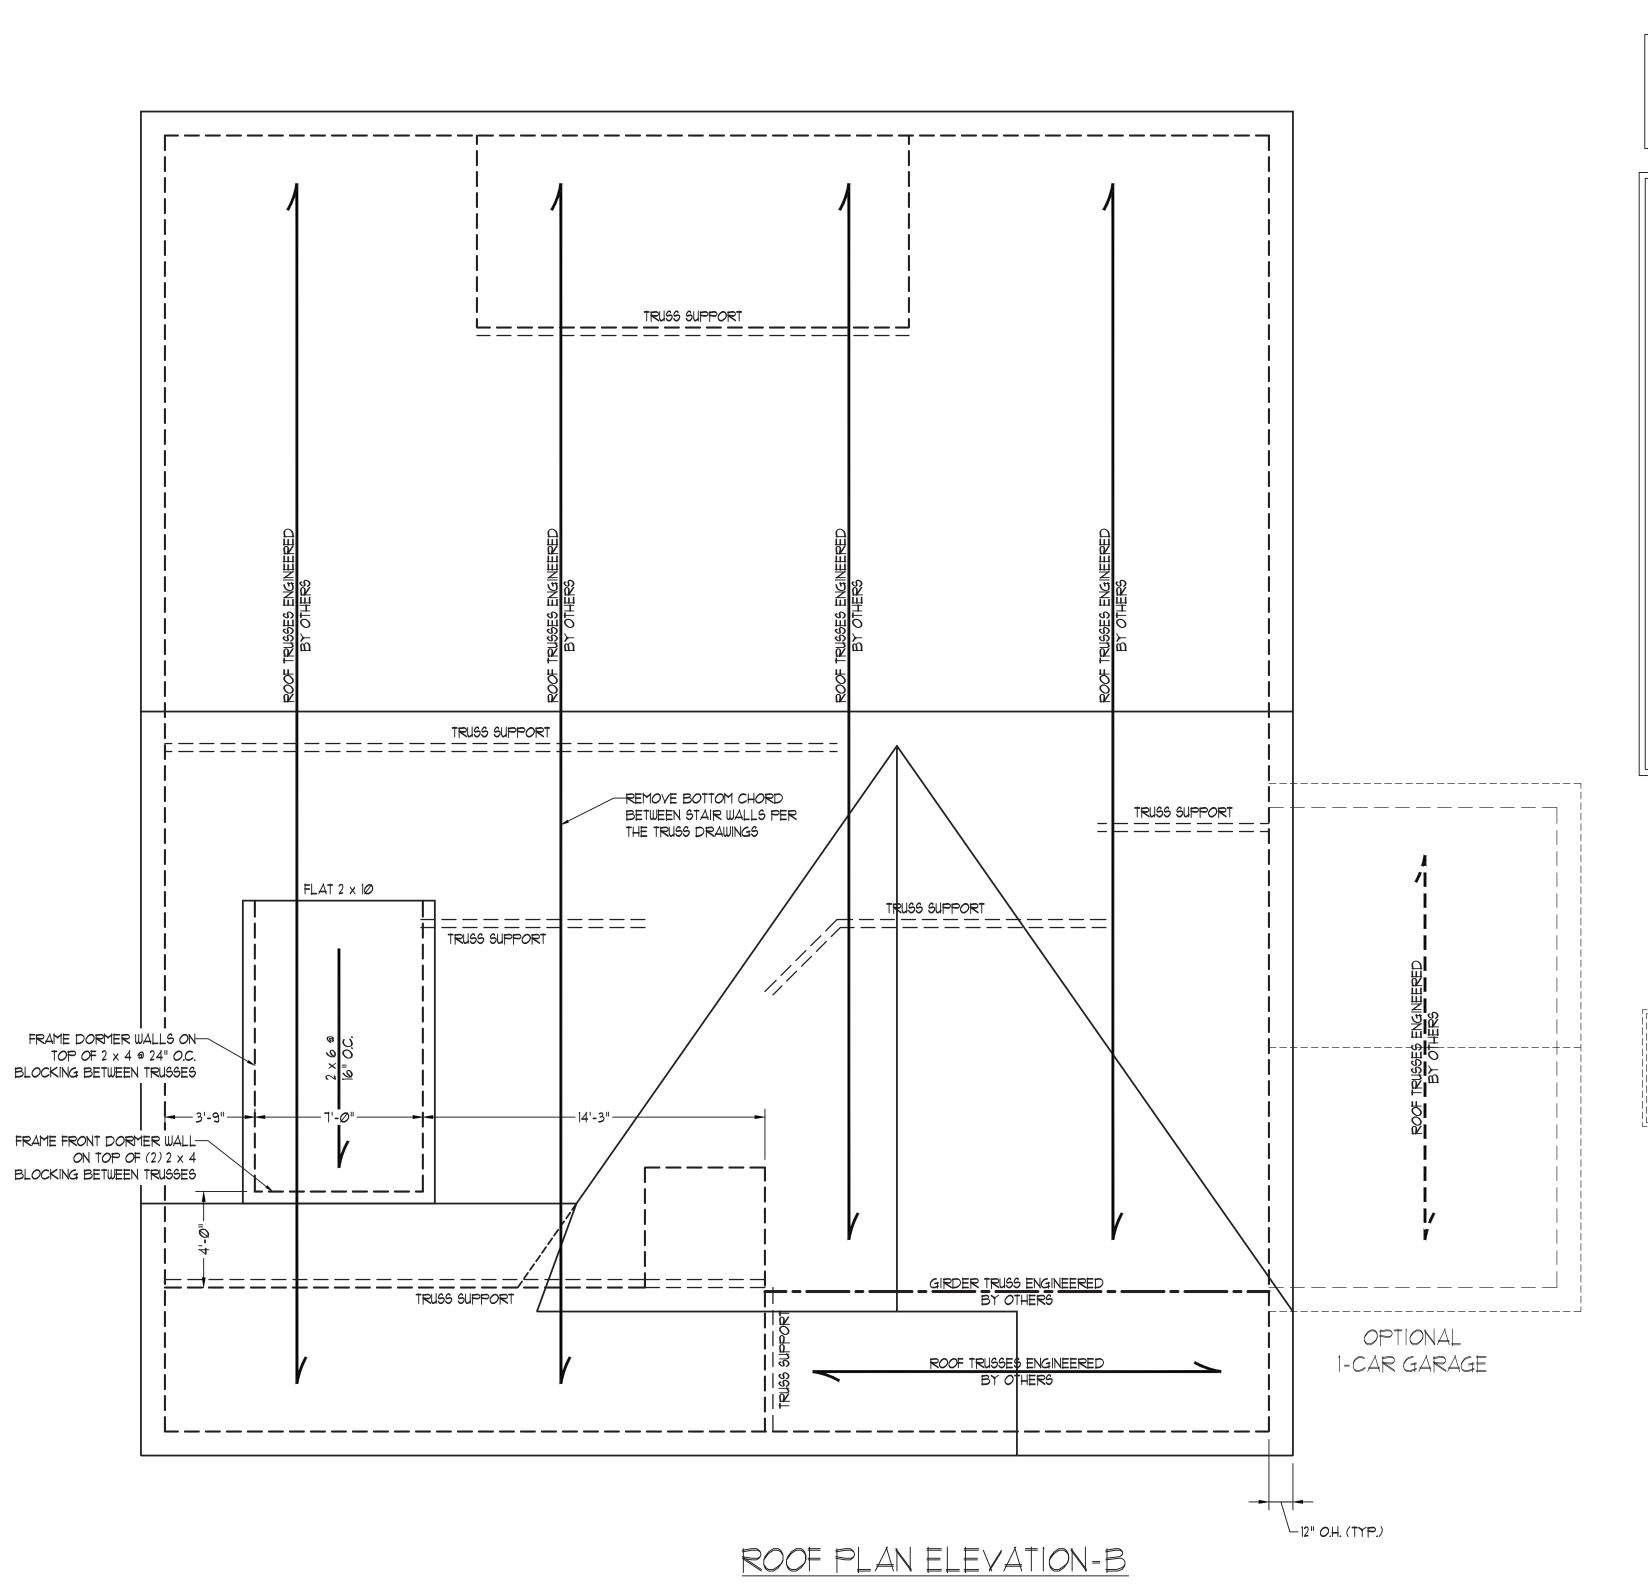

<u>ATTIC VENT CALCULATION:</u>

2688 SQ. FT. OF ATTIC DIVIDED BY 150 REQUIRES 17.9 SQ. FT. OF NET FREE VENTILATING AREA (MIN.).

STRUCTURAL NOTES:

- . ALL FRAMING LUMBER TO BE #2 SPF (UNO).
- CIRCLES DENOTE (3) 2 x 4 POSTS
- FOR ROOF SUPPORT.
 FRAME DORMER WALLS ON TOP
- OF DOUBLE OR TRIPLE RAFTERS.

 4. HIP SPLICES ARE TO BE SPACED
 A MIN. OF 8'-O". FASTEN
 MEMBERS WITH THREE ROWS OF
 12d NAILS @ 16" O.C. (TYP.)
- 5. STICK FRAME OVER-FRAMED ROOF SECTIONS W/2 x 8 RIDGES, 2 x 6 RAFTERS @ 16" O.C. AND FLAT 2 x 10 VALLEYS OR USE VALLEY TRUSSES.
- 6. FASTEN FLAT VALLEYS TO
 RAFTERS OR TRUSSES WITH
 SIMPSON H2.5A HURRICANE TIES @
 32" O.C. MAX. PASS HURRICANE
 TIES THROUGH NOTCH IN ROOF
 SHEATHING. EACH RAFTER IS TO
 BE FASTENED TO THE FLAT
 VALLEY WITH A MIN. OF (6) 12d
 TOE NAILS.
- REFER TO SECTION R802.11 OF THE 2018 NCRC FOR REQUIRED UPLIFT RESISTANCE AT RAFTERS AND TRUSSES.
- 8. REFER TO NOTES AND DETAIL SHEETS FOR ADDITIONAL STRUCTURAL INFORMATION.

ATTIC VENT CALCULATION:

294 SQ. FT. OF ATTIC DIVIDED BY 150 REQUIRES 2.0 SQ. FT. OF NET FREE VENTILATING AREA (MIN.).





RENAISSANCE RESIDENTIAL DESIGN, INC.

4810 GLENMIST CT. | RALEIGH, NC 27612 (919) 649-4128

WWW.RRDCAROLINA.COM
The art of transforming your vision into re ality

RENAISSANCE RESIDENTIAL DESIGN, INC...
RESERVES THE RIGHT TO MAKE
MODIFICATIONS TO FLOOR PLANS,
DIMENSIONS, MATERIALS, AND
SPECIFICATIONS WITHOUT NOTICE.
THESE DRAWINGS ARE FOR THE
PURPOSE OF CONVEYING AN
ARCHITECTURAL CONCEPT ONLY.

RENAISSANCE RESIDENTIAL DESIGN, INC..
HEREBY EXPRESSLY RESERVES ITS
COMMON LAW COPYRIGHT AND OTHER
PROPERTY RIGHTS IN THESE PLANS,
THESE PLANS AND DRAWNIGS ARE NOT
TO BE REPRODUCED, CHANGED, OR
COPIED IN ANY FORM OR MANNER
WITHOUT FIRST OBTAINING THE EXPRESS
WRITTEN CONSENT OF RENAISSANCE
RESIDENTIAL DESIGNS, INC.. NOR ARE
THEY TO BE ASSIGNED TO ANY THIRD
PARTY WITHOUT FIRST OBTAINING SAID
WRITTEN PERMISSION AND CONSENT.

J.S. THOMPSON ENGINEERING, INC 606 WADE AVE., SUITE 104 RALEIGH, NC 27605 PHONE: (919) 789-9919 FAX: (919) 789-9921

N.C. LICENSE NO.: C-1733



FLOOR PLANS, ELEVATIONS, DESIGNS, MATERIALS AND DIMENSIONS ARE SET SUBJECT TO CHANGE WITHOUT NOTICE. SOURE FOOTAGE AND DIMENSIONS ARE ESTIMATED AND ANY VARY IN ACTUAL CONSTRUCTION ACTUAL POSITION OF OUSE ON 10T WILL BE DETERMINED BY THE SITE PLAN AND LOT PLAN. FLOOR PLANS AND ELEVATION RENDERINGS ARE PRIST CONCEPTIONS. FLOOR PLANS ARE THE COPYRIGHTED PROPERTY OF WESTAN HOMES. ANY USE, REPRODUCTION, ADAPTATION, OR DISPLAY OF THE PLANS IS STRUCTLY PROHIBITED. SEE NEW HOME SALES CONSULTANT FOR CURRENT DETAILS.

WESTAN HOMES JAMES

DATE: JANUARY 26, 2019

REV.:


SCALE: 1/4" = 1'-0"

DRAWN BY: WG

ENGINEERED BY: ZHH

REVIEWED BY: MGS

ROOF PLAN ELEVATION - B

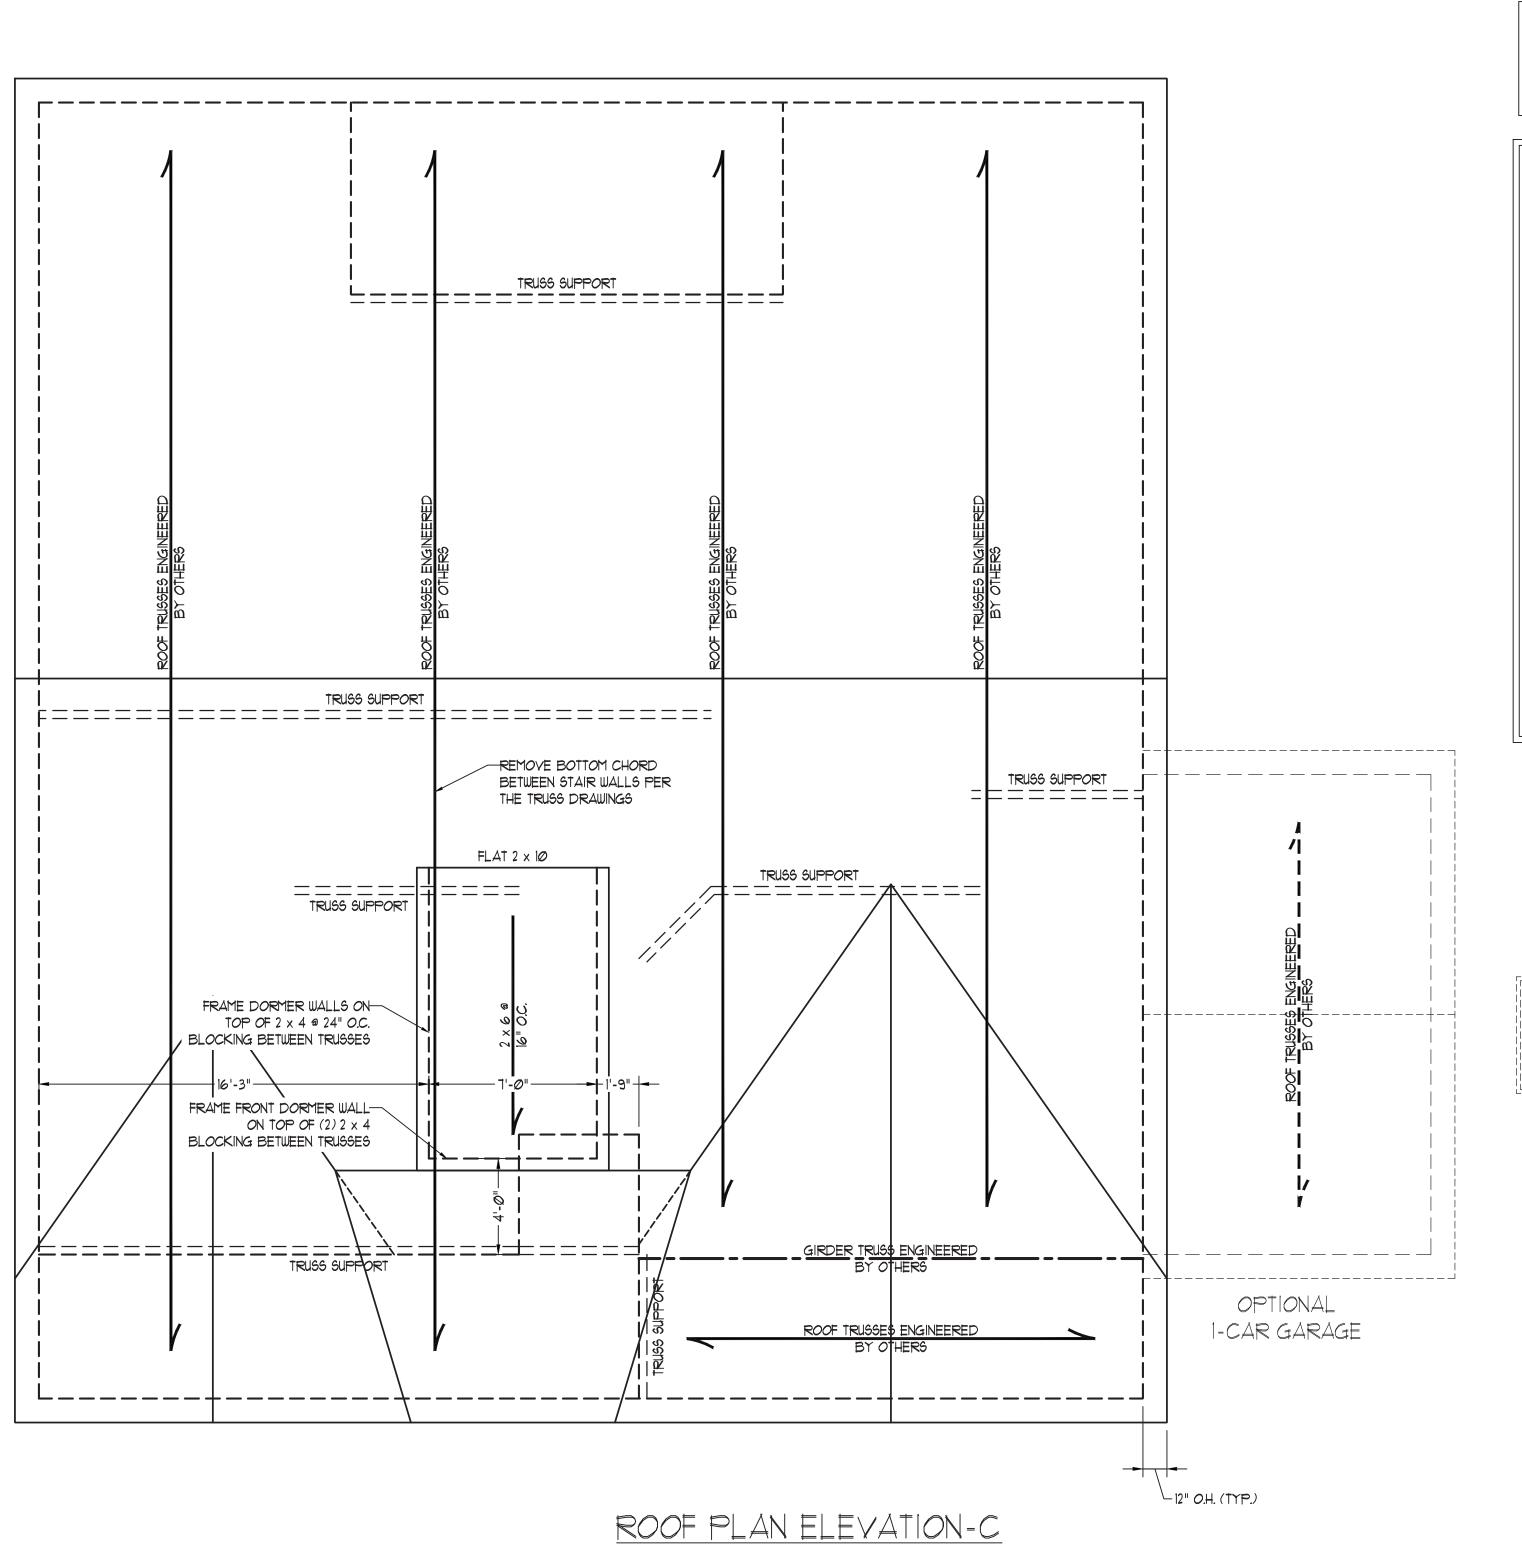

ATTIC VENT CALCULATION:

2688 SQ. FT. OF ATTIC DIVIDED BY 150 REQUIRES 17.9 SQ. FT. OF NET FREE YENTILATING AREA (MIN.).

STRUCTURAL NOTES:

- . ALL FRAMING LUMBER TO BE *2 SPF (UNO).
- CIRCLES DENOTE (3) 2 x 4 POSTS
- FOR ROOF SUPPORT.
 FRAME DORMER WALLS ON TOP
- OF DOUBLE OR TRIPLE RAFTERS.

 4. HIP SPLICES ARE TO BE SPACED A MIN. OF 8'-0". FASTEN MEMBERS WITH THREE ROWS OF 12d NAILS @ 16" O.C. (TYP.)
- 5. STICK FRAME OVER-FRAMED ROOF SECTIONS W/2 x 8 RIDGES, 2 x 6 RAFTERS @ 16" O.C. AND FLAT 2 x 10 VALLEYS OR USE VALLEY TRUSSES.
- 6. FASTEN FLAT VALLEYS TO RAFTERS OR TRUSSES WITH SIMPSON H2.5A HURRICANE TIES @ 32" O.C. MAX. PASS HURRICANE TIES THROUGH NOTCH IN ROOF SHEATHING. EACH RAFTER IS TO BE FASTENED TO THE FLAT VALLEY WITH A MIN. OF (6) 12d TOE NAILS.
- . REFER TO SECTION R802.11 OF THE 2018 NCRC FOR REQUIRED UPLIFT RESISTANCE AT RAFTERS AND TRUSSES.
- 8. REFER TO NOTES AND DETAIL SHEETS FOR ADDITIONAL STRUCTURAL INFORMATION.

ATTIC VENT CALCULATION:

294 SQ. FT. OF ATTIC DIVIDED BY 150 REQUIRES 2.0 SQ. FT. OF NET FREE VENTILATING AREA (MIN.).





RENAISSANCE RESIDENTIAL DESIGN, INC.

4810 GLENMIST CT. | RALEIGH, NC 27612 (919) 649-4128 WWW.RRDCAROLINA.COM

WWW.HHDCAHOLINA.COM

The art of transforming your vision into re ality

RENAISSANCE RESIDENTIAL DESIGN, INC...

BESERVES THE RIGHT TO MAKE

RESERVES THE RIGHT TO MAKE
MODIFICATIONS TO FLOOR PLANS,
DIMENSIONS, MATERIALS, AND
SPECIFICATIONS WITHOUT NOTICE.
THESE DRAWINGS ARE FOR THE
PURPOSE OF CONVEYING AN
ARCHITECTURAL CONCEPT ONLY.

RENAISSANCE RESIDENTIAL DESIGN, INC...
HEREBY EXPRESSLY RESERVES ITS
COMMON LAW COPYRIGHT AND OTHER
PROPERTY RIGHTS IN THESE PLANS.
THESE PLANS AND DRAWINGS ARE NOT
TO BE REPRODUCED, CHANGED, OR
COPIED IN ANY FORM OR MANNER
WITHOUT FIRST OBTAINING THE EXPRESS
WRITTEN CONSENT OF RENAISSANCE
RESIDENTIAL DESIGNS, INC.. NOR ARE
THEY TO BE ASSIGNED TO ANY THIRD
PARTY WITHOUT FIRST OBTAINING SAID
WRITTEN PERMISSION AND CONSENT.

J.S.THOMPSON ENGINEERING, INC 606 WADE AVE., SUITE 104 RALEIGH, NC 27605 PHONE: (919) 789-9919 FAX: (919) 789-9921 N.C. LICENSE NO.: C-1733



TITLOGY, TO THOUS, THE PLANS TO THE PLANS TO THE PLANS, ELEVATIONS, DESIGNS, MATERIALS AND DIMENSIONS ARE ESTIMATED AND AY VARY IN ACTUAL CONSTRUCTION. ACTUAL POSITION OF OUSE ON LOT WILL BE DETERMINED BY THE SITE PLAN AND OTHE PLANTON RENDERINGS ARE THE COMPARTIONS. FLOOR PLANS AND ELEVATION RENDERINGS ARE THE COMPARTIONS. FLOOR PLANS AND ELEVATION RENDERINGS ARE THE PROPERTY OF WESTAN HOMES. ANY USE, REPRODUCTION, ADAPTATION, OR DISPLAY OF THE PLANS IS STRICTLY PROHIBITED. SEE NEW HOME SALES CONSULTANT FOR CURRENT DETAILS. COPYRIGHT © 2019 WESTAN HOMES.

WESTAN HOMES JAMES

DATE: JANUARY 26, 2019

REV.:


SCALE: 1/4" = 1'-0"

DRAWN BY: WG

ENGINEERED BY: ZHH

REVIEWED BY: MGS

ROOF PLAN ELEVATION - C

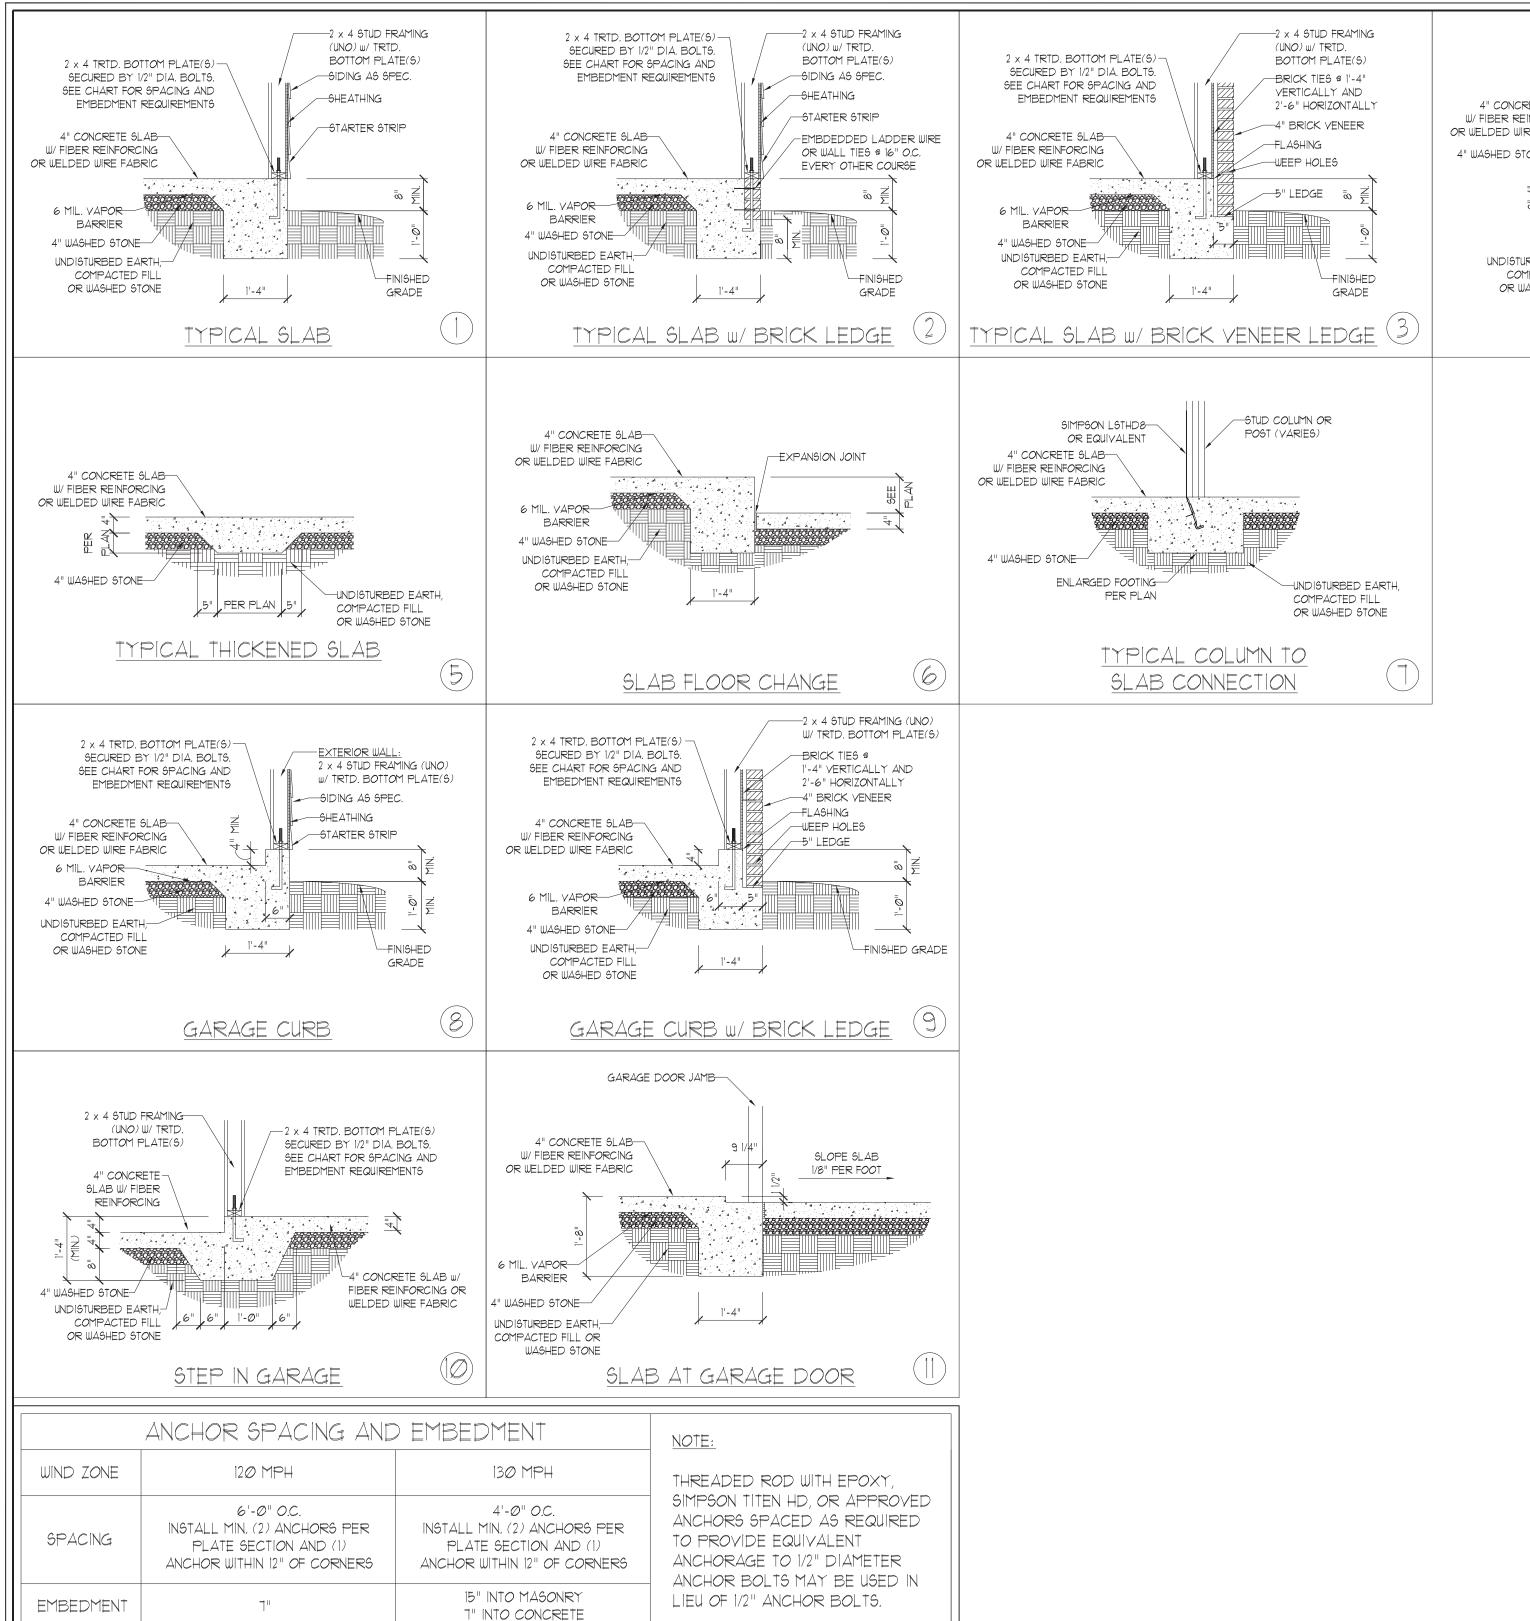

-TREATED POST PER PLAN 4" CONCRETE SLAB-POST BASE PER PLAN W/ FIBER REINFORCING OR WELDED WIRE FABRIC -FINISHED GRADE 4" WASHED STONE UNDISTURBED EARTH, COMPACTED FILL OR WASHED STONE (4)PORCH/SCREEN PORCH

MONOLITHIC SLAB FOUNDATION DETAIL

DATE: NOVEMBER 1, 2018 SCALE: NTS

ENGINEERED BY: JST

DRAWN BY: JST

FOUNDATION

conjunction with a full plan set engineered by J.S. Thompson **DETAILS** Engineering, Inc. only. Use of this

H CARO

SEAL

2/13/19

This sealed page is to be used in

individual sealed page within

architectural pages or shop drawings

by others is a punishable offense

under N.C. Statute § 89C-23

DATE: NOVEMBER 1, 2018 SCALE: NTS

DRAWN BY: JST

ENGINEERED BY: JST

FOUNDATION **DETAILS**

1'-4" VERTICALLY AND WALL HEIGHT 2'-6" HORIZONTALLY ADDER WIRE EVERY OTHER

BRICK TIES @

-4" BRICK VENEER

COURSE

-WALL REINFORCEMENT,

-20" WIDE BY 8" DEEP

CONT. CONC. FTG.

SEE CHART FOR SPACING

-12" CMU BLOCK

-FLASHING

WEEP HOLES

7 AND

(FEET)

2 AND

BELOW

3

5

GREATER

GROUT SOLID w/ #4 NOT APPLICABLE REBAR @ 24" O.C. REBAR @ 24" O.C. ENGINEERED DESIGN BASED ON SITE CONDITIONS

MASONRY STEMWALL SPECIFICATIONS

4" BRICK AND

4" CMU

GROUT SOLID

GROUT SOLID

GROUT SOLID w/ #4

REBAR @ 48" O.C.

NOT APPLICABLE

MASONRY WALL TYPE

4" BRICK AND

8" CMU

UNGROUTED

UNGROUTED

GROUT SOLID

GROUT SOLID w/ #4

REBAR @ 36" O.C.

GROUT SOLID w/ #4

12" CMU

UNGROUTED

UNGROUTED

GROUT SOLID w/ #4

REBAR @ 64" O.C.

GROUT SOLID w/ #4

REBAR @ 64" O.C.

GROUT SOLID w/ #4

REBAR @ 64" O.C.

STRUCTURAL NOTES:

- 1) WALL HEIGHT MEASURED FROM TOP OF FOOTING TO TOP OF THE WALL
- 2) TIE MULTIPLE WYTHES TOGETHER WITH LADDER WIRE AT 16" O.C. VERTICALLY.
- 3) CHART APPLICABLE FOR HOUSE FOUNDATION ONLY. CONSULT ENGINEER FOR DESIGN OF GARAGE FOUNDATION NOT COMMON TO HOUSE.
- 4) BACKFILL OF CLEAN #57 / #67 WASHED STONE IS ALLOWABLE.

8" CMU

UNGROUTED


UNGROUTED

GROUT SOLID

GROUT SOLID w/ #4

REBAR @ 36" O.C.

- 5) BACKFILL OF WELL DRAINED OR SAND GRAYEL MIXTURE SOILS (45 PSF/FT BELOW GRADE) CLASSIFIED AS GROUP I ACCORDING TO UNIFIED SOILS CLASSIFICATION SYSTEM IN ACCORDANCE WITH TABLE R405.1 OF THE 2018 NORTH CAROLINA RESIDENTIAL CODE ARE ALLOWABLE.
- 6) PREP SLAB PER <u>R506.2.1</u> AND <u>R506.2.2</u> BASE AND <u>EXCEPTION</u> OF 2018 NORTH CAROLINA RESIDENTIAL CODE.
- 1) MINIMUM 24" LAP SPLICE LENGTH.
- 8) LOCATE REBAR IN CENTER OF FOUNDATION WALL.
- 9) WHERE REQUIRED, FILL BLOCK SOLID WITH TYPE "S" MORTAR OR 3000 PSI GROUT. USE OF "LOW LIFT GROUTING" METHOD REQUIRED WHEN FILLING WALLS WITH GROUT AT HEIGHTS OF 5' AND GREATER.

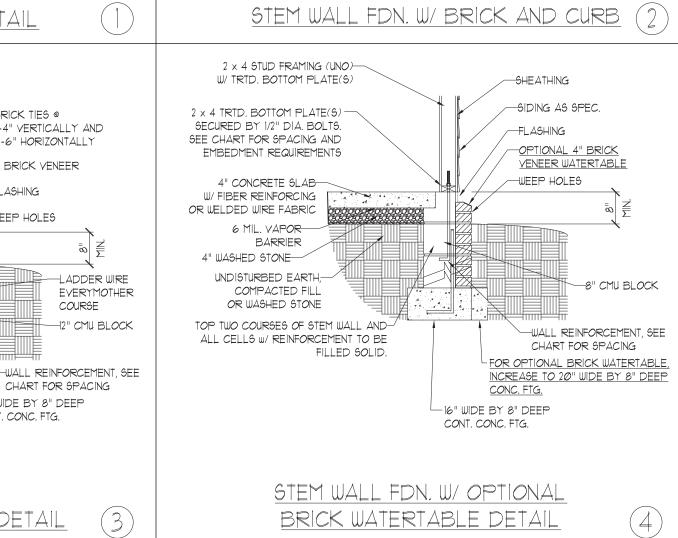

2 x 4 STUD FRAMING (UNO)

W/ TRTD. BOTTOM PLATE(S)

2 x 4 TRTD. BOTTOM PLATE(5)-

SECURED BY 1/2" DIA. BOLTS.

EMBEDMENT REQUIREMENTS

SEE CHART FOR SPACING AND

4" CONCRETE SLAB-W/ FIBER REINFORCING [

> 6 MIL. VAPOR-BARRIER

UNDISTURBED EARTH,

COMPACTED FILL

OR WASHED STONE

TOP TWO COURSES OF STEM WALL AND-

ALL CELLS W/ REINFORCEMENT TO BE

FILLED SOLID.

OR WELDED WIRE FABRIC

4" WASHED STONE-

	ANCHOR SPACING AND EMBEDMENT				
WIND ZONE	120 MPH	13Ø MPH			
SPACING	6'-0" O.C. INSTALL MIN. (2) ANCHORS PER PLATE SECTION AND (1) ANCHOR WITHIN 12" OF CORNERS	4'-0" O.C. INSTALL MIN. (2) ANCHORS PER PLATE SECTION AND (1) ANCHOR WITHIN 12" OF CORNERS			
EMBEDMENT	7"	15" INTO MASONRY 1" INTO CONCRETE			

STEM WALL FDN. W/ BRICK DETAIL

2 x 4 STUD FRAMING (UNO)-W/ TRTD. BOTTOM PLATE(S)

-SIDING AS SPEC.

LADDER WIRE IN TOP TWO

-OPTIONAL BRICK VENEER

COURSES (W/ VENEER ONLY)

-FINISHED GRADE

LADDER WIRE

EVERY OTHER

—8" CMU BLOCK

COURSE

-WALL REINFORCEMENT, SEE

CHART FOR SPACING

H6" WIDE BY 8" DEEP

BRICK TIES @

1'-4" VERTICALLY AND

COURSE

2'-6" HORIZONTALLY

4" BRICK VENEER

-FLASHING

WEEP HOLES

-20" WIDE BY 8" DEEP

CONT. CONC. FTG.

CONT. CONC. FTG.

STEM WALL FON. DETAIL

-SHEATHING

2 x 4 TRTD. BOTTOM PLATE(S)-

SECURED BY 1/2" DIA. BOLTS.

SEE CHART FOR SPACING AND

THICKENED SLAB

4" CONCRETE SLAB-

6 MIL. VAPOR-

UNDISTURBED EARTH,

COMPACTED FILL

OR WASHED STONE

TOP TWO COURSES OF STEM WALL AND-

ALL CELLS W/ REINFORCEMENT TO BE

2 x 4 STUD FRAMING (UNO)

W/ TRTD. BOTTOM PLATE(S)

2 x 4 TRTD. BOTTOM PLATE(S) -

SECURED BY 1/2" DIA. BOLTS.

SEE CHART FOR SPACING AND

4" CONCRETE SLAB

6 MIL. VAPOR-

UNDISTURBED EARTH,

BARRIER

COMPACTED FILL

TOP TWO COURSES OF STEM WALL AND-

ALL CELLS W/ REINFORCEMENT TO BE

FILLED SOLID.

OR WASHED STONE

W/ FIBER REINFORCING

OR WELDED WIRE FABRIC

4" WASHED STONE

EMBEDMENT REQUIREMENTS

FILLED SOLID.

BARRIER

W/ FIBER REINFORCING

OR WELDED WIRE FABRIC

4" WASHED STONE

NOT REQUIRED

EMBEDMENT REQUIREMENTS

NOTE:

THREADED ROD WITH EPOXY, SIMPSON TITEN HD, OR APPROVED ANCHORS SPACED AS REQUIRED TO PROVIDE EQUIVALENT ANCHORAGE TO 1/2" DIAMETER ANCHOR BOLTS MAY BE USED IN LIEU OF 1/2" ANCHOR BOLTS.

This sealed page is to be used in conjunction with a full plan set engineered by J.S. Thompson Engineering, Inc. only. Use of this individual sealed page within architectural pages or shop drawings by others is a punishable offense under N.C. Statute § 89C-23

Mating XI Marken


SEAL


33736


2/13/19


GENERAL WALL BRACING NOTES:

- WALL BRACING DESIGNED IN ACCORDANCE WITH CHAPTER 6 OF THE 2018 NC RESIDENTIAL BUILDING CODE (NCRC). TABLES AND FIGURES REFERENCED ARE FROM THE 2018 NCRC.
- SEE THIS SHEET FOR GENERAL DETAILS. REFER TO THE 2018 NCRC FOR ADDITIONAL INFORMATION AS NEEDED. BRACED EXTERIOR WALLS SUPPORTING ROOF TRUSSES AND RAFTERS, INCLUDING STORIES BELOW THE TOP FLOOR, HAVE BEEN DESIGNED PER R6023.5 (3), WALL SHEATHING AND FASTENERS HAVE BEEN DESIGNED TO RESIST COMBINED UPLIFT AND SHEAR FORCES IN ACCORDANCE WITH ACCEPTED ENGINEERED PRACTICE.
- SEE STRUCTURAL SHEETS FOR BRACED WALL LOCATIONS, DIMENSIONS, HOLD DOWN TYPE AND LOCATIONS, BRACED WALL LINE KEY WITH WALL DESIGN SUMMARY OF REQUIRED/PROVIDED TOTALS FOR EACH WALL LINE AND ANY SPECIAL NOTES OR REQUIREMENTS
- 5. ALL EXTERIOR WALLS ARE TO BE SHEATHED WITH CS-WSP IN ACCORDANCE WITH SECTION R602.10.3 UNLESS NOTED OTHERWISE.
- ALL EXTERIOR AND INTERIOR WALLS TO HAVE 1/2" GYPSUM INSTALLED. WHEN NOT USING METHOD "GB", GYPSUM TO BE FASTENED PER TABLE R102.3.5. METHOD GB TO BE FASTENED PER TABLE R602.10.1
- CS-WSP REFERS TO THE "CONTINUOUS SHEATHING WOOD STRUCTURAL PANELS" WALL BRACING METHOD. 7/16" 05B SHEATHING IS TO BE INSTALLED ON ALL EXTERIOR WALLS ATTACHED W/ 6d COMMON NAILS OR 8d (2 1/2" LONG x Ø.113" DIAMETER) NAILS SPACED 6" O.C. ALONG PANEL EDGES AND 12" O.C. IN THE FIELD (UN.O.).
- GB REFERS TO THE "GYPSUM BOARD" WALL BRACING METHOD. 1/2" (MIN.) GYPSUM WALL BOARD IS TO BE INSTALLED ON BOTH SIDES OF THE BRACED WALL FASTENED WITH 1 1/4" SCREWS OR 1 5/8" NAILS SPACED 1" O.C. ALONG PANEL EDGES INCLUDING TOP AND BOTTOM PLATES AND INTERMEDIATE SUPPORTS (UN.O.). YERIFY ALL FASTENER OPTIONS FOR 1/2" AND 5/8" GYPSUM PRIOR TO CONSTRUCTION. FOR INTERIOR FASTENER OPTIONS SEE TABLE R102.3.5. FOR EXTERIOR FASTENER OPTIONS SEE TABLE R6023(1). EXTERIOR GB TO BE INSTALLED VERTICALLY.
- REQUIRED BRACED WALL LENGTH FOR EACH SIDE OF THE CIRCUMSCRIBED RECTANGLE ARE INTERPOLATED PER TABLE R602. 10.3. METHOD C9-USP CONTRIBUTES ITS ACTUAL LENGTH, METHOD GB CONTRIBUTES IS ITS ACTUAL LENGTH, AND METHOD PF CONTRIBUTES 1.5 TIMES ITS ACTUAL LENGTH.

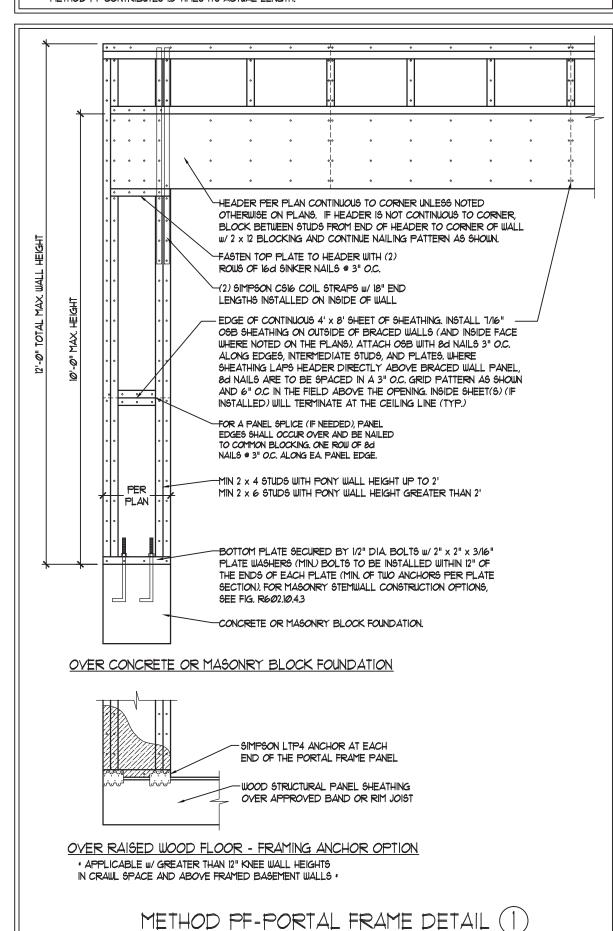

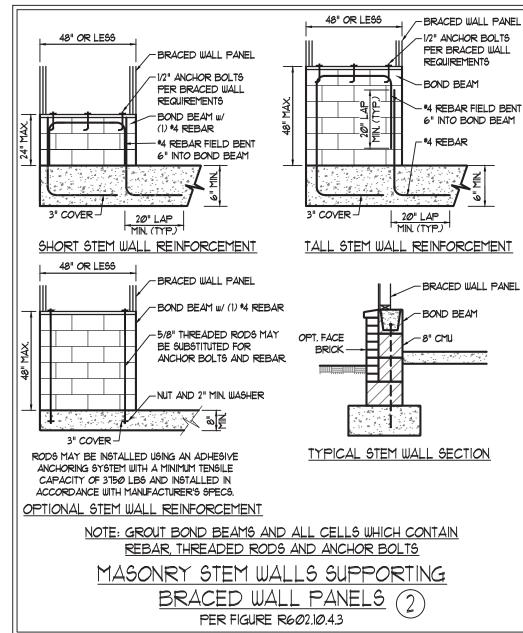


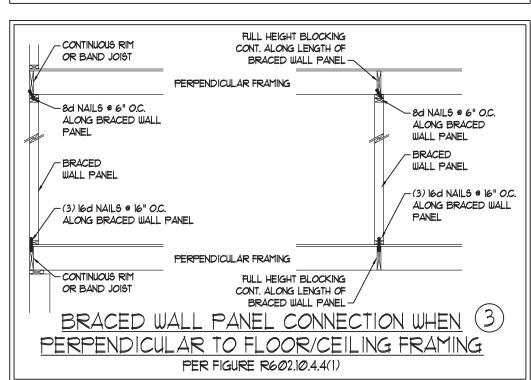


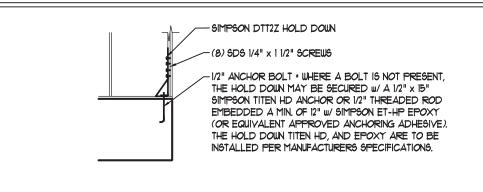


HOLD DOWN DETAIL FOR MASONRY, FOUNDATION OR MONOLITHIC SLAB * APPLICABLE ONLY WHERE SPECIFIED ON PLAN

TYPICAL EXTERIOR CORNER FRAMING FOR CONTINUOUS SHEATHING (5) PER FIGURE R602.10.3(5) MIN. 24" WOOD STRUCTURAL - SEE TABLE R602.3(1) PANEL AN 800 LB HOLD DOWN FOR FASTENING DEVICE MAY BE INSTALLED IN LIEU OF CORNER RETURN-ORIENTATION OF STUD MAY VARY. SEE FIGURE R602.3(2) 16d NAIL (3 1/2" x Ø.131") -GYPSUM WALLBOARD AS REQUIRED @ 12" O.C. -AND INSTALLED IN ACCORDANCE WITH CHAPTER 1 (TYP.) OPTIONAL NON-STRUCTURAL - CONTINUOUS WOOD STRUCTURAL FILLER PANEL -PANEL BRACED WALL LINE SEE TABLE R602.3(1) FOR FASTENING (a) OUTSIDE CORNER DETAIL (5a) ORIENTATION OF STUD MAY VARY. SEE FIGURE R602.3(2) 16d NAIL (3 1/2" x Ø.131") -CONTINUOUS WOOD STRUCTURAL @ 12" O.C. PANEL BRACED WALL LINE SEE TABLE R602.3(1) GYPSUM WALLBOARD AS FOR FASTENING REQUIRED AND INSTALLED MIN. 24" WOOD STRUCTURAL PANEL IN ACCORDANCE WITH CORNER RETURN. AN 800 LB HOLD CHAPTER 1 (TYP.)-DOWN DEVICE MAY BE INSTALLED IN LIEU OF CORNER RETURN (b) INSIDE CORNER DETAIL (5b) GYPSUM WALLBOARD AS REQUIRED SEE TABLE R6023(1) AND INSTALLED IN ACCORDANCE FOR FASTENING WITH CHAPTER 1 (TYP.) 16d NAIL (3 1/2" x Ø.131") (2 ROWS @ 24" O.C. -MIN. 24" WOOD STRUCTURAL SHEATHING PER PLAN-PANEL CORNER RETURN. AN 800 LB HOLD DOWN DEVICE MAY BE INSTALLED IN LIEU OF CORNER RETURN CONTINUOUS WOOD STRUCTURAL PANEL FASTENERS ON EACH STUD 5C
AT EACH PANEL EDGE BRACED WALL LINE -AT EACH PANEL EDGE (c) GARAGE DOOR CORNER DETAIL (SEE PLAN FOR ADDITIONAL





BRACED WALL PANEL CONNECTION WHEN PARALLEL TO FLOOR/CEILING FRAMING PER FIG. R602.10.4.4(2) -FULL HEIGHT BLOCKING @ - ADDITIONAL FRAMING 16" O.C. ALONG LENGTH OF MEMBER DIRECTLY ABOVE BRACED WALL PANEL -CONTINUOUS RIM OR BAND JOIST BRACED WALL PANEL TOE NAIL (3) 8d NAILS AT -8d NAILS @ 6" O.C. ALONG -8d NAILS ® 6" O.C. ALONG BRACED WALL PANEL EA. BLOCKING MEMBER BRACED WALL PANEL -BRACED WALL PANEL -BRACED WALL PANEL BRACED WALL PANEL ~(3) 16d NAILS @ 16" O.C. -(3) 16d NAILS @ 16" O.C. ~(3) 16d NAILS @ 16" O.C. AT EA. BLOCKING ALONG BRACED WALL PANEL ALONG BRACED WALL PANEL (2) 16d NAILS EA. SIDE ADDITIONAL FRAMING -FULL HEIGHT BLOCKING @ - CONTINUOUS RIM W/ FINGER MEMBER DIRECTLY BELOW 16" O.C. ALONG LENGTH OF JOISTS OR DBL. BAND JOIST BRACED WALL PANEL BRACED WALL PANEL



DATE: OCTOBER 30, 2018

DET,

AND

NOTES

BRACING

DRAWN BY: IST

ENGINEERED BY: JST

BRACED WALL NOTES AND DETAILS AND PF DETAIL

STRUCTURAL INFORMATION OR ALTERNATE CONFIGURATIONS)

This sealed page is to be used in conjunction with a full plan set engineered by J.S. Thompson Engineering, Inc. only. Use of this individual sealed page within architectural pages or shop drawings by others is a punishable offense under N.C. Statute § 89C-23



SCALE: 1/4" = 1'-0"

GENERAL NOTES


- I. ENGINEER'S SEAL APPLIES ONLY TO STRUCTURAL COMPONENTS INCLUDING ROOF RAFTERS, HIPS, VALLEYS, RIDGES, FLOORS, WALLS, BEAMS, HEADERS, COLUMNS, CANTILEVERS, OFFSET LOAD BEARING WALLS, PIERS, GIRDER SYSTEM AND FOOTING. ENGINEER'S SEAL DOES NOT CERTIFY DIMENSIONAL ACCURACY OF ARCHITECTURAL LAYOUT INCLUDING ROOF. ENGINEER'S SEAL DOES NOT APPLY TO I-JOIST OR FLOOR/ROOF TRUSS LAYOUT DESIGN AND ACCURACY.
- 2. ALL CONSTRUCTION SHALL CONFORM TO THE LATEST REQUIREMENTS OF THE NORTH CAROLINA RESIDENTIAL CODE (NCRC), 2018 EDITION, PLUS ALL LOCAL CODES AND REGULATIONS. THE STRUCTURAL ENGINEER IS NOT RESPONSIBLE FOR, AND WILL NOT HAVE CONTROL OF, CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES OR PROCEDURES, OR SAFETY PRECAUTIONS AND PROGRAMS IN CONNECTION WITH THE CONSTRUCTION WORK. NOR WILL THE ENGINEER BE RESPONSIBLE FOR THE CONTRACTORS FAILURE TO CARRY OUT THE CONSTRUCTION WORK IN ACCORDANCE WITH THE CONTRACT DOCUMENTS.
- 3. STRUCTURAL DESIGN BASED ON THE PROVISIONS OF THE NCRC, 2018 EDITION (R301.4 R301.7)

DESIGN CRITERIA:	LIVE LOAD (PSF)	DEAD LOAD (PSF)	DEFLECTION (IN)
ATTIC WITH LIMITED STORAGE	2Ø	10	L/240 (L/360 w/ BRITTLE FINISHES)
ATTIC WITHOUT STORAGE	10	10	L/360
DECKS	40	10	L/360
EXTERIOR BALCONIES	40	10	L/360
FIRE ESCAPES	40	10	L/360
HANDRAILS/GUARDRAILS	200 LB OR 50 (PLF)	10	L/360
PASSENGER VEHICLE GARAGE	5Ø	10	L/360
ROOMS OTHER THAN SLEEPING ROOM	40	10	L/360
SLEEPING ROOMS	3Ø	10	L/360
STAIRS	40	10	L/360
WIND LOAD	(BASED ON TABLE R301.2(4) WIND ZONE AND EXPOSURE)		
GROUND SNOW LOAD: Pg	20 (PSF)		

- I-JOIST SYSTEMS DESIGNED WITH 12 PSF DEAD LOAD AND DEFLECTION (IN) OF L/480
- FLOOR TRUSS SYSTEMS DESIGNED WITH 15 PSF DEAD LOAD
- 4. FOR 115 AND 120 MPH WIND ZONES, FOUNDATION ANCHORAGE 15 TO COMPLY WITH SECTION R403.1.6 OF THE NCRC, 2018 EDITION. FOR 130 MPH, 140 MPH, AND 150 MPH WIND ZONES, FOUNDATION ANCHORAGE 15 TO COMPLY WITH SECTION 4504 OF THE NCRC, 2018 EDITION.
- 5. ENERGY EFFICIENCY COMPLIANCE AND INSULATION VALUES OF THE BUILDING TO BE IN ACCORDANCE WITH CHAPTER II OF THE NCRC, 2018 EDITION.

FOOTING AND FOUNDATION NOTES

- I. FOUNDATION DESIGN BASED ON A MINIMUM ALLOWABLE BEARING CAPACITY OF 2000 PSF. CONTACT GEOTECHNICAL ENGINEER IF BEARING CAPACITY IS NOT ACHIEVED.
- 2. FOR ALL CONCRETE SLABS AND FOOTINGS, THE AREA WITHIN THE PERIMETER OF THE BUILDING ENVELOPE SHALL HAVE ALL VEGETATION, TOP SOIL AND FOREIGN MATERIAL REMOVED. FILL MATERIAL SHALL BE FREE OF VEGETATION AND FOREIGN MATERIAL. THE FILL SHALL BE COMPACTED TO ASSURE UNIFORM SUPPORT OF THE SLAB, AND EXCEPT WHERE APPROVED, THE FILL DEPTHS SHALL NOT EXCEED 24" FOR CLEAN SAND OR GRAVEL. A 4" THICK BASED COURSE CONSISTING OF CLEAN GRADED SAND OR GRAVEL SHALL BE PLACED. A BASE COURSE IS NOT REQUIRED WHERE A CONCRETE SLAB IS INSTALLED ON WELL-DRAINED OR SAND-GRAVEL MIXTURE SOILS CLASSIFIED AS GROUP I, ACCORDING TO THE UNITED SOIL CLASSIFICATION SYSTEM IN ACCORDANCE WITH TABLE R405.1 OF THE NCRC, 2018 EDITION.
- 3. PROPERLY DEWATER EXCAVATION PRIOR TO POURING CONCRETE WHEN BOTTOM OF CONCRETE SLAB IS AT OR BELOW WATER TABLE. IF APPLICABLE, 3/4" 1" DEEP CONTROL JOINTS ARE TO BE SAWED WITHIN 4 TO 12 HOURS OF CONCRETE FINISHING AND WALL LOCATIONS HAVE BEEN MARKED. ADJUST WHERE NECESSARY.
- 4. CONCRETE SHALL CONFORM TO SECTION R402.2 OF THE NCRC, 2018 EDITION. CONCRETE REINFORCING STEEL TO BE ASTM A615 GRADE 60. WELDED WIRE FABRIC TO BE ASTM A185. MAINTAIN A MINIMUM CONCRETE COVER AROUND REINFORCING STEEL OF 3" IN FOOTINGS AND 1 1/2" IN SLABS. FOR POURED CONCRETE WALLS, CONCRETE COVER FOR REINFORCING STEEL MEASURED FROM THE INSIDE FACE OF THE WALL SHALL NOT BE LESS THAN 3/4". CONCRETE COVER FOR REINFORCING STEEL MEASURED FROM THE OUTSIDE FACE OF THE WALL SHALL NOT BE LESS THAN 1 1/2" FOR #5 BARS OR SMALLER, AND NOT LESS THAN 2" FOR #6 BARS OR LARGER.
- 5. MASONRY UNITS TO CONFORM TO ACE 530/ASCE 5/TMS 402. MORTAR SHALL COMFORM TO ASTM C270.
- 6. THE UNSUPPORTED HEIGHT OF MASONRY PIERS SHALL NOT EXCEED FOUR TIMES THEIR LEAST DIMENSION FOR UNFILLED HOLLOW CONCRETE MASONRY UNITS AND TEN TIMES THEIR LEAST DIMENSION FOR SOLID OR SOLID FILLED PIERS. PERS MAY BE FILLED SOLID WITH CONCRETE OR TYPE M OR S MORTAR PIERS AND WALLS SHALL BE CAPPED WITH 8" OF SOLID MASONRY.
- 1. THE CENTER OF EACH OF THE PIERS SHALL BEAR IN THE MIDDLE THIRD OF ITS RESPECTIVE FOOTING. EACH GIRDER SHALL BEAR IN THE MIDDLE THIRD OF THE PIERS.
- 8. ALL CONCRETE AND MASONRY FOUNDATION WALLS ARE TO BE CONSTRUCTED IN ACCORDANCE WITH THE PROVISIONS OF SECTION R404 OF THE NCRC, 2018 EDITION OR IN ACCORDANCE WITH ACI 318, ACI 332, NCMA TR68-A OR ACE 530/ASCE 5/TMS 402. MASONRY FOUNDATION WALLS ARE TO BE REINFORCED PER TABLE R404.I.I(1), R404.I.I(2), R404.I.I(3), OR R404.I.I(4) OF THE NCRC, 2018 EDITION. CONCRETE FOUNDATION WALLS ARE TO BE REINFORCED PER TABLE R404.I.I(5) OF THE NCRC, 2018 EDITION. STEP CONCRETE FOUNDATION WALLS TO 2 x 6 FRAMED WALLS AT 16" O.C. WHERE GRADE PERMITS (UNO).



This sealed page is to be used in conjunction with a full plan set engineered by J.S. Thompson Engineering, Inc. only. Use of this individual sealed page within architectural pages or shop drawings by others is a punishable offense under N.C. Statute § 89C-23

FRAMING NOTES

- 1. ALL FRAMING LUMBER SHALL BE *2 SPF MINIMUM (Fb = 875 PSI, Fv = 375 PSI, E = 1600000 PSI) UNLESS NOTED OTHERWISE (UNO). ALL TREATED LUMBER SHALL BE *2 SYP MINIMUM (Fb = 975 PSI, Fv = 175 PSI, E = 1600000 PSI) UNLESS NOTED OTHERWISE (UNO).
- 2. LAMINATED VENEER LUMBER (LVL) SHALL HAVE THE FOLLOWING MINIMUM PROPERTIES: Fb = 2600 PSI, Fv = 285 PSI, E = 1900000 PSI.

 LAMINATED STRAND LUMBER (LSL) SHALL HAVE THE FOLLOWING MINIMUM PROPERTIES: Fb = 2325 PSI, Fv = 310 PSI, E = 1550000 PSI.

 PARALLEL STRAND LUMBER (PSL) UP TO T" DEPTH SHALL HAVE THE FOLLOWING MINIMUM PROPERTIES: Fc = 2500 PSI, E = 18000000 PSI.

 PARALLEL STRAND LUMBER (PSL) MORE THAN T" DEPTH SHALL HAVE THE FOLLOWING MINIMUM PROPERTIES: Fc = 2900 PSI, E = 20000000 PSI. INSTALL ALL CONNECTIONS PER MANUFACTURER'S SPECIFICATIONS.
- 3. STRUCTURAL STEEL SHALL CONFORM TO THE FOLLOWING ASTM SPECIFICATIONS

A. W AND WT SHAPES: ASTM A992
B. CHANNELS AND ANGLES: ASTM A36
C. PLATES AND BARS: ASTM A36

D. HOLLOW STRUCTURAL SECTIONS: ASTM A500 GRADE B

STEEL PIPE: ASTM A53, GRADE B, TYPE E OR S

4. STEEL BEAMS SHALL BE SUPPORTED AT EACH END WITH A MINIMUM BEARING LENGTH OF 3 1/2" AND FULL FLANGE WIDTH (UNO). PROVIDE SOLID BEARING FROM BEAM SUPPORT TO FOUNDATION. BEAMS SHALL BE ATTACHED AT THE BOTTOM FLANGE TO EACH SUPPORT AS FOLLOWS (UNO):

A. WOOD FRAMING (2) 1/2" DIA. x 4" LONG LAG SCREWS
B. CONCRETE (2) 1/2" DIA. x 4" WEDGE ANCHORS

C. MASONRY (FULLY GROUTED) (2) 1/2" DIA. x 4" LONG SIMPSON TITEN HD ANCHORS

LATERAL SUPPORT IS CONSIDERED ADEQUATE PROVIDING THE JOISTS ARE TOE NAILED TO THE 2x NAILER ON TOP OF THE STEEL BEAM, AND THE 2x NAILER IS SECURED TO THE TOP OF THE STEEL BEAM w/ (2) ROWS OF SELF TAPPING SCREWS @ 16" O.C. OR (2) ROWS OF 1/2" DIAMETER BOLTS @ 16" O.C. IF 1/2" BOLTS ARE USED TO FASTEN THE NAILER, THE STEEL BEAM SHALL BE FABRICATED w/ (2) ROWS OF 9/16" DIAMETER HOLES @ 16" O.C.

- 5. SQUARES DENOTE POINT LOADS WHICH REQUIRE SOLID BLOCKING TO GIRDER OR FOUNDATION. SHADED SQUARES DENOTE POINT LOADS FROM ABOVE WHICH REQUIRE SOLID BLOCKING TO SUPPORTING MEMBER BELOW.
- 6. ALL LOAD BEARING HEADERS TO CONFORM TO TABLE R602.7(1) AND R602.7(2) OF THE NCRC, 2018 EDITION OR BE (2) 2 x 6 WITH (1) JACK AND (1) KING STUD EACH END (UNO), WHICHEVER IS GREATER ALL HEADERS TO BE SECURED TO EACH JACK STUD WITH (4) 8d NAILS. ALL BEAMS TO BE SUPPORTED WITH (2) STUDS AT EACH BEARING POINT (UNO). INSTALL KING STUDS PER SECTION R602.7.5 OF THE NORTH CAROLINA RESIDENTIAL CODE, 2018 EDITION.
- 1. ALL BEAMS, HEADERS, OR GIRDER TRUSSES PARALLEL TO WALL ARE TO BEAR FULLY ON (1) JACK OR (2) STUDS MINIMUM OR THE NUMBER OF JACKS OR STUDS NOTED. ALL BEAMS OR GIRDER TRUSSES PERPENDICULAR TO WALL AND SUPPORTED BY (3) STUDS OR LESS ARE TO HAVE I 1/2" MINIMUM BEARING (UNO). ALL BEAMS OR GIRDER TRUSSES PERPENDICULAR TO WALL AND SUPPORTED BY MORE THAN (3) STUDS OR OTHER NOTED COLUMN ARE TO BEAR FULLY ON SUPPORT COLUMN FOR ENTIRE WALL DEPTH (UNO). BEAM ENDS THAT BUTT INTO ONE ANOTHER ARE TO EACH BEAR EQUAL LENGTHS (UNO).
- 8. FLITCH BEAMS SHALL BE BOLTED TOGETHER USING 1/2" DIAMETER BOLTS (ASTM A3ØT) WITH WASHERS PLACED AT THREADED END OF BOLT.
 BOLTS SHALL BE SPACED AT 24" CENTERS (MAXIMUM), AND STAGGERED AT TOP AND BOTTOM OF BEAM (2" EDGE DISTANCE), WITH (2) BOLTS LOCATED AT 6" FROM EACH END (UNO).
- 9. ALL 1-JOIST OR TRUSS LAYOUTS ARE TO BE IN COMPLIANCE WITH THE OVERALL DESIGN SPECIFIED ON THE PLANS. ALL DEVIATIONS ARE TO BE BROUGHT TO THE ATTENTION OF THE ENGINEER OF RECORD PRIOR TO INSTALLATION.
- 10. BRACED WALL PANELS SHALL BE CONSTRUCTED ACCORDING TO THE NORTH CAROLINA RESIDENTIAL CODE 2018 EDITION WALL BRACING CRITERIA. THE AMOUNT, LENGTH, AND LOCATION OF BRACING SHALL COMPLY WITH ALL APPLICABLE TABLES IN SECTION R602.10.
- 11. PROVIDE DOUBLE JOIST UNDER ALL WALLS PARALLEL TO FLOOR JOISTS. PROVIDE SUPPORT UNDER ALL WALLS PARALLEL TO FLOOR TRUSSES OR 1-JOISTS PER MANUFACTURER'S SPECIFICATIONS. INSTALL BLOCKING BETWEEN JOISTS OR TRUSSES FOR POINT LOAD SUPPORT FOR ALL POINT LOADS ALONG OFFSET LOAD LINES.
- 12. FOR ALL HEADERS SUPPORTING BRICK VENEER THAT ARE LESS THAN 8'-0" IN LENGTH, REST A 6" x 4" x 5/16" STEEL ANGLE WITH 6" MINIMUM EMBEDMENT AT SIDES FOR BRICK SUPPORT (UN.O). FOR ALL HEADERS 8'-0" AND GREATER IN LENGTH, BOLT A 6" x 4" x 5/16" STEEL ANGLE TO HEADER WITH 1/2" LAG SCREWS AT 12" O.C. STAGGERED FOR BRICK SUPPORT. FOR ALL BRICK SUPPORT AT ROOF LINES, BOLT A 6" x 4" x 5/16" STEEL ANGLE TO (2) 2 x 10 BLOCKING INSTALLED W/ (4) 12d NAILS EA. PLY BETWEEN WALL STUDS WITH (2) ROWS OF 1/2" LAG SCREWS AT 12" O.C. STAGGERED AND IN ACCORDANCE WITH SECTION RT03.8.2.1 OF THE NCRC, 2018 EDITION.
- 13. FOR STICK FRAMED ROOFS: CIRCLES DENOTE (3) 2 x 4 POSTS FOR ROOF MEMBER SUPPORT. HIP SPLICES ARE TO BE SPACED A MINIMUM OF 8'-0". FASTEN MEMBERS WITH THREE ROWS OF 12d NAILS AT 16" O.C. FRAME DORMER WALLS ON TOP OF DOUBLE OR TRIPLE RAFTERS AS SHOWN (UNO).
- 14. FOR TRUSSED ROOFS: FRAME DORMER WALLS ON TOP OF 2 x 4 LADDER FRAMING AT 24" O.C. BETWEEN ADJACENT ROOF TRUSSES. STICK FRAME OVER-FRAMED ROOF SECTIONS WITH 2 x 8 RIDGES, 2 x 6 RAFTERS AT 16" O.C. AND FLAT 2 x 10 VALLEYS (UNO).
- 15. ALL 4 x 4 AND 6 x 6 POSTS TO BE INSTALLED WITH 700 LB CAPACITY UPLIFT CONNECTORS TOP AND BOTTOM (UNO.) POSTS MAY BE SECURED USING ONE SIMPSON H6 OR LTS12 UPLIFT CONNECTOR FASTENED TO THE BAND AT THE BOTTOM AND THE BEAM AT THE TOP OF EACH POST. ONE 16" SECTION OF SIMPSON CS16 COIL STRAPPING WITH (8) 8d HDG NAILS AT EACH END MAY BE USED IN LIEU OF EACH TWIST STRAP IF DESIRED. FOR MASONRY OR CONCRETE FOUNDATION USE SIMPSON POST BASE.

ENGINEERING, INC 2605
PHONE: (919) 789-9919 FAX: (919) 789-9921
N.C. LICENSE NO.: C.1733

STANDARD STRUCTURAL NOTES

DATE: OCTOBER 29, 2018

DRAWN BY: JES

SCALE: 1/4" = 1'-0"

ENGINEERED BY: JST

STRUCTURAL NOTES