


THIS LAYOUT IS INTENDED FOR THE PURPOSE OF TRUSS LOCATION AND PLACEMENT ONLY. REFER TO THE BUILDING PLANS FOR ACTUAL BUILDING CONSTRUCTION.



DEDICATED TO QUALITY AND EXCELLENCE
 200 EMMETT ROAD
 DUNN, NORTH CAROLINA 28334
 PHONE: 910-892-8400

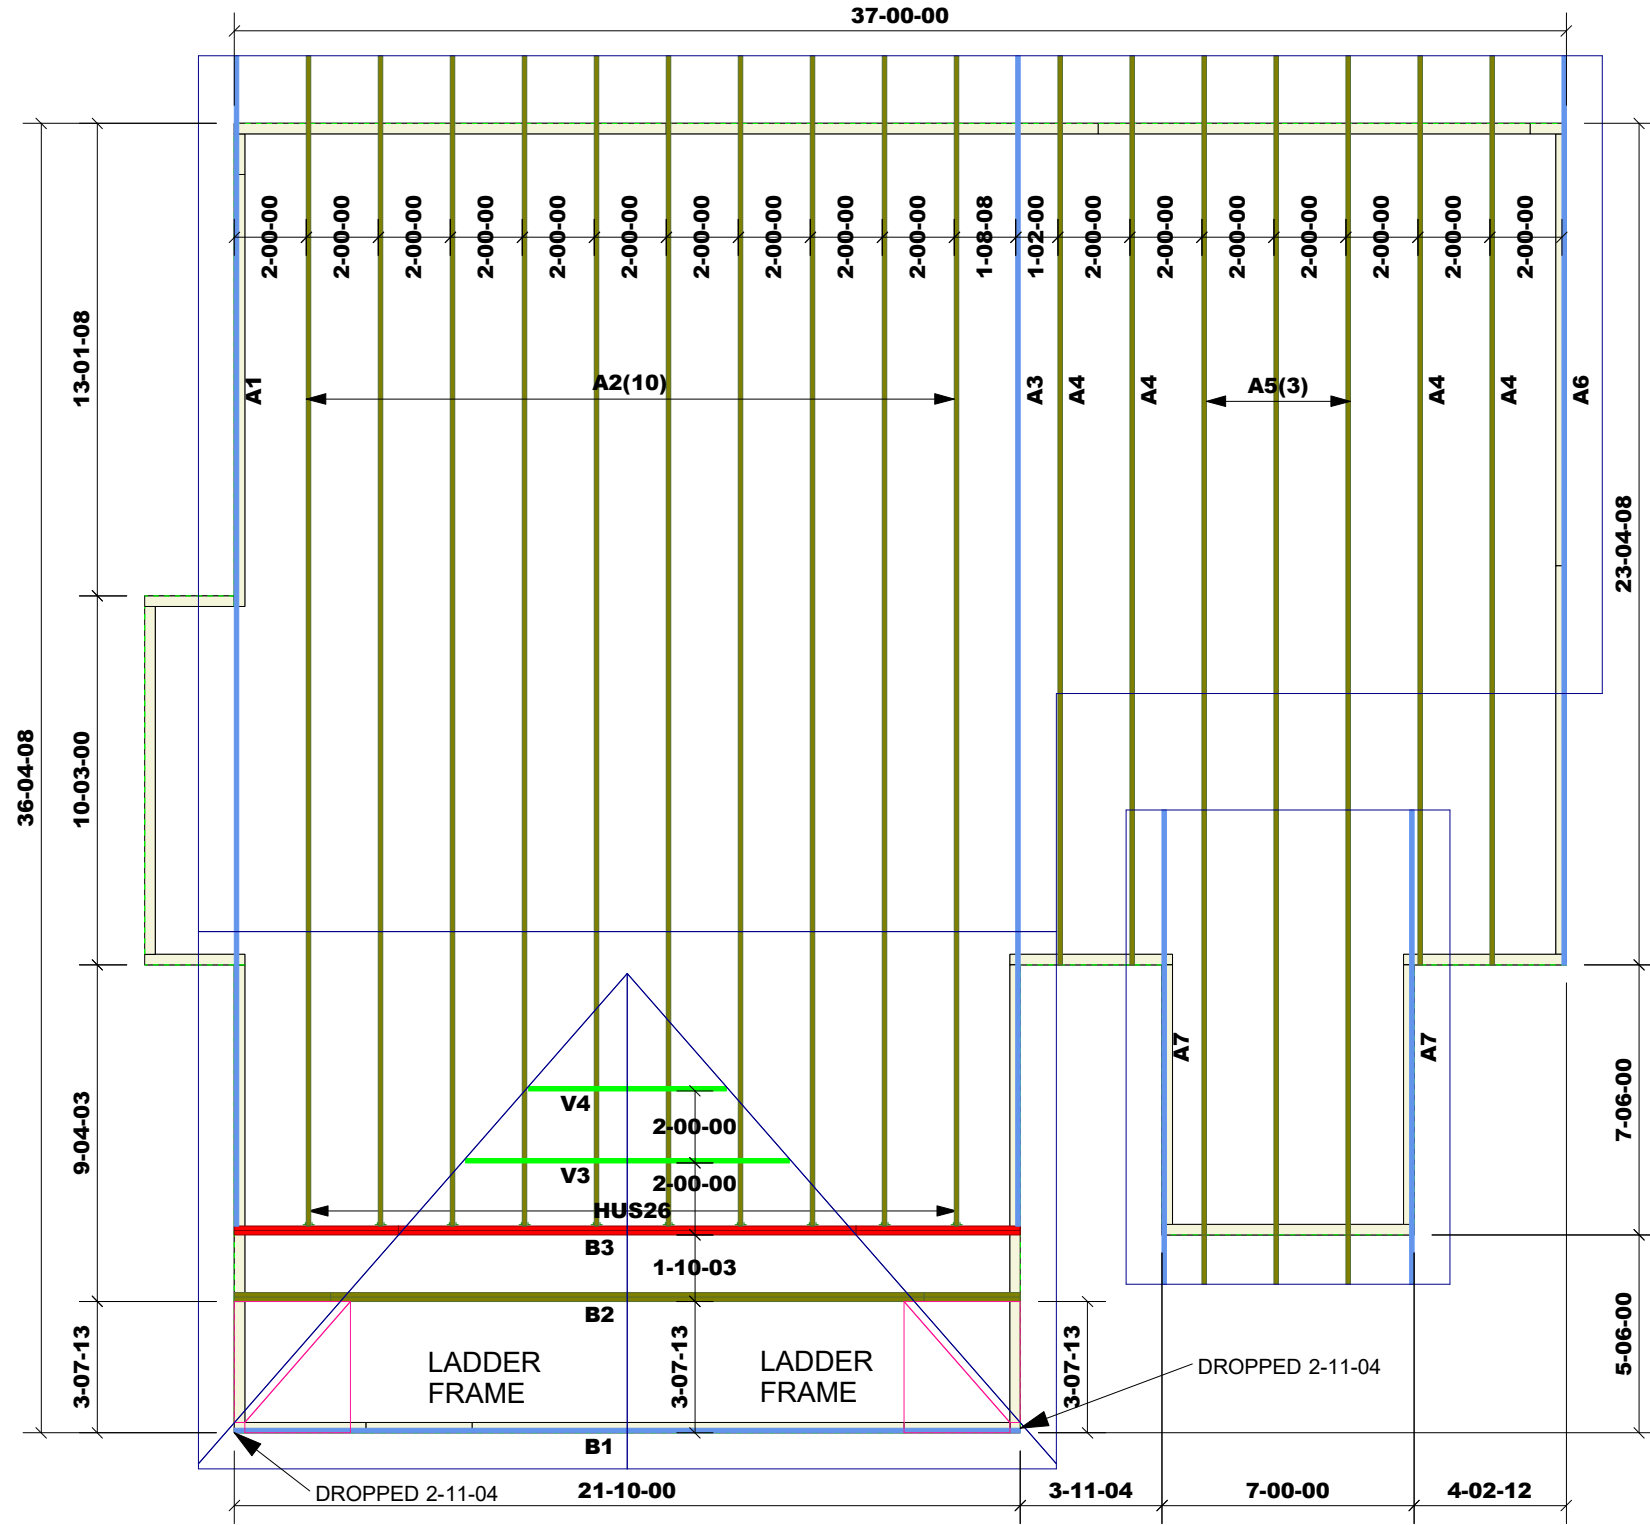

Manuf	Product	Qty
Simpson	HUS26	10

PROJECT: LAUREN WELLONS JOB - FLOOR
 CUSTOMER: WELLONS CALL DUANE

MODEL:
 QUOTE #: 29653
 PRINT DATE: 12/17/2021
 DRAWN BY:
 SCALE: N.T.S

GENERAL NOTES:
 - IT IS THE RESPONSIBILITY OF THE BUILDER TO PROVIDE ADEQUATE SUPPORT FOR ALL MEMBERS DISPLAYED ON THIS DRAWING.
 - DO NOT CUT OR MODIFY TRUSSES
 - BUILDER IS RESPONSIBLE TO VERIFY ALL DIMENSIONS, PLUMBING AND HVAC DROPS / RISE LOCATIONS PRIOR TO TRUSS PLACEMENT.
 - REFER TO THE INDIVIDUAL TRUSS DESIGN DRAWINGS FOR THE LOCATION OF LATERAL BRACING AND MULTI-PLY CONNECTION REQUIREMENTS.
 - PER ANSITPI 1-2002 THE TRUSS ENGINEER IS RESPONSIBLE FOR TRUSS TO TRUSS CONNECTIONS AND TRUSS PLY TO PLY CONNECTIONS. THIS TRUSS CONNECTION PLAN RECOMMENDS TRUSS TO BEARING CONNECTIONS AND TRUSS TO BEAM CONNECTIONS WHICH SHALL BE REVIEWED BY THE BUILDING DESIGNER. IT IS THE RESPONSIBILITY OF THE BUILDING DESIGNER TO RESOLVE ALL ROOF FORCES ADEQUATELY TO THE FOUNDATION.

1st Level Floor Area 1451.83	2nd Level Floor Area 1451.83
1st Level Roof Area 3786	2nd Level Roof Area 0

Indicates Left End of Truss