
THIS IS A TRUSS/COMPONENT PLACEMENT DIAGRAM (TPD) ONLY; NOT AN ENGINEERED DOCUMENT. Trusses are designed as individual building components to be incorporated into the building design at the specification of the building designer is responsible for temporary and permanent bracing of the roof and floor system and for the overall structure. The design of the support structure including but not limited to headers, beams, walls, and columns is also the responsibility of the building designer. For general guidance regarding installation and bracing, consult "Building Component Safety Information" (BCSI) available from the SBC Association (www.sbcacomponents.com). It is the responsibility of the General Contractor to verify that the provided component layout matches the final intended construction plans, loading conditions, and use. If they do not, it is the responsibility of the General Contractor to notify UPP and provide plans containing the latest specifications and designs on the seponsible for plan changes by others after final approval of shop plans containing the latest specifications and designs on the responsible for plan changes by others after final approval of shop plans containing the latest specifications and designs on the responsible for plan changes by others after final approval of shop plans containing the latest specifications. DO NOT CUT, NOTCH, DRILL, OR OTHERWISE "REPAIR" MANUFACTURED TRUSSES IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION BY A LICENSED PROFESSIONAL DESIGNATED BY UFP. The Framer is responsible to verify all dimensions, including adjusting member spacing within tolerances to allow for the drop and rise of plumbing/HVAC, unless noted otherwise. Truss-to-wall connectors shown that are not truss-to-truss are suggestions only and are to be verified by the Building Designer or Engineer of Record for suitability to this particular project. UFP accepts no responsibility for the specific application or suitability of any connector that is not truss-to-truss as they apply to this specific

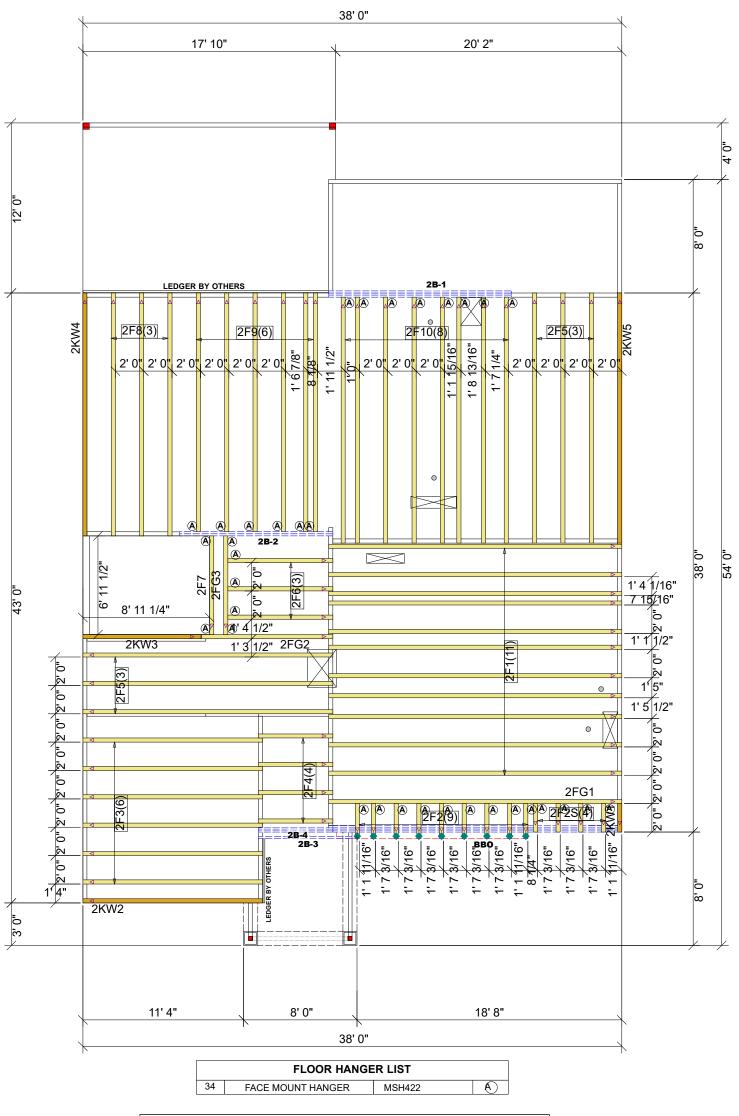

FLUSH LVL BEAM LIST						
Fab Type	Net Qty	Plies	Product	Length	PlotID	
MFD	3	3	1 3/4" x 14" 2.0E Microllam® LVL	14' 0"	2B-1	
MFD	2	2	1 3/4" x 14" 2.0E Microllam® LVL	12' 0"	2B-2	
MFD	1	1	1 3/4" x 14" 2.0E Microllam® LVL	8' 0"	2B-3	
MFD	2	2	1 3/4" x 14" 2.0E Microllam® LVL	6' 0"	2B-4	

## ROOF AREA: 2454.76 ft<sup>2</sup>\_RIDGE LINE: 86.09 ft \_ VALLEY LINES: 70.38 \_ HIP LINES:0

**LILLINGTON, NC 27546** 

 $\Delta$  Indicates Left End of Truss

JOB #: 2207	DESIGNER LAYOUT DATE ARCH DATE STRUC DATE	[
22070176F2	AM 7-13-22	

ARCH DATE COLORS DATE DESCRIPTION DSN PLAN #4 SELMA 'GEORGIAN' 2ND FLOOR

4457 OLD US 421

PBS

LOT 4 DUNCAN'S CREEK

This drawing is property of UFP Site Built, LLC. Any unauthorized use of this document without written permission is prohibited. UFP relinquishes ownership of delivered product upon delivery. Owner of product must obtain UFP's authorization prior to any alteration or modification of product; UFP will not be held responsible for any unauthorized modifications done or costs incurred without prior written authorization from UFP.



UFP SITE BUILT

Burlington, NC Locust, NC Chesapeake, VA Liberty, NC Clinton, NC Ooltewah, TN Conway, SC Pearisburg, VA Jefferson, GA Stanfield, NC

rg, VA , NC

Customer Service (800) 476-9356