

**THIS LAYOUT IS INTENDED FOR THE PURPOSE OF TRUSS LOCATION AND PLACEMENT ONLY. REFER TO THE BUILDING PLANS FOR ACTUAL BUILDING CONSTRUCTION.**




DEDICATED TO QUALITY AND EXCELLENCE  
 200 EMMETT ROAD  
 DUNN, NORTH CAROLINA 28334  
 PHONE: 910-892-8400

PROJECT: Huntington A 1546

CUSTOMER: Wellon Homes

MODEL: Huntington A 1546

QUOTE #: 28170  
 PRINT DATE: 8/19/2021  
 DRAWN BY: N.T.S.  
 SCALE:

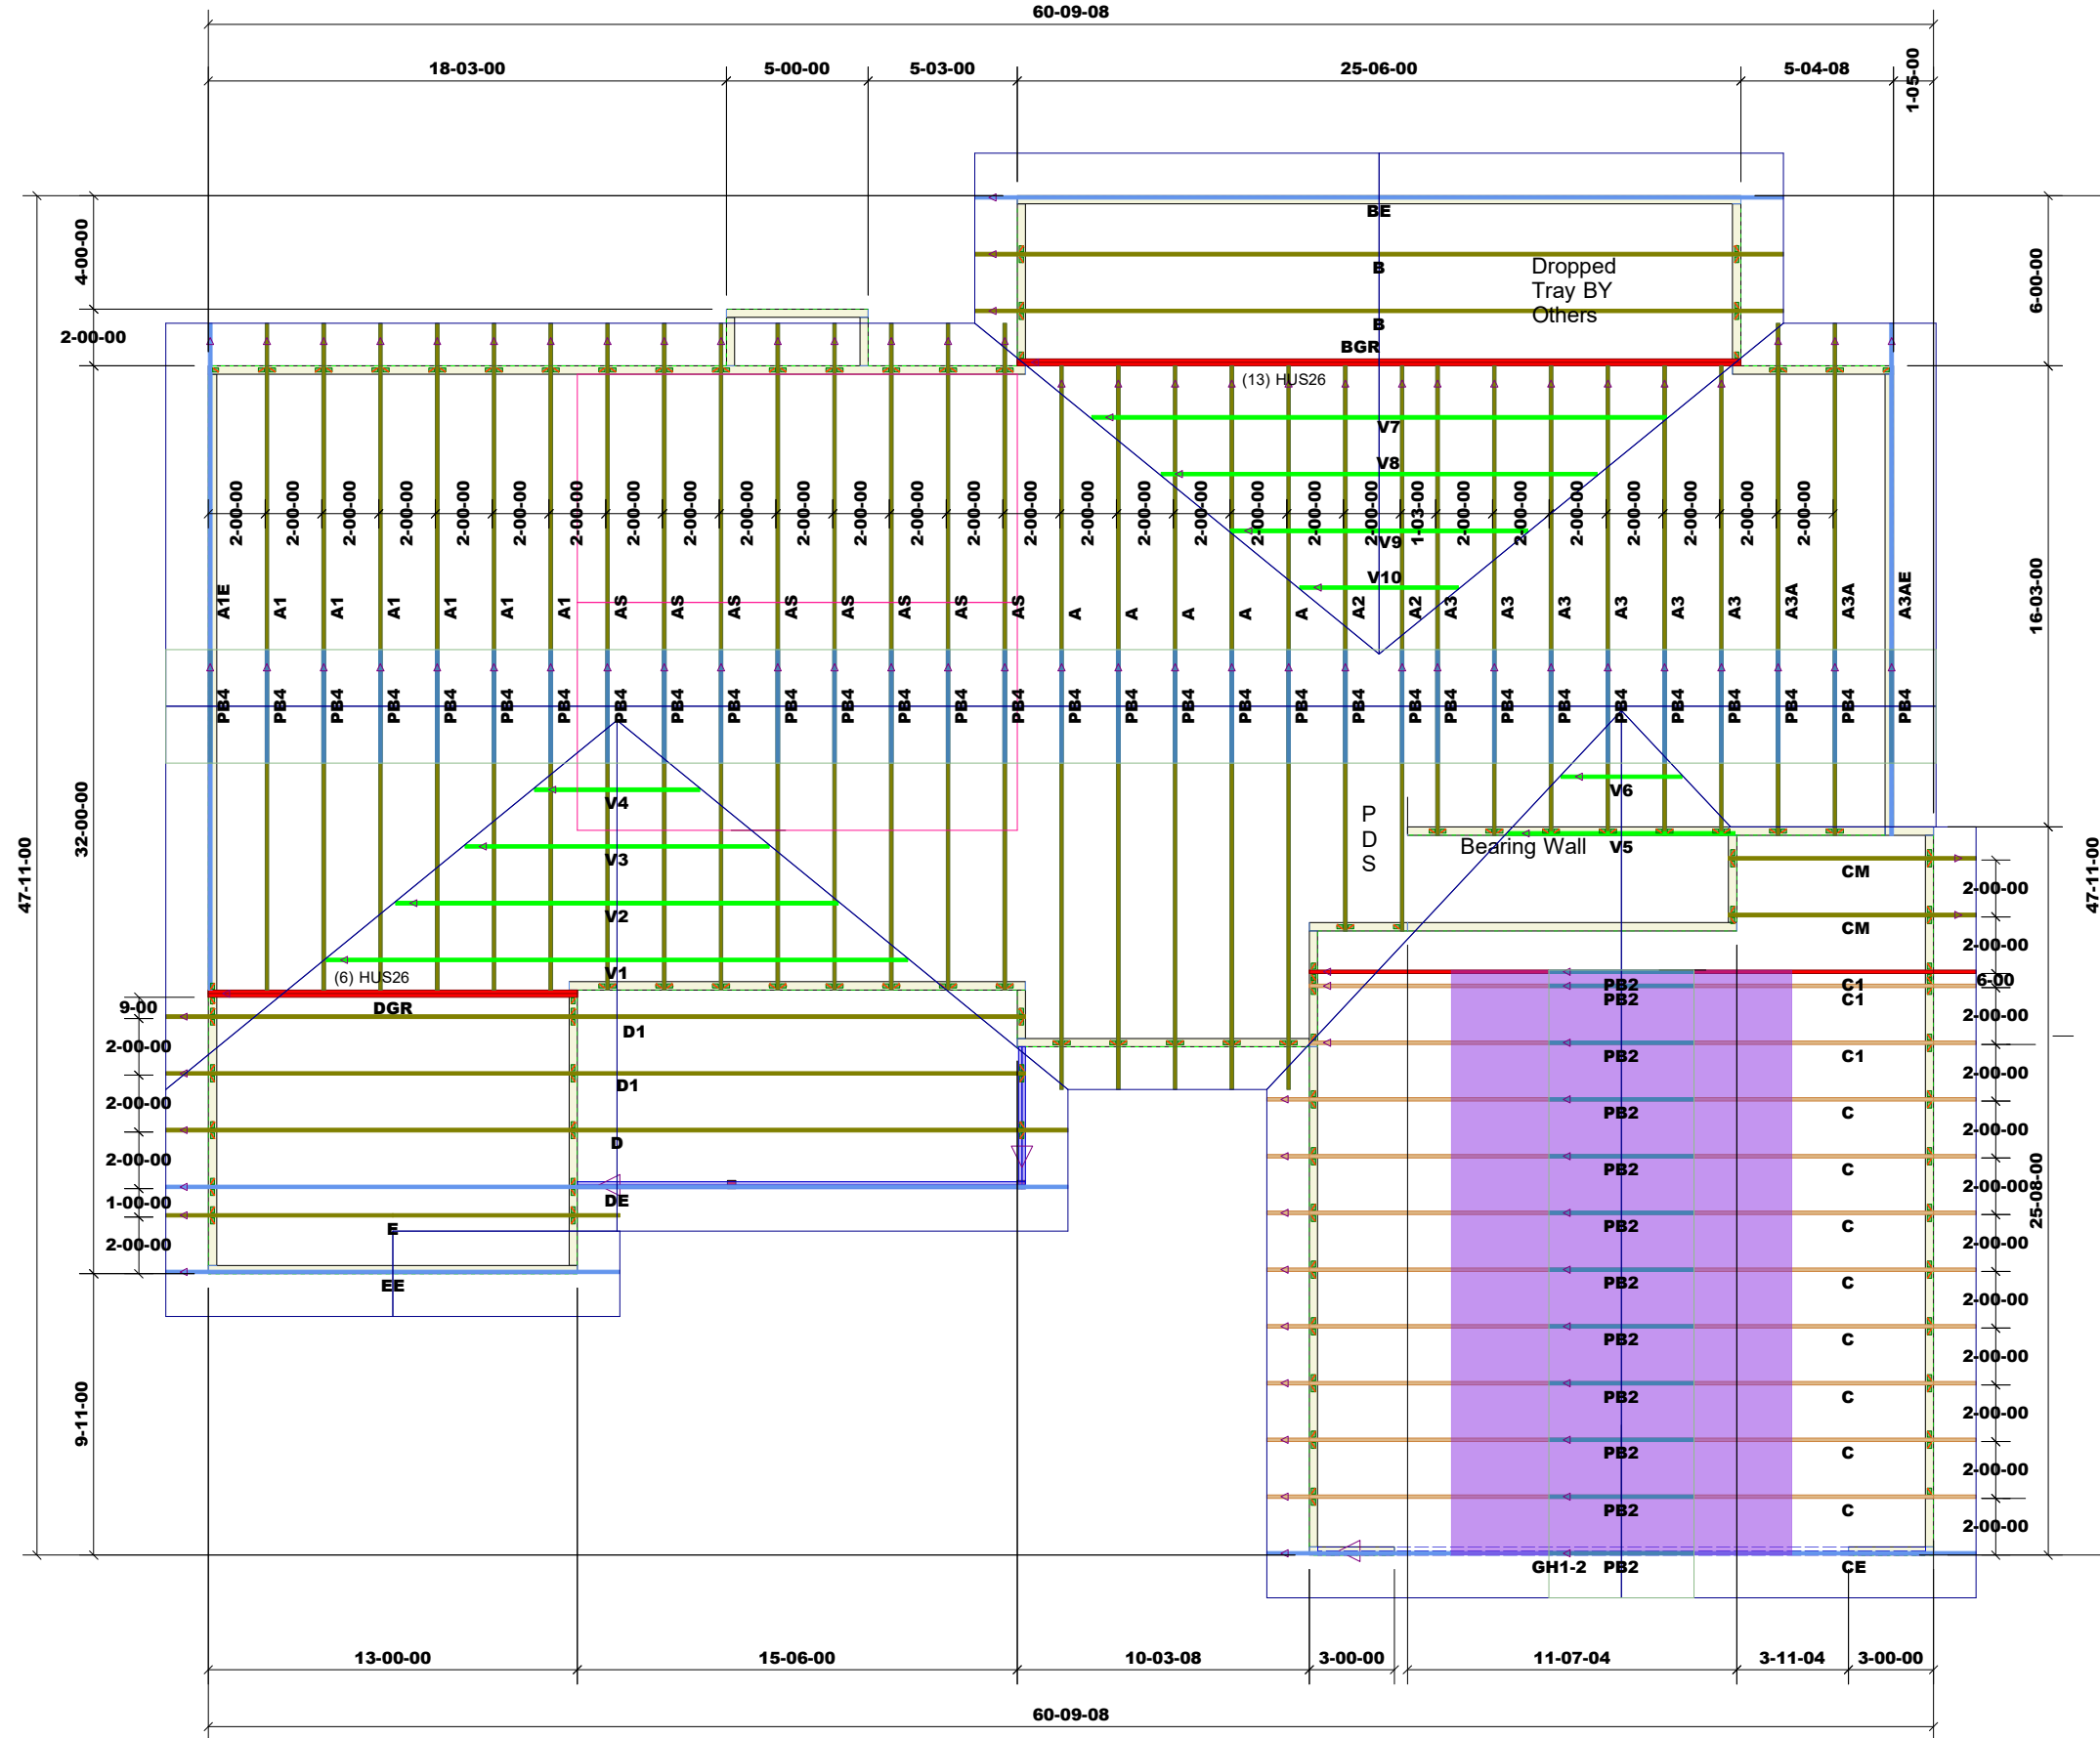

**LVL BY OTHERS**

**Garage Walls Dropped 12"**

PlotID	Length	Product	Plies	Net Qty	Fab Type
GH1-2	22-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	2	2	MFD

1st Level Roof Area: 3370.9  
 2nd Level Roof Area: 0

GENERAL NOTES:

- DO NOT CUT OR MODIFY TRUSSES
- TRUSSES ARE SPACED 24" ON CENTER UNLESS OTHERWISE NOTED
- REFER TO THE INDIVIDUAL TRUSS DESIGN DRAWINGS FOR THE LOCATION OF LATERAL BRACING AND MULTI-PLY CONNECTION REQUIREMENTS.
- PER ANSI TPI 1-2002 THE TRUSS ENGINEER IS RESPONSIBLE FOR TRUSS TO TRUSS CONNECTIONS AND TRUSS PLY TO PLY CONNECTIONS. THIS TRUSS DESIGNER RECOMMENDS TRUSS TO BEARING CONNECTIONS AND TRUSS TO BEAM CONNECTIONS WHICH SHALL BE REVIEWED BY THE BUILDING DESIGNER. IT IS THE RESPONSIBILITY OF THE BUILDING DESIGNER TO RESOLVE ALL ROOF FORCES ADEQUATELY TO THE FOUNDATION.

TOP LIVE LOAD: 20.0 lb/ft²  
 TOP DEAD LOAD: 10.0 lb/ft²  
 BOTTOM DEAD LOAD: 10.0 lb/ft²  
 WIND SPEED: 130 mph