
## Harnett County Department of Public Health

## Improvement Permit

A building permit cannot be issued with only an Improvement Permit

WILL TO HODIOMIN STOLIT HOOL LOTOTO	SUBDIVISION Liberty Meado		LOT # 6
ISSUED TO: Benjamin Stout Real Estate  NEW REPAIR REPAIR EXPANSION		quired prior to Construction Author	
NEW X REPAIR EXPANSION Type of Structure: 45'x43' SFD	ate improvements rec	faired prior to construction Author	ilzation issuance.
Proposed Wastewater System Type: 25% reduction			
Projected Daily Flow: 360 GPD			
Number of bedrooms: 3 Number of Occupants: 6	max		
Basement Yes X No			
	inal location and elevations of facilities		
Type of Water Supply: Community Public Well		Permit valid for:	X Five years
Permit conditions:			☐ No expiration
11 11			
Authorized State Agent:: Mah Charlet	Date: 10-14-22	SEE AT	TACHED SITE SKETCH
The issuance of this permit by the Health Department in no way guarantees the issuance			
site is subject to revocation if the site plan, plat, or the intended use changes. The Impro the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.	vement Permit shall not be affected by a change in own	ersnip of the site. This permit is subject to	o comphance with the provisions of
Cou	nstruction Authorization		
<u> </u>			
The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956,	(Required for Building Permit)	into this permit and shall he met Sustem	ss shall be installed in accordance
with the attached system layout.	1771, 1770. and 1777 are incorporated by references	mito this permit also shall be met. System	is shall be histaired in accordance
D : : 0:			
ISSUED TO: Benjamin Stout Real Estate	PROPERTY LOCATION: 128 S		
	SUBDIVISION Liberty Me	adows	LOT # <u>6</u>
Facility Type: 45'x43' SFD	New Expansion Repair		
Basement? Yes No Basement Fixtures? Yes	s 🔀 No		
The state of the s			
Type of Wastewater System** 25% reduction		(Initial) Wastewater Flow:	360 GPD
(See note below, if applicable )		(Initial) Wastewater Flow:	360 GPD
,	(Repair)	(Initial) Wastewater Flow:	360 GPD
(See note below, if applicable ) 50% reduction	trenches 1 (Repair)	(Initial) Wastewater Flow:	360 GPD
(See note below, if applicable)	trenches 1		
(See note below, if applicable)	trenches 1 h of each trench 180 feet	Trench Spacing: 9	
(See note below, if applicable)  50% reduction  Installation Requirements/Conditions Number of Septic Tank Size 1000 gallons Exact lengt Pump Tank Size gallons Irenches sh	trenches 1 h of each trench 180 feet all be installed on contour at a	Trench Spacing: 9 Soil Cover: 6	_ Feet on Center _inches
(See note below, if applicable)	trenches 1 feet h of each trench 180 feet all be installed on contour at a rench Depth of: 18 inches	Trench Spacing: 9 Soil Cover: 6 (Maximum soil cover shall	_ Feet on Center inches not exceed
(See note below, if applicable)	trenches 1 feet  h of each trench 180 feet  all be installed on contour at a rench Depth of: 18 inches  toms shall be level to +/-1/4"	Trench Spacing: 9 Soil Cover: 6	_ Feet on Center inches not exceed
(See note below, if applicable)  50% reduction  Installation Requirements/Conditions Septic Tank Size 1000 gallons Pump Tank Size gallons Trenches sh Maximum T (Trench bot in all direct	trenches 1 feet  h of each trench 180 feet  all be installed on contour at a rench Depth of: 18 inches  toms shall be level to +/-1/4"	Trench Spacing: 9 Soil Cover: 6 (Maximum soil cover shall	_ Feet on Center _inches not exceed ttom)
(See note below, if applicable)	trenches 1 feet  h of each trench 180 feet  all be installed on contour at a rench Depth of: 18 inches  toms shall be level to +/-1/4"	Trench Spacing: 9 Soil Cover: 6 (Maximum soil cover shall 36" above the trench bot	_ Feet on Center _inches not exceed ttom) inches below pipe
See note below, if applicable	trenches 1 feet  h of each trench 180 feet  all be installed on contour at a rench Depth of: 18 inches  toms shall be level to +/-1/4"	Trench Spacing: 9 Soil Cover: 6 (Maximum soil cover shall	Feet on Centerinches not exceed ttom) inches below pipe inches above pipe
See note below, if applicable	trenches 1 feet  h of each trench 180 feet  all be installed on contour at a rench Depth of: 18 inches  toms shall be level to +/-1/4"	Trench Spacing: 9 Soil Cover: 6 (Maximum soil cover shall 36" above the trench bot	_ Feet on Center _inches not exceed ttom) inches below pipe
See note below, if applicable	trenches 1 hof each trench 180 feet all be installed on contour at a rench Depth of: 18 inches toms shall be level to +/-1/4"	Trench Spacing: 9  Soil Cover: 6  (Maximum soil cover shall 36" above the trench bot Aggregate Depth:	Feet on Centerinches not exceed ttom) inches below pipe inches above pipe
See note below, if applicable	trenches 1 h of each trench 180 feet all be installed on contour at a rench Depth of: 18 inches toms shall be level to +/-1/4"  DM ANY PART OF SEPTIC SYSTEM OR 1	Trench Spacing: 9  Soil Cover: 6  (Maximum soil cover shall 36" above the trench bot Aggregate Depth:	Feet on Centerinches not exceed ttom) inches below pipe inches above pipe
See note below, if applicable	trenches 1 h of each trench 180 feet all be installed on contour at a rench Depth of: 18 inches toms shall be level to +/-1/4"  DM ANY PART OF SEPTIC SYSTEM OR 1	Trench Spacing: 9  Soil Cover: 6  (Maximum soil cover shall 36" above the trench bot Aggregate Depth:	Feet on Centerinches not exceed ttom) inches below pipe inches above pipe
See note below, if applicable	trenches 1 h of each trench 180 feet all be installed on contour at a rench Depth of: 18 inches toms shall be level to +/-1/4"  DM ANY PART OF SEPTIC SYSTEM OR I AREA.	Trench Spacing: 9  Soil Cover: 6  (Maximum soil cover shall 36" above the trench bot Aggregate Depth:	_ Feet on Center _inches not exceed ttom) inches below pipe inches above pipe inches total
See note below, if applicable	trenches 1 h of each trench 180 feet all be installed on contour at a rench Depth of: 18 inches toms shall be level to +/-1/4"  DM ANY PART OF SEPTIC SYSTEM OR I AREA.	Trench Spacing: 9  Soil Cover: 6  (Maximum soil cover shall 36" above the trench bot Aggregate Depth:	_ Feet on Center _inches not exceed ttom) inches below pipe inches above pipe inches total
See note below, if applicable	trenches 1 h of each trench 180 feet all be installed on contour at a rench Depth of: 18 inches toms shall be level to +/-1/4"  DM ANY PART OF SEPTIC SYSTEM OR I AREA.	Trench Spacing: 9  Soil Cover: 6  (Maximum soil cover shall 36" above the trench bot Aggregate Depth:  REPAIR AREA.	_ Feet on Center _inches not exceed ttom) inches below pipe inches above pipe inches total
See note below, if applicable	trenches 1 h of each trench 180 feet all be installed on contour at a rench Depth of: 18 inches toms shall be level to +/-1/4" tions)  OM ANY PART OF SEPTIC SYSTEM OR I AREA.  from the type specified on the application	Trench Spacing: 9  Soil Cover: 6  (Maximum soil cover shall 36" above the trench bot Aggregate Depth:  REPAIR AREA.	_ Feet on Center _inches not exceed ttom) inches below pipe inches above pipe inches total
See note below, if applicable	trenches 1 h of each trench 180 feet all be installed on contour at a rench Depth of: 18 inches toms shall be level to +/-1/4" tions)  OM ANY PART OF SEPTIC SYSTEM OR I AREA.  From the type specified on the application and the type specified on the application of the specified on the specifi	Trench Spacing: 9  Soil Cover: 6  (Maximum soil cover shall 36" above the trench both Aggregate Depth:  REPAIR AREA.  I accept the specifications of Date:  Date:  be transferred when there is a change in	_ Feet on Center _inches not exceed ttom) inches below pipe inches above pipe inches total  this permit.  ownership of the site. This
See note below, if applicable	trenches 1 h of each trench 180 feet all be installed on contour at a rench Depth of: 18 inches toms shall be level to +/-1/4" tions)  OM ANY PART OF SEPTIC SYSTEM OR I AREA.  From the type specified on the application and the type specified on the application of the specified on the specifi	Trench Spacing: 9  Soil Cover: 6  (Maximum soil cover shall 36" above the trench both Aggregate Depth:  REPAIR AREA.  I accept the specifications of Date:  Date:  be transferred when there is a change in	_ Feet on Center _inches not exceed ttom) inches below pipe inches above pipe inches total
See note below, if applicable	trenches 1 h of each trench 180 feet all be installed on contour at a rench Depth of: 18 inches ttoms shall be level to +/-1/4" tions)  OM ANY PART OF SEPTIC SYSTEM OR I AREA.  From the type specified on the application ed use changes. The Construction Authorization shall not les for Sewage Treatment and Disposal and to the conditi	Trench Spacing: 9  Soil Cover: 6  (Maximum soil cover shall 36" above the trench bot Aggregate Depth:  REPAIR AREA.  Date:  Date:  be transferred when there is a change in SEE	_ Feet on Center _inches not exceed ttom) inches below pipe inches above pipe inches total  this permit.  ownership of the site. This
See note below, if applicable	trenches 1 h of each trench 180 feet all be installed on contour at a rench Depth of: 18 inches ttoms shall be level to +/-1/4" tions)  OM ANY PART OF SEPTIC SYSTEM OR I AREA.  From the type specified on the application ed use changes. The Construction Authorization shall not les for Sewage Treatment and Disposal and to the conditi	Trench Spacing: 9  Soil Cover: 6  (Maximum soil cover shall 36" above the trench bot Aggregate Depth:  REPAIR AREA.  Date:  Date:  be transferred when there is a change in SEE  10-14-22	_ Feet on Center _inches not exceed ttom) inches below pipe inches above pipe inches total  this permit.  ownership of the site. This

## Harnett County Department of Public Health Site Sketch

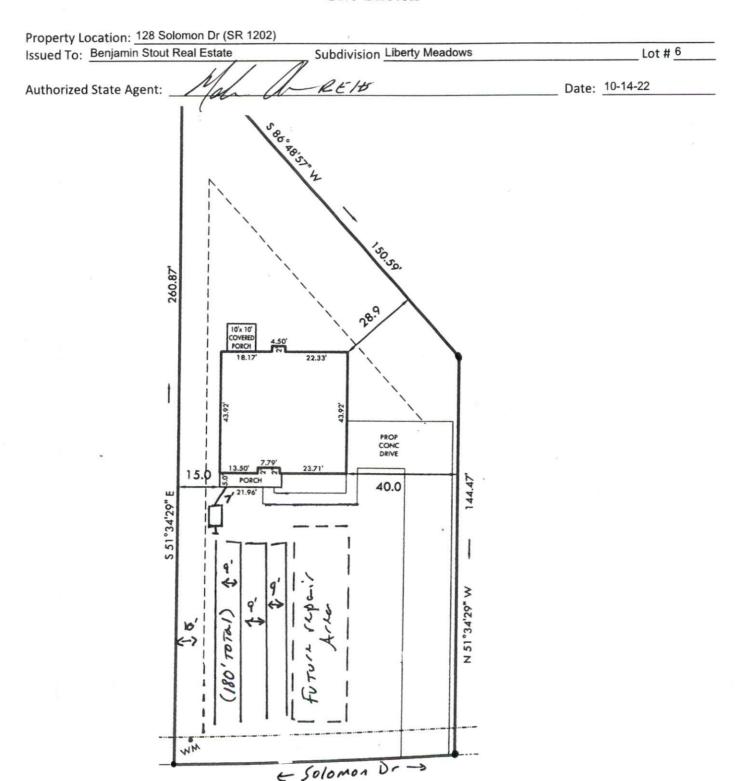

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.