


Project Details			
Name	STEPHEN REGISTER	Date	01/16/2024
Location	3495 Rawls Church Road, Fuquay-Varina, NC 27526	Total modules	4
Module	Mission Solar Energy: MSE395SX9R (40mm)	Total watts	1,580
Dimensions	Dimensions: 75.08" x 41.5" x 1.57" (1907.0mm x 1054.0mm x 40.0mm)	Attachments	11
ASCE	7-10	Rails per row	2

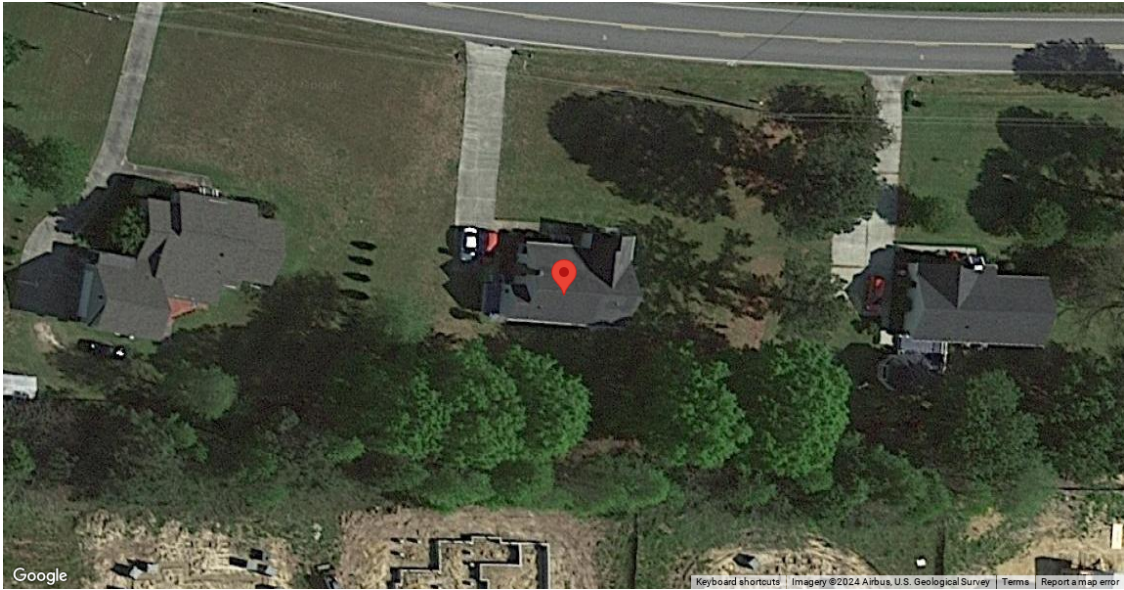


System Weight	
Total system weight	228.1 lbs
Weight/attachment	20.7 lbs
Racking weight	34.1 lbs
Distributed weight	2.6 psf

Load Assumptions	
Wind exposure	B
Wind speed	116 mph
Ground snow load	15 psf
Attachment spacing landscape	5.3333'

Roof Information			
Roof Material Family	Comp Shingle	Roof material	Comp Shingle
Risk category	II	Roof attachment	Halo UltraGrip (Rafter attached)
		Staggered attachments	Yes
Attachment hardware	Square		
Specific gravity	0.42		

Roof Plane A					
Height	15 ft	Slope	42 °	Rafter spacing	16 in

Roof Plane A: Roof Section 1		
Details		Weights
Panels: 4	Provided rail: 56' [4 x 168"]	Total weight: 228.1 lbs
Rail orientation: East-West	Attachments: 11	Weight/attachment: 20.7 lbs
Panel orientation: Landscape	Splices: 2	Total Area: 87.5 sq ft
Entry type: Graphical	Clamps: 10	Distributed weight: 2.6 psf

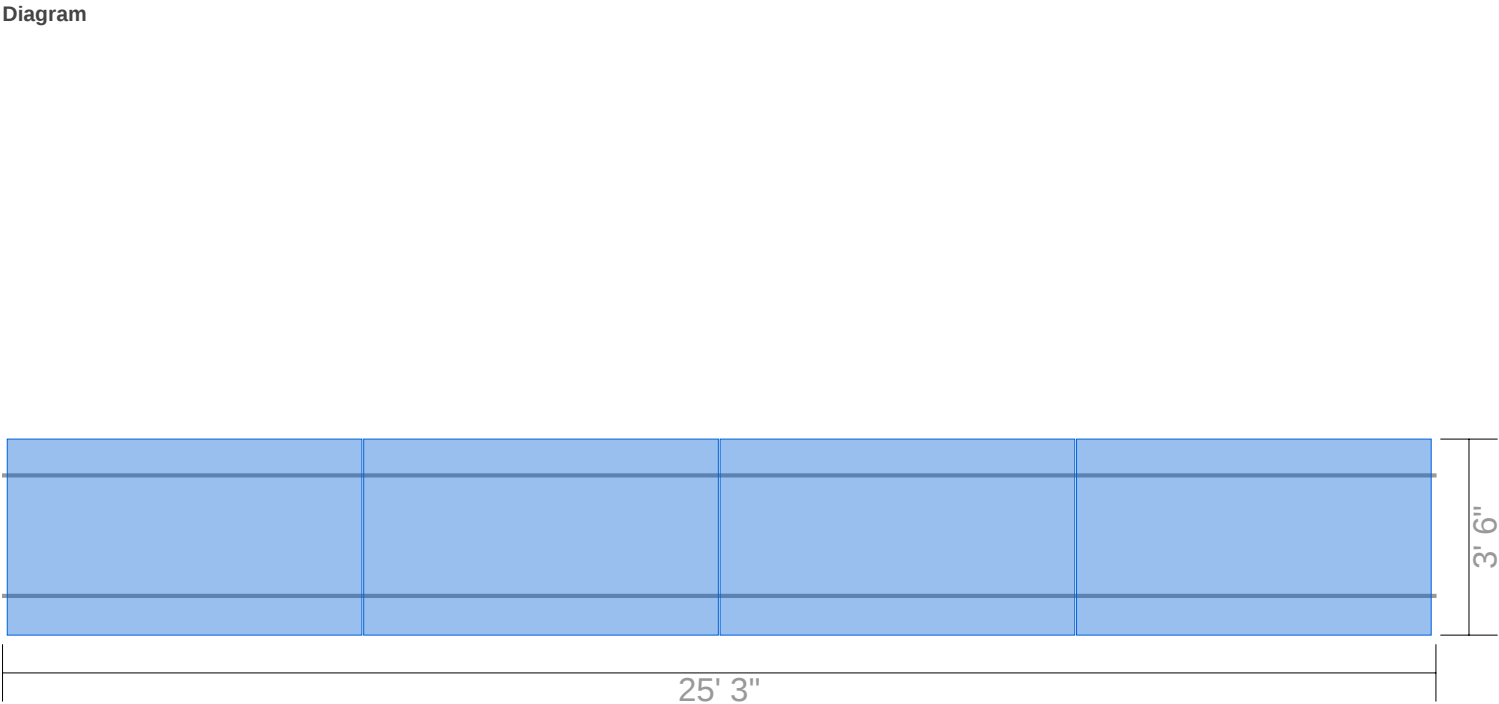

Segments								
Identifier	Columns	Row length	Rail length	Cantilever	Rail	Attachments	Splices	Clamps
A	4	25' 3"	25' 3"	2'	56' [4 x 168"]	11	2	10

Span Details XR10 - Landscape

Zone	Max span	Max cantilever
1	8'	3'
2	8'	3'
3	8'	3'

Reaction Forces XR10 - Landscape

Zone	Uplift (PSF)	Down (lbs)	Uplift (lbs)	Lateral Par (lbs)	Lateral Perp (lbs)
1	12.0	124	100	49	2
2	14.4	124	122	49	2
3	14.4	124	122	49	2

Attachment Span Details Halo UltraGrip (Rafter attached) - Landscape



Zone	Max attachment span
1	8'
2	8'
3	8'

*Optional - Attachment Span Details Halo UltraGrip (Deck attached) - Landscape


Zone	Max attachment span
1	8'
2	8'
3	8'

* Based on minimum 7/16" sheathing thickness


Side View (landscape)

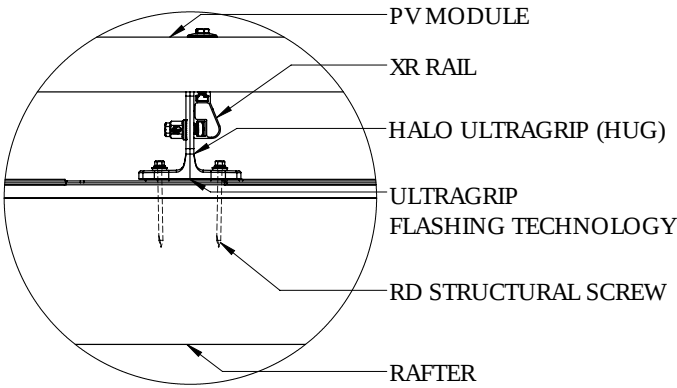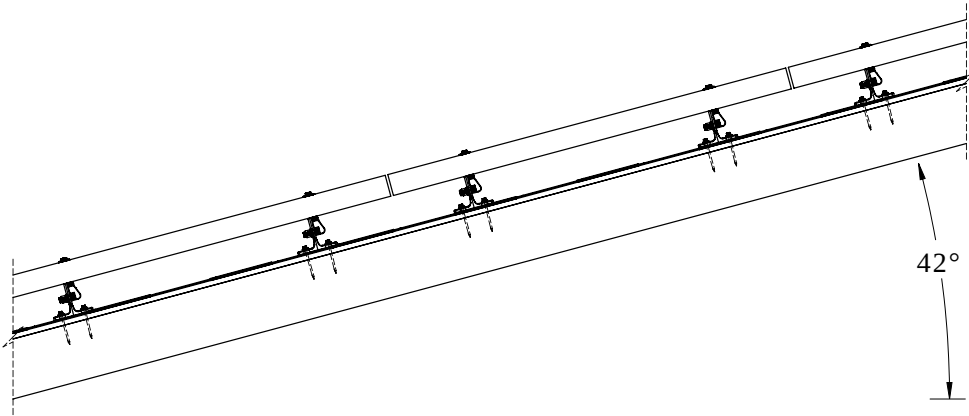


Front View (landscape)

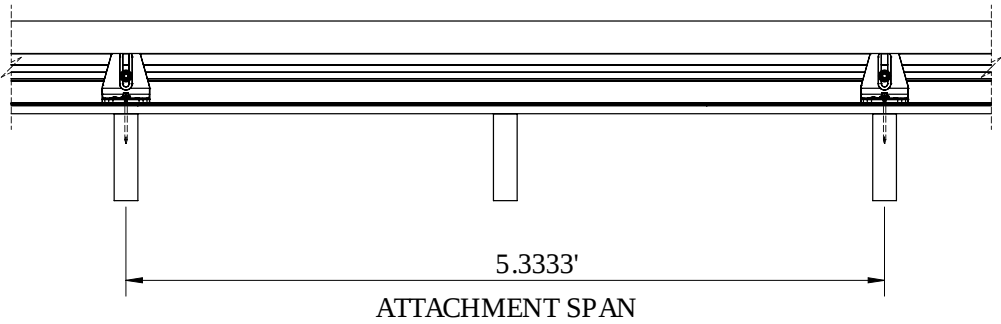


Front View (landscape)

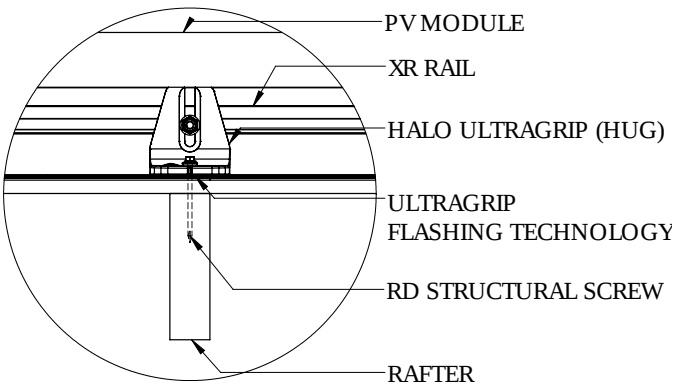

Splice Details

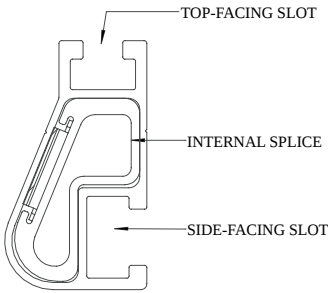


XR10

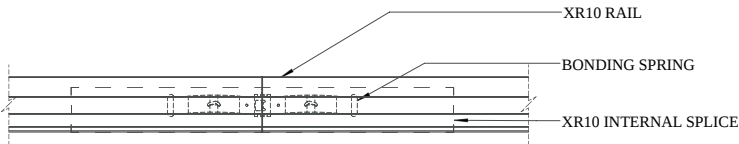


Splice Connection


Clamp Detail

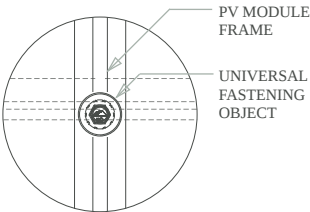


Mid Clamp, Plan

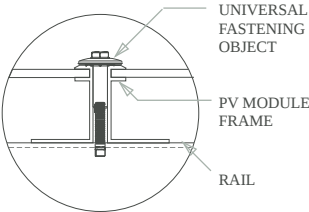


Mid Clamp, Front

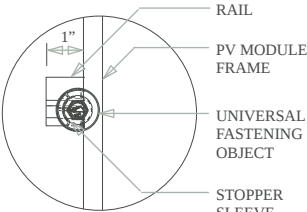


End Clamp, Plan

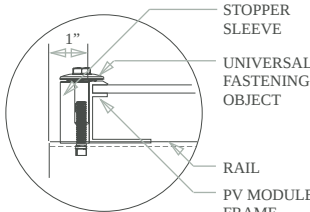


End Clamp, Front

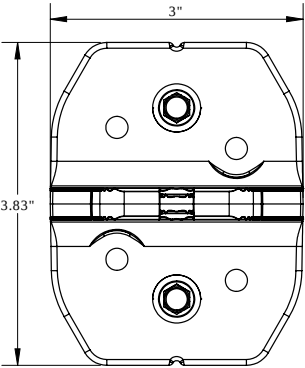


Plan View

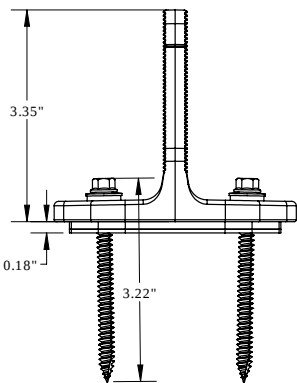

Side View

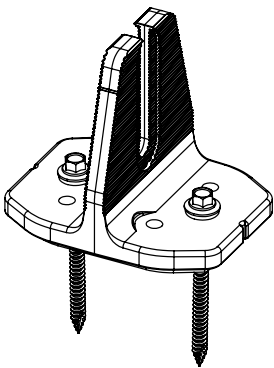


Perspective View

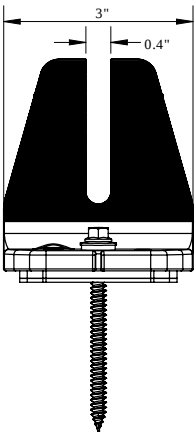

Front View

Grounding Diagram

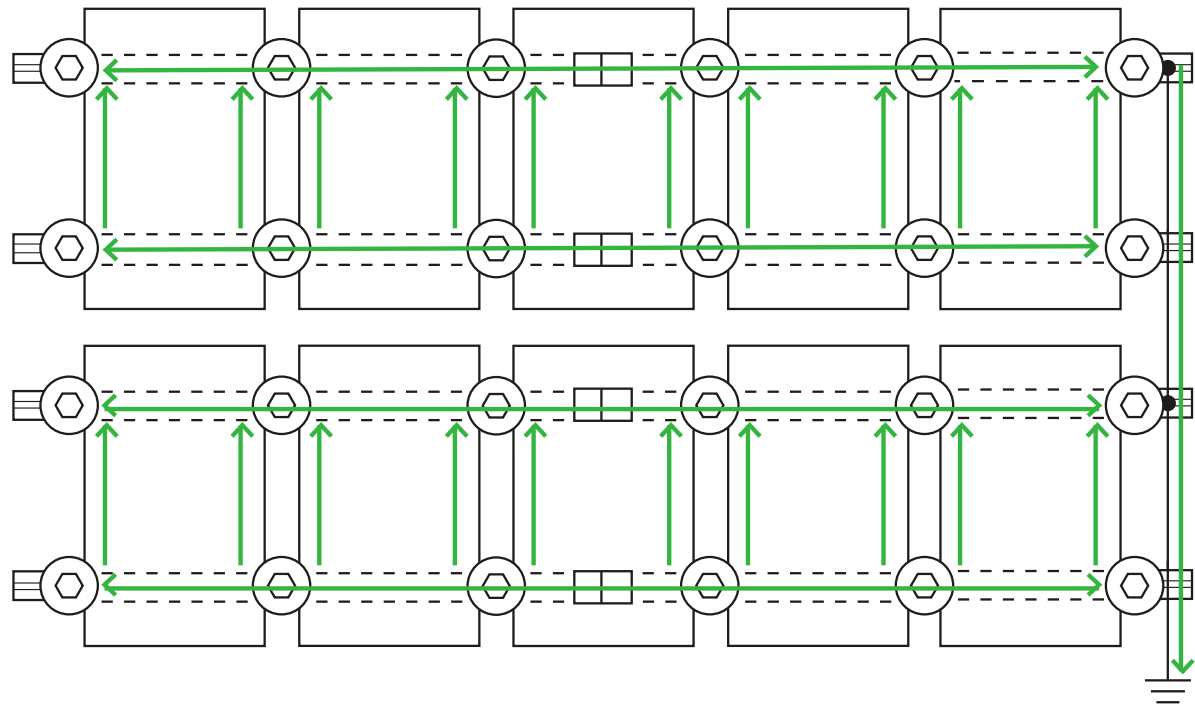

 UFO Clamp

 Fault Current Ground Path

 Grounding Lug *

 Min 10 AWG Copper Wire *

 Bonded Splice (Rail Connection)

* Grounding Lugs and Wire are not required in systems using Enphase microinverters.

Bill of Materials		
Part	Spares	Total Qty
Rails & Splices		
XR-10-168A XR10, Rail 168" Clear	0	4
XR10-BOSS-01-M1 Bonded Splice, XR10	0	2
Clamps & Grounding		
UFO-CL-01-A1 Universal Module Clamp, Clear	0	10
UFO-STP-40MM-M1 Stopper Sleeve, 40MM, Mill	0	4
XR-LUG-03-A1 Grounding Lug, Low Profile	0	1
Attachments		
QM-HUG-01-M1 Halo UltraGrip, Mill	0	11
HW-RD1430-01-M1 RD Structural Screw, 3.0L * Add desired additional screws by adjusting spares column.	0	22
BHW-SQ-02-A1 Square-Bolt Bonding Hardware	0	11

ATTACHMENTS

PRE-INSTALLATION

- Verify module compatibility. See [Page 21](#) for info.

TOOLS REQUIRED

- | | |
|---------------------------------|-----------------------|
| □ Cordless Drill (non-impact) | □ 3/8" Socket |
| □ Impact Driver (for lag bolts) | □ 1/8" Drill Bit |
| □ Torque Wrench (0-250 in-lbs) | □ 1/4" Drill Bit |
| □ 7/16" Socket | □ T30 Bit |
| □ 1/2" Socket | □ Channel Lock Pliers |
| □ 9/16" Socket | □ #3 Phillips Bit |
| □ 7/32" Drill Bit | □ 3/16" Hex Bit |

BONDING HARDWARE TORQUE VALUES

Please refer to each attachment's individual section for full details on all torque values and instructions.


- 3/8" Bonding Hardware Nuts (7/16" Socket): 250 in-lbs
- All Tile Hook Carriage Bolts (7/16" Socket): 132 in-lbs
- Flat Roof Attachment Nuts (9/16" Socket): 250 in-lbs
- Lynx Set Screw (3/16" Hex Drive): 150 in-lbs
- Lynx Flange Nut (1/2" Socket): 150 in-lbs

ATTACHMENTS


COMPOSITION SHINGLE




FlashFoot2




FlashVue




QM L-Mount



QM QBase




QM Classic Comp Mount




HUG
(Halo UltraGrip)


TILE




Knockout Tile




QM Tile Replacement




All Tile Hook and Flashing (optional)



QM Quick Hook and Flashing (optional)




QM QBase Tile




QM Tile Conduit Penetration


ADDITIONAL ROOF TYPES



QM Qbase Shake - Slate - Metal Shingle




QM Classic Mount Shake




QM Lynx Metal Roof Attachment

LOW SLOPE ROOF



Flat Roof Attachment



QM QBase Mount

- If using previous version of Integrated Grounding Mid Clamps, End Clamps, Expansion Joints and for a list of approved 3rd party components please refer to Alternate Components Addendum (Version 1.9)

PRE-INSTALLATION

- ❑ Verify module compatibility. See [Page 21](#) for info.

TOOLS REQUIRED

- | | |
|---------------------------------|-----------------------|
| ❑ Cordless Drill (non-impact) | ❑ 1/8" Drill bit |
| ❑ Impact Driver (for lag bolts) | ❑ 1/4" Drill bit |
| ❑ Torque Wrench (0-250 in-lbs) | ❑ T30 Torx Bit |
| ❑ 7/16" Socket | ❑ Channel Lock Pliers |
| ❑ 1/2" Socket | ❑ #3 Phillips Bit |
| ❑ 9/16" Socket | ❑ Paddle Bit |
| ❑ 7/32" Drill bit | |

BONDING HARDWARE TORQUE VALUES

Please refer to each attachment's individual section for full details on all torque values and instructions.

- ❑ Universal Fastening Object (7/16" Socket): 80 in-lbs
- ❑ Rail Grounding Lug Nut (7/16" Socket): 80 in-lbs
- ❑ Module Grounding Lug
 - ❑ Grounding Nut (7/16" Socket): 60 in-lbs
 - ❑ Grounding Lug Terminal Screws (7/16" Socket): 20 in-lbs
- ❑ Microinverter Kit Nuts (7/16" Socket): 80 in-lbs
- ❑ Frameless Module Kit Nuts (7/16" Socket): 80 in-lbs
- ❑ 3/8" Bonding Hardware Nuts (7/16" Socket): 250 in-lbs
- ❑ Contour Clamp (T-30 Torx Bit): 80 in-lbs

➤ Unless otherwise noted, all components have been evaluated for multiple use. They can be uninstalled and reinstalled in the same or new location.


COMPONENTS




XR Rail



Wire Clip




BOSS



UFO and Stopper Sleeve (30-46MM)




CAMO




Ironridge L-Foot and QM L-Foot




End Cap




Rail Grounding Lug




Module Grounding Lug




Microinverter Kit




3/8" Bonding Hardware




8" Bonding Jumper Single Use Only




QM Classic Conduit Comp Mount



JAYBOX




QM Composition Conduit Penetration




QM Tile Conduit Mount




Frameless End/Mid Clamp



Frameless Module Kit



Contour Trim



Contour Clamp

Rail: XR10		Flush Mount System Span Table (inches) - Portrait or Landscape Installation Max Module Length: 78.5", Max Module SF: 24 SF Exposure B																																						
Wind Speed (mph)	Roof Slope (deg.)	Ground Snow: 0 psf			10 psf			20 psf			30 psf			40 psf			50 psf			60 psf			70 psf*			80 psf*			90 psf*			100 psf*			110 psf*			120 psf*		
		Zone 1	Zone 2	Zone 3	Zone 1	Zone 2	Zone 3	Zone 1	Zone 2	Zone 3	Zone 1	Zone 2	Zone 3	Zone 1	Zone 2	Zone 3	Zone 1	Zone 2	Zone 3	Zone 1	Zone 2	Zone 3	Zone 1	Zone 2	Zone 3	Zone 1	Zone 2	Zone 3	Zone 1	Zone 2	Zone 3	Zone 1	Zone 2	Zone 3	Zone 1	Zone 2	Zone 3			
110	8-27	84	75	61	72	72	61	61	61	61	60	60	60	54	54	54	49	49	49	45	45	45	42	42	42	40	40	40	38	38	38	36	36	36	34	34	34	33	33	33
mph	28-45	84	84	84	72	72	72	60	60	60	60	60	60	55	55	55	52	52	52	49	49	49	48	48	48	43	43	43	41	41	41	39	39	39	37	37	37	36	36	36
115	8-27	84	72	58	72	72	58	61	61	58	60	60	58	54	54	54	49	49	49	45	45	45	42	42	42	40	40	40	38	38	38	36	36	36	34	34	34	33	33	33
mph	28-45	81	81	81	72	72	72	60	60	60	60	60	60	55	55	55	52	52	52	49	49	49	48	48	48	43	43	43	41	41	41	39	39	39	37	37	37	36	36	36
120	8-27	84	72	56	72	72	56	61	61	56	60	60	56	54	54	54	49	49	49	45	45	45	42	42	42	40	40	40	38	38	38	36	36	36	34	34	34	33	33	33
mph	28-45	79	78	78	72	72	72	60	60	60	60	60	60	55	55	55	52	52	52	49	49	49	48	48	48	43	43	43	41	41	41	39	39	39	37	37	37	36	36	36
130	8-27	83	64	51	72	64	51	61	61	51	60	60	51	54	54	51	49	49	49	45	45	45	42	42	42	40	40	40	38	38	38	36	36	36	34	34	34	33	33	33
mph	28-45	75	73	73	72	69	69	60	60	60	60	60	60	55	55	55	52	52	52	49	49	49	48	48	48	43	43	43	41	41	41	39	39	39	37	37	37	36	36	36
140	8-27	81	59	48	72	59	48	61	59	48	60	59	48	54	54	48	49	49	48	45	45	45	42	42	42	40	40	40	38	38	38	36	36	36	34	34	34	33	33	33
mph	28-45	72	68	68	67	67	67	59	59	59	58	58	58	54	54	54	51	51	51	48	48	48	48	48	48	43	43	43	41	41	41	39	39	39	37	37	37	36	36	36
150	8-27	75	55	44	72	55	44	61	55	44	60	55	44	54	54	44	49	49	44	45	45	44	42	42	42	40	40	40	38	38	38	36	36	36	34	34	34	33	33	33
mph	28-45	67	64	64	65	64	64	57	57	57	57	57	57	53	53	53	50	50	50	48	48	48	45	45	45	43	43	43	41	41	41	39	39	39	37	37	37	36	36	36
160	8-27	72	52	42	72	52	42	60	52	42	59	52	42	54	52	42	49	49	42	45	45	42	42	42	42	40	40	40	38	38	38	36	36	36	34	34	34	33	33	33
mph	28-45	64	60	60	64	60	60	56	56	56	55	55	55	52	52	52	49	49	49	48	48	48	44	44	44	42	42	42	41	41	41	39	39	39	37	37	37	36	36	36
170	8-27	67	48	39	67	48	39	59	48	39	58	48	39	53	48	39	49	48	39	45	45	39	42	42	39	40	40	39	38	38	38	36	36	36	34	34	34	33	33	33
mph	28-45	61	56	56	60	56	56	54	54	54	53	53	53	50	50	50	48	48	48	45	45	45	43	43	43	42	42	42	40	40	40	39	39	39	37	37	37	36	36	36
180	8-27	64	48	37	64	48	37	58	48	37	57	48	37	52	48	37	49	48	37	45	45	37	42	42	37	40	40	37	38	38	37	36	36	36	34	34	34	33	33	33
mph	28-45	58	53	53	58	53	53	52	52	52	52	52	52	49	49	49	48	48	48	44	44	44	43	43	43	41	41	41	40	40	40	38	38	38	37	37	37	36	36	36

= min 72" span
 = min 64" span
 = min 48" span
 = Shaded cells indicate conditions in which UFO Mid Clamp connection capacity is exceeded. See Note 10 on page 2 for details.

* = Note: additional installation requirement for CAMO module clamp. See Note 12 on Page 3 for details.

REV 03/05/2021