CONT	ENTS
------	------

0011	
1	CONTENTS AND PROJECT INFORMATION
2	MONOLITHIC SLAB FOUNDATION PLANS
2.0	MONOLITHIC SLAB FOUNDATION PLANS - OPTIONS
3	FIRST FLOOR PLANS
3.1	FIRST FLOOR PLANS - OPTIONS
3.1.1	FIRST FLOOR PLANS - OPTIONS
3.2	SECOND FLOOR PLAN
4	ELEVATION A AND ROOF PLAN
4.1	ELEVATION B AND ROOF PLAN
4.2	ELEVATION C AND ROOF PLAN
4.3	ELEVATION D AND ROOF PLAN
4.4	ELEVATION E AND ROOF PLAN
4.5	ELEVATION F AND ROOF PLAN
5	TYPICAL BUILDING SECTION
6	FOUNDATION, WALL AND SOFFIT DETAILS
6.1	FOUNDATION AND WALL DETAILS
6.2	FOUNDATION AND WALL DETAILS
6.2A	ELEVATION A DETAILS
6.2B	ELEVATION B/C/D/E/F DETAILS
7	FIRST FLOOR ELECTRICAL PLANS
7.1	SECOND FLOOR ELECTRICAL PLAN
CD1	

STANDARD DETAILS AND NOTES - MONOLITHIC SD1

AREA SCHEDULE

FIRST FLOOR HEATED *	1,308 SF
SECOND FLOOR HEATED **	1,708 SF
TOTAL HEATED AREA	3,016 SF
GARAGE ***	450 SF
COVERED FRONT PORCH (VARIES) ****	165 SF
TOTAL COVERED AREA	3,631 SF
OPT. COVERED REAR PORCH/SUNROOM *****	138 SF

* + 68 SF @ OPT. BATHROOM

+ 25 SF @ ELEV. D

** +25 SF @ ELEV. D

*** + 252 SF @ OPT. THIRD-CAR GARAGE + 56 SF @ OPT. GARAGE STORAGE

**** 150 SF @ ELEV D + 98 SF @ OPT. WRAP AROUND PORCH

**** + 174 SF @ OPT. SUNROOM W/ OPT. COVERED PORCH

GENERAL NOTES

01. GENERAL CONDITIONS

- 1. STAIRS: ALL STAIRS SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE REQUIREMENTS ESTABLISHED BY THE ADOPTED BUILDING CODE. STAIR INFORMATION - MAXIMUM STAIR RISER 8-1/4"; MINIMUM STAIR TREAD 9" WITH A 3/4" - 1-1/4" NOSING ON STAIRS WITH SOLID RISER. MINIMUM STAIR HEADROOM 6'-8" CLEAR MEASURED VERTICALLY FROM THE STAIR NOSING OR FROM THE FLOOR SURFACE OF THE LANDING OR PLATFORM. MINIMUM CLEAR STAIR OPENING WIDTH SHALL NOT BE LESS THAN 36 INCHES. STAIRS WITH OPEN RISERS SHALL BE CONSTRUCTED TO PREVENT THE PASSAGE OF A SPHERE OF 4 INCHES OR MORE IN DIAMETER THROUGH THE RISER OPENINGS. THE GREATEST RISER HEIGHT WITHIN ANY FLIGHT OF STAIRS SHALL NOT EXCEED THE SMALLEST BY MORE THAN 3/8 INCHES. THE GREATEST TREAD RUN WITHIN
- ANY FLIGHT OF STAIRS SHALL NOT EXCEED THE SMALLEST BY MORE THAN 3/8 INCHES. . HANDRAILS AND GUARDRAILS: HANDRAILS MUST HAVE A MINIMUM AND MAXIMUM HEIGHT OF 34 INCHES AND 38 INCHES, RESPECTIVELY, MEASURED VERTICALLY FROM THE NOSING OF THE TREADS, AND SHALL BE PROVIDED ONE AT LEAST ON SIDE OF STAIRWAYS OF FOUR OR MORE RISERS. HANDRAILS SHALL BE CONTINUOUS THE FULL LENGTH OF THE STAIRS. ENDS SHALL BE RETURNED OR SHALL TERMINATE IN NEWEL POSTS OR SAFETY TERMINALS. ALL STAIRWAY HANDRAILS SHALL HAVE A CIRCULAR CROSS SECTION WITH AND OUTSIDE DIAMETER OF AT LEAST 1-1/4 INCHES AND NOT GREATER THAN 2 INCHES MAX. OR APPROVED RAILS OF EQUIVALENT GRASPABILITY. HANDRAILS PROJECTING FROM THE WALL SHALL HAVE A SPACE OF NOT LESS THAN 1-1/2 INCHES BETWEEN THE WALL AND THE HANDRAIL. GUARDRAILS NOT LESS THAN 36 INCHES IN HEIGHT AND SHALL BE INSTALLED AT ALL PORCHES, BALCONIES, OR RAISED FLOOR SURFACES
- LOCATED MORE THAN 30 INCHES ABOVE THE FLOOR OR GRADE BELOW. . WINDOW SUPPLIER IS TO CERTIFY THAT THE WINDOWS PROVIDED FOR BEDROOMS MEET THE GOVERNING BUILDING CODE EGRESS AND FALL PREVENTION REQUIREMENTS. IF LARGER WINDOWS ARE REQUIRED THAN THOSE SHOWN ON THE PLANS, THE SUPPLIER SHALL NOTIFY THE BUILDER AND THE BUILDER SHALL SUBSTITUTE THE LARGER WINDOWS FOR THOSE SHOWN ON THE PLANS. THE BUILDER SHALL CONFIRM WINDOW SIZES BY COMPLETING THE ROUGH FRAME OPENINGS BEFORE THE WINDOWS ARE ORDERED. GLAZING AT ALL WINDOWS, DOORS, TUBS, FIXED GLASS PANELS, SIDELIGHTS, ETC. MUST MEET THE REQUIREMENTS OF THE GOVERNING CODE WITH SPECIAL ATTENTION PAID TO GLAZING AT HAZARDOUS LOCATIONS PER IRC SECTION R308.
- 4. ALL VENTED CRAWL OR ATTIC SPACES SHALL BE PROVIDED WITH VENTS TO ALLOW A FLOW OF AIR THROUGH THE SPACE. FREE VENT AREA IS TO BE AS FOLLOWS: CRAWL VENTS SHOULD EQUAL 1/150 OF GROUND AREA, ROOF VENTS 1/300 OF CEILING AREA WITH VENTS DISTRIBUTED PER THE GOVERNING BUILDING CODE. PROVIDE ACCESS OPENINGS TO CRAWL (18"X 24" MIN.) AND ATTIC (22" X 30" MIN. WITH 30" HEADROOM) OR SIZED FOR REMOVAL OF MECHANICAL EQUIPMENT IF LOCATED IN ATTIC PER IRC M1305.1.3.
- . WHERE DRAWINGS OR INFORMATION IS IN CONFLICT WITH OTHER DRAWINGS OR DETAILS, THE BUILDER SHALL NOTIFY THE ARCHITECT IN WRITING PRIOR TO THE COMMENCEMENT OF CONSTRUCTION IN ORDER THAT A CLARIFICATION NOTICE CAN BE ISSUED.
- 6. ALL COMPONENTS AND CLADDING SHALL BE ATTACHED FOR WIND SPEED REQUIREMENTS NOTED ON THIS COVER SHEET OR PER THE GOVERNING BUILDING OFFICIAL'S REQUIREMENTS. <u>02. SITE WORK</u>
- PRESUMED SOIL BEARING CAPACITY IS NOTED ON THIS COVER SHEET. THE BUILDER IS RESPONSIBLE FOR VERIFYING THIS BEARING CAPACITY. ALL FOOTINGS SHALL BEAR ON UNDISTURBED SOIL OR ENGINEERED FILL.
- THE BOTTOM OF ALL FOOTINGS SHALL BE BELOW THE FROST LINE AS DEFINED BY THIS COVER SHEET, THE
- DRAWINGS OR THE GOVERNING BUILDING OFFICIAL'S REQUIREMENTS AND/OR 12" MINIMUM. FOR BASEMENT CONDITIONS, THE MAXIMUM VERTICAL DISTANCE MEASURED FROM THE TOP OF A BASEMENT FLOOR SLAB TO THE OUTSIDE FINISHED GRADE SHALL NOT EXCEED DISTANCES FOR THE WALL THICKNESS AS SHOWN IN IRC TABLES R-404.1.1 (1-4) OR R-404.1.2 (1-9) BASED ON WALL TYPE AND SOIL CLASS.
- 4. DO NOT BACKFILL UNTIL WALLS HAVE CURED AND THE ENTIRE BUILDING STRUCTURE ABOVE IS IN PLACE. BACKFILL SHALL BE CLEAN GRANULAR FILL, FREE OF ORGANIC MATERIAL, PLACED EQUALLY ON ALL SIDES, COMPACTED TO 95% MAXIMUM DRY DENSITY PER ASTM D 698.
- 5. FINISHED GRADE SHALL SLOPE AWAY FROM THE BUILDING AT A MINIMUM SLOPE OF 6 INCHES PER FOR A MINIMUM DISTANCE OF 10 FEET FROM THE BUILDING PER IRC SECTION R401.3. 6. TERMITE TREATMENT - TREAT INTERIOR AND EXTERIOR EARTH AT PERIMETER WITH EPA APPROVED
- TERMICIDE. SPRAY BORA-CARE OR EO. TERMICIDE & MOLD TREATMENT ON STUDS 3 FEET ABOVE SLABS PER MANUFACTURER'S RECOMMENDATIONS. PROVIDE TERMITE SHIELDS WHERE SHOWN ON PLANS. 03. CAST-IN-PLACE CONCRETE
- 1. CONCRETE SHALL HAVE A MINIMUM 28-DAY COMPRESSIVE STRENGTH OF 3,000 PSI. EXTERIOR SLABS TO BE 3,000 PSI, MIN. 5% & MAX. 7% AIR ENTRAINED CONCRETE.
- 2. CONCRETE PLACEMENT SHALL COMPLY WITH RECOMMENDATIONS OF ACI 332. 3. CONCRETE SLABS SHALL HAVE POLYPROPYLENE FIBER ADDITIVE (1.5 LB/CY) OR WWF REINFORCEMENT 6 X 6, W1.4 X W1.4 PER ASTM A185 LOCATED MIDWAY THROUGH THE SLAB THICKNESS. ALL SLABS ARE TO BEAR ON COMPACTED FILL TESTED FOR 95% MAXIMUM DRY DENSITY PER ASTM D 698.
- 4. REINFORCING STEEL WHERE SHOWN ON PLANS SHALL CONFORM TO ASTM A 615, GRADE 60 MIN., DEFORMED.
- 5. PROVIDE A 6 MIL POLYETHELENE MOISTURE VAPOR BARRIER MEMBRANE UNDER INTERIOR AND GARAGE CONCRETE SLABS AND FOOTINGS WHERE INDICATED ON THE DRAWINGS. LAP SHEETS 6" MIN. AT JOINTS. 6. COVERED PORCHES SLABS SHALL SLOPE AT A MINIMUM SLOPE OF 1/8" PER FOOT TO DRAIN
- WATER AWAY FROM EXTERIOR WALLS. UNCOVERED PATIO SLABS SHALL SLOPE AT 1/4" PER FOOT. 04. MASONRY

1. CONCRETE MASONRY UNITS (CMU) SHALL CONFORM TO ASTM C90, GRADE N, NORMAL WEIGHT UNITS. 2. MORTAR TO BE TYPE 'M' WITH A 28 DAY COMPRESSIVE STRENGTH OF 2,000 PSI. PROVIDE CONTINUOUS HORIZONTAL JOINT REINFORCING EVERY OTHER COURSE. MORTAR TO MEET ASTM C270 STANDARDS.

- 3. GROUT SHALL MEET THE REQUIREMENTS OF ASTM C476 WITH A 28 DAY COMPRESSIVE STRENGTH OF 2,500 PSI. GROUT ALL CELLS RECEIVING ANCHORS AND THE TOP COURSE OF ALL BEARING WALLS.
- 4. FACE BRICK SHALL BE STANDARD SIZE AND COMPLY WITH ASTM C216, RUNNING BOND WITH TOOLED JOINT APPLICATION. SECURE BRICK VENEER TO WALL STUDS WITH 22 GA. GALV. METAL TIES ATTACHED TO STUDS WITH 8d NAILS SPACING AS SHOWN ON PLANS.
- 5. APPLY A BITUMINOUS WATERPROOF MEMBRANE TO THE EXTERIOR OF ALL BASEMENT WALLS TO BE BELOW GRADE AFTER BACKFILLING.
- 6. MANUFACTURED STONE WHERE SHOWN ON PLANS, SHALL BE INSTALLED IN STRICT ACCORDANCE WITH MANUFACTURER'S INSTALLATION INSTRUCTIONS AND DETAILS AND THE MASONRY VENEER MANUFACTURERS ASSOCIATION (MVMA) "INSTALLATION GUIDE AND DETAILING OPTIONS FOR COMPLIANCE WITH ASTM C1780.

05. STRUCTURAL STEEL 1. STEEL BEAMS AND PLATES SHALL CONFORM WITH ASTM A36. STEEL COLUMNS SHALL CONFORM TO ASTM A53.

- 2. ALL STRUCTURAL STEEL SHALL BE INSTALLED IN ACCORDANCE WITH CURRENT AISC SPECIFICATIONS AND "STEEL CONSTRUCTION MANUAL." ALL PIPE COLUMNS SHALL BE STANDARD WEIGHT STEEL COLUMNS IN ACCORDANCE WITH ASTM A500 AND FINISHED WITH CORROSION RESISTANT COATING PER ASTM B117. STEEL COLUMNS AT BASEMENT LOCATIONS SHALL PENETRATE THE BASEMENT SLAB DOWN TO THE TOP OF THE COLUMN FOOTING BELOW SLAB.
- 3. ALL BRICK STEEL LINTELS SHALL BE SIZED PER STRUCTURAL DRAWINGS ON SHEET SD1.

DETACHED SINGLE FAMILY DWELLING MODEL 628 - GARAGE RIGHT

<u>06. WOOD</u> 1. FRAMING LUMBER SHALL BE IDENTIFIED BY A GRADE MARK OR CERTIFICATE OF INSPECTION WHICH PROVIDES THE FOLLOWING MINIMUM DESIGN VALUES: <u>MEMBER</u> FRAMING LUMBER SPF #2 OR BETTER Fb = 875 PSI 1BER SYP #2 OR BETTER Fb = 975 PSI

SYP/SPF #3

	PRESSURE TREATED LU	IME
	PLATES	
	BLOCKING	
2	CONSTRUCTION SHALL	RF

STANDARD Fb = 275 PSI 2. CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE AMERICAN FOREST AND PAPER ASSOCIATION (AF&PA), "WOOD FRAME CONSTRUCTION MANUAL" (WFCM) AND SHALL COMPLY WITH IRC R301.1 TO SUPPORT AND TRANSFER ALL LOADS SAFELY TO THE FOUNDATION.

3. THE DESIGN LOADS FOR PREFABRICATED WOOD TRUSSES ARE PER THESE SPECS., THE GOVERNING BUILDING CODE AND CURRENT EDITIONS OF TPI -1 AND NDS. THE TRUSS MANUF. SHALL PROVIDE SHOP DRAWINGS, SEALED BY A STATE-LICENSED DESIGNN PROFESSIONAL, FOR APPROVAL PRIOR TO FABRICATION. INSTALL TRUSSES AND ENGINEERED LUMBER IN STRICT ACCORDANCE WITH THE SHOP DRAWINGS AND WTCA-B1 AND WTCA-B2. ALL POINT LOADS, PARTIAL UNIFORM LOADS OR COMBINATIONS THEREOF SHALL BE DETERMINED BY THE TRUSS MANUFACTURER AND

Fc = 425 PSI

- ACCOUNTED FOR IN THE DESIGN OF THE ROOF AND/OR FLOOR SYSTEM. 4. PREFABRICATED WOOD-I-JOISTS SHALL BE RATED PER ASTM D5055 AND INSTALLED PER SHOP DRAWINGS AND DETAILS PROVIDED BY THE MANUFACTUER.
- 5. HANGERS, ANCHORS AND FASTENERS, WHEN CALLED FOR IN SHOP DRAWINGS OR THESE DRAWINGS, SHALL BE INSTALLED IN COMPLIANCE WITH THE MANUFACTURER'S INSTRUCTIONS.
- ALL HANGERS, FRAMING ANCHORS AND FASTENERS IN CONTACT WITH PRESSURE TREATED WOOD TO BE STAINLESS STEEL OR GALVANIZED PER G185 RATING 'Z-MAX' COATING BY SIMPSON OR 'TRIPLE ZINC' BY USP. 6. BEAMS AND HEADERS ARE TO BEAR ON JACK STUDS AS NOTED ON THE PLANS, SHOP DRAWINGS, OR PER CODE.
- PROVIDE SOLID BLOCKING BELOW ALL JACK STUDS FORMING A CONTINUOUS BEARING LINE TO THE FOUNDATION. 7. ALL LUMBER IN CONTACT WITH EARTH, CONCRETE OR MASONRY SHALL BE PRESSURE TREATED. FIELD TREAT SAWED, DRILLED OR NOTCHED TREATED LUMBER PER AWPA M4-11.
- 8. PROVIDE STRUCTURAL SHEATHING WHERE NOTED ON PLANS. ALL WOOD SHEATHING SHALL BE APA RATED FOR INTENDED USE AND SUPPORT SPANS. INSTALL ROOF SHEATHING WITH "H" CLIPS BETWEEN TRUSSES.
- 9. INSTALL FIREBLOCKING PER R302.11 TO CUT OFF DRAFT OPENINGS AT ALL INTERCONNECTIONS BETWEEN CONCEALED VERTICAL AND HORIZONTAL SPACES, BETWEEN STORIES, AND BETWEEN THE TOP STORY AND ROOF.
- 10. STUDS FOR EXTERIOR WALLS SHALL BE SIZED PER THE INTERNATIONAL RESIDENTIAL CODE, TABLE R602.3.1 11. ALL NOTCHES AND CUTS IN FRAMING SHALL NOT EXCEED MAX. DIMENSIONS AS DEFINED IN THE IRC R602.6.. 07. THERMAL AND MOISTURE PROTECTION
- 1. INSTALL INSULATION MATERIALS TO MEET THE 'R' VALUES AS SHOWN ON THE DRAWINGS. FIT INSULATION TIGHT INTO SPACES AND LEAVE NO GAPS OR VOIDS. PROVIDE RIGID INSULATION WHERE SHOWN ON PLANS. AT INTERIOR WALLS SEAL ALL JOINTS, SEAMS AND PENETRATIONS TO PREVENT AIR LEAKAGE PER N1102.4.
- 2. INSTALL FIBERGLASS/ASPHALT ROOF SHINGLES IN ACCORDANCE WITH MANUF. INSTRUCTIONS AND ASPHALT ROOFING MANUFACTURERS ASSOC. "ASPHALT ROOFING RESIDENTIAL MANUAL." SHINGLES ARE TO BE CERTIFIED MIN. CLASS C FIRE RESISTANCE PER ASTM E108 OR UL 790 AND WIND RESISTANCE CLASS PER ASTM D7158 OR D3161 FOR WIND SPEED. INSTALL UNDERLAYMENT PER ROOF SLOPE AND IRC R905.2.2 AND CONFORMING TO ASTM D226.
- 3. INSTALL FLASHING, SHEET METAL, GUTTERS AND DOWNSPOUTS PER PLANS AND PER "ASPHALT ROOFING RESIDENTIAL MANUAL" AND "ARCHITECTURAL SHEET METAL MANUAL" BY SMACNA. INSTALL FLASHING AT ALL ROOF TO WALL CONDITIONS, EXTERIOR OPENINGS AND ELSEWHERE WHERE REQUIRED.
- 4. INSTALL A WATER-RESISTIVE BARRIER ON ALL WALLS. HOUSEWRAPS SHOULD MEET ASTM D5034 FOR DURABILITY, D779 FOR WATER RESISTANCE AND E96 FOR PERMEABILITY AND BE INSTALLED PER MANUF. INSTALLATION INSTRUCTIONS. PRE-WEATHERIZED SHEATHING SHALL BE TAPED AND SECURED PER MANUF. INSTALLATION INSTRUCTIONS. 5. INSTALL SIDING AND ACCESSORY COMPONENTS IN STRICT ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS.

WIND PRESSURE RESISTANCE TO BE DETERMINED BY ASTM E330. 08. DOORS, WINDOWS AND GLASS

- 1. INSTALL DOORS IN ACCORDANCE WITH MANUFACTURER'S WRITTEN INSTALLATION RECOMMENDATIONS. 2. ALL ALUMINUM AND/OR VINYL (PVC) AND/OR WOOD WINDOWS AND DOORS SHALL CONFORM TO CLASS R WITH DP PERFORMANCE GRADE AS NOTED ON THE COVER SHEET, TESTED PER AAMA/WDMA/CSA 101/I.S.2/A440 FOR
- THE APPLICABLE WINDOW AND DOOR TYPES SHOWN ON THE DRAWINGS. INSTALL TEMPERED GLASS AND WINDOWS WHERE NOTED ON PLANS OR AS REQUIRED BY CODE. ENERGY PERFORMANCE RATINGS FOR U VALUES AND SHGC SHALL BE AS NOTED ON THE COVER SHEET AND TESTED PER NFRC 100 AND NFRC 200 RESPECTIVELY. 3. INSTALLATION AND FLASHING OF WINDOWS AND DOORS TO BE IN ACCORDANCE WITH MANUFACTURERS WRITTEN
- INSTALLATION INSTRUCTIONS AND ASTM E2112. 4. INSECT SCREENS TO BE IN ACCORDANCE WITH ANSI/SMA 1004, ANSI/SMA 2006, OR ANSI/SMA 3001.
- 5. PROVIDE AND INSTALL HARDWARE PER OWNER'S SCHEDULE.
- 6. GARAGE DOORS SHALL BE CERTIFIED IN ACCORDANCE WITH ASTM/DASMA 108 FOR THE

APPLICABLE WIND PRESSURES AS NOTED ON THE COVER SHEET.

- 09. FINISHES 1. GYPSUM WALL BOARD, GYPSUM SHEATHING MATERIALS AND ACCESSORIES SHALL BE INSTALLED IN ACCORDANCE
- WITH IRC R702.3 AND WITH GA-253 "APPLICATION OF GYPSUM SHEATHING" PUBLISHED BY THE GYPSUM ASSOCIATION. 2. INSTALL FLOOR COVERINGS AS SHOWN ON PLANS OR PER OWNER'S SCHEDULE PER MANUF. INSTALLATION INSTRUCTIONS. 10. SPECIALTIES
- 1. PROVIDE KITCHEN AND BATH CABINETS FIXTURES AND APPLIANCES, FIREPLACE, HARDWARE AND MISC. ITEMS PER OWNERS SCHEDULE. INSTALLATIONS TO BE IN ACCORDANCE WITH APPROVED SHOP DRAWINGS AND MANUFACTURER'S INSTALLATION INSTRUCTIONS. PRE-FAB FIREPLACES TO BE UL LISTED AND COMPLY WITH UL 127. <u>11-14. N/A</u>

15. MECHANICAL

- 1. INSTALL VENTILATORS AND HEATING AND AIR CONDITIONING SYSTEMS AS SHOWN ON PLANS OR PER OWNER'S SCHEDULE. SIZE ALL EQUIPMENT PER ACCA MANUAL S AND J AND INSTALL FOR FUTURE ACCESS SERVICE AND REMOVAL. PROVIDE COMBUSTION AIR WHEN REQUIRED PER M1701. ALL DUCTWORK AND PIPING LOCATED IN UNCONDITIONED SPACES SHALL BE INSULATED AND SEALED PER CODE. INSTALL DRYER DUCT TO OUTSIDE WITH
- SMOOTH METAL DUCTING WITHOUT SCREWS AND WITH MINIMUM BENDS, MAXIMUM DUCT LENGTH PER IRC M1502. 2. VENTING: ALL DRYERS, BATH EXHAUSTS, AND RANGES MUST BE VENTED DIRECT TO THE EXTERIOR OF THE STRUCTURE WITH A BACKDRAFT DAMPER IN ACCORDANCE WITH THE CURRENT CODE.
- 3. PROVIDE A PROGRAMABLE THERMOSTADT, MANUALS FOR MECHANICAL AND WATER HEATING EQUIPMENT,
- ENERGY COMPLIANCE CERTIFICATE AND ALL OTHER REQUIREMENTS OF THE CURRENT ENERGY CODE. 16. ELECTRICAL
- 1. TERMINAL HOOK UP IS REQUIRED FOR ALL FIXTURES, APPLIANCES, MOTORS, FANS AND CONTROLS. LOCATION OF OUTLETS AND EQUIPMENT ON PLANS IS APPROXIMATE, EXACT ROUTING OF WIRING AND OUTLETS SHALL BE GOVERNED BY STRUCTURAL CONDITIONS AND OBSTRUCTIONS.
- 2. ALL ELECTRICAL BREAKERS AND CONTROLS SHALL BE PROPERLY LABELED. INSTALL GFCI PROTECTED AND AFCI OUTLETS WHERE SHOWN ON PLANS OR AS REQUIRED BY CODE. MATERIAL AND EQUIPMENT SHALL BEAR A UL LABEL. LIGHT FIXTURES MUST MEET CLEARANCES STATED IN THE NEC. INSTALL LIGHT SWITCHES AT 3' 6" A.F.F. AND OUTLETS
- 12" A.F.F. TO CENTERLINE U.N.O. 3. INSTALL ELECTRIC SMOKE DETECTORS, CARBON MONOXIDE/ALARMS WHERE SHOWN ON PLANS. ALL DETECTORS MUST BE INTER-CONNECTED AND INCORPORATE A BATTERY BACK-UP. INSTALL PER NFPA 72 AND UL 217 REQUIREMENTS. CO ALARMS TO COMPLY WITH NFPA 720 AND UL 2075. COMBINATION SMOKE/CO ALARMS MUST BE LISTED PER UL 2034.
- 4. PROVIDE HIGH EFFICACY LAMPS IN PERMANENT FIXTURES PER CURRENT ENERGY CODE. 17. PLUMBING
- 1. INSTALL PLUMBING FIXTURES, SUPPLY AND WASTE LINES PER GOVERNING CODE. ALL NOTCHES AND CUTS IN FRAMING SHALL NOT EXCEED MAX. DIMENSIONS AS DEFINED IN THE BUILDING CODE. PROTECT PLUMBING LINES AND REINFORCE STUD WALL NOTCHES WITH 16 GA. METAL PLATES.

Vario Location: Deta Proposed Use: Owner: Contact Person: Mark

DESIGNER OF RECO

<u>Designer</u> Na James V Architect

Jonatha Structural:

BUILDING DATA:

Year Edition of Code:

DESIGN LOADS:

Roof Live Load: Floor Live Load: Floor Live Load Sleepi

CLIMATIC & GEOGRA DESIGN CRITERIA: Ground Snow Load: Design Wind Speed: Seismic Site Class: Seismic Design Categ Weathering: Frost Line:

Termite Decay: Winter Design Temp.: Climate Zone:

ENERGY EFFICIENC Minimum Insulation:

Ceiling: Walls: Floors: Slab: Glazing 'U' Value: SHGC:

(Note: Minimum insul

SOIL BEARING CAPA


Presumptive Bearing

Homesite ' Plan 628 **Elevation B** Garage Rig

-Mono Sla

- -Patio
- -Optional
- -Optional
- -Optional
- -Flush Kite
- -Optional
- -Optional
- -Optional
- -Optional

	JAMES WENTLING/ ARCHITECT LAND TITLE BUILDING 100 SOUTH BROAD STREET, SUITE 1524 PHILADELPHIA, PA 19110
	(215) 568-2551 email -information@ wentlinghouseplans.com
BUILDING CODE SUMMARY	ARCHITECTURE LAND PLANNING
ched Single Family Dwelling sapeake Homes < Kring Telephone #: (919) 256-3060 E-mail: Mark@cheshomes.com	GRAPHICS
	THESE PLANS ARE COPYRIGHTED AND ARE SUBJECT TO COPYRIGHT PROTECTION AS AN "ARCHITECTURAL WORK" UNDER SECTION 102 OF THE COPYRIGHT ACT, 17 U.S.C. AS AMENDED DECEMBER 1, 1990 AND KNOWN
RD: me License # Telephone #: E-mail: /. Wentling NC-Arch. # 4642 (215) 568-2551 JamesWentling @wentlinghouseplans.com	GRAPHICS THESE PLANS ARE COPYRIGHTED AND ARE SUBJECT TO COPYRIGHT PROTECTION AS AN "ARCHITECTURAL WORK" UNDER SECTION 102 OF THE COPYRIGHT ACT, 17 U.S.C. AS AMENDED DECEMBER 1, 1990 AND KNOWN AS THE "ARCHITECTURAL WORKS COPYRIGHT PROTECTION ACT OF 1990." THE PROTECTION INCLUDES BUT IS NOT LIMITED TO, THE OVERALL FORM AS WELL AS THE ARRANGEMENT AND COMPOSITION OF SPACES AND ELEMENTS OF THE DESIGN. UNDER SUCH PROTECTION, UNAUTHORIZED USE OF THESE PLANS, WORKS, OR FORMS REPRESENTED CAN LEGALLY RESULT IN THE CESSATION OF SUCH CONSTRUCTION OR BUILDINGS BEING SEIZED AND/OR RAISED.
A. Troxler NC-P.E # 27845 (919) 878-1617 jtroxler @southernengineers.com	REPRESENTED CAN LEGALLY RESULT IN THE CESSATION OF SUCH CONSTRUCTION OR BUILDINGS BEING SEIZED AND/OR RAISED.
2018 North Carolina State Residential Code (2015 IRC with North Carolina Amendments)	©
Attic With Permanent Stair: <u>40 PSF</u> <u>40 PSF</u> Attic Without Permanent Stair: <u>20 PSF</u> <u>30 PSF</u> Attic Without Storage: <u>10 PSF</u>	4642 4642 A U.Lucator Part Carolint Part Carolint 5/18/20
ory: $ \begin{array}{c c} \underline{20 \text{ PSF}}\\ \underline{115-120 \text{ MPH}}\\ \underline{C}\\ B\\ \underline{C}\\ B\\ \underline{Risk Group:}\\II\\ \underline{II}\\ Urred B\\ \underline{Roof:}\\20\\ \underline{35}\\20\\ \underline{20^{\circ}}\\4A\\ \end{array} $ Windows + Doors:	REVISIONSMARKDATEDESCRIPTIONDN01-10-19CONVERT OLAHSDN02-14-19STRUCT. DWGS. REV.
Y:	CH 12-10-19 ADD KINGST. ELEV. D + E CH 05-18-20 ELEV. F + SUNRM. W/ COV.
<u>R-38 (R-30 w/ Raised Heel Truss)</u> <u>R-15</u> R-19	
R-0 (Per Southern Energy) 0.35 Max. 0.30 Max.	PROJECT NO.
lation values per Southern Energy Reports)	113-69 Date 01-13-16
CITIES:	SCALE NO SCALE
Capacity: 2,000 PSF	DRAWN BY JB CHECKED BY JW
72	ISSUED FOR PERMITS/CONSTRUCTION PROJECT TITLE
jht	MODEL 628 - GARAGE RIGHT
b	
3rd Car Garage Covered Porch Bathroom @3rd Car Garage chen Island Drop Zone Bench Deluxe Primary Bath #1	CLIENT CHESAPEAKE HOMES OF NC 3100 Smoketree Court, Suite 210 Raleigh, NC 27604 (919) 256-3060 (919) 556-0690 Fax
Double Bowl @ Hall Bath #1 (next to Bedroom # Door from Bedroom #4 to Hall Bath #2	2) DRAWING TITLE CONTENTS AND PROJECT INFORMATION
	SHEET 1

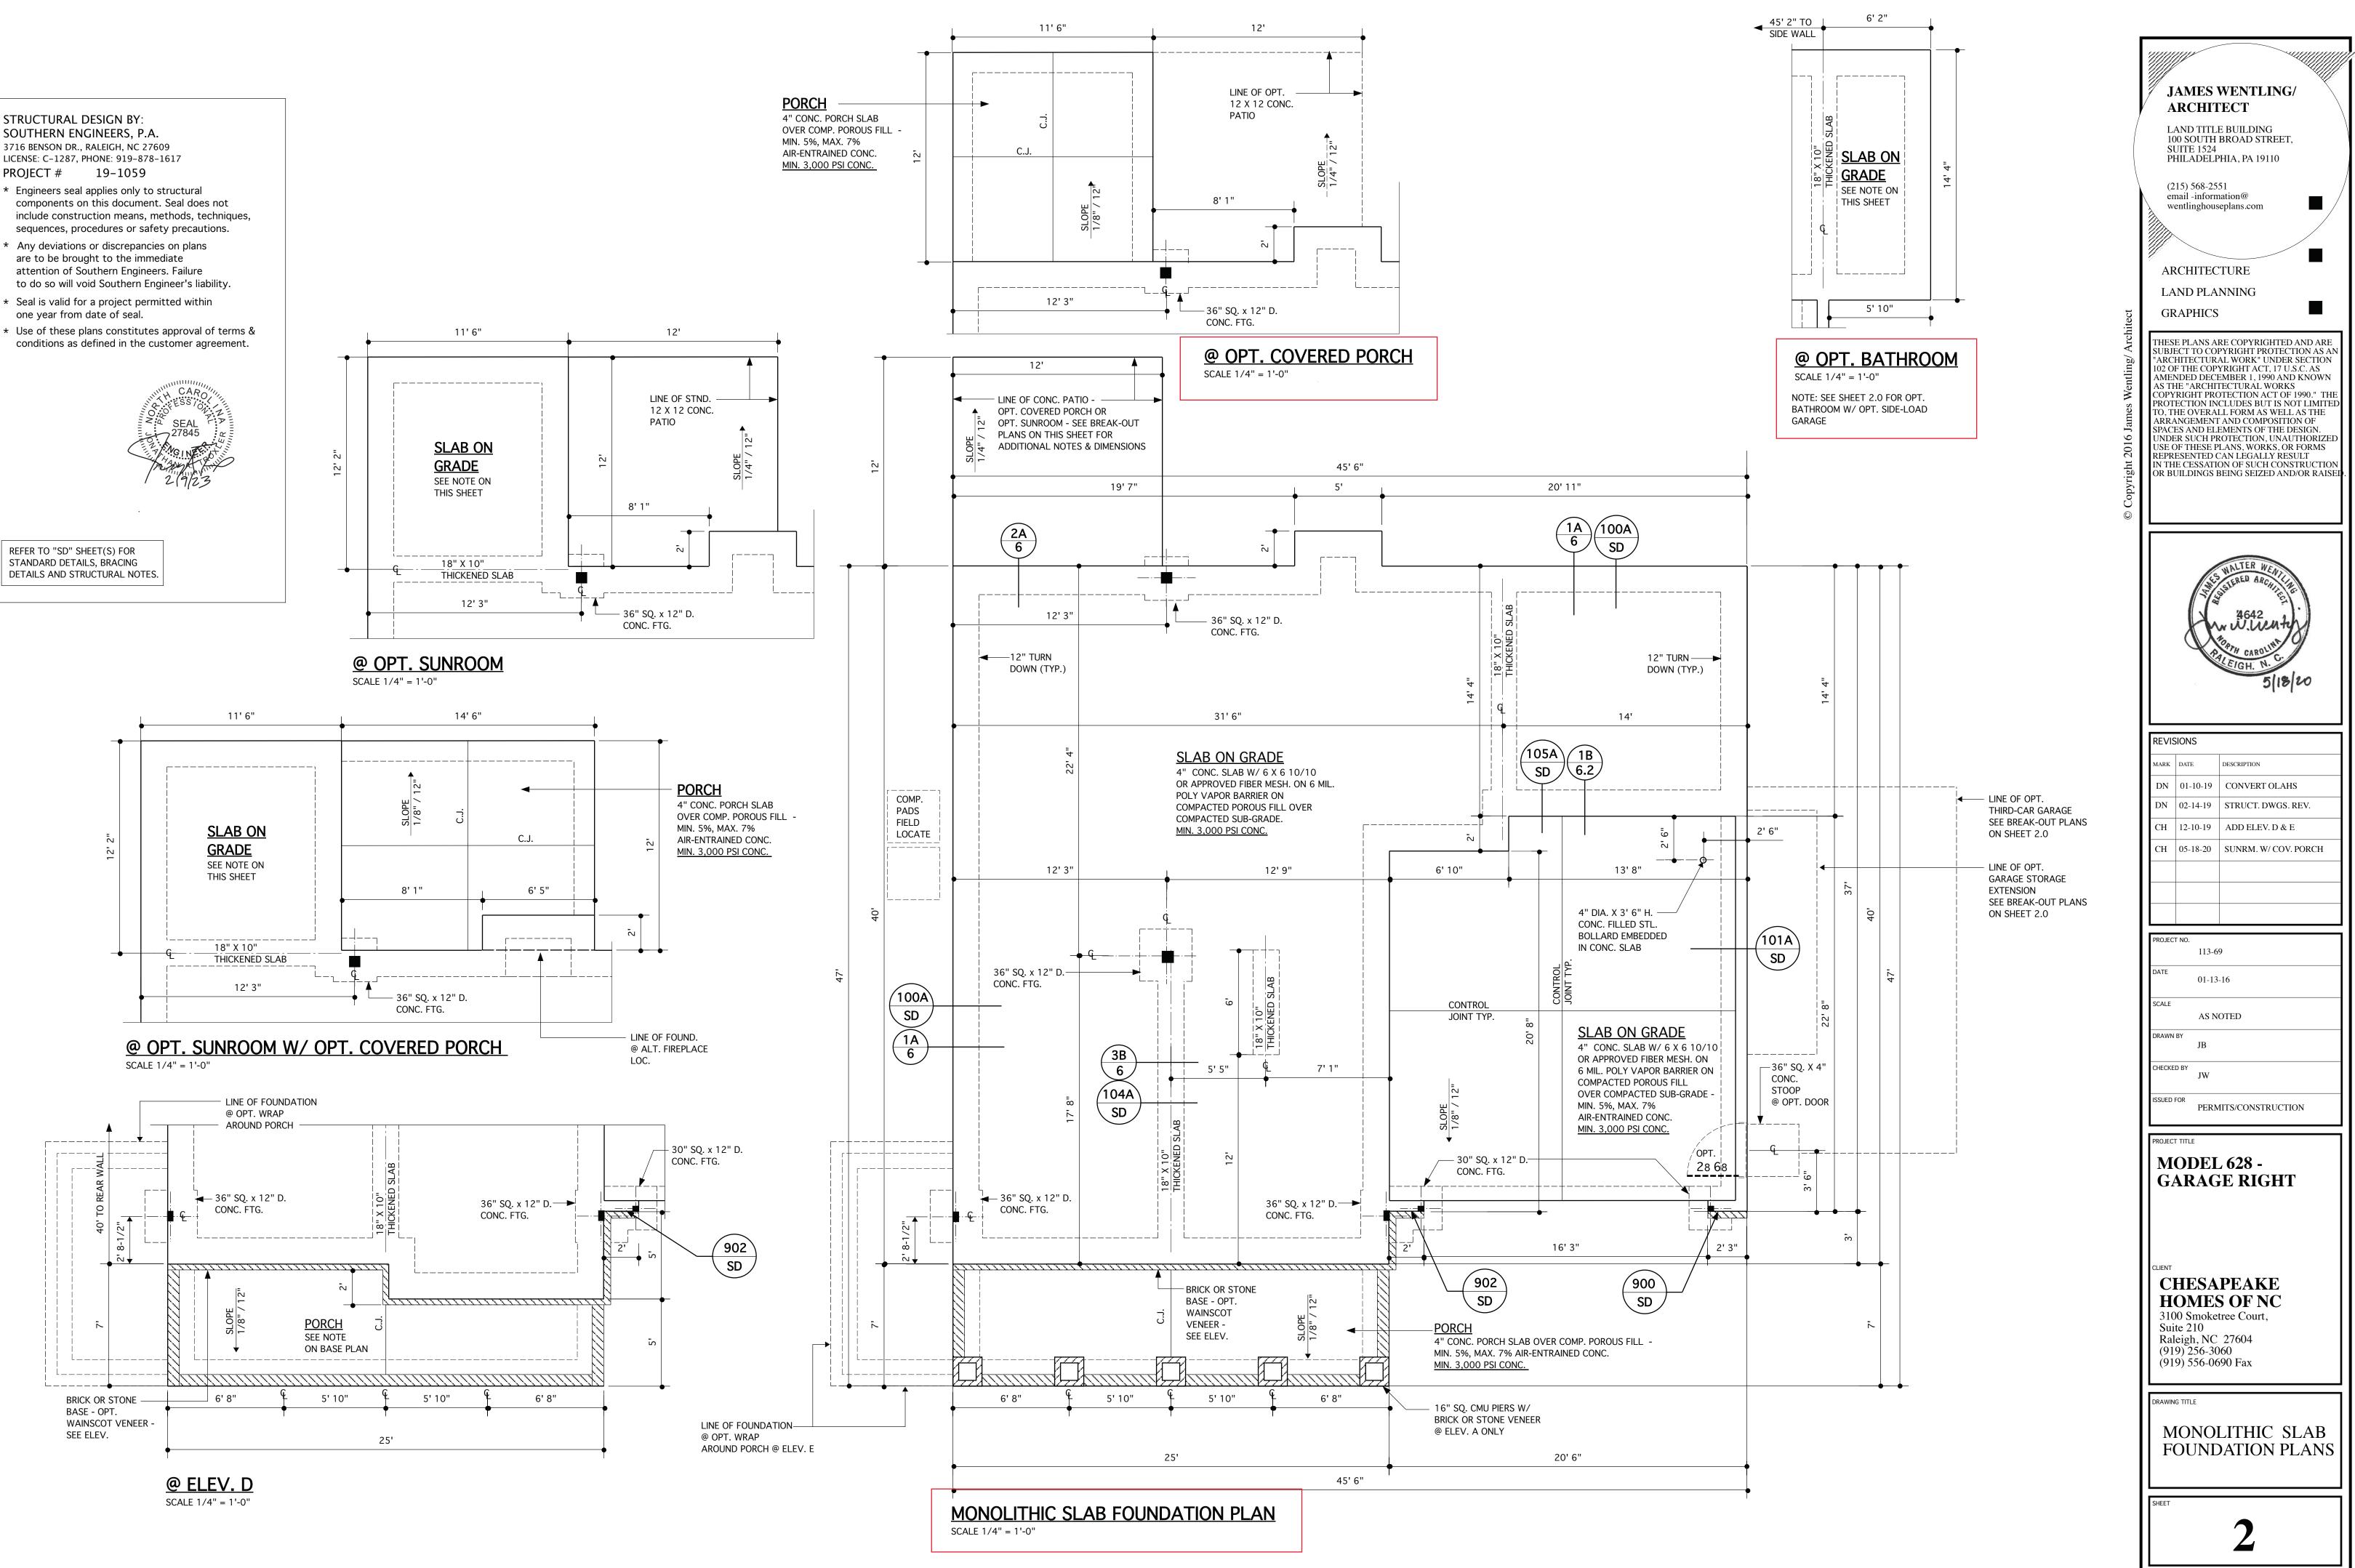

- STRUCTURAL DESIGN BY:


- SOUTHERN ENGINEERS, P.A. 3716 BENSON DR., RALEIGH, NC 27609


- LICENSE: C-1287, PHONE: 919-878-1617

- PROJECT # 19–1059 * Engineers seal applies only to structural


STRUCTURAL DESIGN BY: SOUTHERN ENGINEERS, P.A. 3716 BENSON DR., RALEIGH, NC 27609 LICENSE: C-1287, PHONE: 919-878-1617 PROJECT # 19–1059

- * Engineers seal applies only to structural components on this document. Seal does not include construction means, methods, techniques, sequences, procedures or safety precautions.
- * Any deviations or discrepancies on plans are to be brought to the immediate attention of Southern Engineers. Failure to do so will void Southern Engineer's liability.
- * Seal is valid for a project permitted within one year from date of seal.
- * Use of these plans constitutes approval of terms & conditions as defined in the customer agreement.




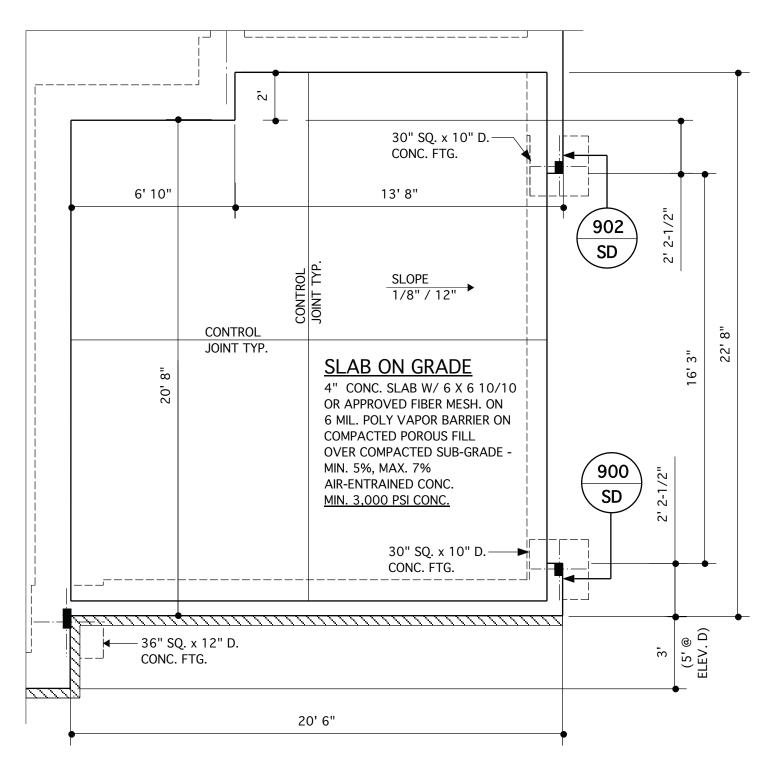

OPT. SIDE-LOAD GARAGE SCALE 1/4" = 1'-0"

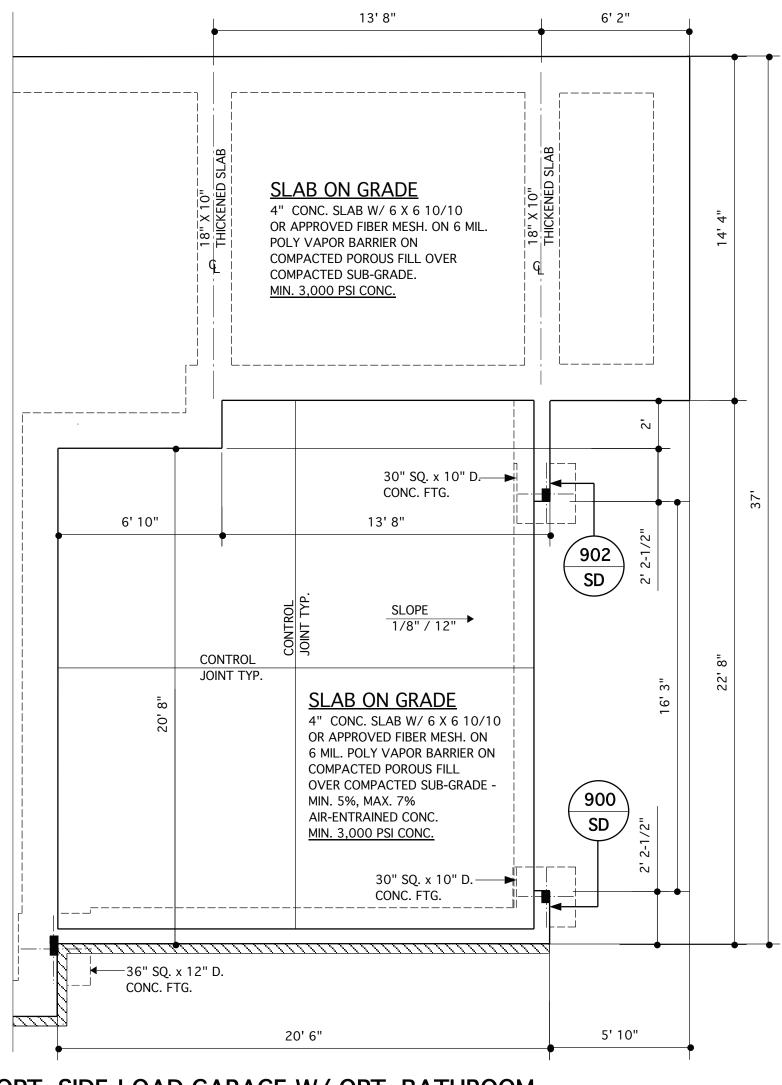


SCALE 1/4" = 1'-0"

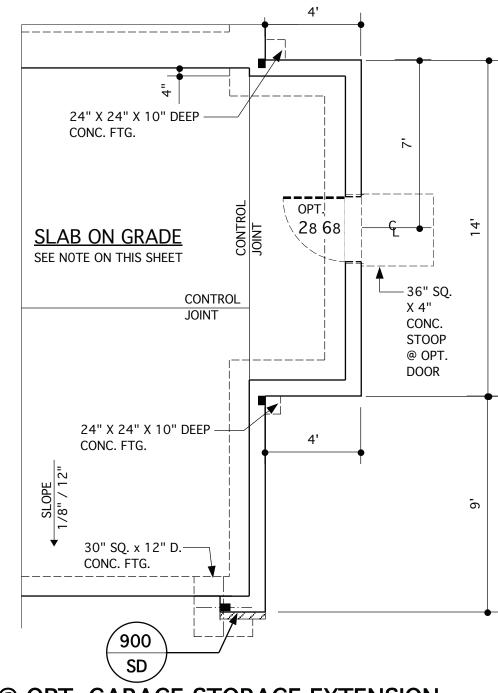


@ OPT. GARAGE STORAGE EXTENSION SCALE 1/4" = 1'-0"




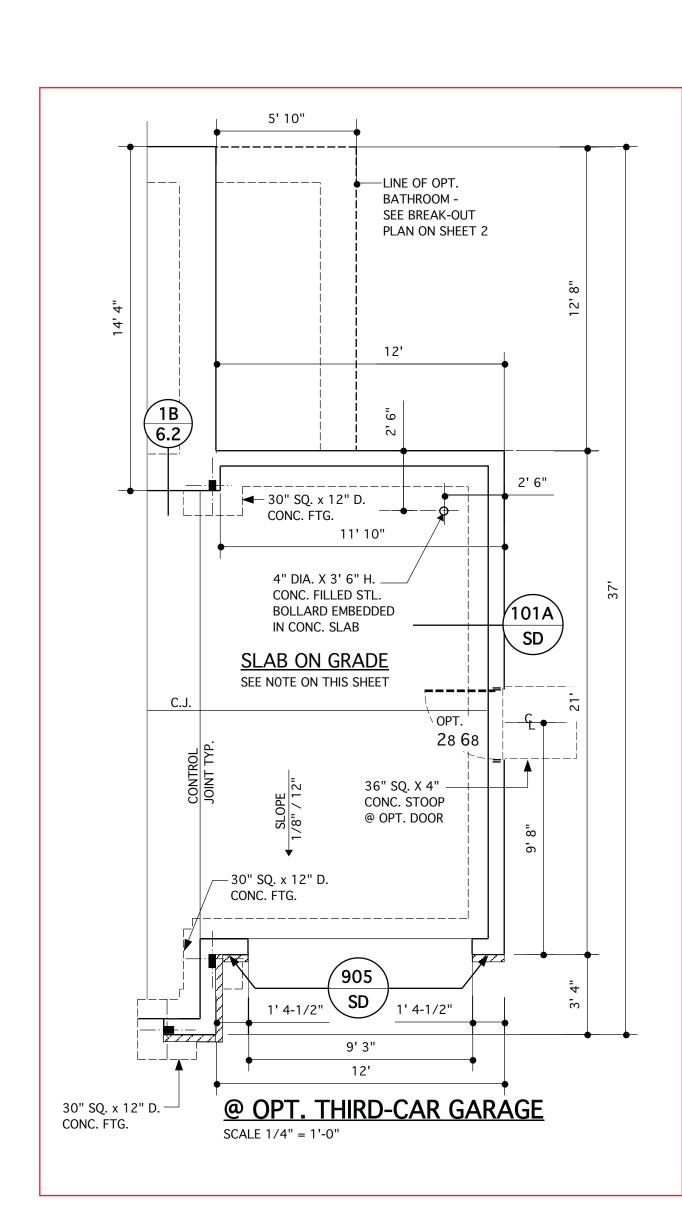


	JAMES WENTLING/ ARCHITECT
	LAND TITLE BUILDING 100 SOUTH BROAD STREET, SUITE 1524
	PHILADELPHIA, PA 19110 (215) 568-2551
	email -information@ wentlinghouseplans.com
	ARCHITECTURE
	GRAPHICS
٥	THESE PLANS ARE COPYRIGHTED AND ARE SUBJECT TO COPYRIGHT PROTECTION AS AN "ARCHITECTURAL WORK" UNDER SECTION 102 OF THE COPYRIGHT ACT, 17 U.S.C. AS
	AMENDED DECEMBER 1, 1990 AND KNOWN AS THE "ARCHITECTURAL WORKS COPYRIGHT PROTECTION ACT OF 1990." THE PROTECTION INCLUDES BUT IS NOT LIMITED
	TO, THE OVERALL FORM AS WELL AS THE ARRANGEMENT AND COMPOSITION OF SPACES AND ELEMENTS OF THE DESIGN. UNDER SUCH PROTECTION, UNAUTHORIZED
0	USE OF THESE PLANS, WORKS, OR FORMS REPRESENTED CAN LEGALLY RESULT IN THE CESSATION OF SUCH CONSTRUCTION OR BUILDINGS BEING SEIZED AND/OR RAISED.
	Resident ARCHIER
	4642 10 10 10 10 10 10 10 10 10 10 10 10 10 1
	PATH CAROLINA PALEIGH. N. C.
	5/18/20
	REVISIONS MARK DATE DESCRIPTION
	PROJECT NO. 113-69
	DATE 12-10-19
	SCALE AS NOTED
	DRAWN BY JB
	CHECKED BY JW
	PERMITS/CONSTRUCTION
	PROJECT TITLE MODEL 628 -
	GARAGE RIGHT
	CHESAPEAKE HOMES OF NC 3100 Smoketree Court,
	Suite 210 Raleigh, NC 27604 (919) 256-3060
	(919) 250-5000 (919) 556-0690 Fax
	MONOLITHIC SLAB FOUNDATION PLANS OPTIONS
	SHEET
	2.0

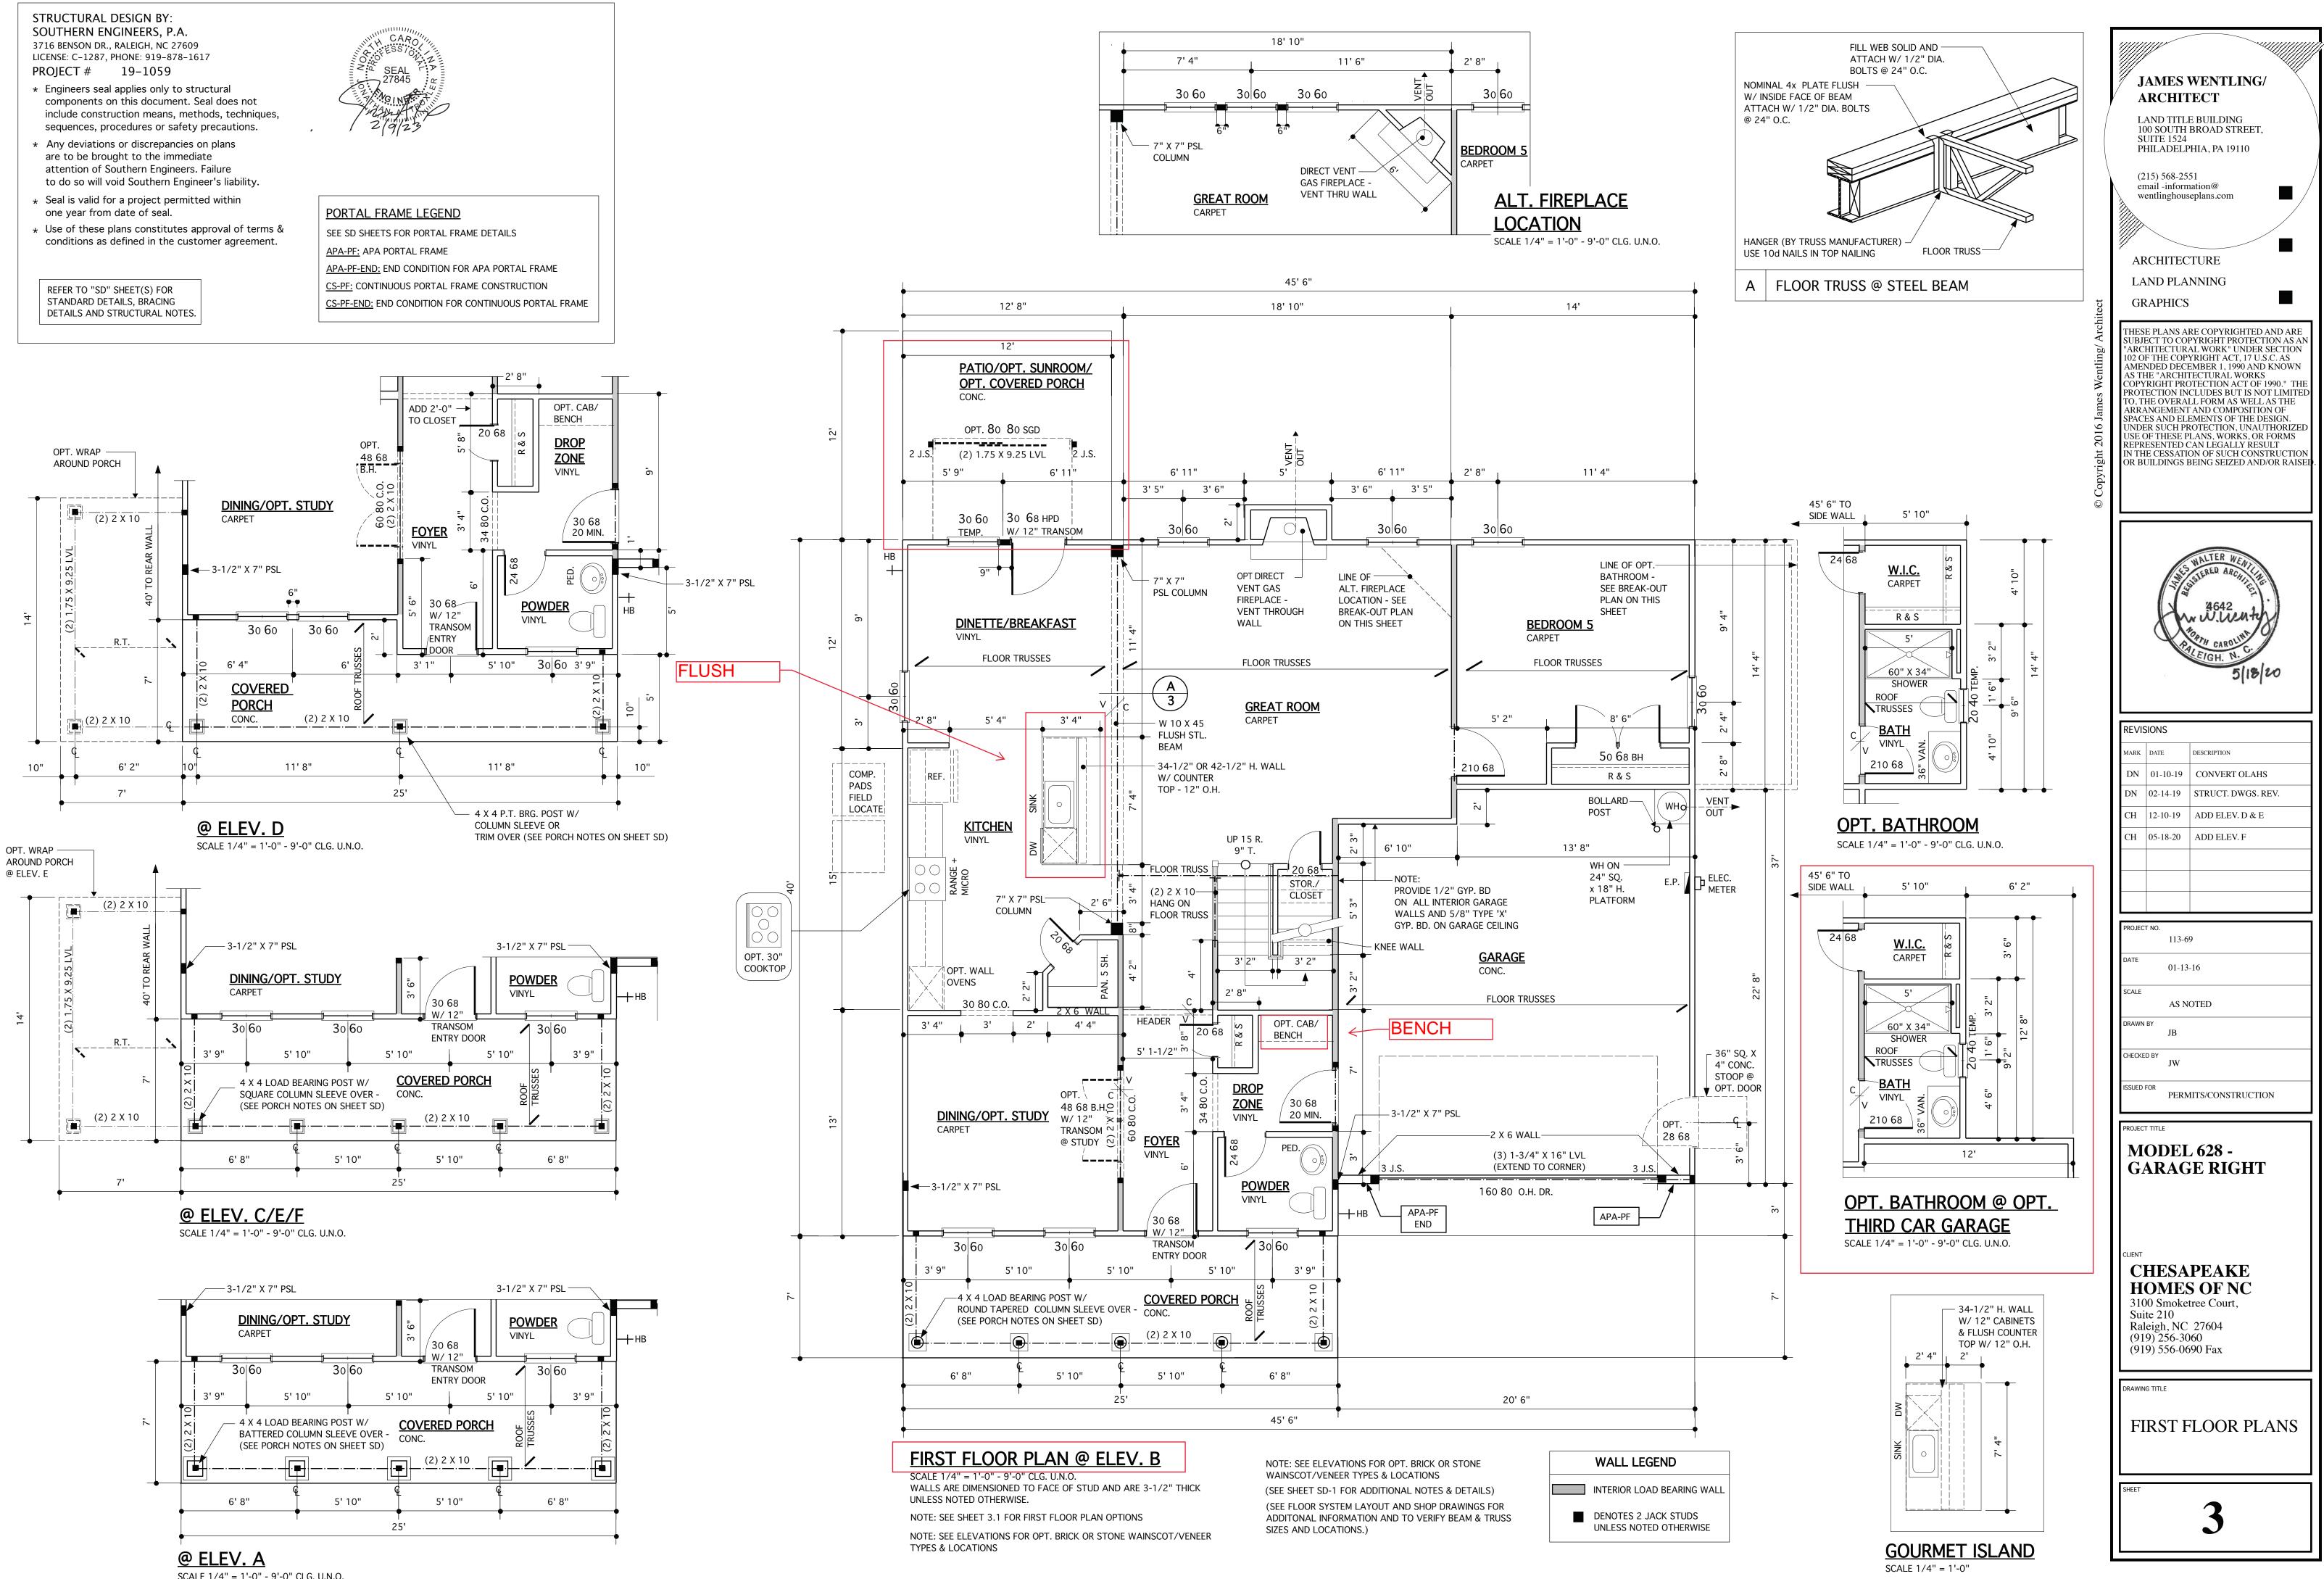


SCALE 1/4" = 1'-0" - 9'-0" CLG. U.N.O.

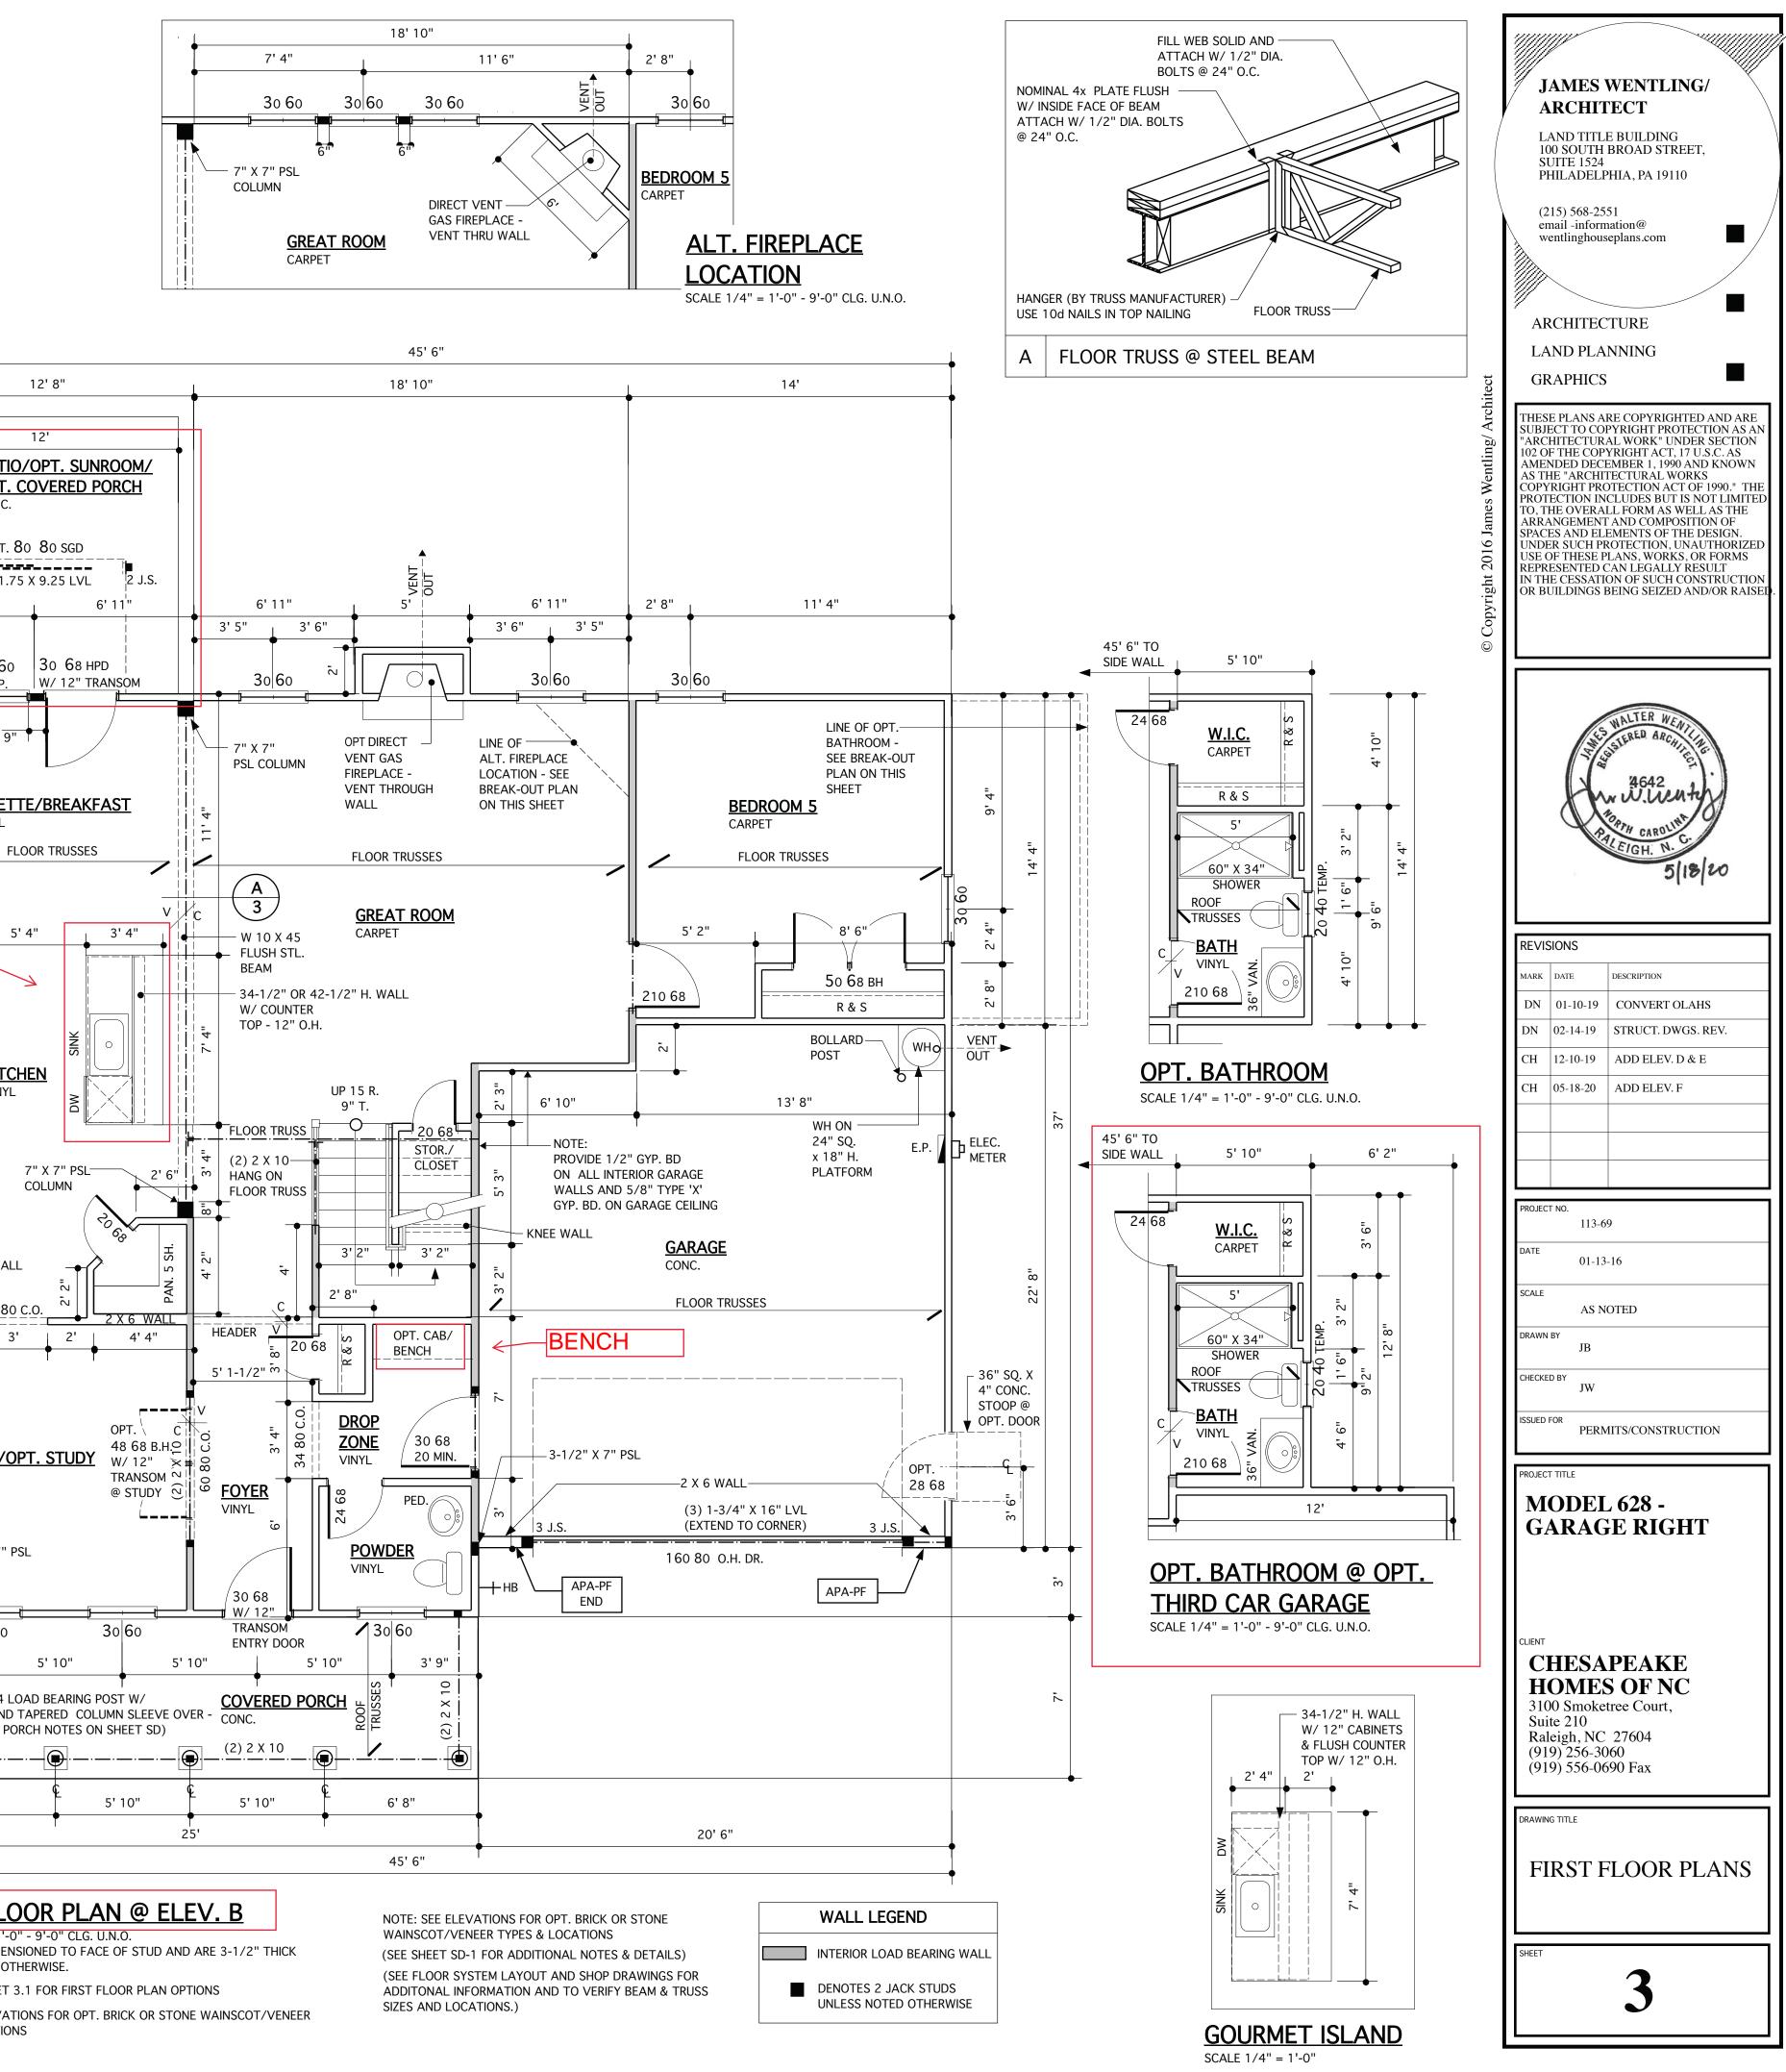


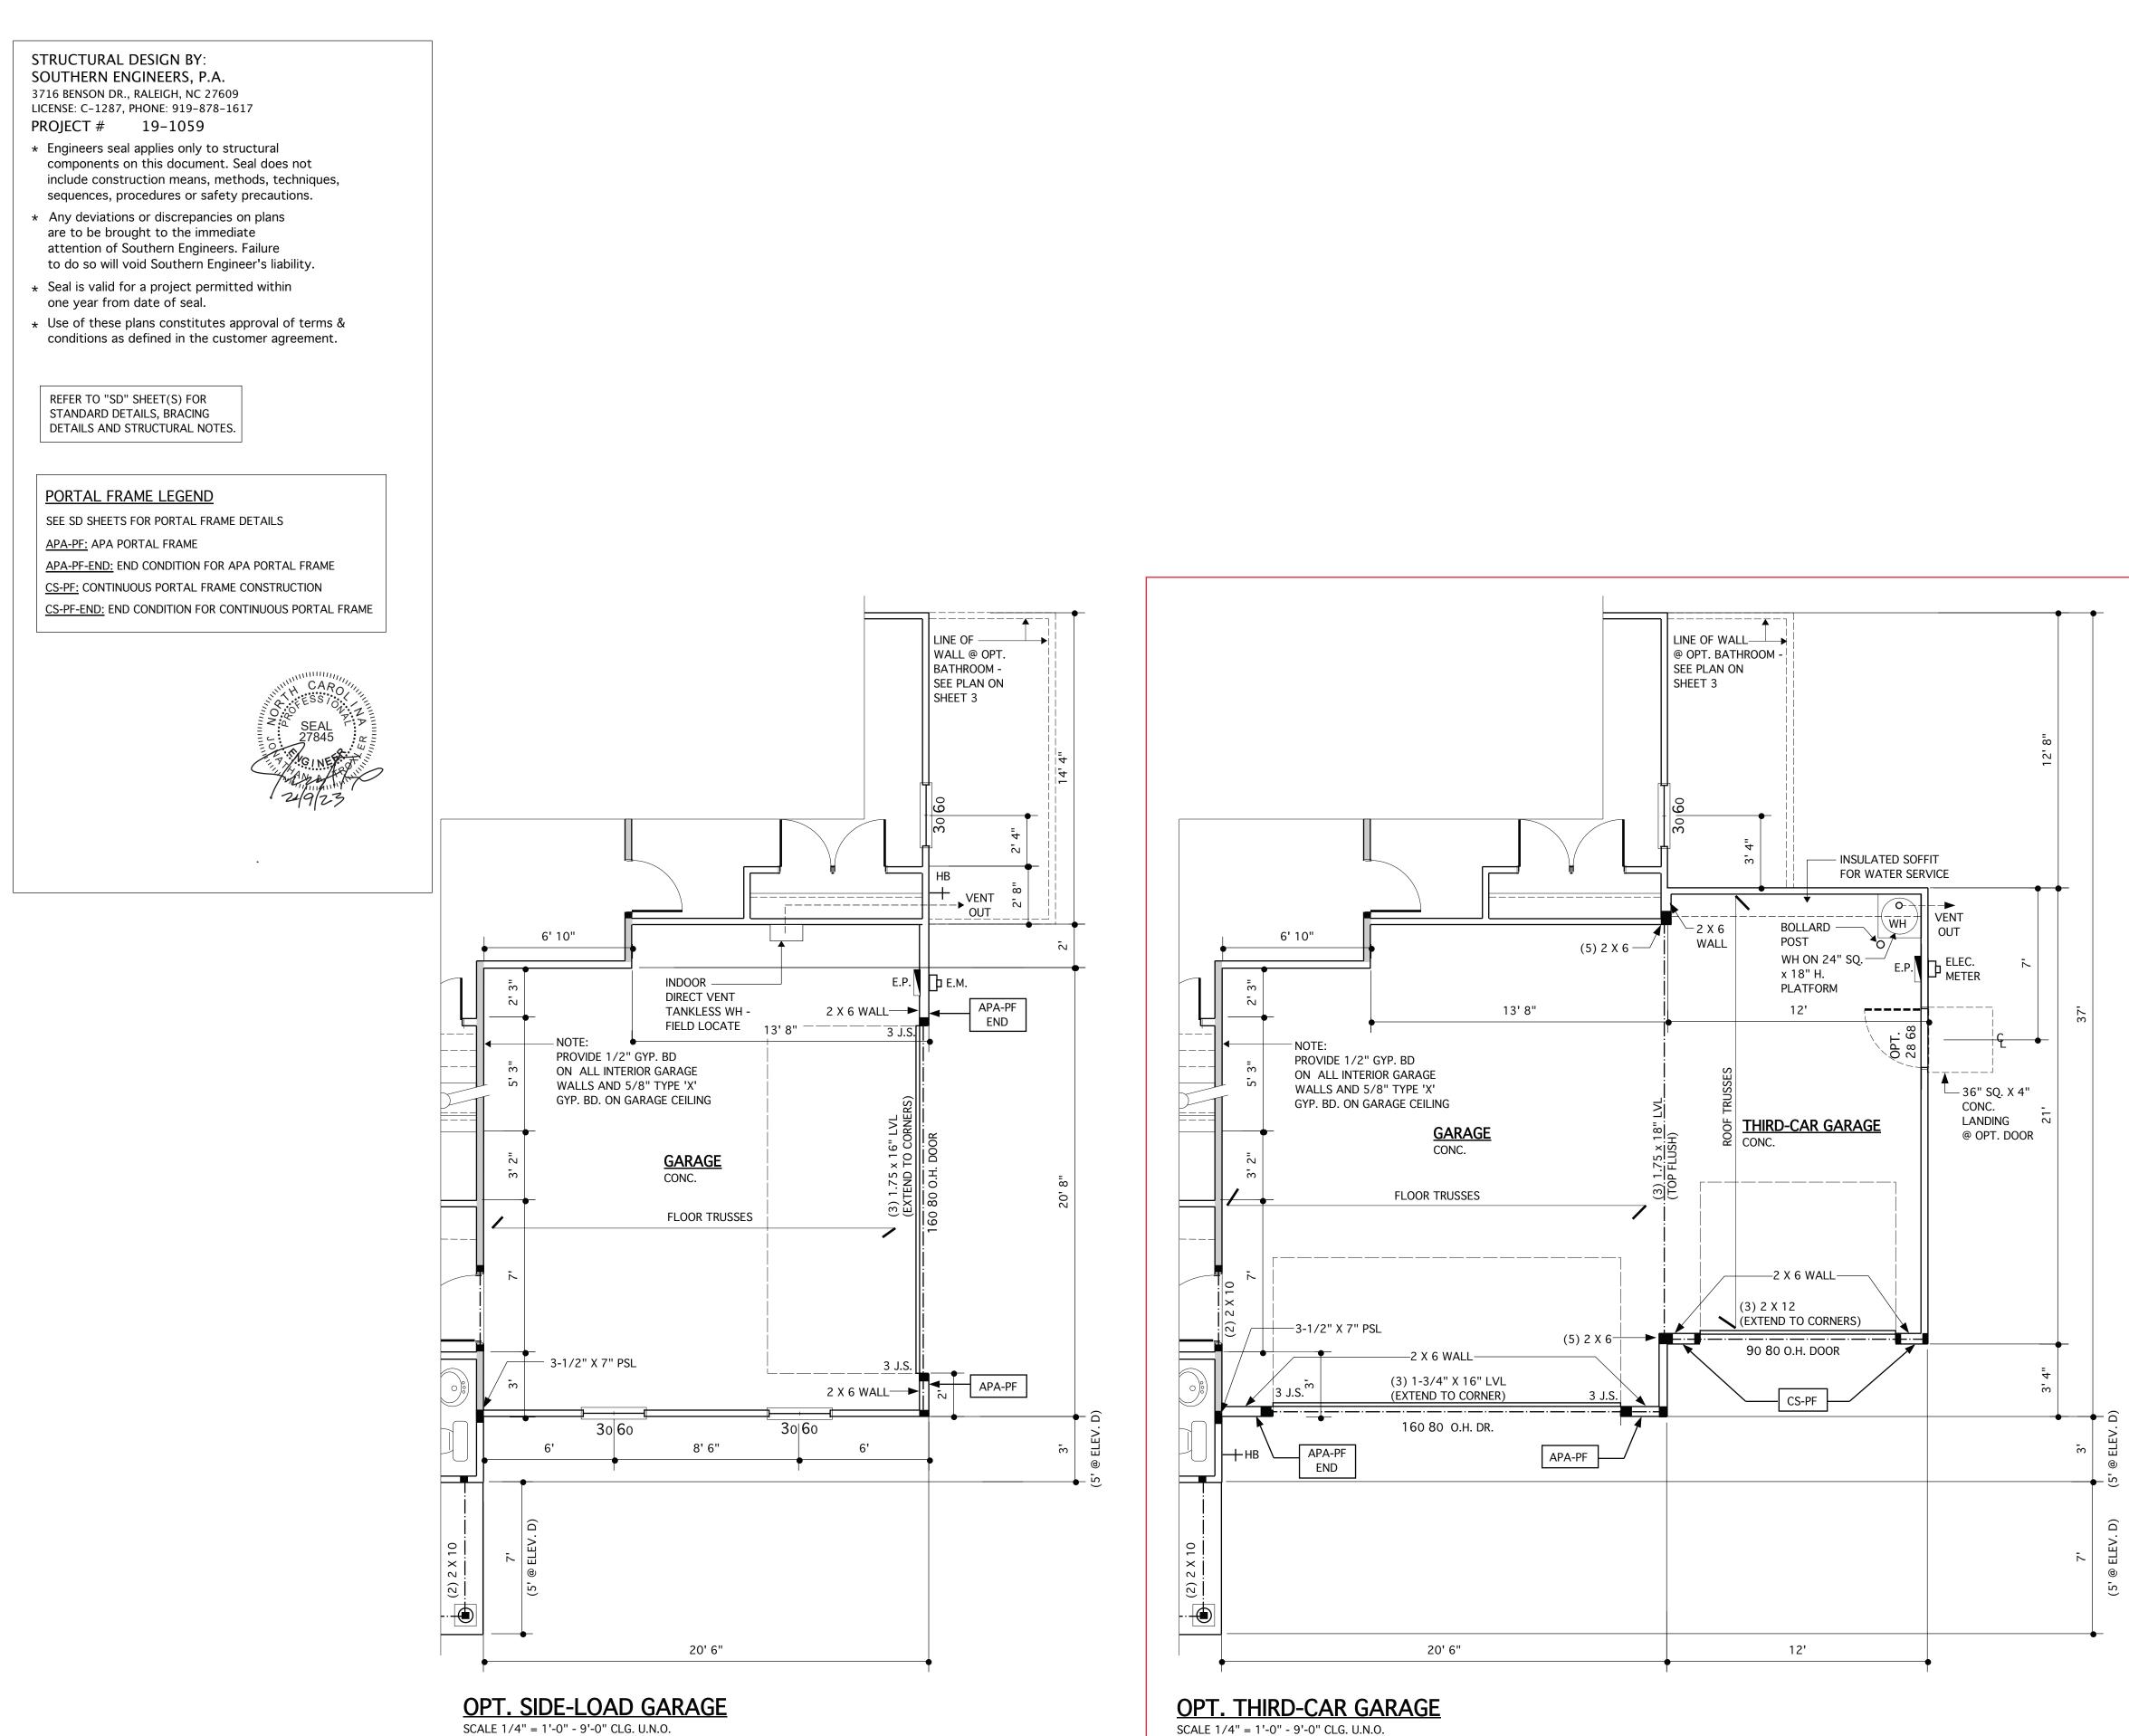

SCALE 1/4" = 1'-0" - 9'-0" CLG. U.N.O.

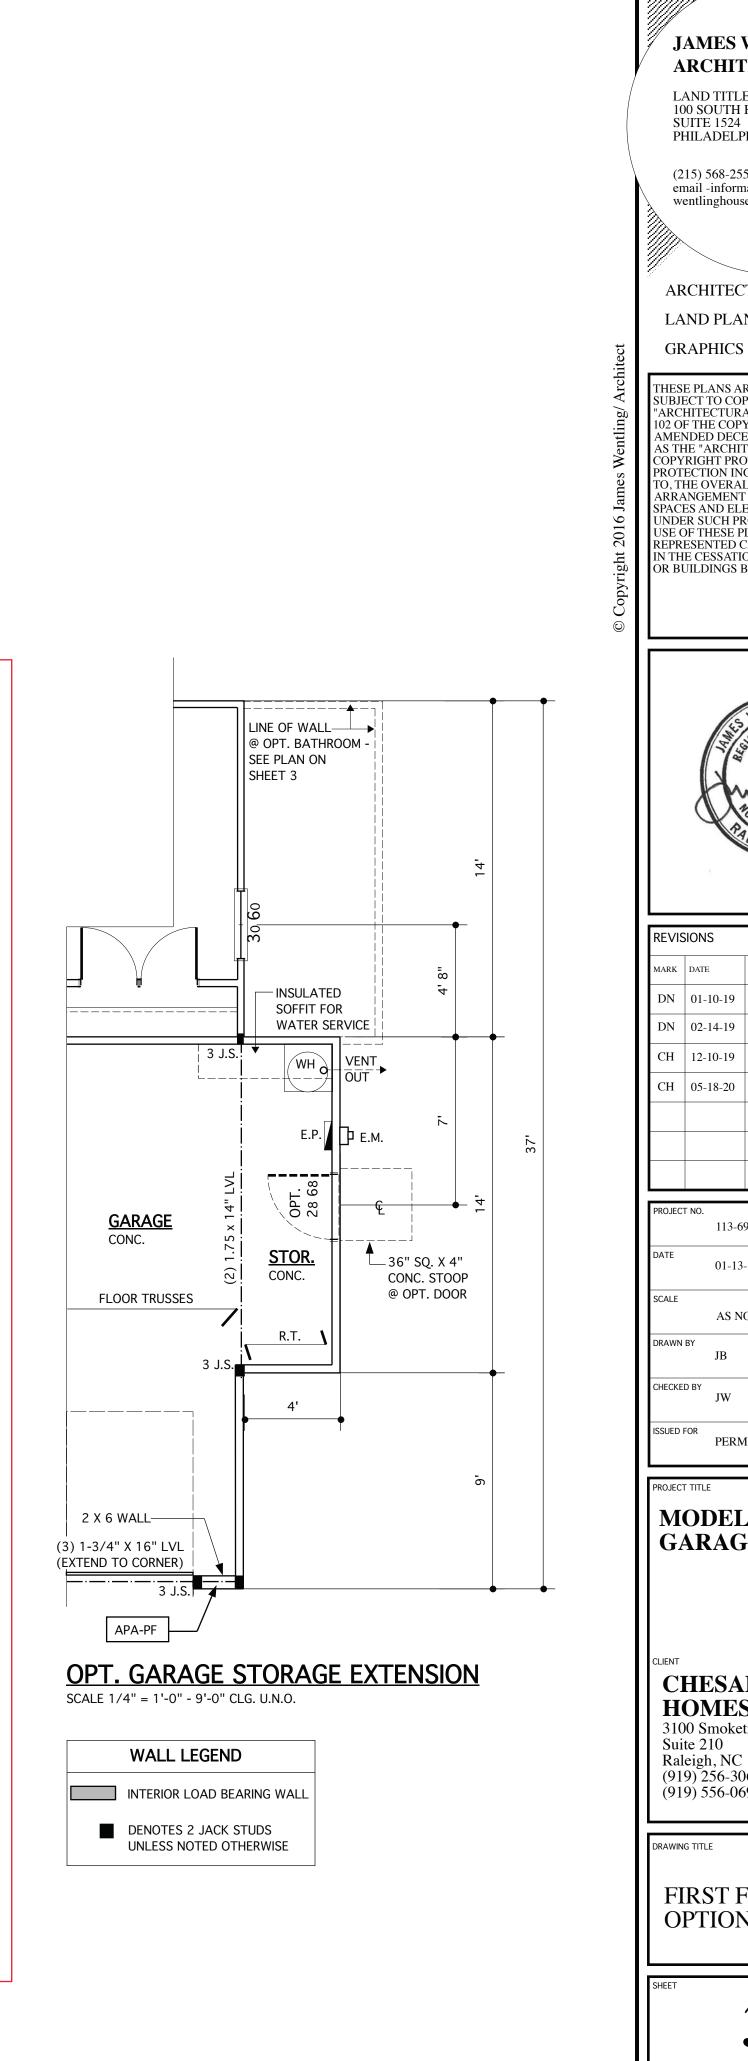


•		WENTLING/
L		EBUILDING
SU	JITE 1524	BROAD STREET, HIA, PA 19110
	15) 568-25	
	nail -inform entlinghous	eplans.com
	CHITEC	
	ND PLA	NNING
		RE COPYRIGHTED AND ARE
"ARCI 102 OI	HITECTURA F THE COPY	PYRIGHT PROTECTION AS AN AL WORK" UNDER SECTION YRIGHT ACT, 17 U.S.C. AS EMBER 1, 1990 AND KNOWN
COPY PROT	RIGHT PRO	TECTURAL WORKS DTECTION ACT OF 1990." THE CLUDES BUT IS NOT LIMITED LL FORM AS WELL AS THE
ARRA SPACI	NGEMENT	AND COMPOSITION OF EMENTS OF THE DESIGN.
USE C REPRI IN TH	OF THESE P ESENTED C E CESSATI(LANS, WORKS, OR FORMS CAN LEGALLY RESULT ON OF SUCH CONSTRUCTION
OK BU	JILDINGS F	BEING SEIZED AND/OR RAISED.
	15	WALTER WENICL
	E.	NGA2
		. W. Trenty
	R	LEIGH. N. C.
		5/18/20
REVIS	SIONS	
MARK	DATE	DESCRIPTION
DN	01-10-19	CONVERT OLAHS
DN CH	02-14-19 12-10-19	STRUCT. DWGS. REV. ELEV. D + E
СН	05-18-20	ADD SHEET 3.1.1
PROJECT	г no. 113-69)
DATE	01-13-	-16
SCALE	A C NI	OTED
DRAWN		OTED
CHECKE		
ISSUED I	FOR	
	PERM	IITS/CONSTRUCTION
PROJECT	r title ODEL	. 628 -
	-	E RIGHT
	HESA	PEAKE
H	OMES	S OF NC tree Court,
Sui Ral	te 210 eigh, NC	27604
(91 (91	9) 256-30 9) 556-06	60 90 Fax
DRAWIN	G TITLE	
Бі	DOLL	FLOOR PLAN -
	PTION	
SHEET		2 1
		3.1

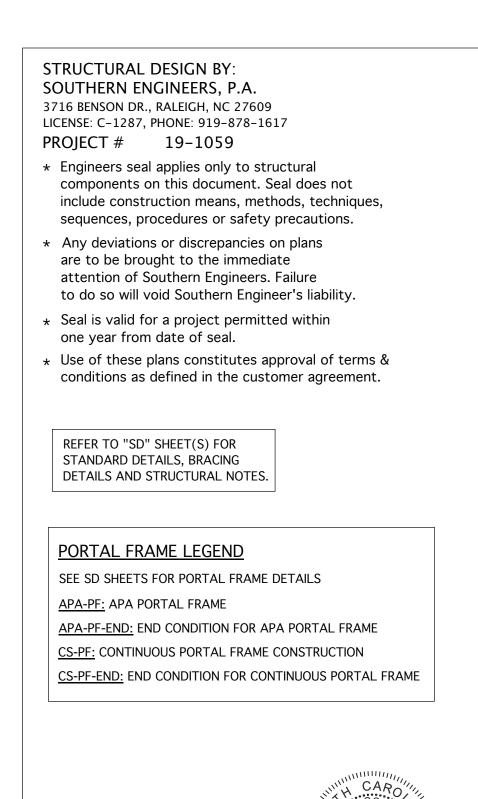




INTERIOR LOAD BEARING WALL


DENOTES 2 JACK STUDS UNLESS NOTED OTHERWISE

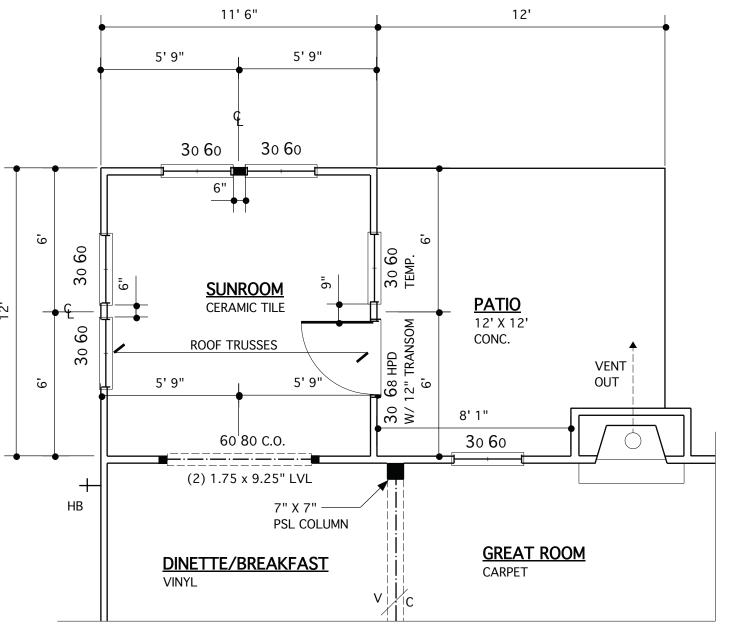


<u>OPT. SUNROOM</u> SCALE 1/4" = 1'-0" - 9'-0" CLG. U.N.O.

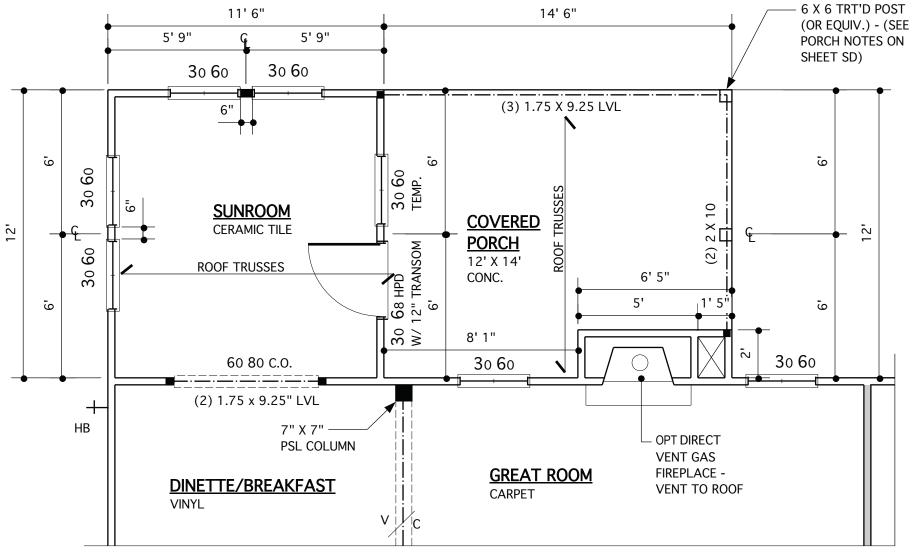

OPT. SUNROOM W/ OPT. COVERED PORCH SCALE 1/4" = 1'-0" - 9'-0" CLG. U.N.O.

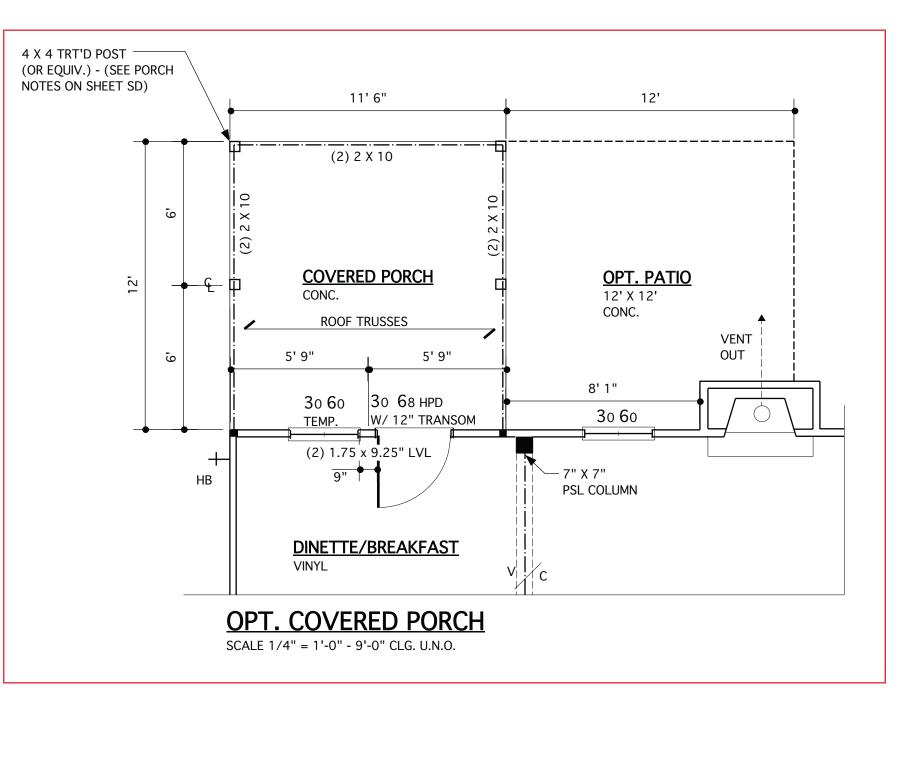

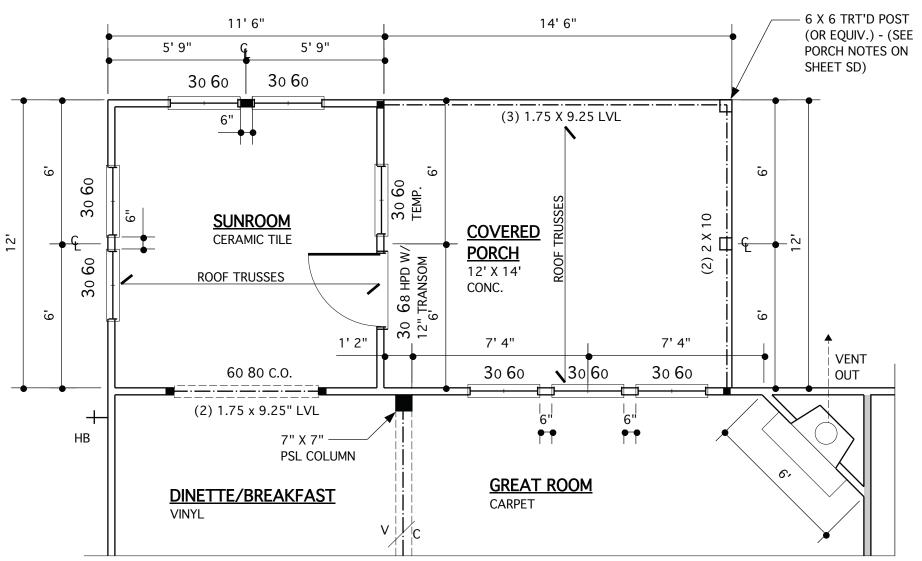



OPT. SUNROOM W/ OPT. COVERED PORCH & ALT. FIREPLACE LOCATION SCALE 1/4" = 1'-0" - 9'-0" CLG. U.N.O.

	JAMES WENTLING/
	ARCHITECT LAND TITLE BUILDING 100 SOUTH BROAD STREET, SUITE 1524 PHILADELPHIA, PA 19110
	(215) 568-2551 email -information@ wentlinghouseplans.com
	ARCHITECTURE
ect	LAND PLANNING GRAPHICS
© Copyright 2016 James Wentling/ Architect	THESE PLANS ARE COPYRIGHTED AND ARE SUBJECT TO COPYRIGHT PROTECTION AS AN "ARCHITECTURAL WORK" UNDER SECTION 102 OF THE COPYRIGHT ACT, 17 U.S.C. AS AMENDED DECEMBER 1, 1990 AND KNOWN AS THE "ARCHITECTURAL WORKS COPYRIGHT PROTECTION ACT OF 1990." THE PROTECTION INCLUDES BUT IS NOT LIMITED TO, THE OVERALL FORM AS WELL AS THE ARRANGEMENT AND COMPOSITION OF SPACES AND ELEMENTS OF THE DESIGN. UNDER SUCH PROTECTION, UNAUTHORIZED USE OF THESE PLANS, WORKS, OR FORMS REPRESENTED CAN LEGALLY RESULT IN THE CESSATION OF SUCH CONSTRUCTION OR BUILDINGS BEING SEIZED AND/OR RAISED.
	A642 A642 A642 AFIEIGH. N. C. 5/18/20
	REVISIONS
	MARK DATE DESCRIPTION
	project no. 113-69
	DATE 05-18-20
	SCALE AS NOTED
	DRAWN BY CH
	CHECKED BY JW ISSUED FOR
	PERMITS/CONSTRUCTION PROJECT TITLE
	MODEL 628 - GARAGE RIGHT
	CLIENT CHESAPEAKE HOMES OF NC 3100 Smoketree Court, Suite 210 Raleigh, NC 27604 (919) 256-3060 (919) 556-0690 Fax
	DRAWING TITLE FIRST FLOOR PLAN - OPTIONS
	SHEET 3.1.1

- components on this document. Seal does not sequences, procedures or safety precautions.
- are to be brought to the immediate attention of Southern Engineers. Failure
- one year from date of seal.




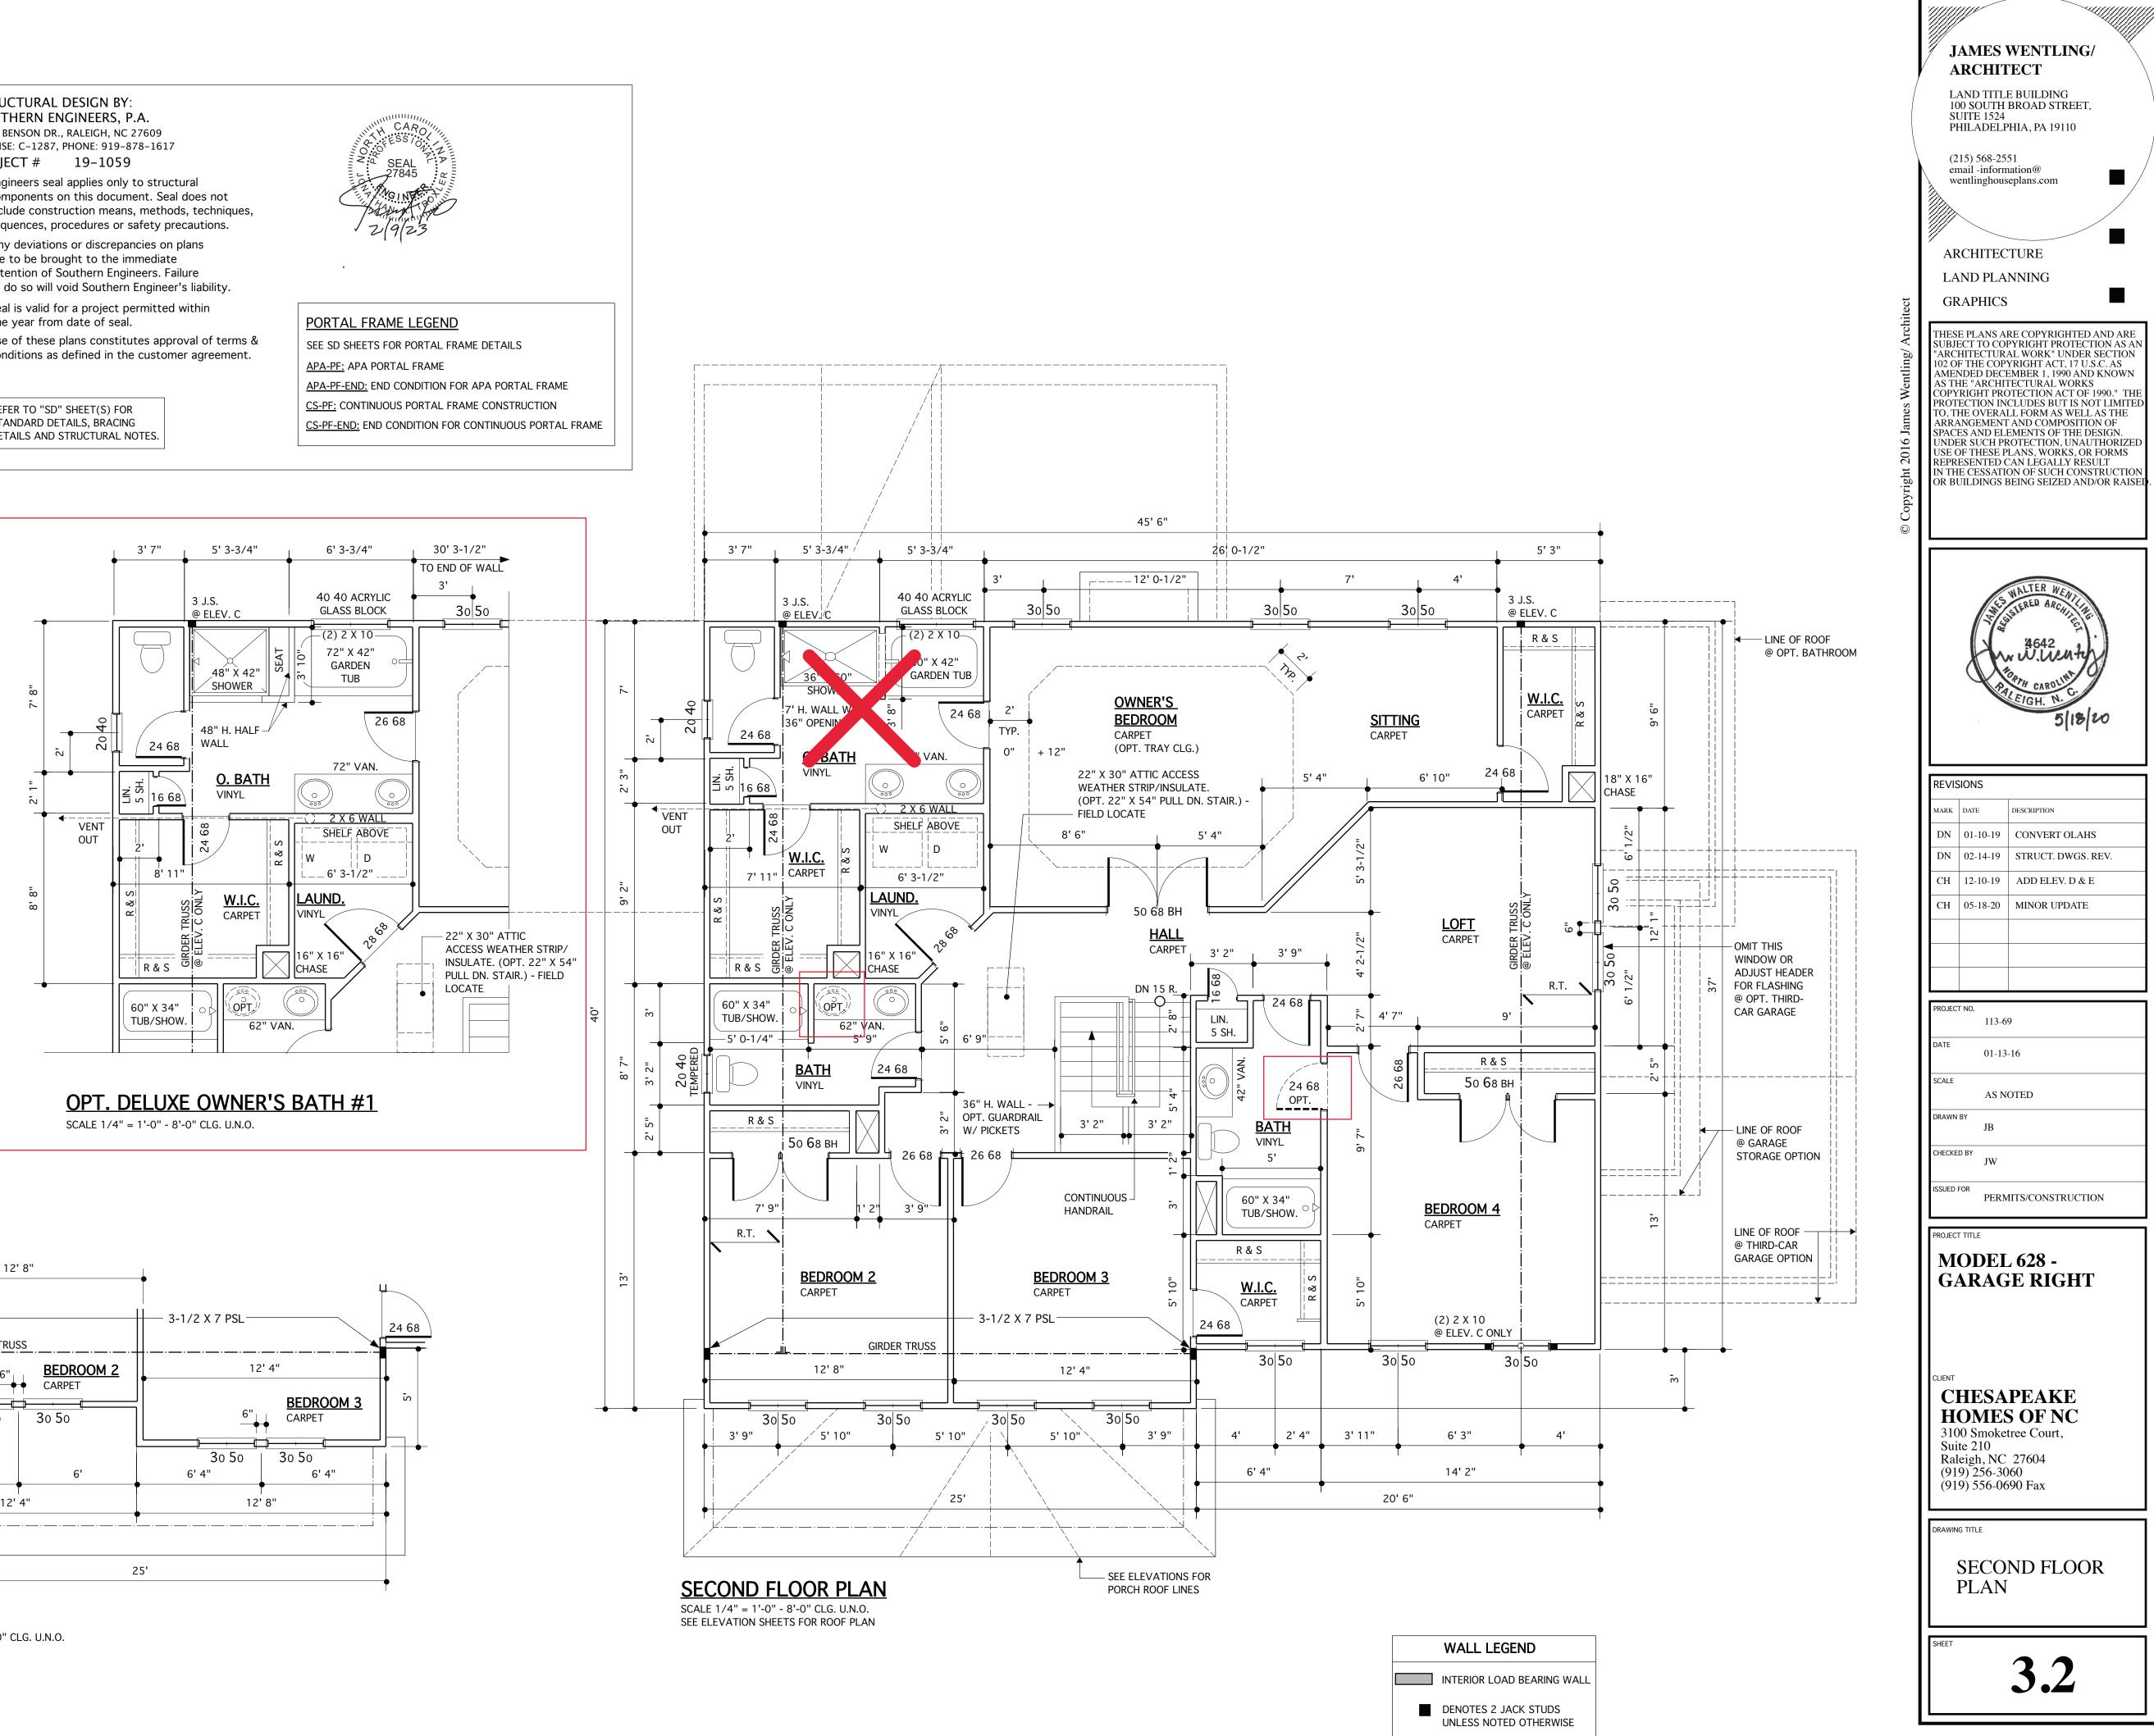

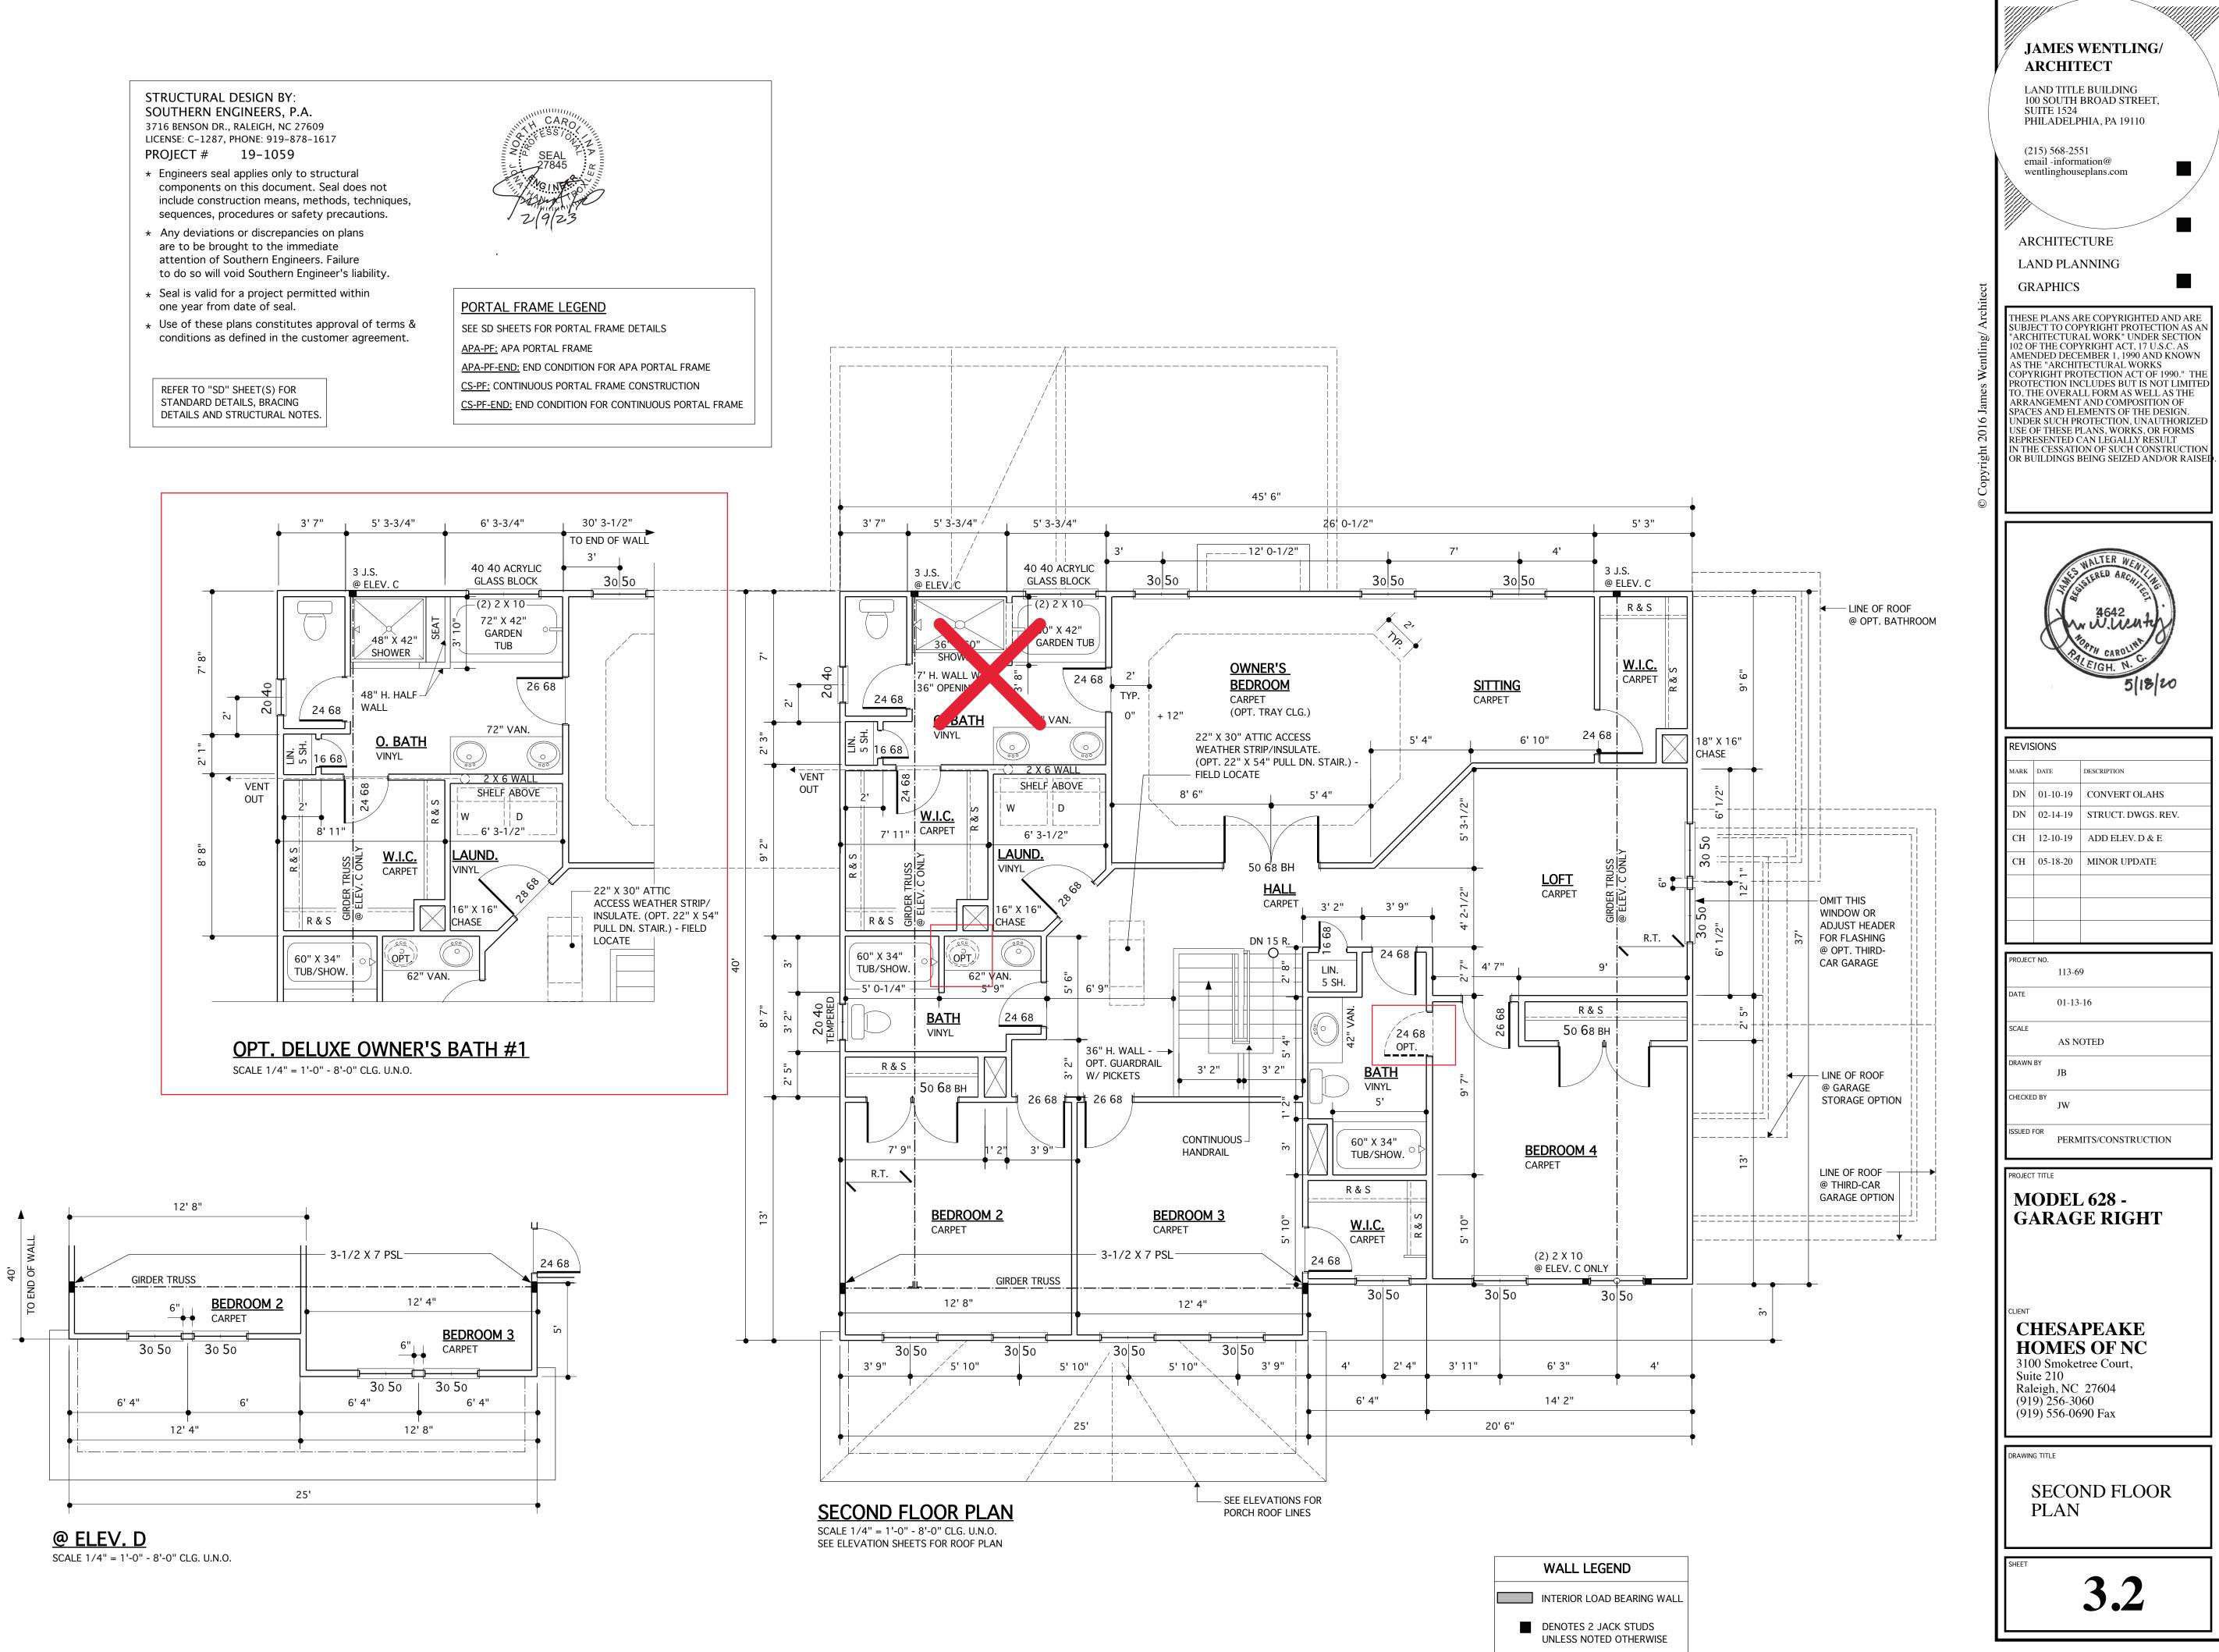





JAMES WENTLING/ ARCHITECT
LAND TITLE BUILDING
100 SOUTH BROAD STREET, SUITE 1524 PHILADELPHIA, PA 19110
(215) 568-2551
email -information@ wentlinghouseplans.com
ARCHITECTURE
LAND PLANNING
GRAPHICS
THESE PLANS ARE COPYRIGHTED AND ARE SUBJECT TO COPYRIGHT PROTECTION AS AN "ARCHITECTURAL WORK" UNDER SECTION 102 OF THE COPYRIGHT ACT, 17 U.S.C. AS
AMENDED DECEMBER 1, 1990 AND KNOWN AS THE "ARCHITECTURAL WORKS COPYRIGHT PROTECTION ACT OF 1990." THE
PROTECTION INCLUDES BUT IS NOT LIMITED TO, THE OVERALL FORM AS WELL AS THE ARRANGEMENT AND COMPOSITION OF
SPACES AND ELEMENTS OF THE DESIGN. UNDER SUCH PROTECTION, UNAUTHORIZED USE OF THESE PLANS, WORKS, OR FORMS REPRESENTED CAN LEGALLY RESULT
IN THE CESSATION OF SUCH CONSTRUCTION OR BUILDINGS BEING SEIZED AND/OR RAISED.
UNITER WC
STATER WEALTER WEALT
4642
A D. LUCATO
TLEIGH. N.
5(18/20
REVISIONS
MARK DATE DESCRIPTION
DN 01-10-19 CONVERT OLAHS
DN 02-14-19 STRUCT. DWGS. REV. CH 12-10-19 WINDOW UPDATE
CH12-10-19WINDOW OFDATECH05-18-20MINOR UPDATE
PROJECT NO.
113-69 Date
01-13-16 SCALE
AS NOTED
DRAWN BY JB
CHECKED BY JW
ISSUED FOR PERMITS/CONSTRUCTION
PROJECT TITLE
MODEL 628 -
GARAGE RIGHT
CHESAPEAKE
HOMES OF NC 3100 Smoketree Court,
Suite 210 Raleigh, NC 27604 (919) 256-3060
(919) 256-3060 (919) 556-0690 Fax
DRAWING TITLE
ELEVATION A
AND ROOF PLAN
SHEET
4

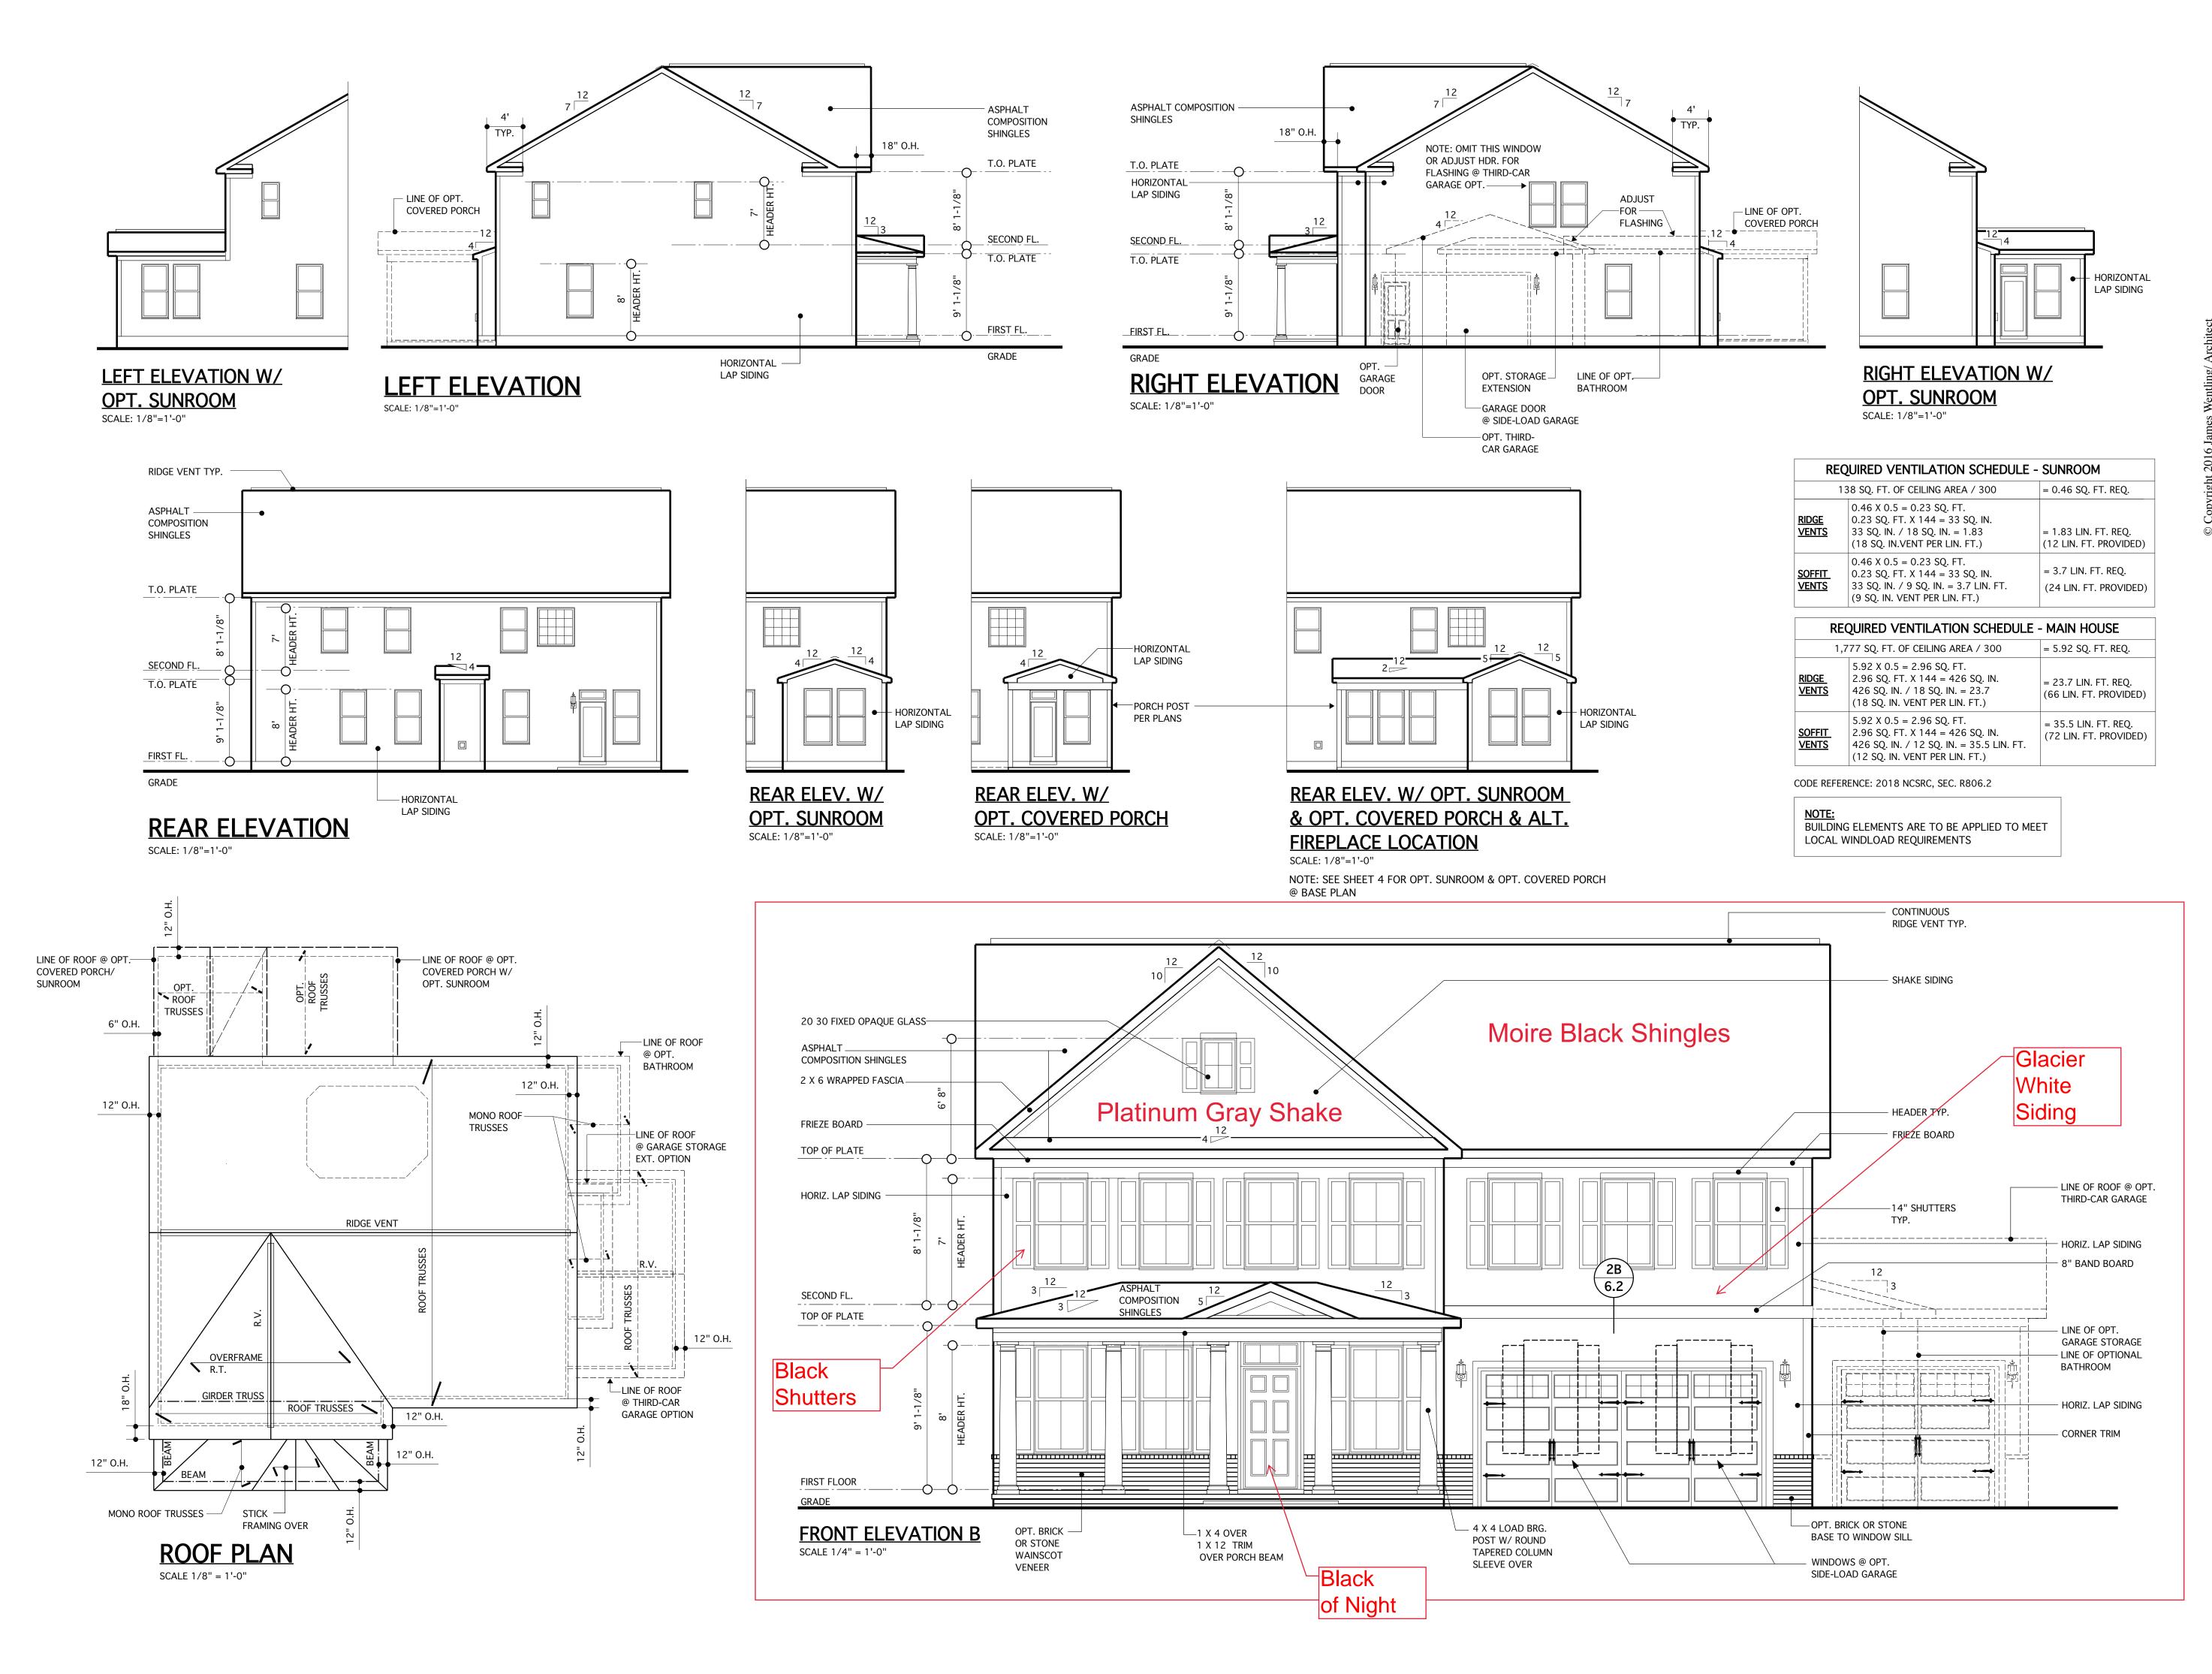


Ŭ	AMES V RCHIT	WENTLING/
LA 10 SU	AND TITLI 0 SOUTH JITE 1524	E BUILDING BROAD STREET, PHIA, PA 19110
(2 en	15) 568-25: 1ail -inform	51
		seplans.com
AR	CHITEC	TURE
	ND PLA	
-	APHICS	
SUBJE "ARCI 102 OI AMEN AS TH COPY PROTI TO, TH ARRA SPACE UNDE UNDE UNDE USE C REPRI IN TH	ECT TO COI HITECTURA F THE COPY NDED DECE IE "ARCHIT RIGHT PRC ECTION IN HE OVERAI NGEMENT ES AND ELI ES AND ELI IR SUCH PR DF THESE P ESENTED C E CESSATIO	RE COPYRIGHTED AND ARE PYRIGHT PROTECTION AS AN AL WORK" UNDER SECTION YRIGHT ACT, 17 U.S.C. AS EMBER 1, 1990 AND KNOWN IECTURAL WORKS DTECTION ACT OF 1990." THE CLUDES BUT IS NOT LIMITED LL FORM AS WELL AS THE "AND COMPOSITION OF EMENTS OF THE DESIGN. ROTECTION, UNAUTHORIZED LANS, WORKS, OR FORMS CAN LEGALLY RESULT ON OF SUCH CONSTRUCTION BEING SEIZED AND/OR RAISED.
		A642 4642 4642 4642 4642 4642 4642 4642 5 18 20
REVIS mark	DATE	DESCRIPTION
DN	01-10-19	CONVERT OLAHS
DN CH	02-14-19	STRUCT. DWGS. REV.
СН	05-18-20	MINOR UPDATE
PROJECT	г NO. 113-69	9
DATE	01-13-	-16
SCALE	AS N	OTED
DRAWN	by JB	
CHECKEI	JW	
ISSUED F	PERM	MITS/CONSTRUCTION
	ODEL	2 628 - E RIGHT
H 310 Suit Ral	OMES	
	ELEV	ATION B ROOF PLAN
SHEET		4.1

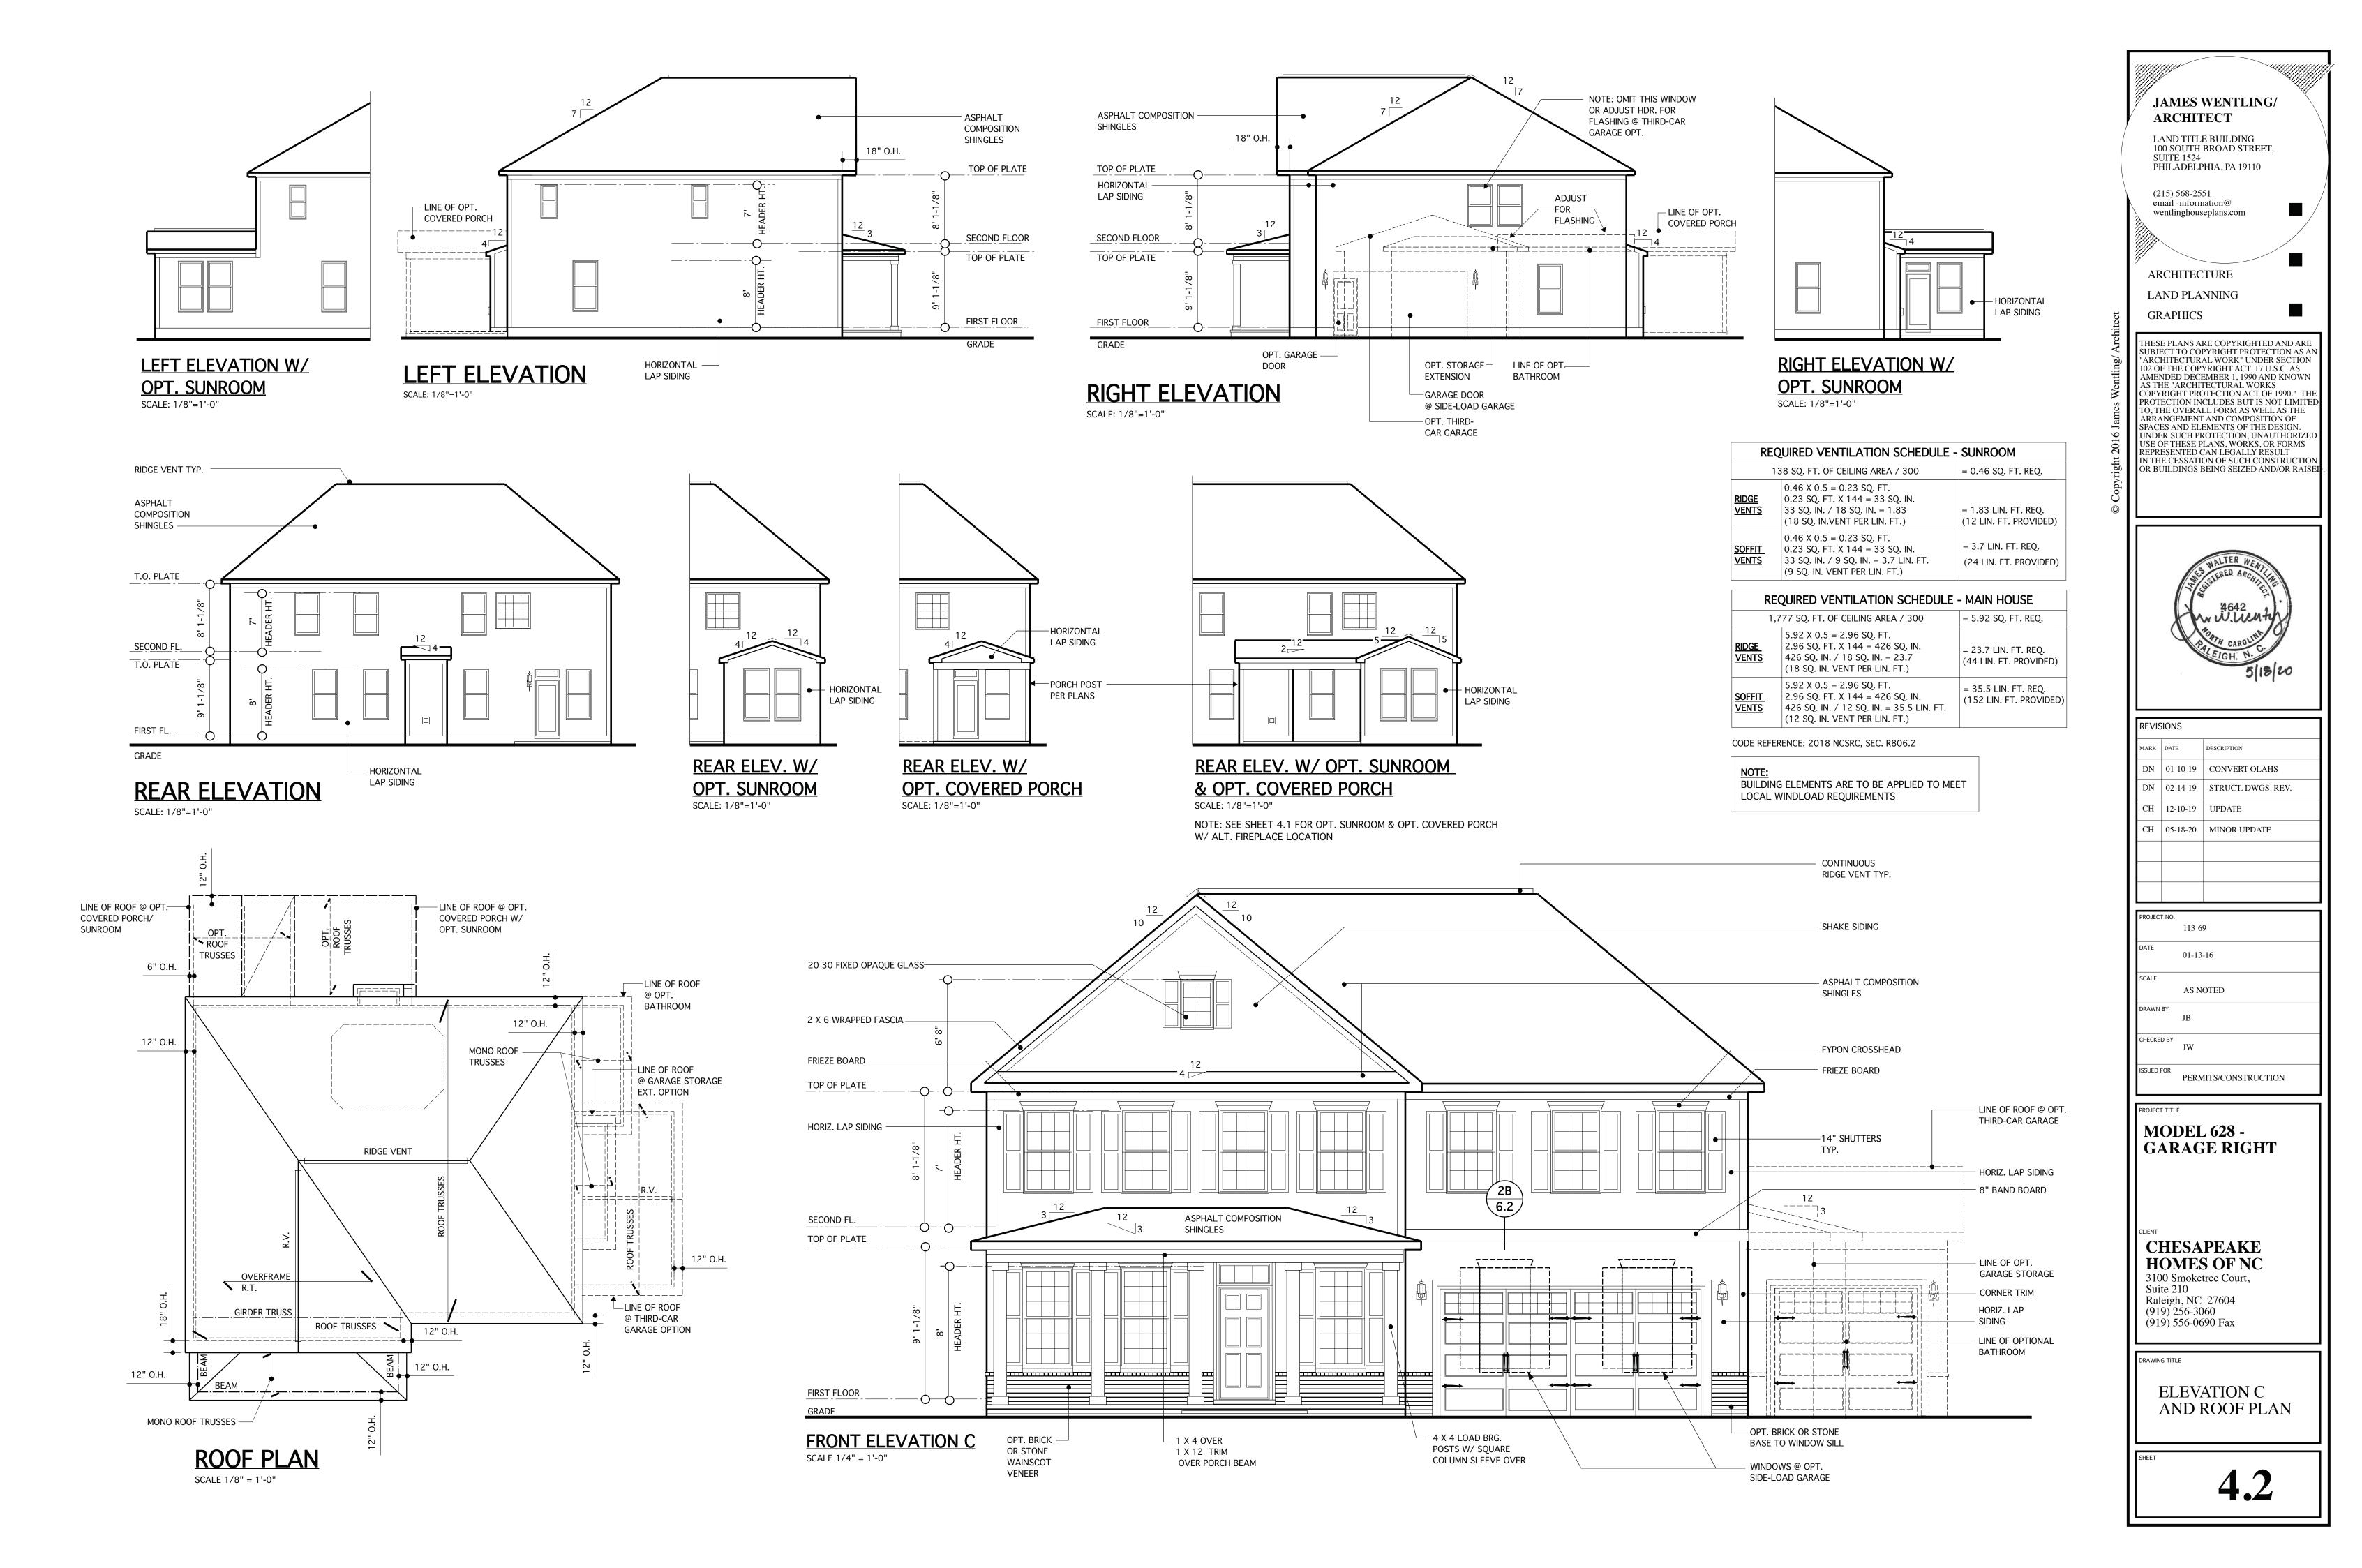

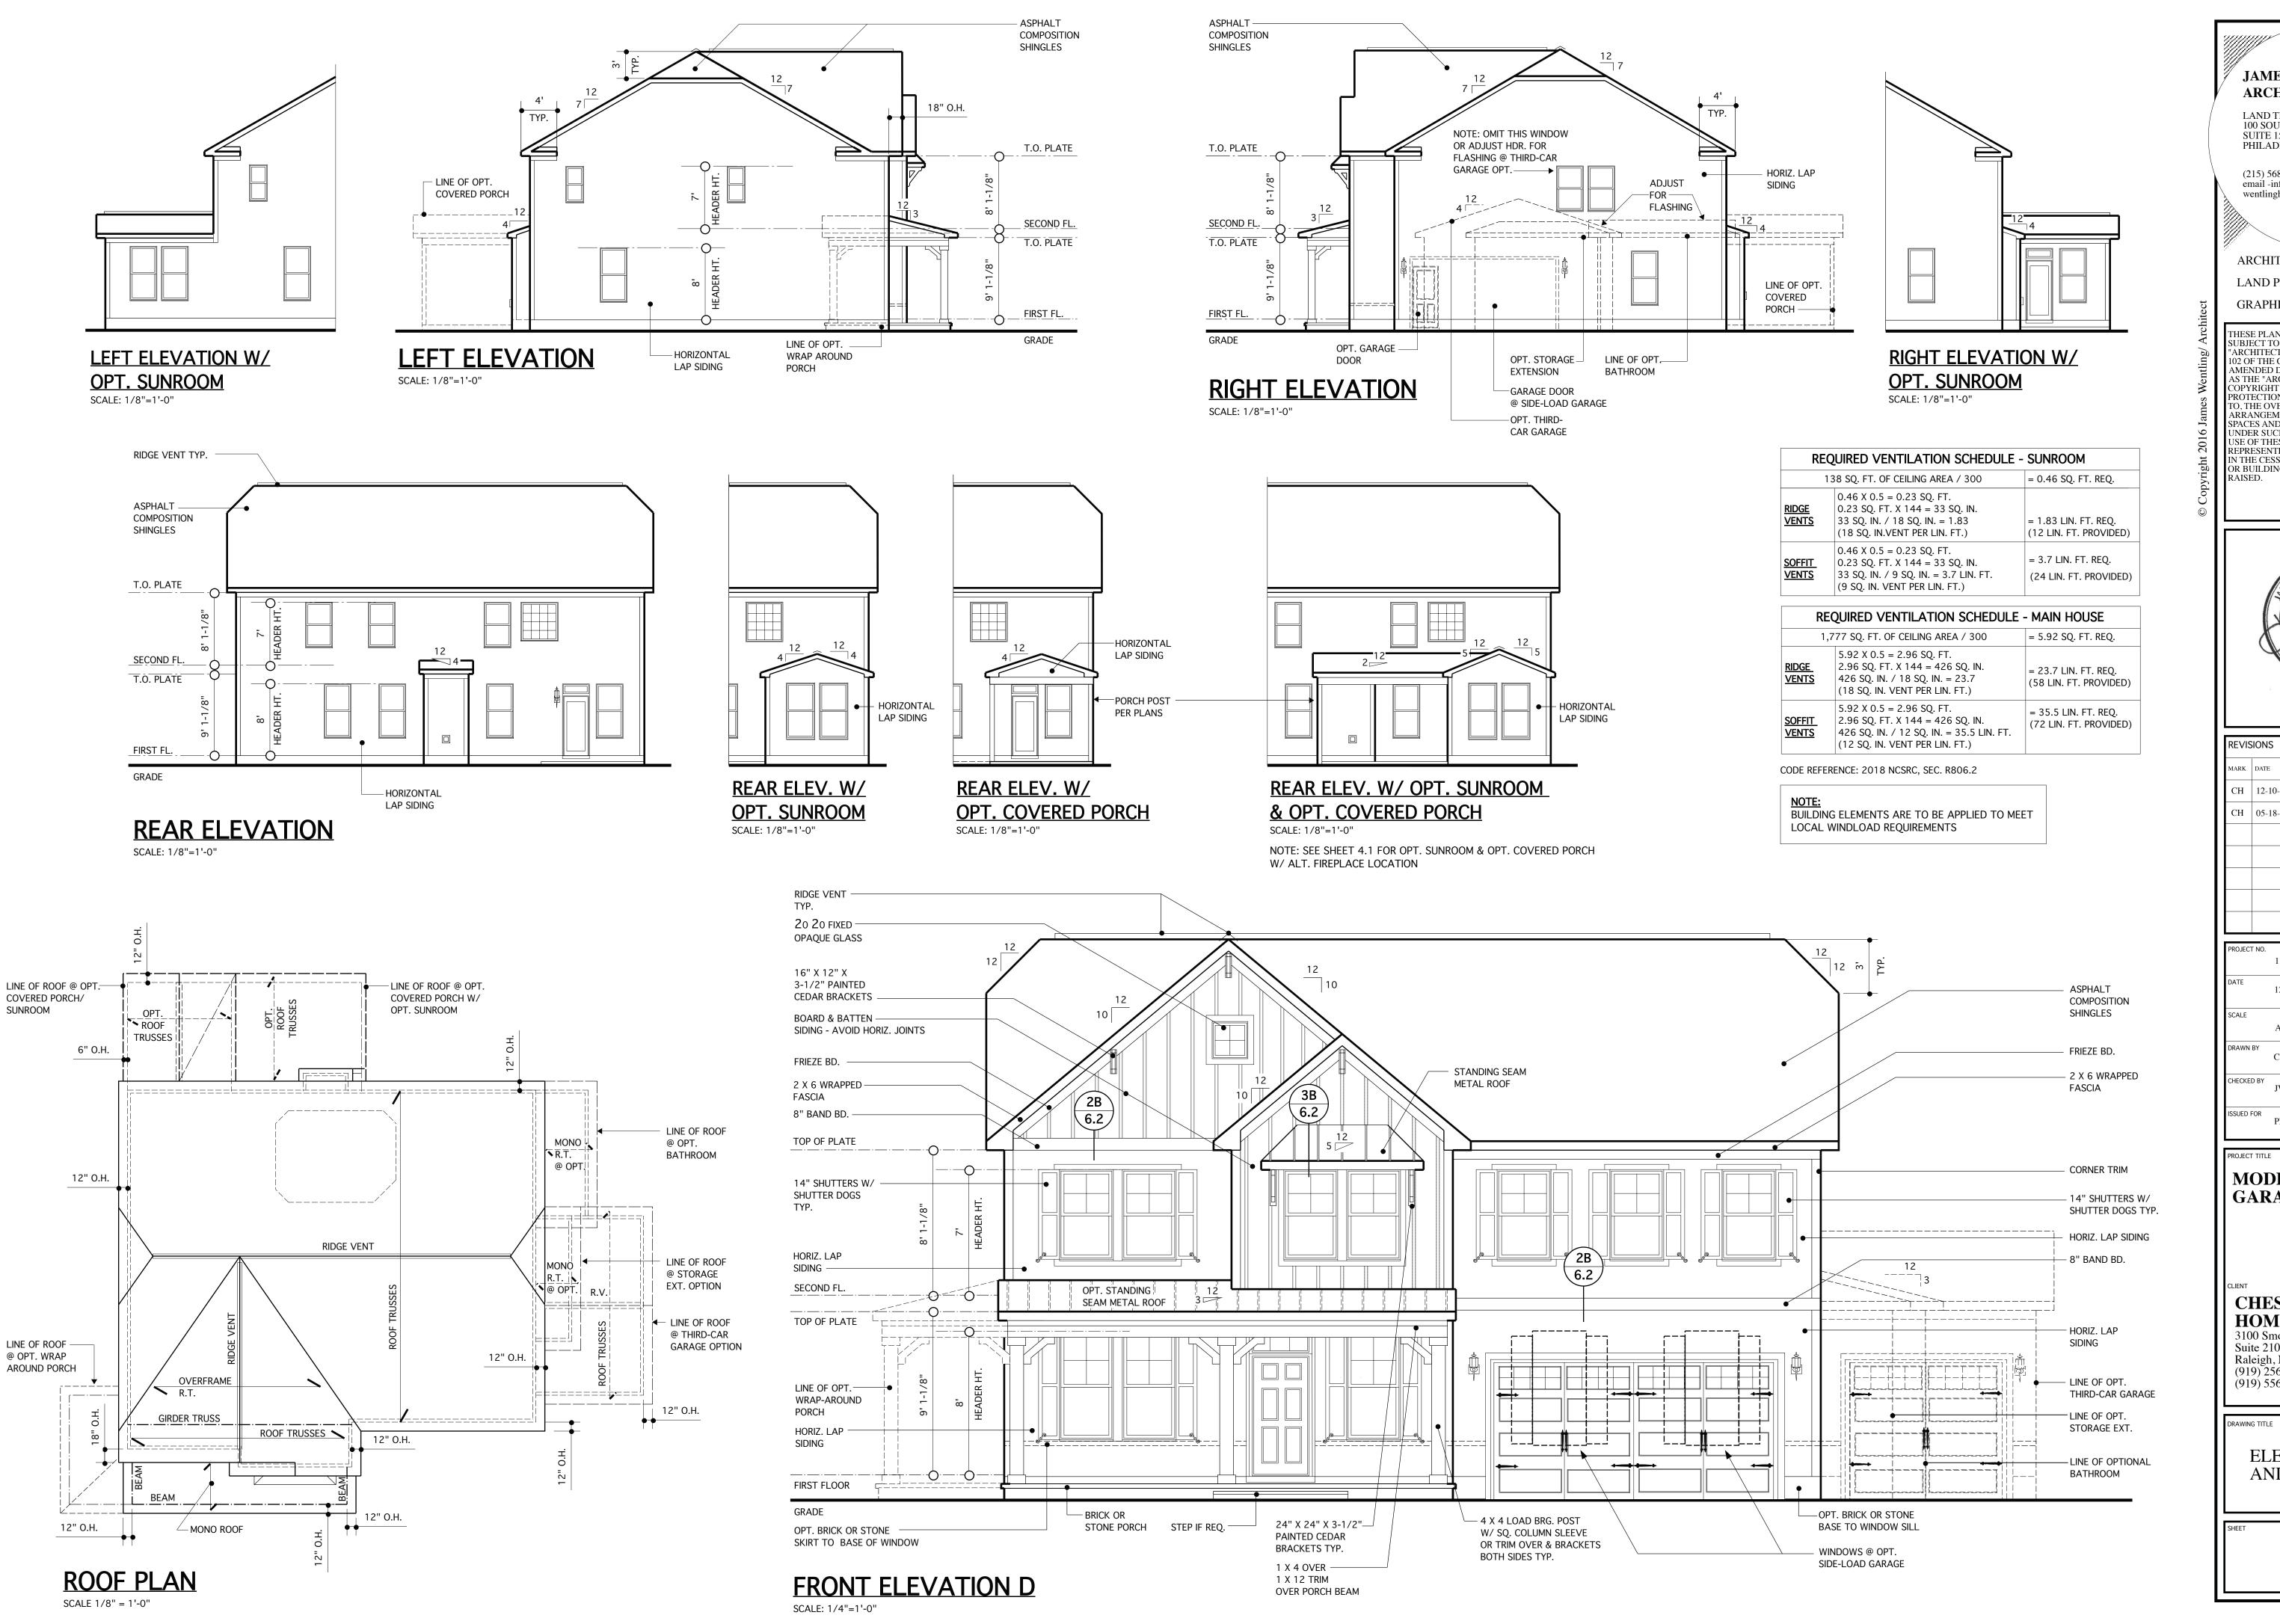

JAMES WENTLING/ ARCHITECT		
LAND TITLE BUILDING 100 SOUTH BROAD STREET, SUITE 1524 PHILADELPHIA, PA 19110		
(215) 568-2551 email -information@ wentlinghouseplans.com		
ARCHITECTURE		
LAND PLANNING GRAPHICS		
THESE PLANS ARE COPYRIGHTED AND ARE SUBJECT TO COPYRIGHT PROTECTION AS AN "ARCHITECTURAL WORK" UNDER SECTION		
102 OF THE COPYRIGHT ACT, 17 U.S.C. AS AMENDED DECEMBER 1, 1990 AND KNOWN AS THE "ARCHITECTURAL WORKS COPYRIGHT PROTECTION ACT OF 1990." THE		
PROTECTION INCLUDES BUT IS NOT LIMITED TO, THE OVERALL FORM AS WELL AS THE ARRANGEMENT AND COMPOSITION OF SPACES AND ELEMENTS OF THE DESIGN.		
UNDER SUCH PROTECTION, UNAUTHORIZED USE OF THESE PLANS, WORKS, OR FORMS REPRESENTED CAN LEGALLY RESULT IN THE CESSATION OF SUCH CONSTRUCTION OR BUILDINGS BEING SEIZED AND/OR		
RAISED.		
NES WALTER WENTLIN		
4642		
Party CAROLINE		
5/18/20		
MARK DATE DESCRIPTION		
CH12-10-19CONVERT KINGSTONCH05-18-20MINOR UPDATE		
PROJECT NO. 113-69		
DATE 12-10-19		
SCALE AS NOTED		
DRAWN BY CH CHECKED BY		
JW ISSUED FOR		
PERMITS/CONSTRUCTION PROJECT TITLE		
MODEL 628 - GARAGE RIGHT		
CLIENT CHESAPEAKE		
HOMES OF NC 3100 Smoketree Court, Suite 210		
Raleigh, NC 27604 (919) 256-3060 (919) 556-0690 Fax		
DRAWING TITLE		
ELEVATION D AND ROOF PLAN		
SHEET 1 3		



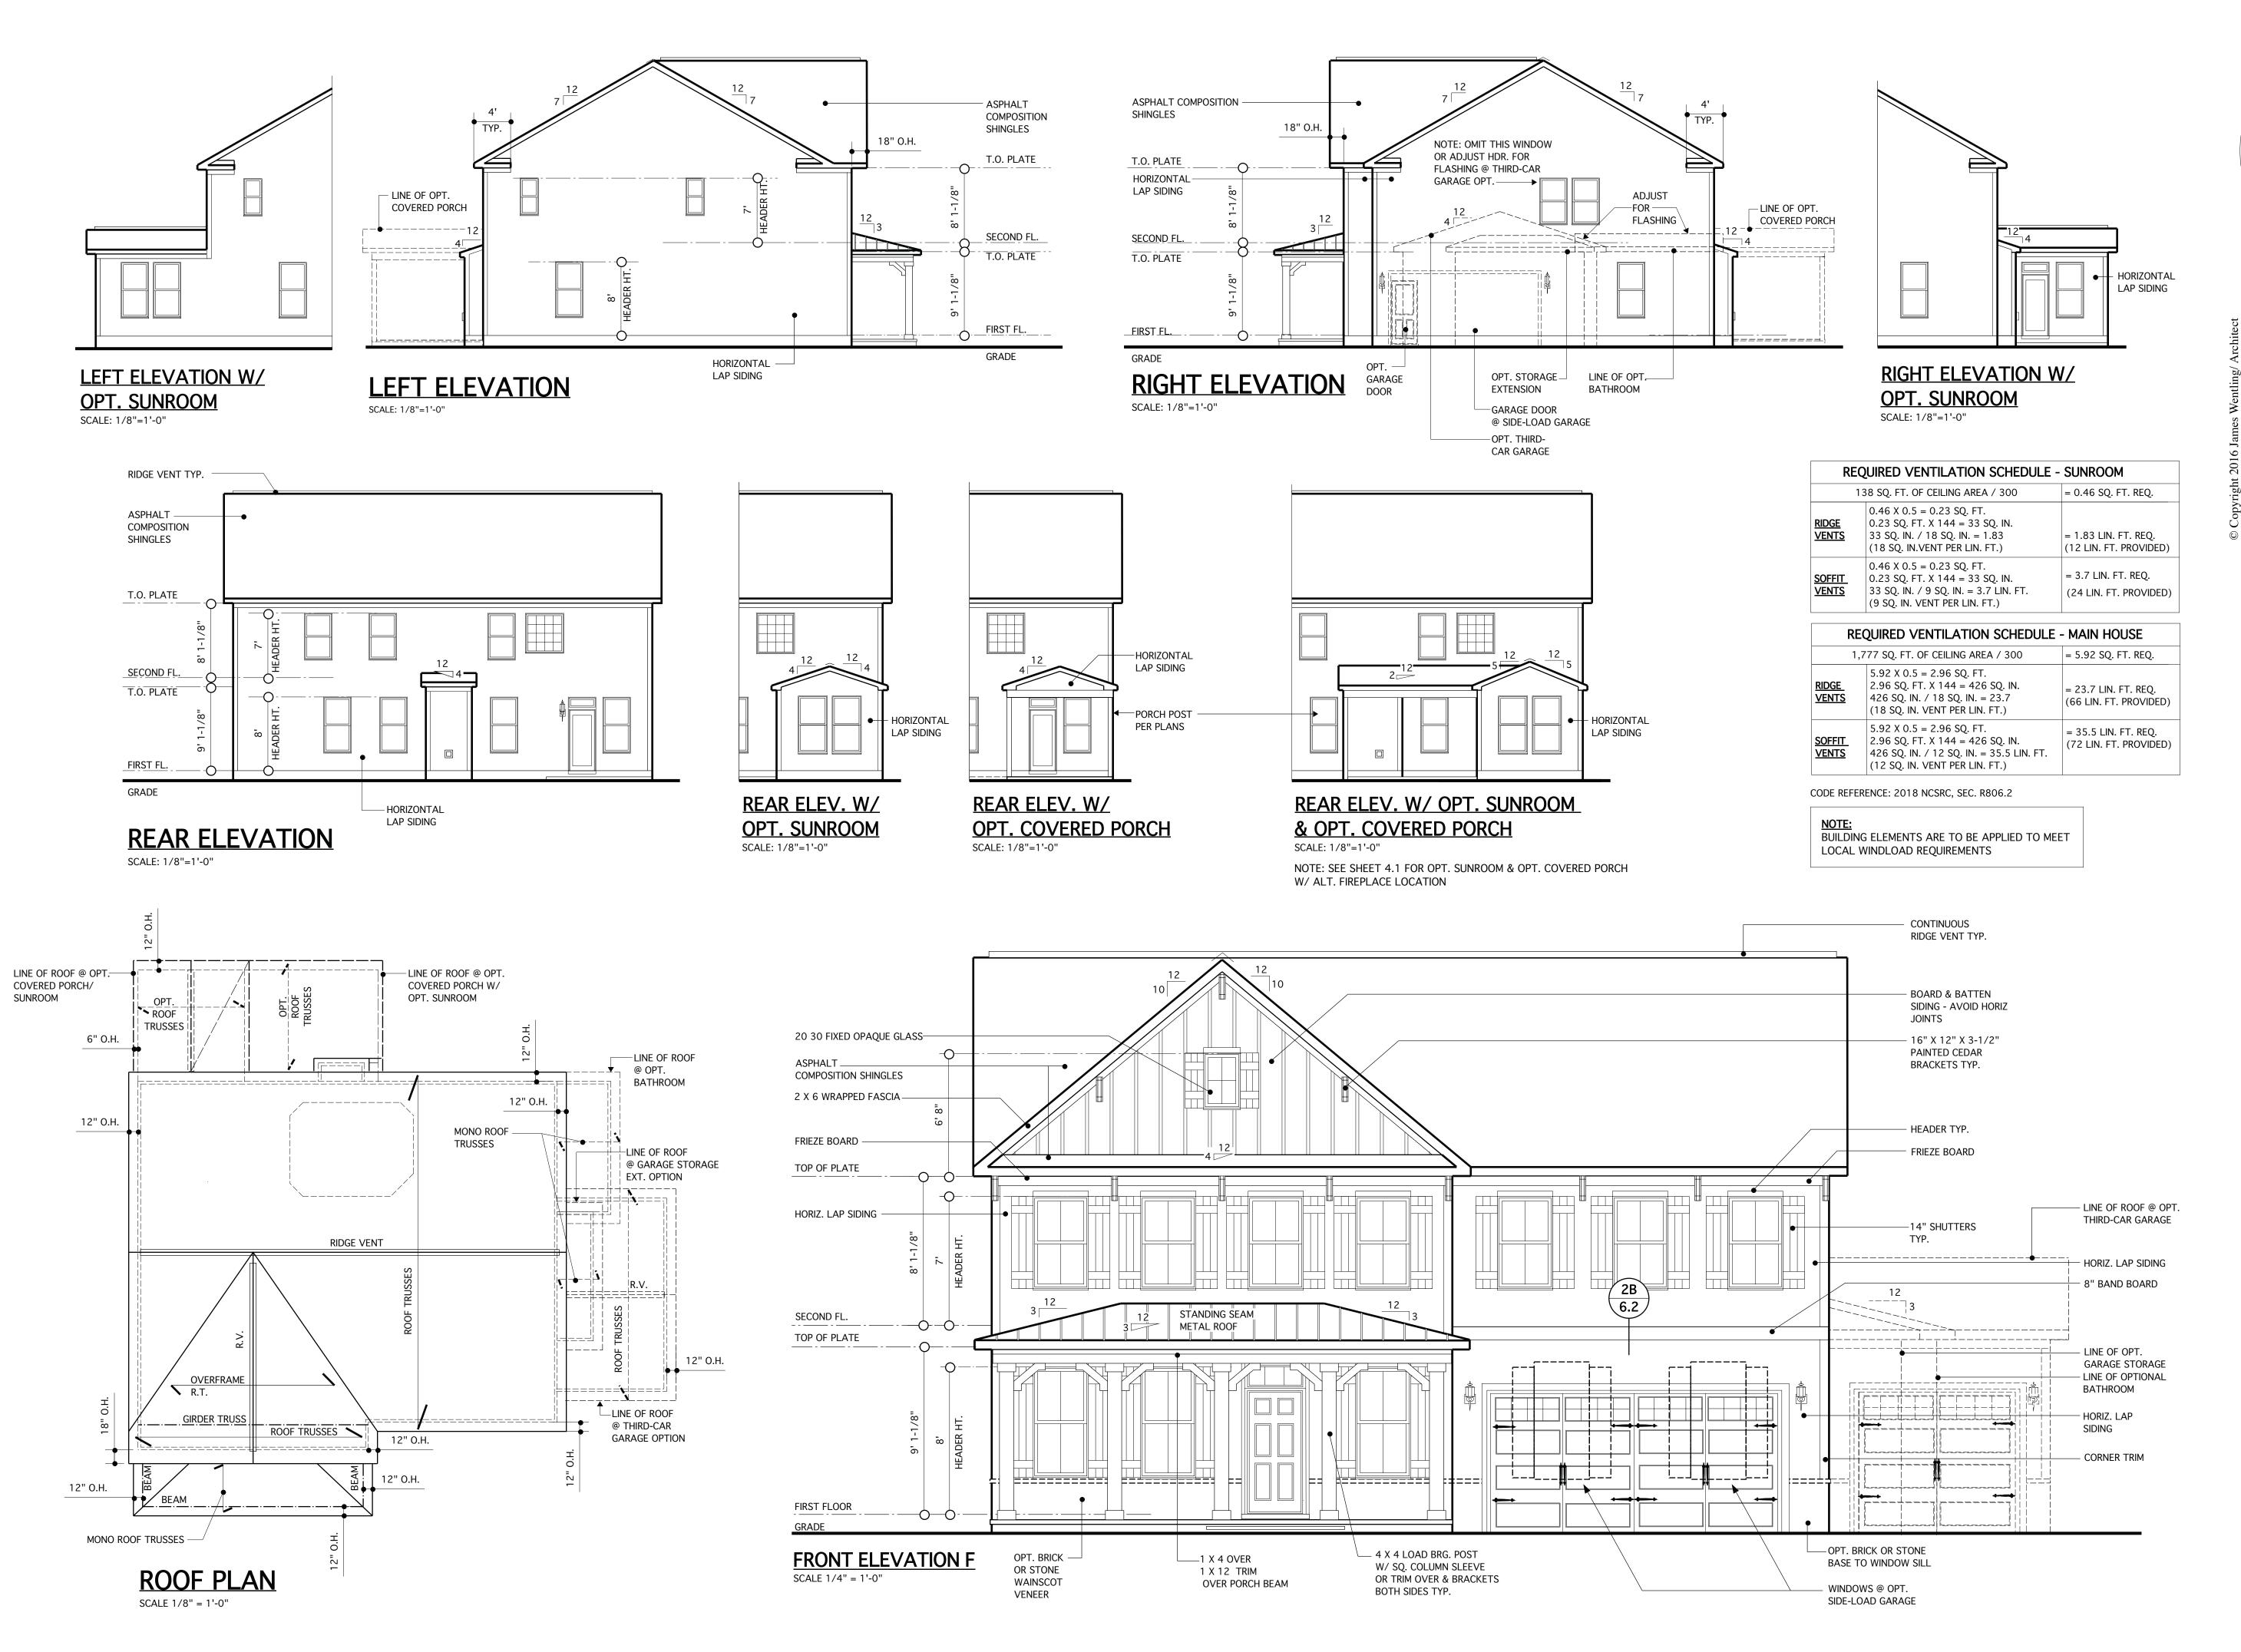

JAMES WENTLING/ ARCHITECT
LAND TITLE BUILDING 100 SOUTH BROAD STREET, SUITE 1524
PHILADELPHIA, PA 19110
(215) 568-2551 email -information@ wentlinghouseplans.com
ARCHITECTURE
LAND PLANNING GRAPHICS
THESE PLANS ARE COPYRIGHTED AND ARE SUBJECT TO COPYRIGHT PROTECTION AS AN
"ARCHITECTURAL WORK" UNDER SECTION 102 OF THE COPYRIGHT ACT, 17 U.S.C. AS AMENDED DECEMBER 1, 1990 AND KNOWN AS THE "ARCHITECTURAL WORKS
COPYRIGHT PROTECTION ACT OF 1990." THE PROTECTION INCLUDES BUT IS NOT LIMITED TO, THE OVERALL FORM AS WELL AS THE ARRANGEMENT AND COMPOSITION OF
SPACES AND ELEMENTS OF THE DESIGN. UNDER SUCH PROTECTION, UNAUTHORIZED USE OF THESE PLANS, WORKS, OR FORMS REPRESENTED CAN LEGALLY RESULT
IN THE CESSATION OF SUCH CONSTRUCTION OR BUILDINGS BEING SEIZED AND/OR RAISED.
WALTER WENTLING
4642 W.U.U.u.th
ATTH CAROLINE ATLEIGH. N. C.
5/18/20
REVISIONS MARK DATE DESCRIPTION
PROJECT NO.
113-69 Date 05-18-20
SCALE AS NOTED
DRAWN BY CH
CHECKED BY JW
ISSUED FOR PERMITS/CONSTRUCTION
PROJECT TITLE
MODEL 628 - GARAGE RIGHT
CLIENT CHESAPEAKE
HOMES OF NC 3100 Smoketree Court, Suite 210
Raleigh, NC 27604 (919) 256-3060
(919) 556-0690 Fax
ELEVATION F AND ROOF PLAN
4.5


GIRDER TRUSS -

T.O. PLATE

MONO TRUSSES -

2ND_FLR. F.F. TOP OF BEAM


1ST FLR F.F.

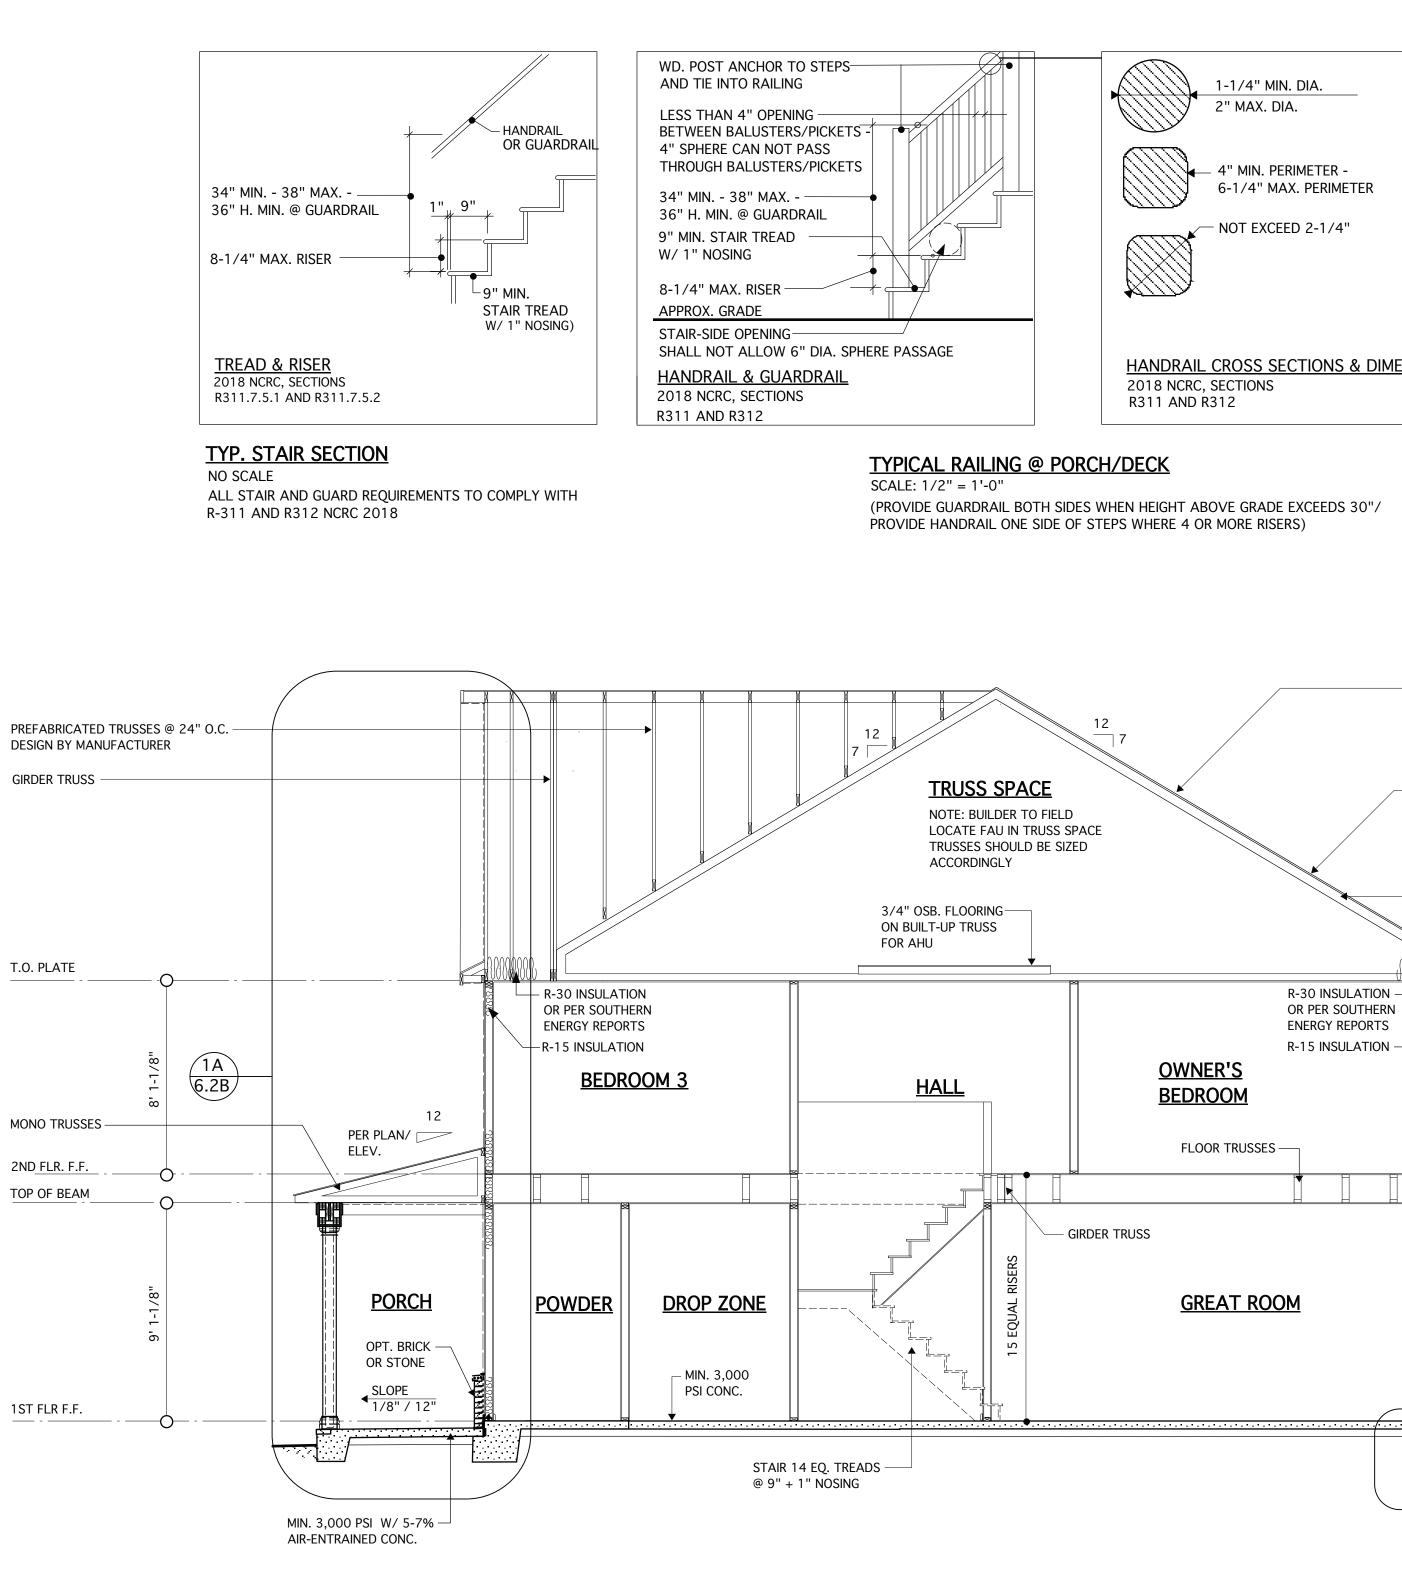


TYPICAL BUILDING SECTION @ ELEVATION B

SCALE: 1/4" = 1'-0" Note: Minimum insulation values subject to Southern Energy


	JAMES WENTLING/
	ARCHITECT LAND TITLE BUILDING 100 SOUTH BROAD STREET, SUITE 1524 PHILADELPHIA, PA 19110
SION:	(215) 568-2551 email -information@ wentlinghouseplans.com ARCHITECTURE LAND PLANNING GRAPHICS THESE PLANS ARE COPYRIGHTED AND ARE SUBJECT TO COPYRIGHT PROTECTION AS AN "ARCHITECTURAL WORK" UNDER SECTION 102 OF THE COPYRIGHT ACT. 17 U.S.C. AS AMENDED DECEMBER 1, 1990 AND KNOWN AS THE "ARCHITECTURAL WORKS" COPYRIGHT PROTECTION ACT OF 1990." THE PROTECTION INCLUDES BUT IS NOT LIMITED TO, THE OVERALL FORM AS WELL AS THE ARRANGEMENT AND COMPOSITION OF SPACES AND ELEMENTS OF THE DESIGN. UNDER SUCH PROTECTION, UNAUTHORIZED USE OF THESE PLANS, WORKS, OR FORMS REPRESENTED CAN LEGALLY RESULT IN THE CESSATION OF SUCH CONSTRUCTION OR BUILDINGS BEING SEIZED AND/OR RAISEI
	TO, THE OVERALL FORM AS WELL AS THE ARRANGEMENT AND COMPOSITION OF SPACES AND ELEMENTS OF THE DESIGN. UNDER SUCH PROTECTION, UNAUTHORIZED USE OF THESE PLANS, WORKS, OR FORMS REPRESENTED CAN LEGALLY RESULT IN THE CESSATION OF SUCH CONSTRUCTION OR BUILDINGS BEING SEIZED AND/OR RAISED.
BUILDER TO PROVIDE TEMPORARY AND PERMANENT TRUSS BRACING AS PER <u>BCSI-B1, B2, & B3</u> BY WTCA/TPI NOTE: SEE ELEVATIONS FLOOR & ROOF PLANS FOR ROOF TRUSS DIRECTION	A642 A642 AFTERED ARCHITESTER A642 AFTERED ARCHITESTER A642 AFTERED ARCHITESTER A642 AFTERED ARCHITESTER A642 AFTERED ARCHITESTER AFTERED ARCHITES
PREFABRICATED TRUSSES @ 24" O.C. DESIGN BY MANUFACTURER T.O. PLATE	REVISIONSMARKDATEDESCRIPTIONDN01-10-19CONVERT OLAHSDN02-14-19STRUCT. DWGS. REV.CH05-18-20MINOR UPDATEIII
2B 2ND FLR. F.F. TOP OF BEAM 8 1 1 6 1 1 1 1 1 1 1 1 1 1 1 1 1	PROJECT NO. 113-69 DATE 01-13-16 SCALE AS NOTED DRAWN BY
1ST FLR F.F.	JB CHECKED BY JW ISSUED FOR PERMITS/CONSTRUCTION PROJECT TITLE MODEL 628 - GARAGE RIGHT
	CLIENT CHESAPEAKE HOMES OF NC 3100 Smoketree Court, Suite 210 Raleigh, NC 27604 (919) 256-3060 (919) 556-0690 Fax
	DRAWING TITLE BUILDING SECTIONS SHEET
	5

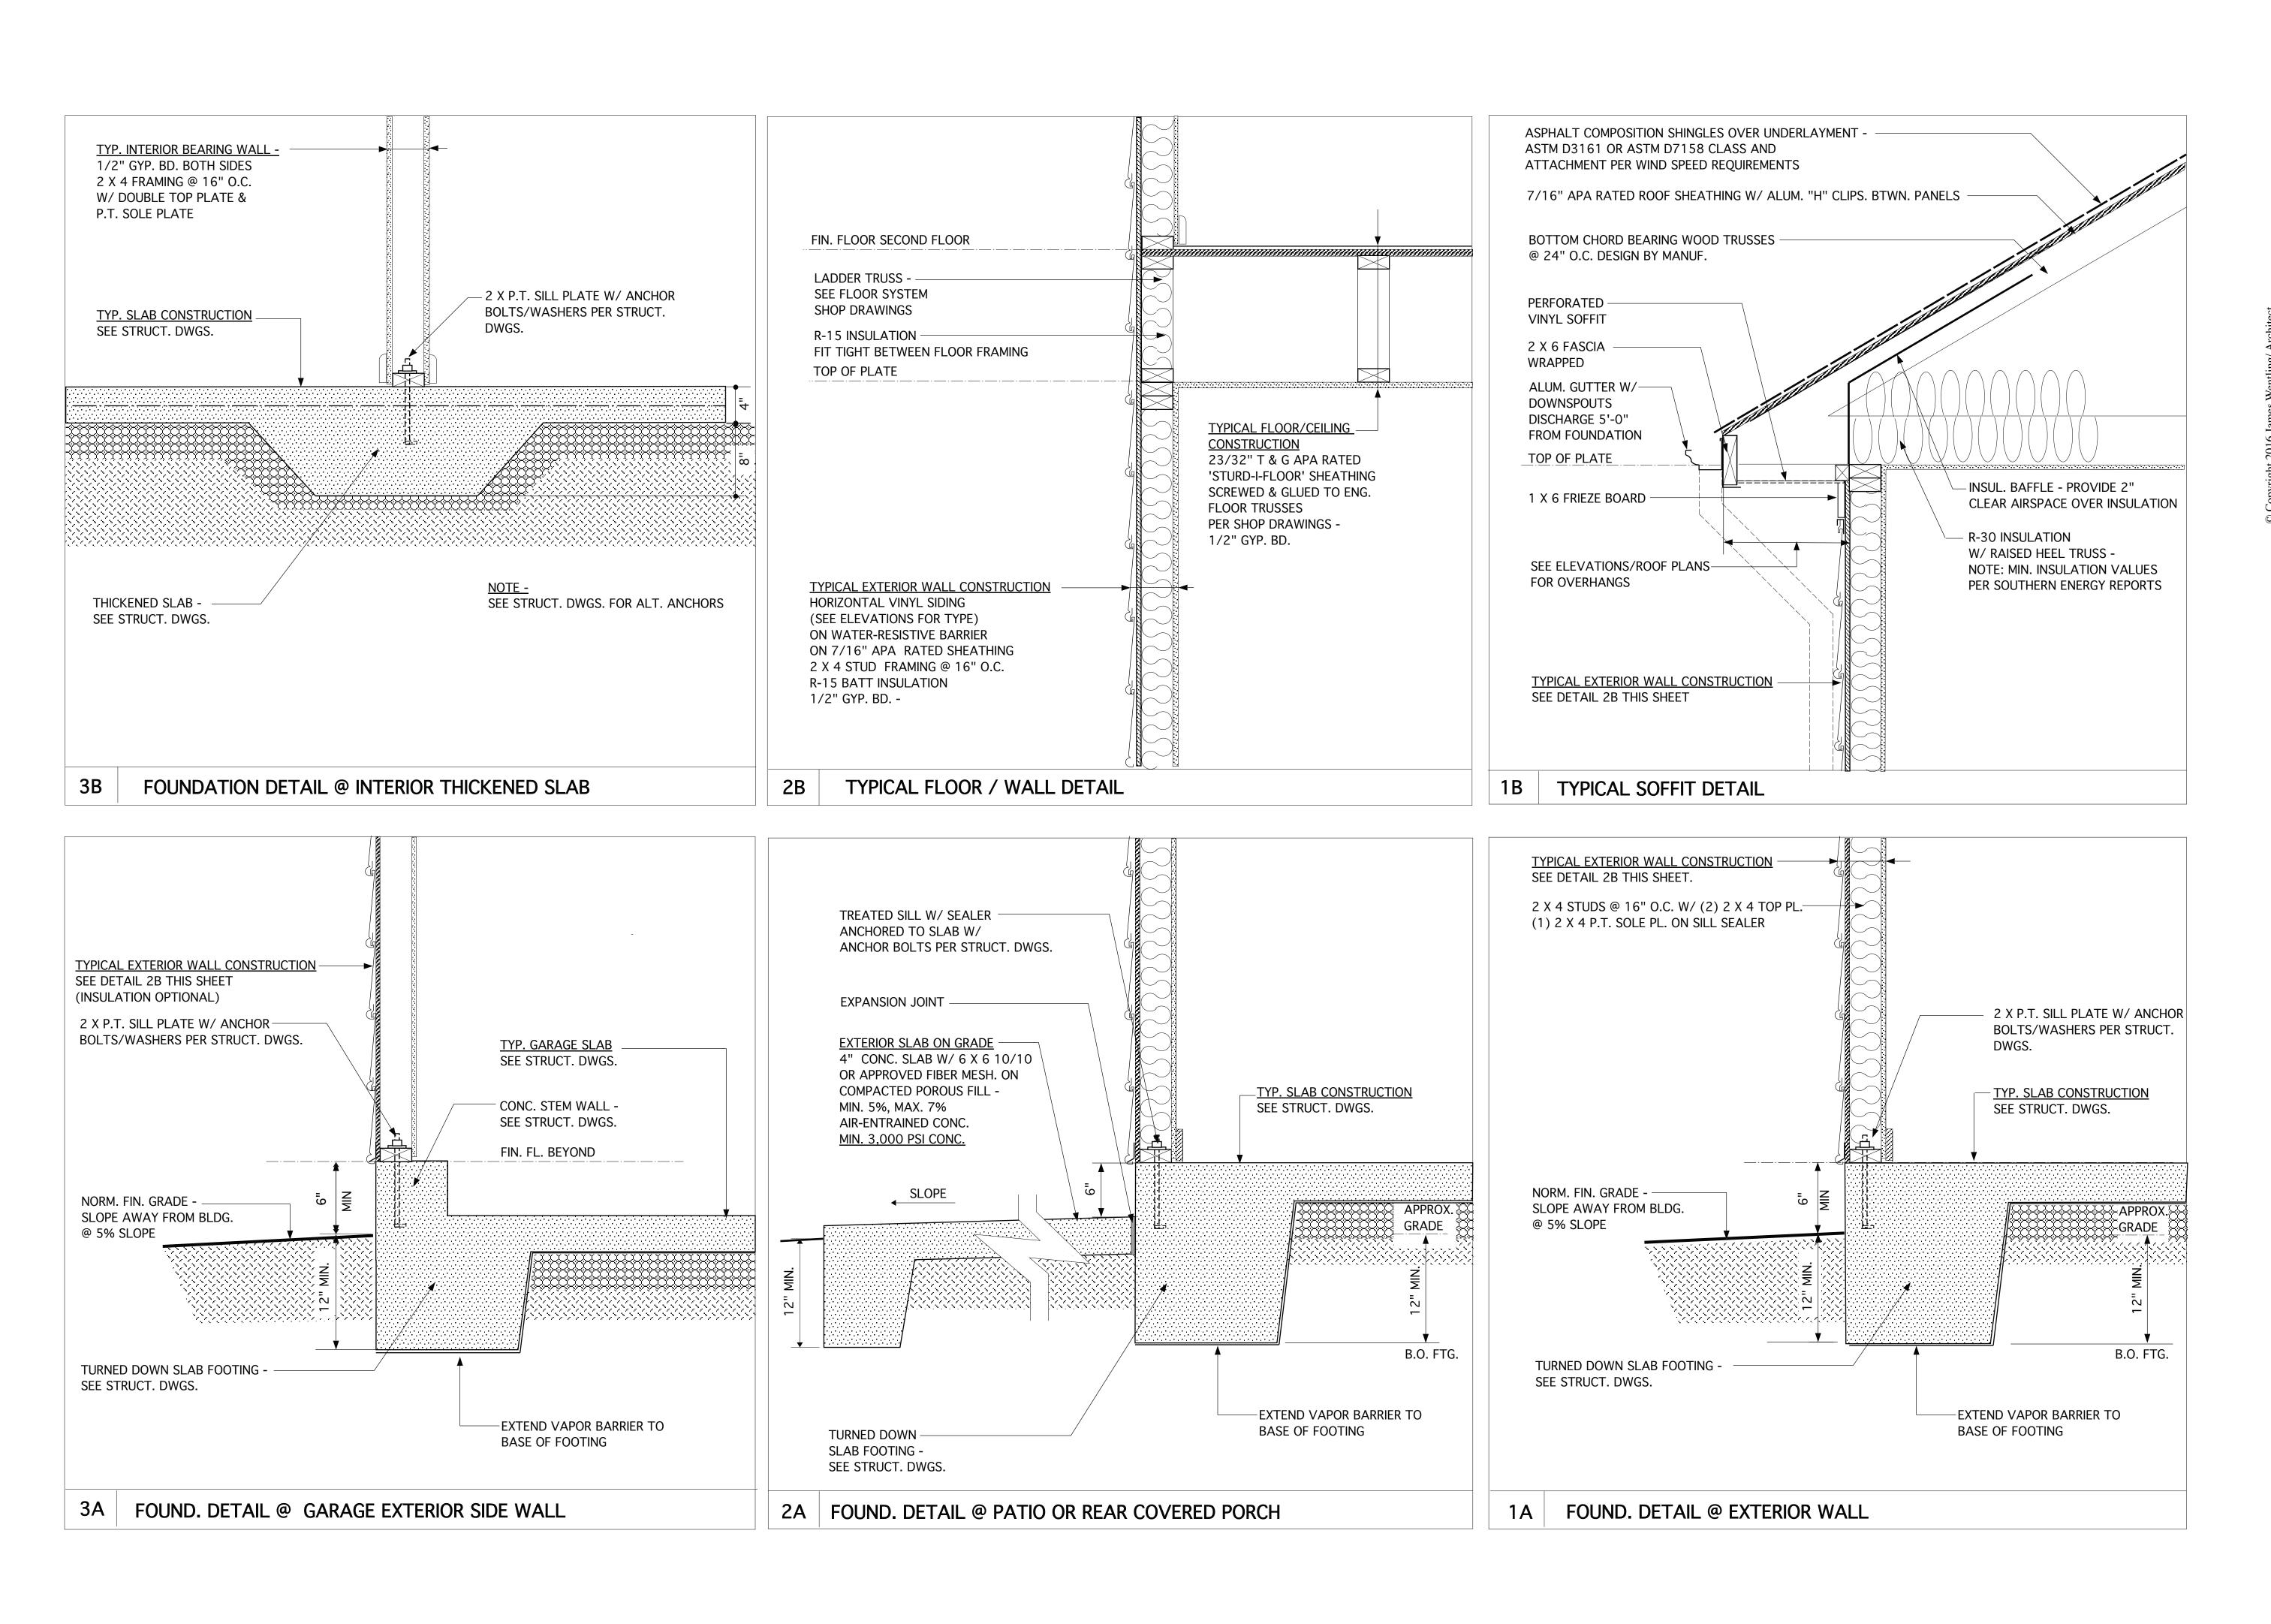


	JAMES WENTLING/
	ARCHITECT LAND TITLE BUILDING 100 SOUTH BROAD STREET, SUITE 1524
	PHILADELPHIA, PA 19110 (215) 568-2551
	email -information@ wentlinghouseplans.com
	ARCHITECTURE
;	LAND PLANNING GRAPHICS
	THESE PLANS ARE COPYRIGHTED AND ARE SUBJECT TO COPYRIGHT PROTECTION AS AN
ò	"ARCHITECTURAL WORK" UNDER SECTION 102 OF THE COPYRIGHT ACT, 17 U.S.C. AS AMENDED DECEMBER 1, 1990 AND KNOWN
	AS THE "ARCHITECTURAL WORKS COPYRIGHT PROTECTION ACT OF 1990." THE PROTECTION INCLUDES BUT IS NOT LIMITED TO, THE OVERALL FORM AS WELL AS THE
	ARRANGEMENT AND COMPOSITION OF SPACES AND ELEMENTS OF THE DESIGN. UNDER SUCH PROTECTION, UNAUTHORIZED
0	USE OF THESE PLANS, WORKS, OR FORMS REPRESENTED CAN LEGALLY RESULT IN THE CESSATION OF SUCH CONSTRUCTION OR BUILDINGS BEING SEIZED AND/OR RAISED.
	ATTER W
	Stants WALLEA WEATH
	4642 10 10 10 10 10 10
	A CAROLINA
	5/18/20
	REVISIONS
	MARK DATE DESCRIPTION DN 01-10-19 CONVERT OLAHS
	DN02-14-19STRUCT. DWGS. REV.
	CH 05-18-20 MINOR UPDATE
	PROJECT NO.
	113-69 Date 01-13-16
	SCALE
	1-1/2" = 1'-0" DRAWN BY
	JB CHECKED BY JW
	ISSUED FOR
	PERMITS/CONSTRUCTION
	PROJECT TITLE MODEL 628 -
	GARAGE RIGHT
	CLIENT
	HOMES OF NC 3100 Smoketree Court,
	Suite 210 Raleigh, NC 27604 (919) 256-3060
	(919) 556-0690 Fax
	MONOLITHIC SLAB FOUNDATION, WALL
	AND SOFFIT DETAILS
	SHEET
	6

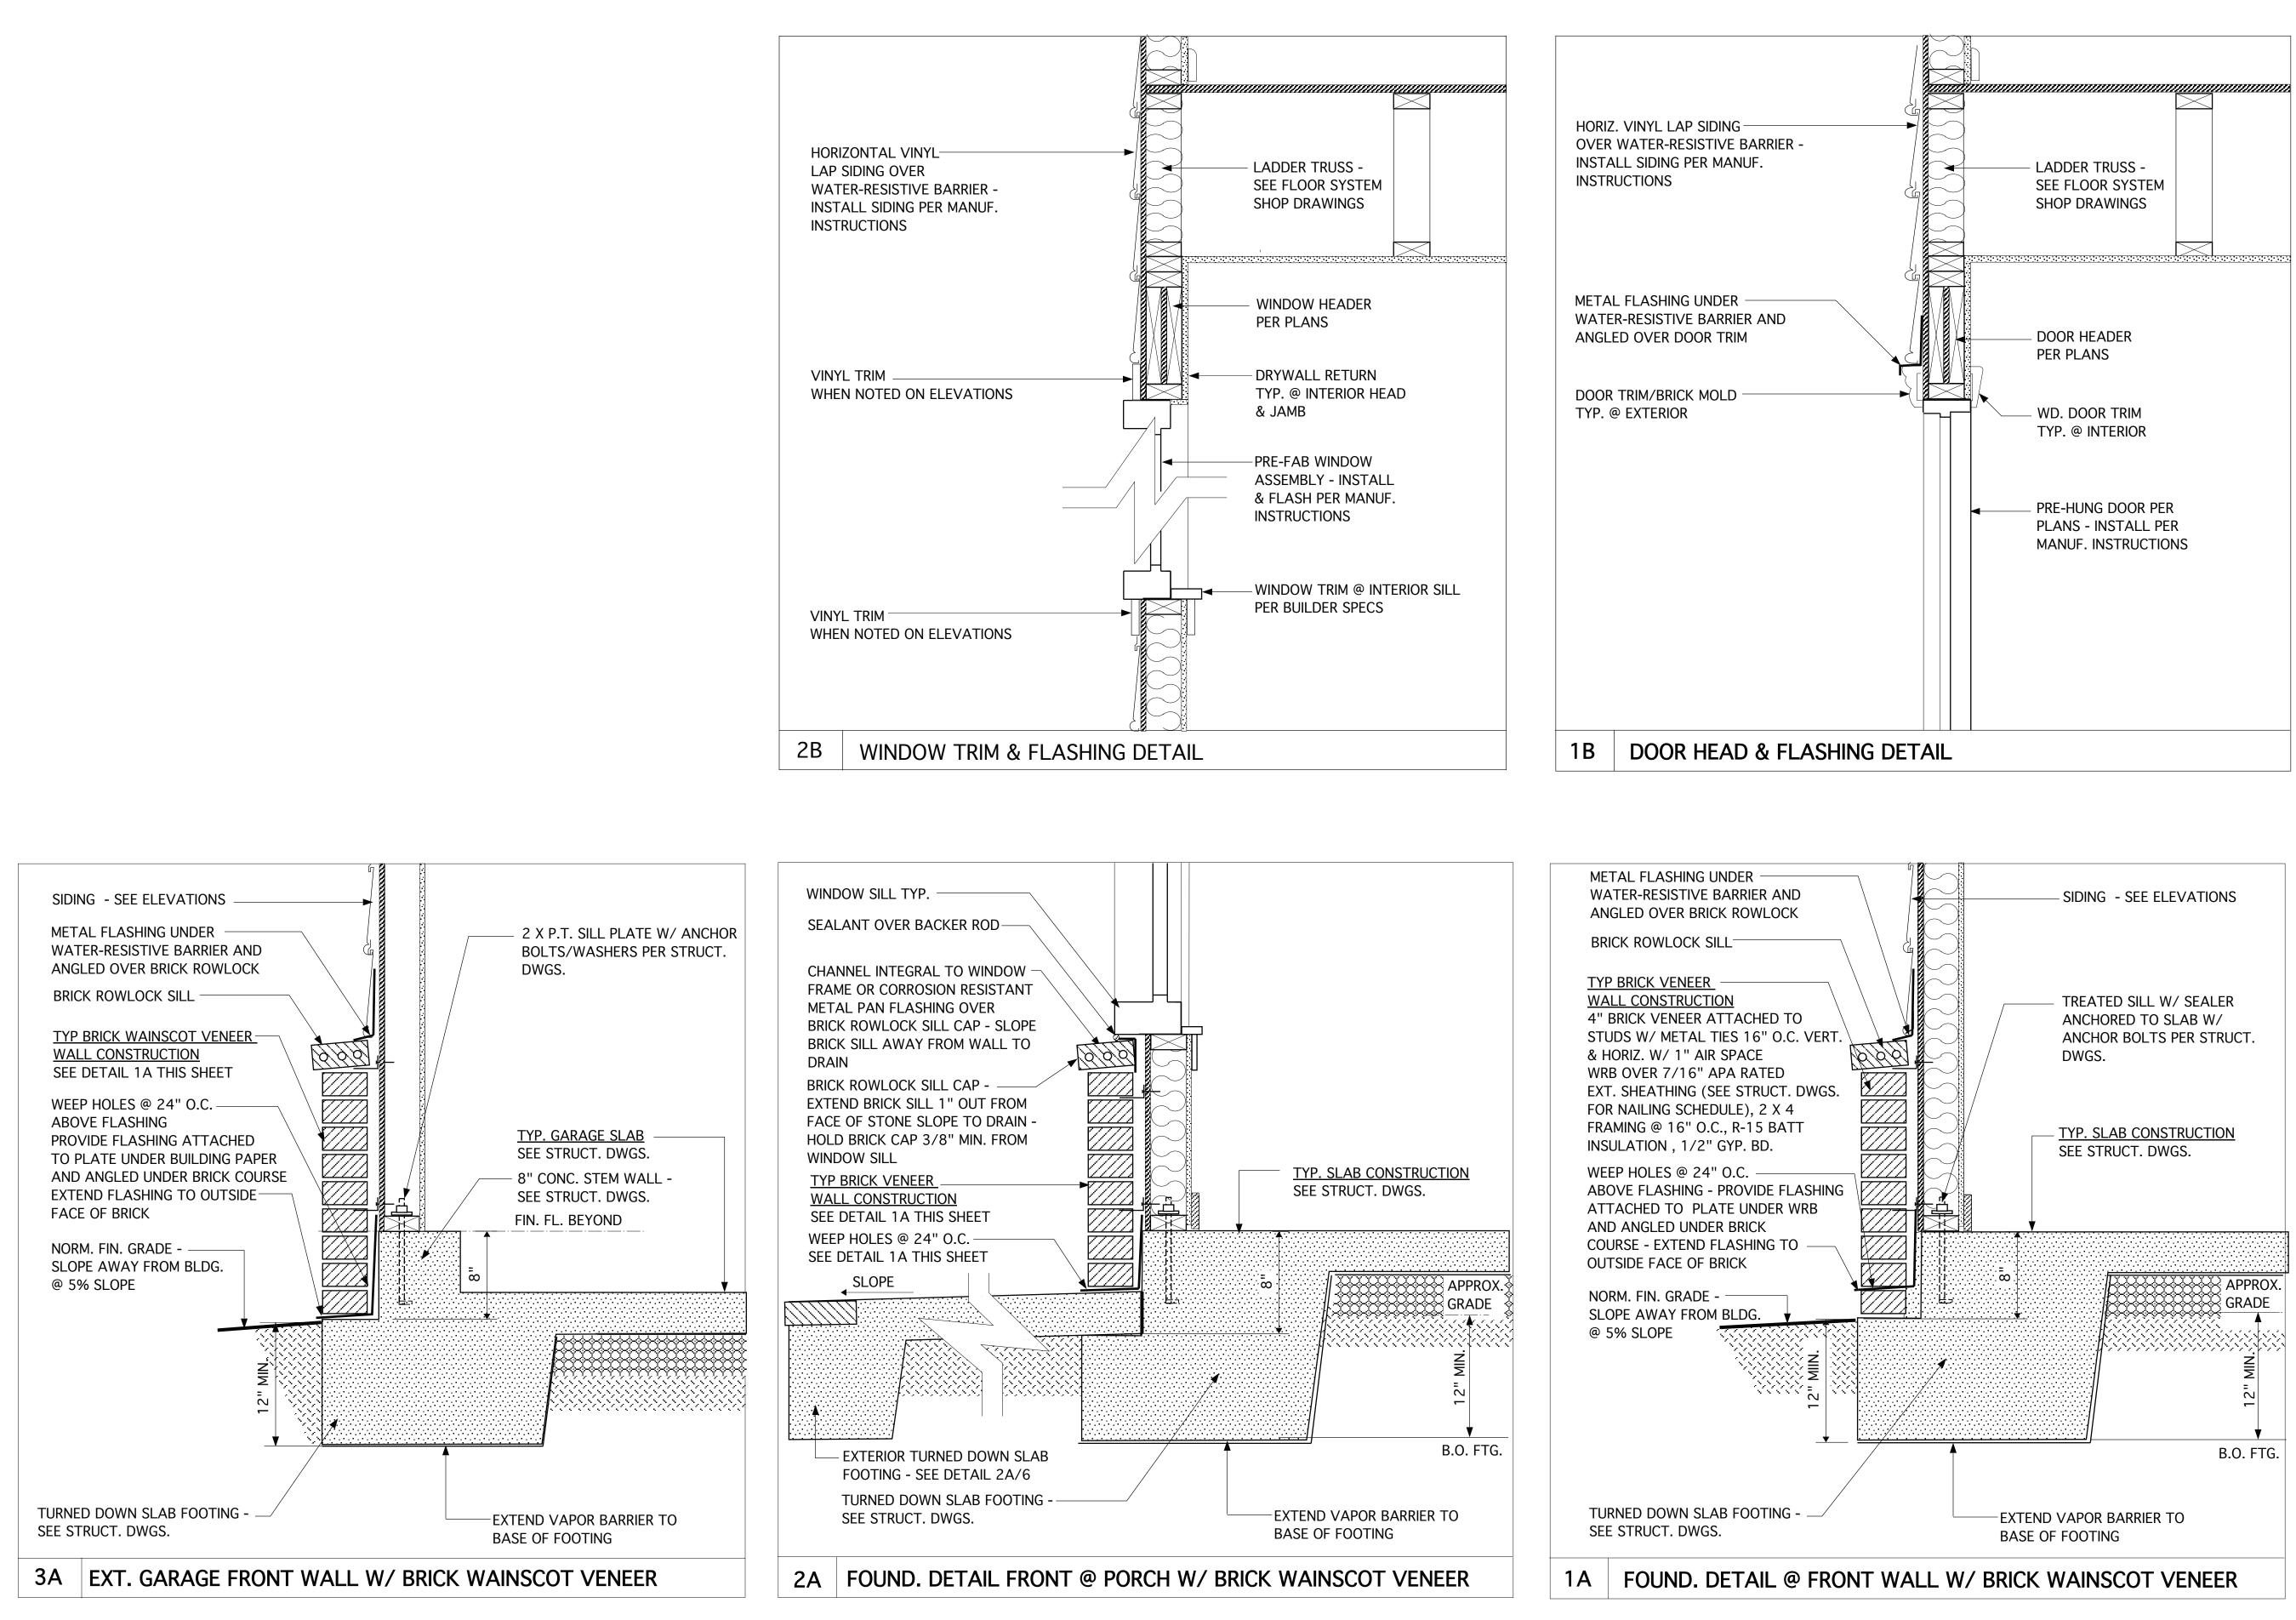



			~~~	
	/ 0		WENTLING/	
	L		E BUILDING	
	SU	JITE 1524	BROAD STREET, PHIA, PA 19110	
		15) 568-25: nail -inform		
			eplans.com	
	Ŵ			
	AR	CHITEC	TURE	
		ND PLA		
			RE COPYRIGHTED A	AND ARE
	"ARCI 102 OI	HITECTURA F THE COPY	PYRIGHT PROTECTI AL WORK" UNDER S YRIGHT ACT, 17 U.S EMBER 1, 1990 AND	SECTION .C. AS
0	AS TH COPY	HE "ARCHIT RIGHT PRO	TECTURAL WORKS TECTION ACT OF 1 CLUDES BUT IS NO	990." THE
	TO, TI ARRA SPACE	HE OVERAI ANGEMENT ES AND ELI	LL FORM AS WELL A AND COMPOSITION EMENTS OF THE DE	AS THE N OF SIGN.
	USE C REPR	OF THESE P ESENTED C	ROTECTION, UNAUT LANS, WORKS, OR I CAN LEGALLY RESU ON OF SUCH CONST	FORMS
			BEING SEIZED AND/	
			WALTER WENT	
		EC.	STERED BRCHITE	
		th	www.uenty	
		A.	PATH CAROLINA	/
			5/18/2	0
	REVIS	SIONS		
	MARK	DATE	DESCRIPTION	
	DN DN	01-10-19	CONVERT OLAHS	EV.
	СН	05-18-20	MINOR UPDATE	
	PROJECT	t no. 113-69	9	
	DATE	01-13-	-16	
	SCALE	1-1/2" =	= 1'-0"	
	DRAWN	by JB		
	CHECKE	d by JW		
	ISSUED I		11TS/CONSTRUCTIO	 N
	PROJECT			
			. <b>628</b> -	
	GA	ARAG	E RIGHT	
		HESA	PEAKE	
	H	OMES	S OF NC	
	Sui	0 Smoket te 210 eigh, NC	tree Court,	
	(91	9) 256-30 9) 556-06	)60	
		0		=
			LITHIC SL	ΔR
	F	OUNE	DATION AN	
	M	ALL	DETAILS	
	SHEET			
			6.1	
		1		

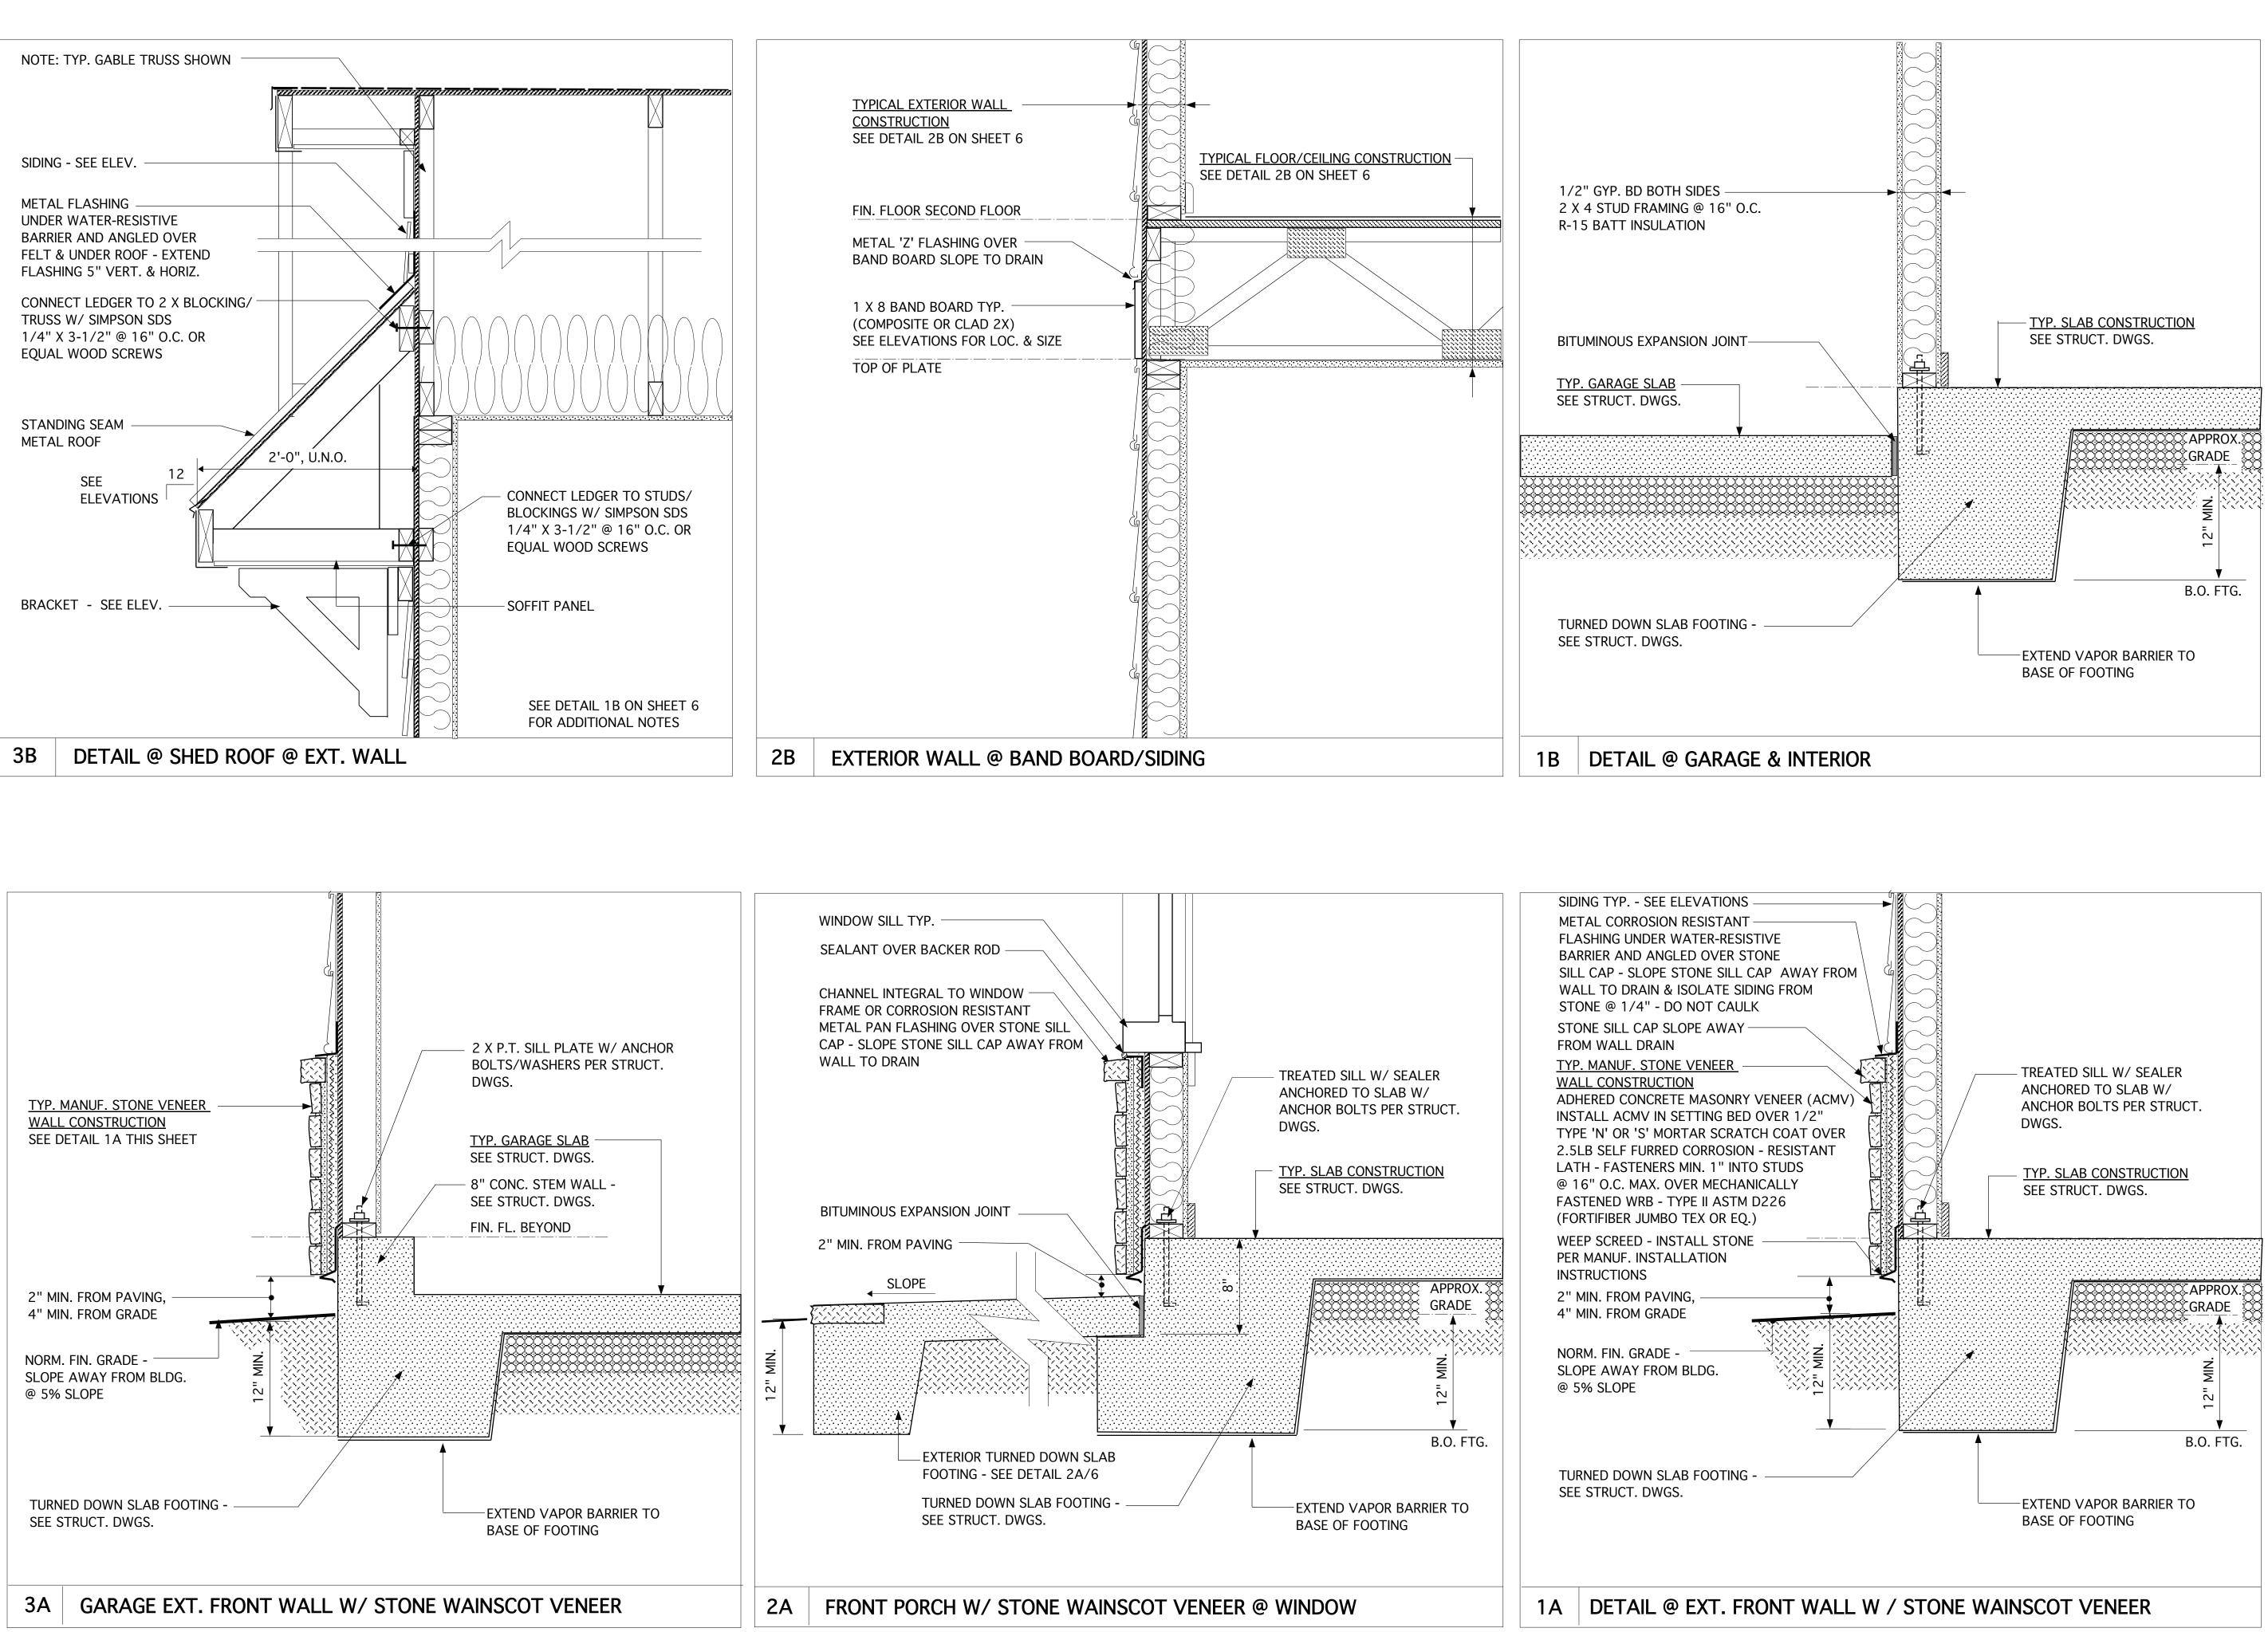

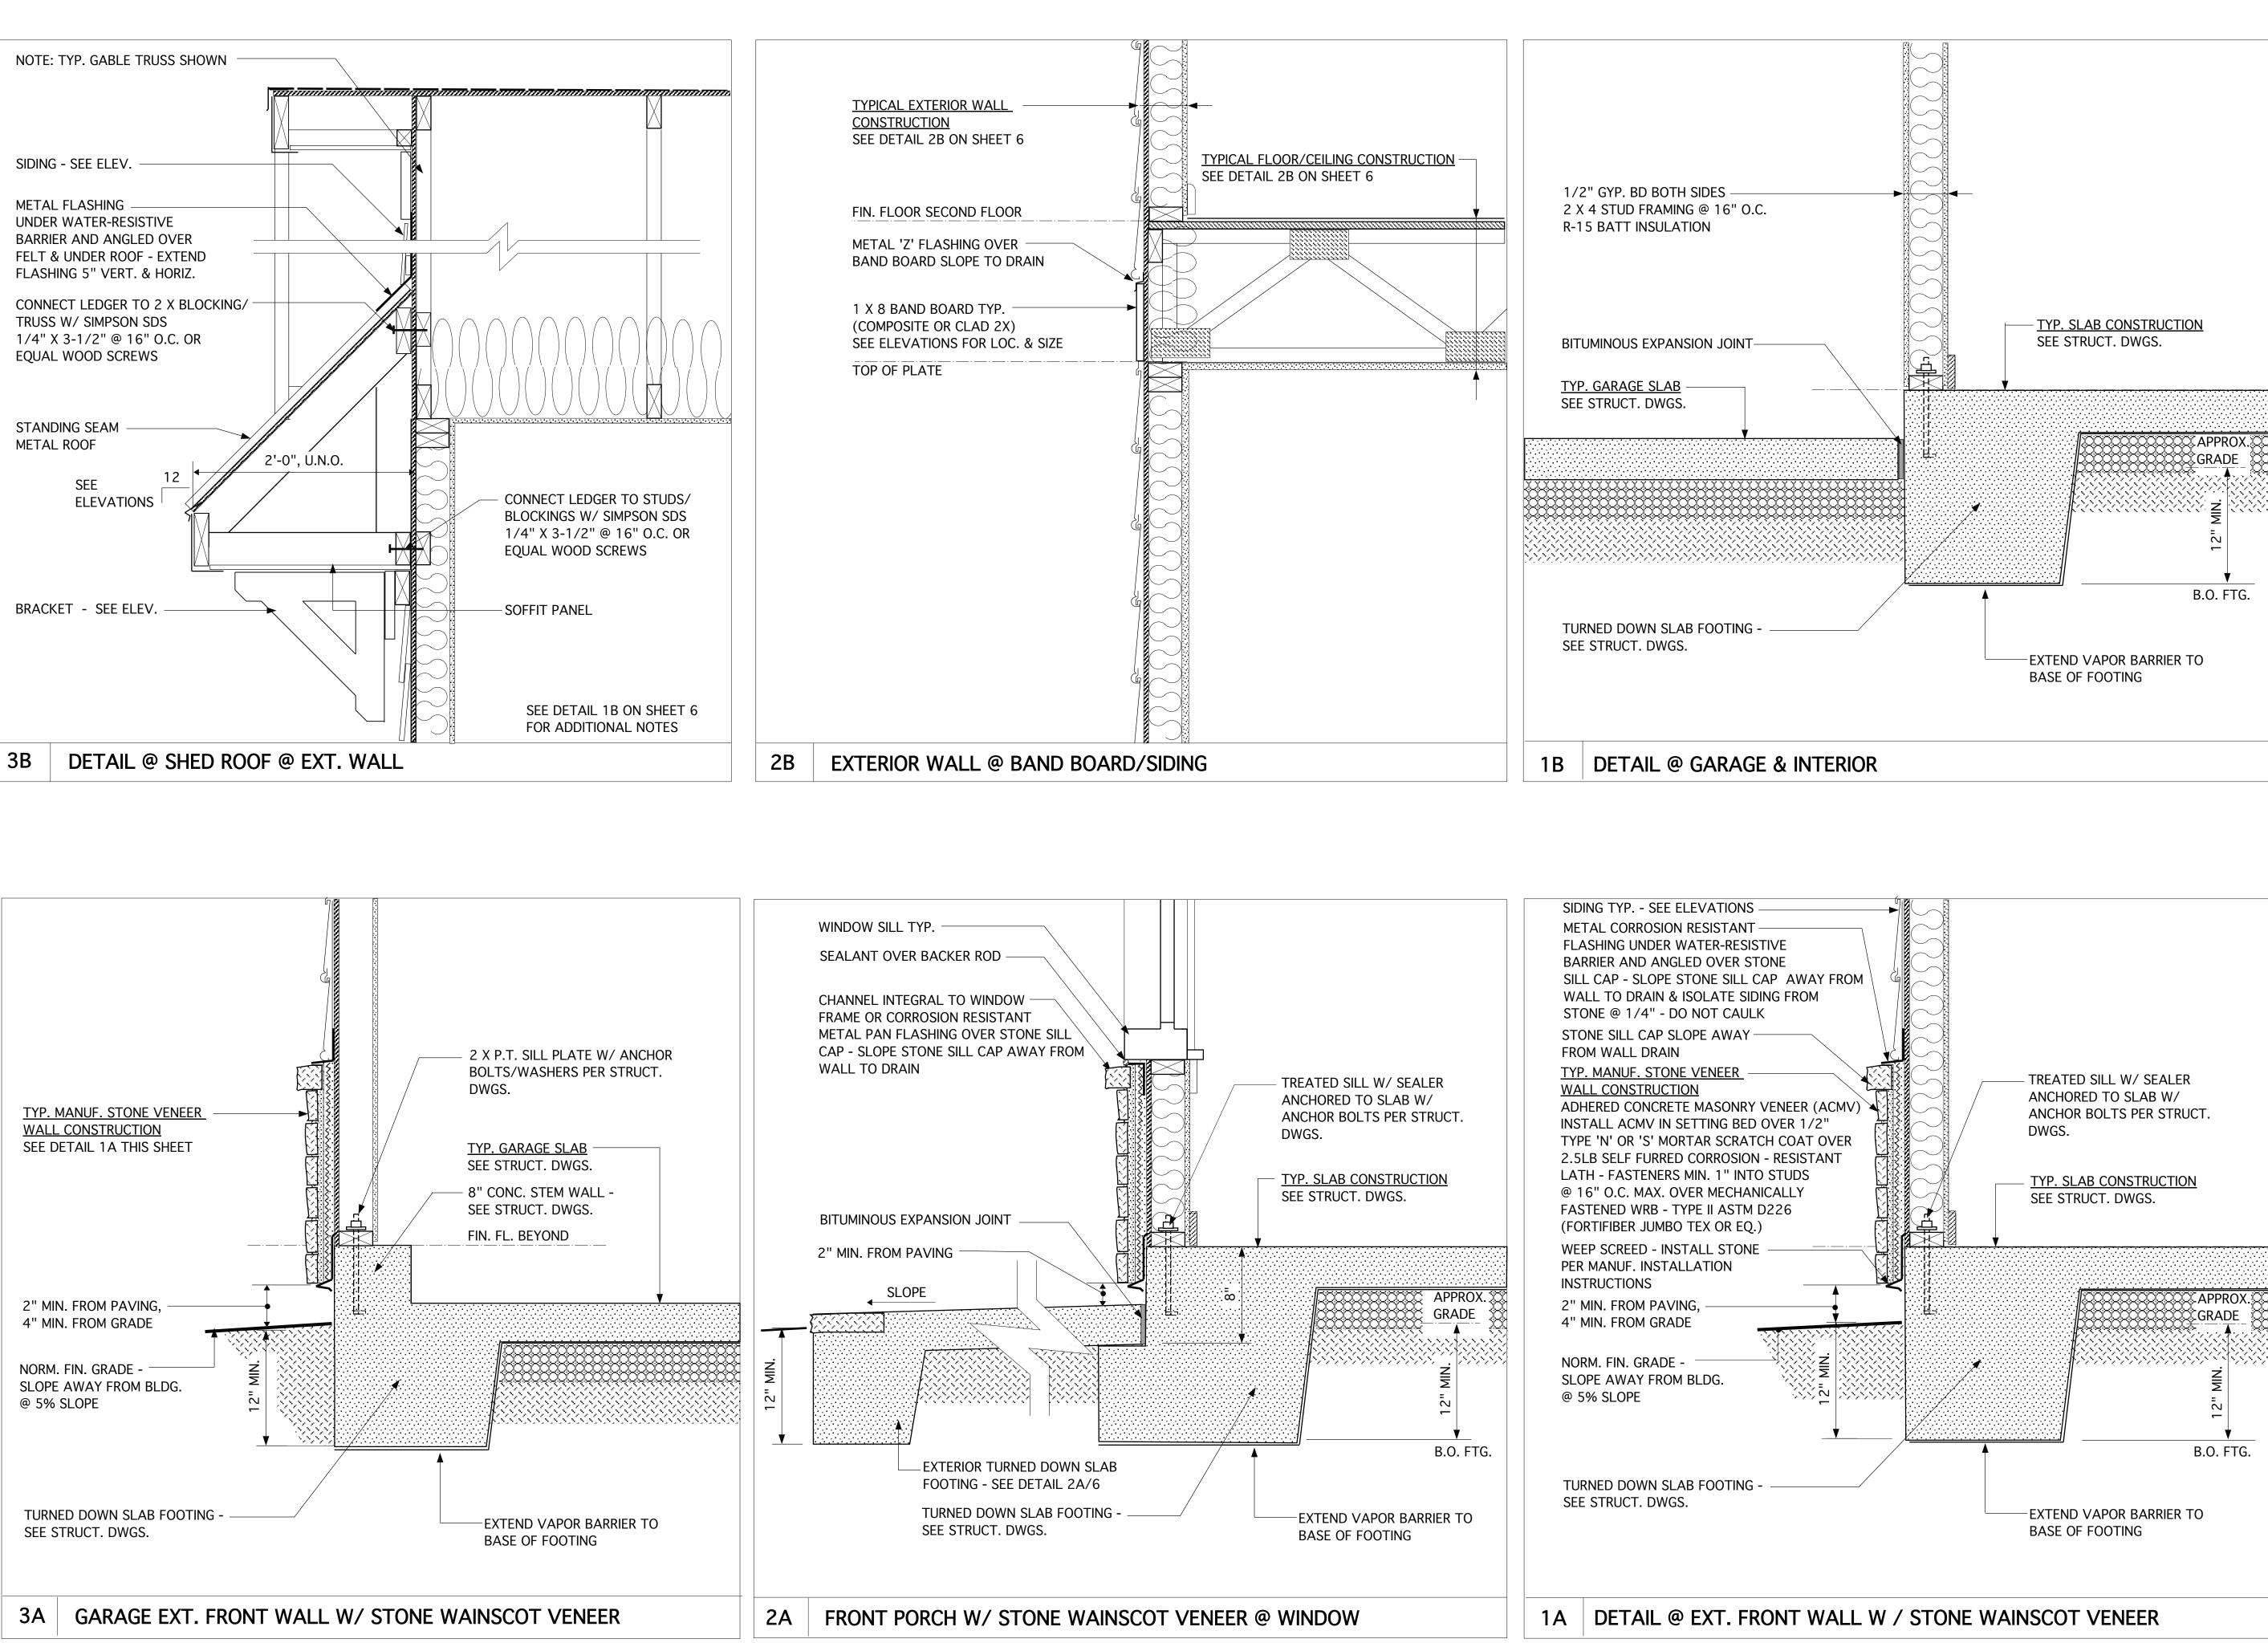

	WENTLING/	
<b>ARCHI</b>	<b>TECT</b>	
100 SOUTH SUITE 1524	I BROAD STREET,	
	PHIA, PA 19110	
(215) 568-2: email -inform wentlinghout		
ARCHITE LAND PLA		
GRAPHICS		
	ARE COPYRIGHTED AND ARE	
"ARCHITECTUR 102 OF THE COR	DPYRIGHT PROTECTION AS AN RAL WORK UNDER SECTION PYRIGHT ACT, 17 U.S.C. AS	
AS THE "ARCHI COPYRIGHT PR	CEMBER 1, 1990 AND KNOWN ITECTURAL WORKS OTECTION ACT OF 1990." THE NCLUDES BUT IS NOT LIMITED	
TO, THE OVERA ARRANGEMEN	ALL FORM AS WELL AS THE T AND COMPOSITION OF LEMENTS OF THE DESIGN.	
UNDER SUCH P USE OF THESE	ROTECTION, UNAUTHORIZED PLANS, WORKS, OR FORMS CAN LEGALLY RESULT	
IN THE CESSAT	ION OF SUCH CONSTRUCTION BEING SEIZED AND/OR	
N HOLD.		
15	WALTER WENTLE	
	July Street	
th	n W. Wenty	
	CAROLINA CAROLINA	
	5/18/20	
REVISIONS		
MARK DATE	DESCRIPTION	
DN 01-10-19 DN 02-14-19	CONVERT OLAHS STRUCT, DWGS, REV.	
DR         02-14-19           CH         12-10-19	DETAIL 3B/2B	
СН 05-18-20	MINOR UPDATE	
PROJECT NO.		
113-0	69	
DATE 01-13	3-16	
SCALE 1-1/2	" = 1'-0"	
DRAWN BY JB		
CHECKED BY		
ISSUED FOR		
PER	MITS/CONSTRUCTION	
PROJECT TITLE		
MODE]   GARA(	L 628 - GE RIGHT	
CLIENT		
CHESA	PEAKE	
HOME 3100 Smoke	<b>S OF NC</b> etree Court,	
Suite 210 Raleigh, NC	2 27604	
(919) 256-3 (919) 556-0	060	
DRAWING TITLE	LITHIC SLAB	
FOUNDATION		
AND W	ALL DETAILS	
SHEET		
	6.2	
	<b>U.</b>	

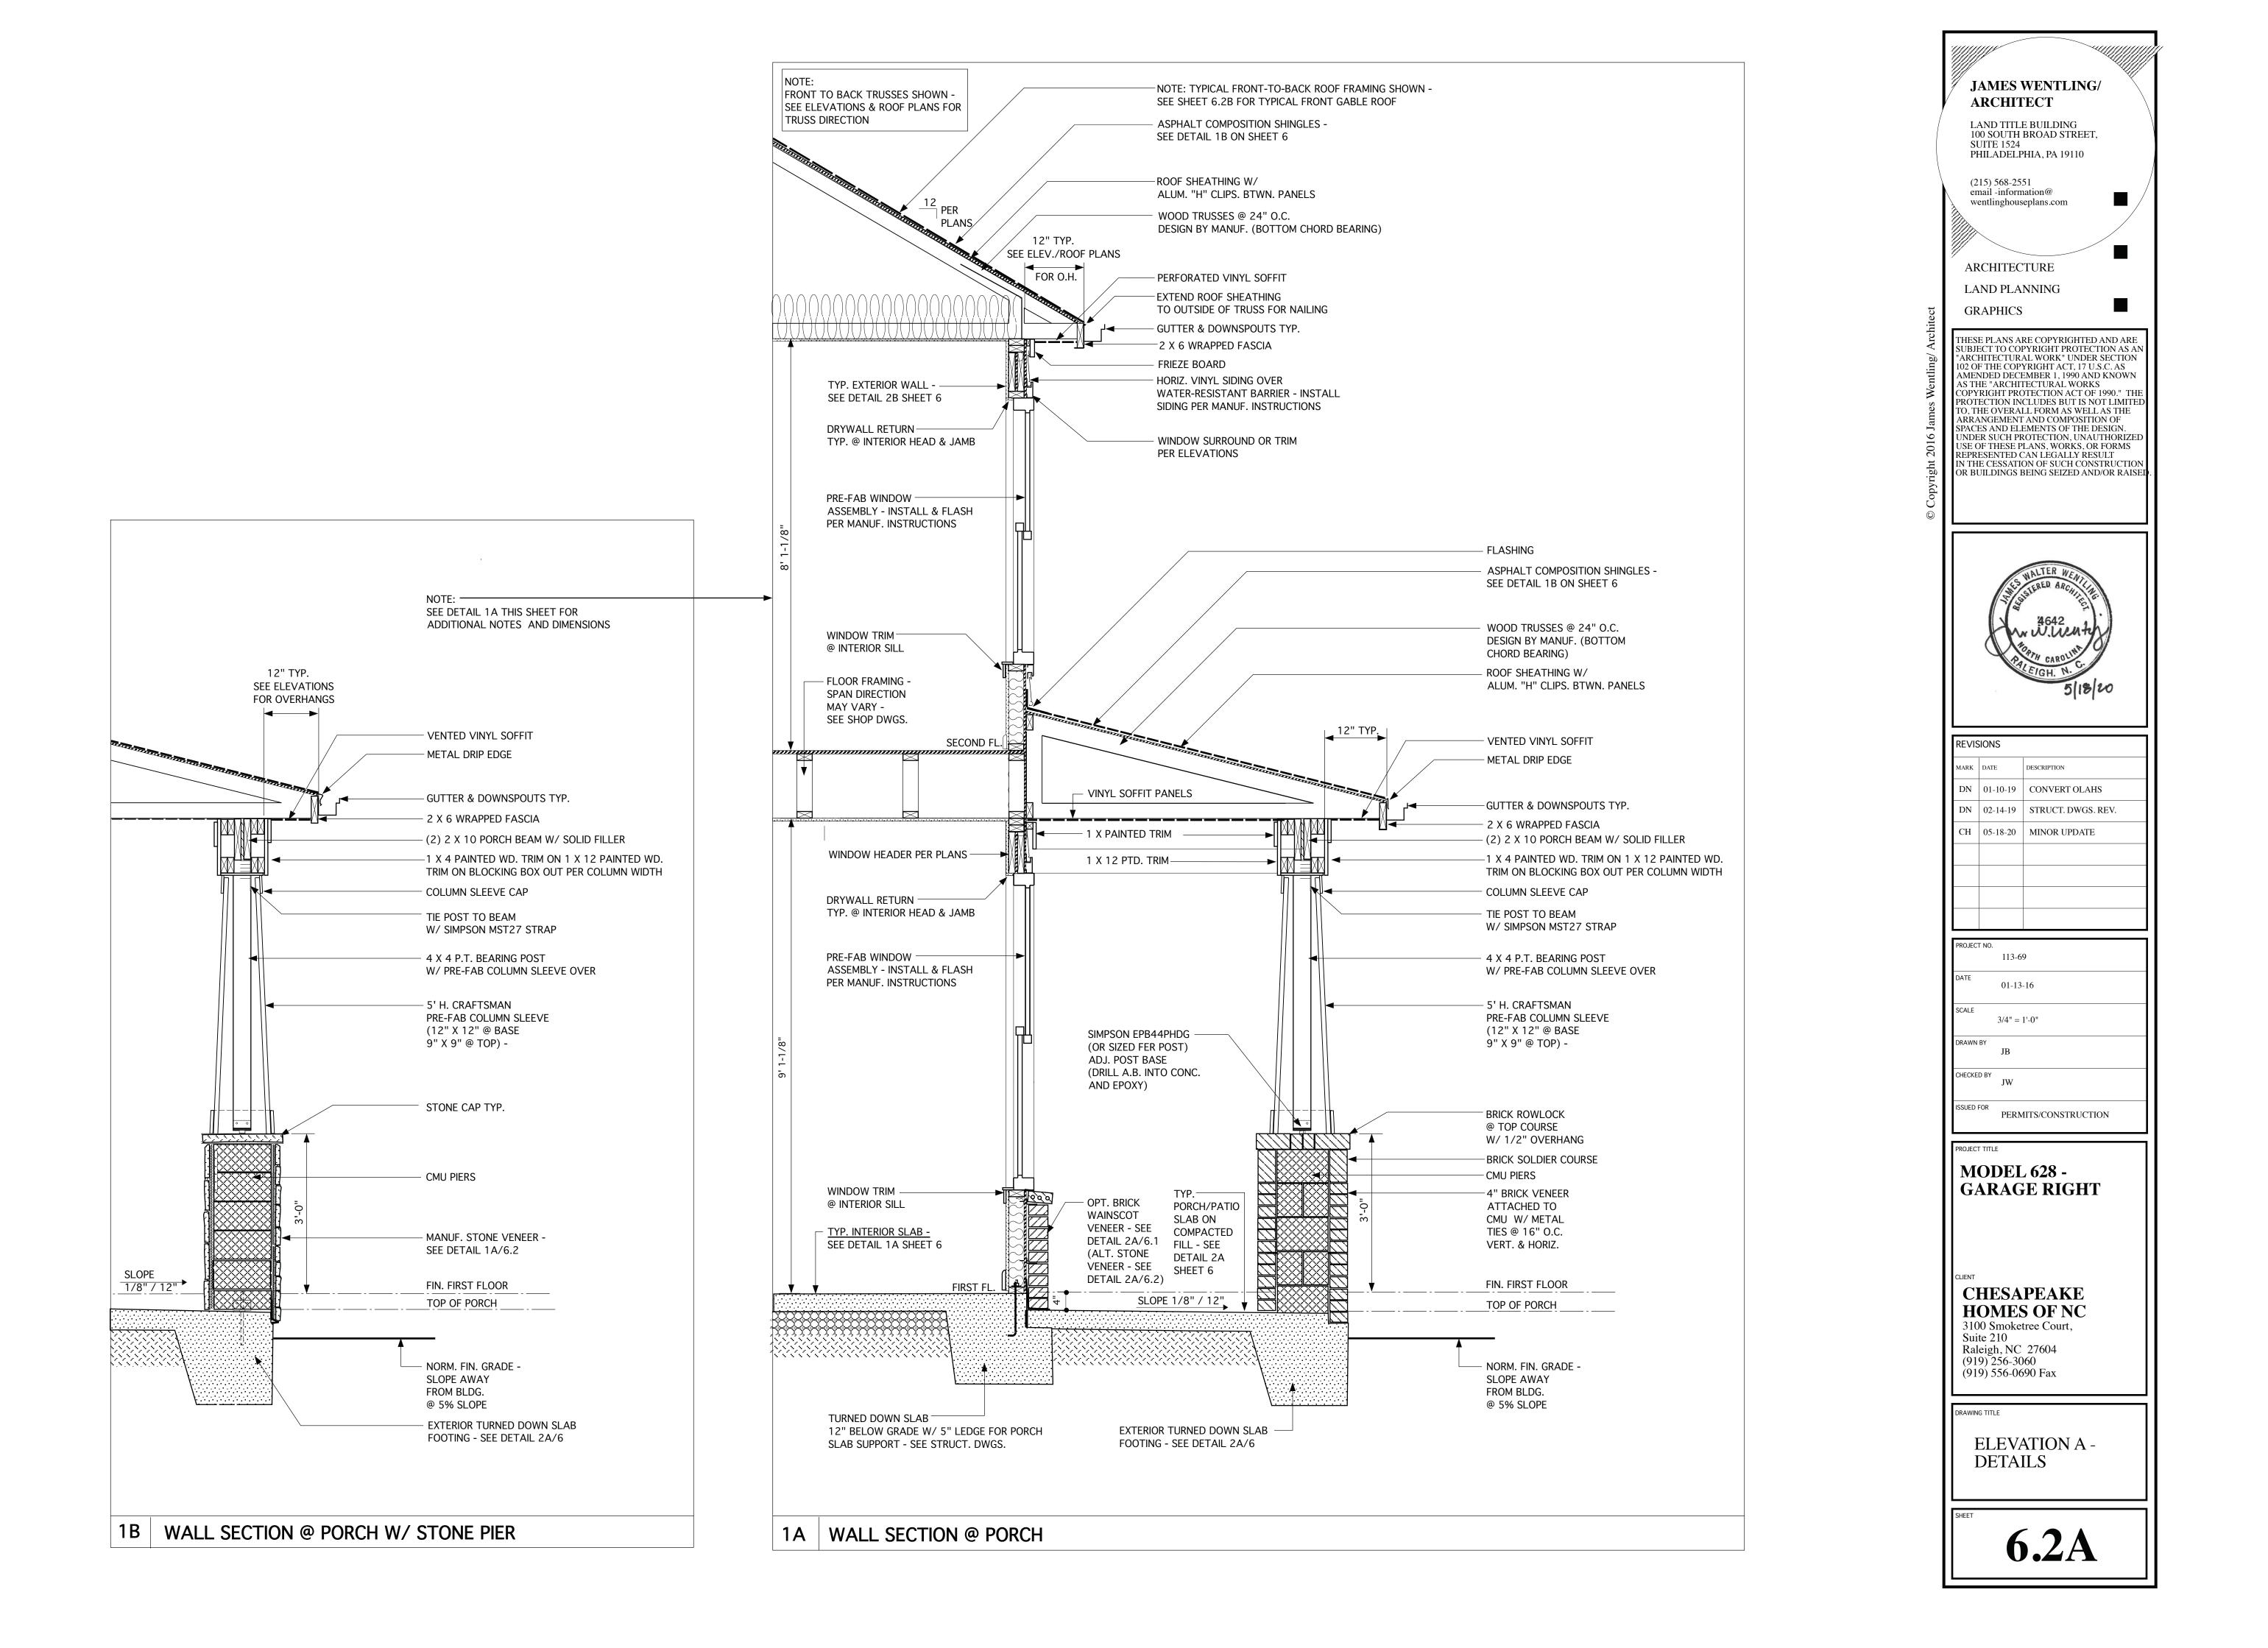

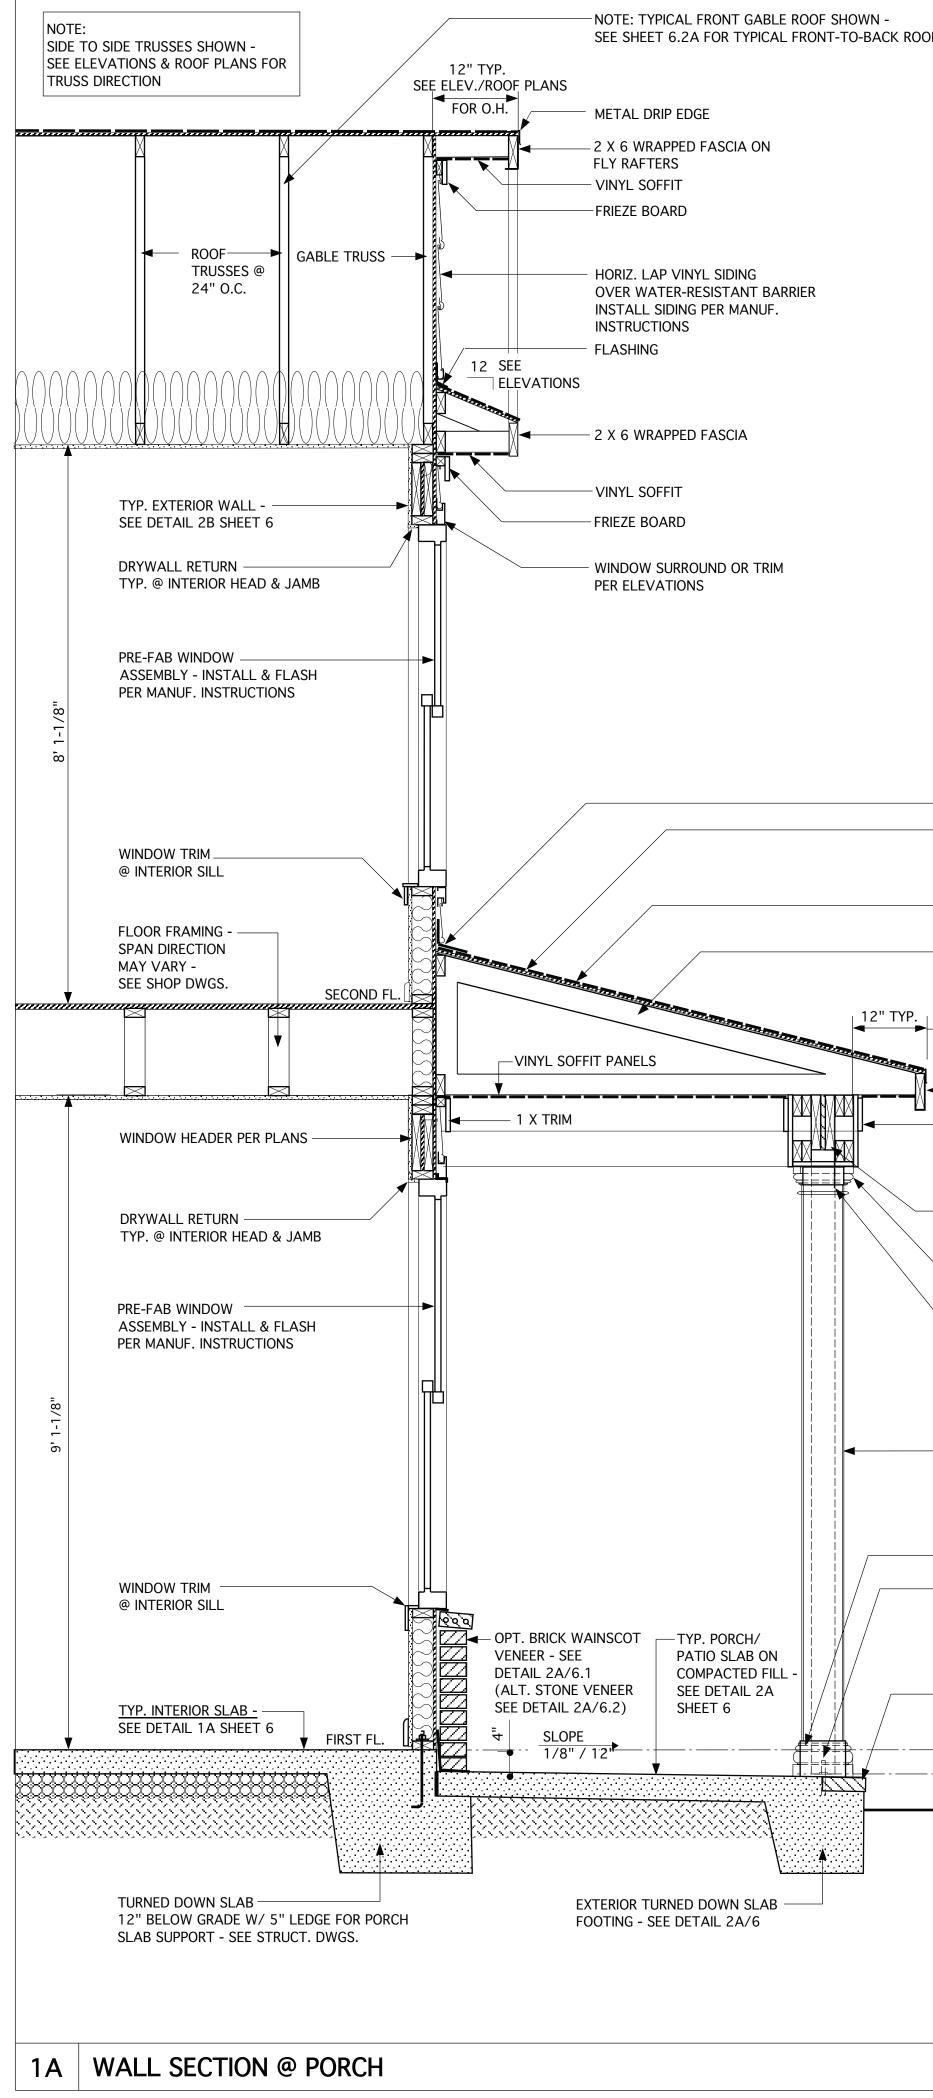

N -	
ACK ROOF FRAMING	


 $\neg$ 


FLASHING ASPHALT COMPOSITION SHINGLES - SEE DETAIL 1B
 ON SHEET 6 ROOF SHEATHING W/
ALUM. "H" CLIPS. BTWN. PANELS
WOOD TRUSSES @ 24" O.C. DESIGN BY MANUF. (BOTTOM CHORD BEARING)
 SEE ELEVATIONS FOR O.H.
 2 X 6 WRAPPED FASCIA
 1 X 4 ON 1 X 12 TRIM ON BLOCKING BOX OUT PER COLUMN WIDTH
 (2) 2 X 10 PORCH BEAM W/ SOLID FILLER
PRE-FAB COLUMN CAP - INSTALL PER MANUF. INSTALLATION INSTRUCTIONS TIE POST TO BEAM W/ SIMPSON MST27 STRAP
 8" SQUARE OR ROUND FIBER GLASS LOAD BEARING COLUMN OR COLUMN SLEEVE - SEE PLANS & ELEV. FOR COLUMN TYPES
 PRE-FAB COLUMN BASE
 SIMPSON EPB44PHDG (OR SIZED FER POST) ADJ. POST BASE (DRILL A.B. INTO CONC. AND EPOXY)
 OPT. BRICK ROWLOCK COURSE @ PORCH EDGES
 FIN. FIRST FLOOR


- Norm. Fin. grade -SLOPE AWAY FROM BLDG. @ 5% SLOPE


TOP OF PORCH


	JAMES WENTLING/ ARCHITECT		
	LAND TITLE BUILDING 100 SOUTH BROAD STREET,		
	SUITE 1524 PHILADELPHIA, PA 19110		
	(215) 568-2551 email -information@ wentlinghouseplans.com		
	ARCHITECTURE		
	LAND PLANNING GRAPHICS		
	THESE PLANS ARE COPYRIGHTED AND ARE		
à	SUBJECT TO COPYRIGHT PROTECTION AS AN "ARCHITECTURAL WORK" UNDER SECTION 102 OF THE COPYRIGHT ACT, 17 U.S.C. AS AMENDED DECEMBER 1, 1990 AND KNOWN		
	AS THE "ARCHITECTURAL WORKS COPYRIGHT PROTECTION ACT OF 1990." THE PROTECTION INCLUDES BUT IS NOT LIMITED TO, THE OVERALL FORM AS WELL AS THE		
	ARRANGEMENT AND COMPOSITION OF SPACES AND ELEMENTS OF THE DESIGN. UNDER SUCH PROTECTION, UNAUTHORIZED USE OF THESE PLANS, WORKS, OR FORMS		
a	REPRESENTED CAN LEGALLY RESULT IN THE CESSATION OF SUCH CONSTRUCTION OR BUILDINGS BEING SEIZED AND/OR RAISED.		
- dan o			
,			
	S WALTER WEND		
	State and a state		
	the willenty		
	PATH CAROLINIC.		
	5/18/20		
	REVISIONS		
	MARK DATE DESCRIPTION		
	DN01-10-19CONVERT OLAHSDN02-14-19STRUCT. DWGS. REV.		
	CH 05-18-20 MINOR UPDATE		
	PROJECT NO.		
	113-69 Date 01-13-16		
	SCALE		
	3/4" = 1'-0" DRAWN BY JB		
	CHECKED BY		
	ISSUED FOR PERMITS/CONSTRUCTION		
	PROJECT TITLE		
	MODEL 628 - GARAGE RIGHT		
	UARAOL KIOIII		
	CLIENT CHESAPEAKE		
	HOMES OF NC 3100 Smoketree Court,		
	Suite 210 Raleigh, NC 27604		
	(919) 256-3060 (919) 556-0690 Fax		
	DRAWING TITLE		
	ELEVATION		
	B/C/D/E/F - DETAILS		
	SHEET		
	<b>6.2B</b>		

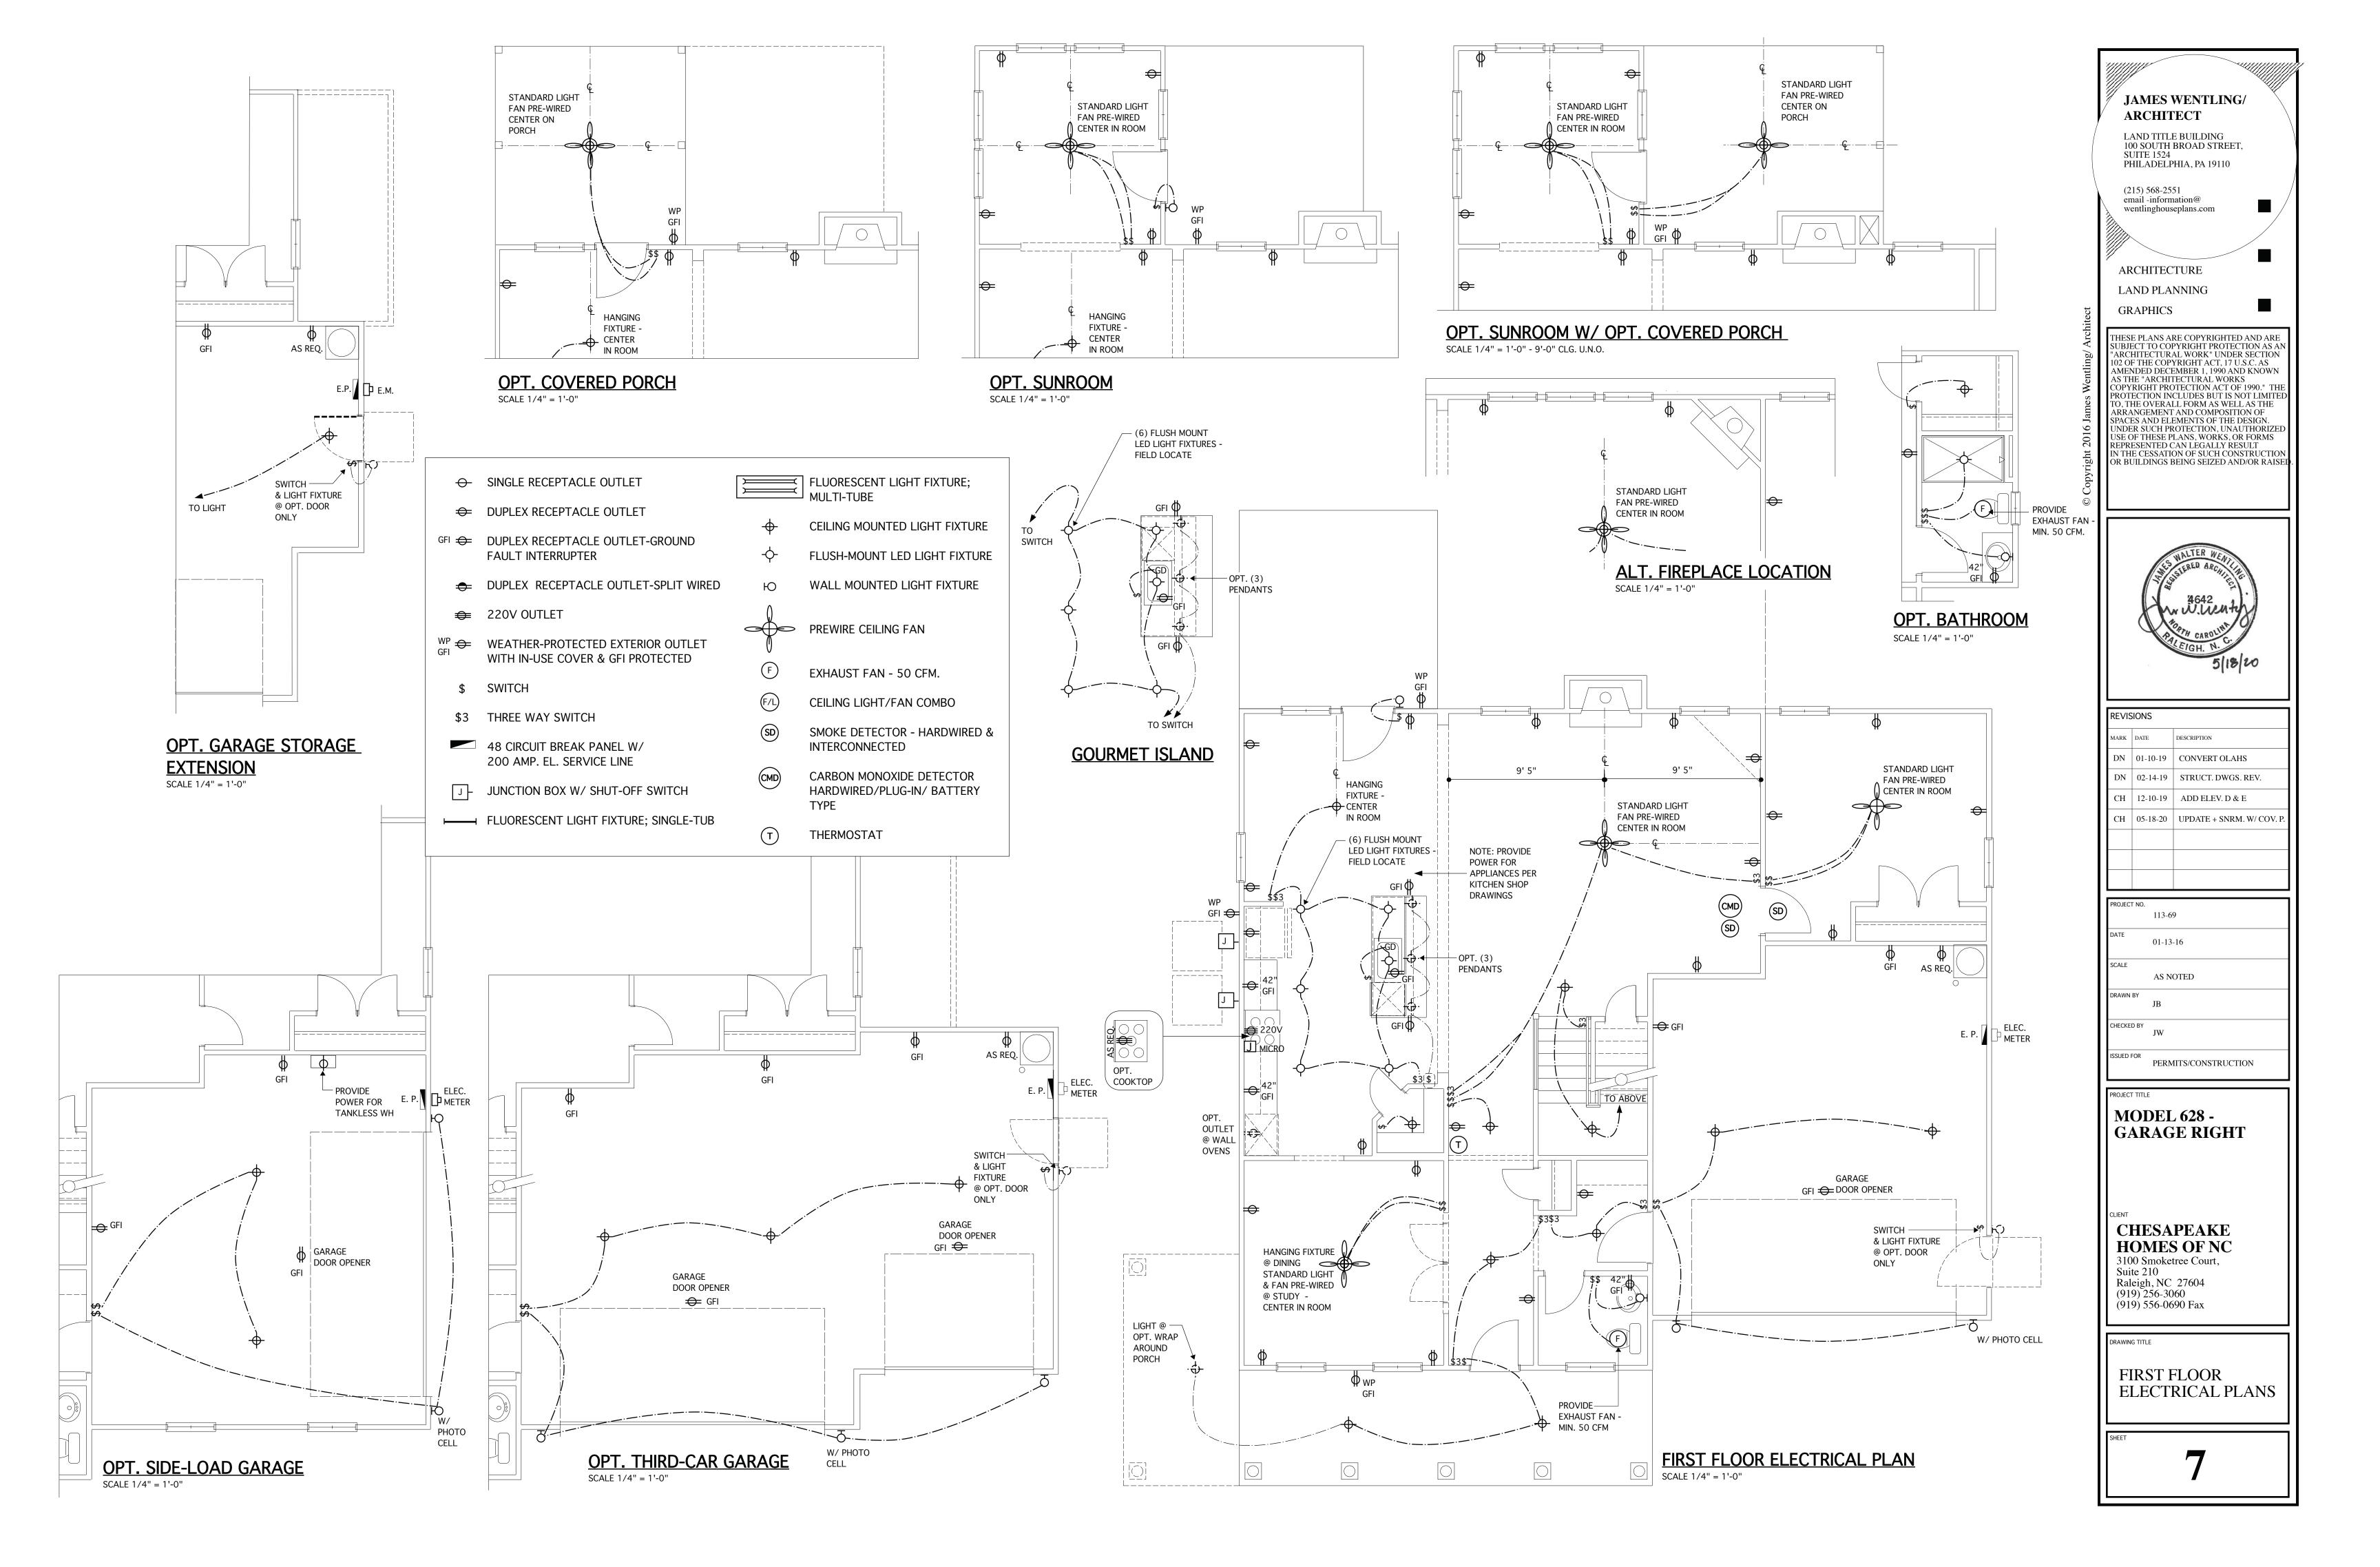

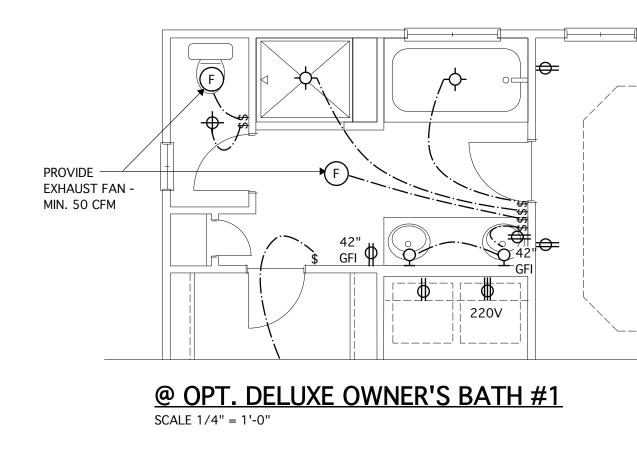

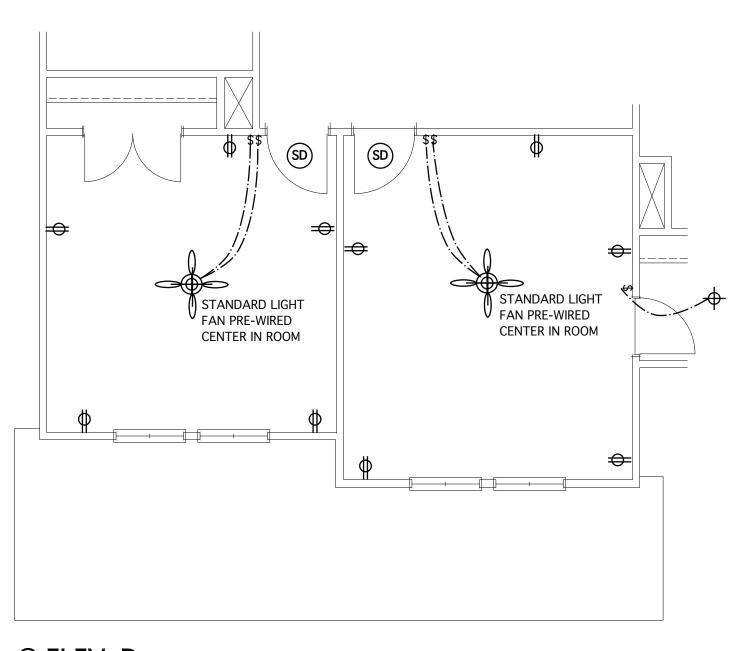



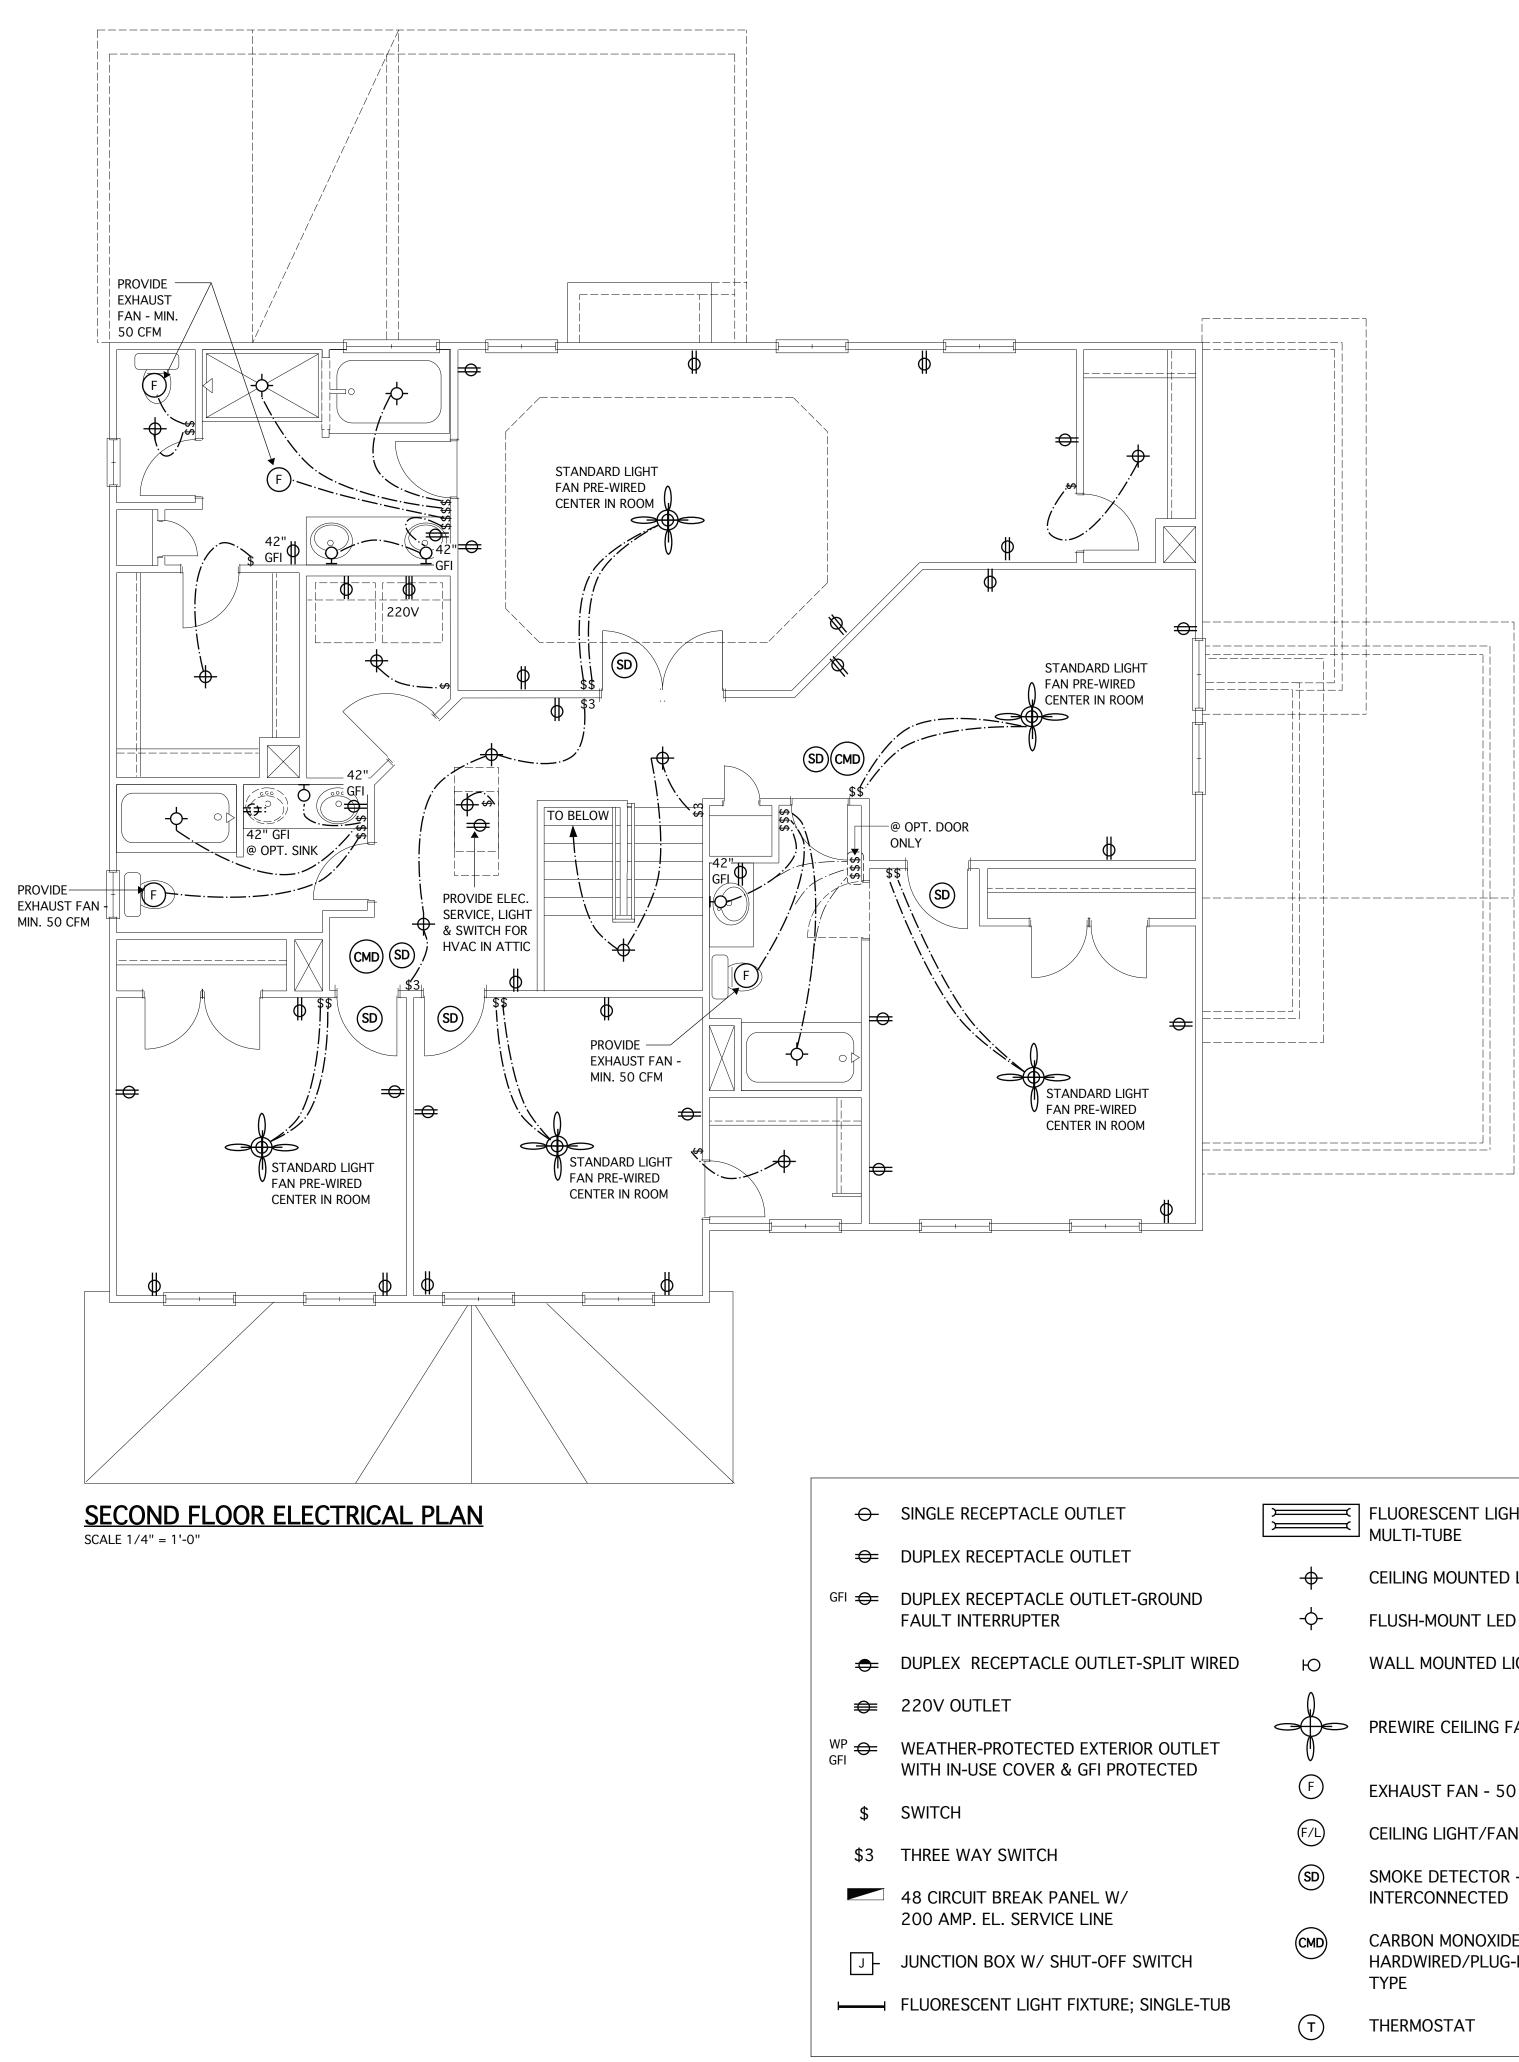

JTLET	Ĭ	FLUORESCENT LIGHT FIXTURE; MULTI-TUBE
UTLET	<b>+</b>	CEILING MOUNTED LIGHT FIXTURE
UTLET-GROUND	+ -ф-	FLUSH-MOUNT LED LIGHT FIXTURE
OUTLET-SPLIT WIRED	Ю	WALL MOUNTED LIGHT FIXTURE
		PREWIRE CEILING FAN
GFI PROTECTED	F	EXHAUST FAN - 50 CFM.
	(F/L)	CEILING LIGHT/FAN COMBO
EL W∕ ⊔INE	SD	SMOKE DETECTOR - HARDWIRED & INTERCONNECTED
T-OFF SWITCH	CMD	CARBON MONOXIDE DETECTOR HARDWIRED/PLUG-IN/ BATTERY TYPE
XTURE; SINGLE-TUB	T	THERMOSTAT

JAMES WENTLING/ ARCHITECT
LAND TITLE BUILDING 100 SOUTH BROAD STREET,
SUITE 1524 PHILADELPHIA, PA 19110
(215) 568-2551 email -information@
wentlinghouseplans.com
ARCHITECTURE
LAND PLANNING
GRAPHICS
THESE PLANS ARE COPYRIGHTED AND ARE SUBJECT TO COPYRIGHT PROTECTION AS AN "ARCHITECTURAL WORK" UNDER SECTION 102 OF THE COPYRIGHT ACT, 17 U.S.C. AS
AMENDED DECEMBER 1, 1990 AND KNOWN AS THE "ARCHITECTURAL WORKS COPYRIGHT PROTECTION ACT OF 1990." THE
PROTECTION INCLUDES BUT IS NOT LIMITED TO, THE OVERALL FORM AS WELL AS THE ARRANGEMENT AND COMPOSITION OF
SPACES AND ELEMENTS OF THE DESIGN. UNDER SUCH PROTECTION, UNAUTHORIZED USE OF THESE PLANS, WORKS, OR FORMS REPRESENTED CAN LEGALLY RESULT
IN THE CESSATION OF SUCH CONSTRUCTION OR BUILDINGS BEING SEIZED AND/OR RAISED.
STERED ARCHIER
4642 ·
the withenty
PALEIGH. N. C.
5/18/20
REVISIONS
MARK DATE DESCRIPTION DN 01-10-19 CONVERT OLAHS
DN01-10-19CONVERTOLARSDN02-14-19STRUCT. DWGS. REV.
CH 12-10-19 ADD ELEV. D & E
CH 05-18-20 MINOR UPDATE
PROJECT NO. 113-69
DATE 01-13-16
SCALE
AS NOTED Drawn by
JB CHECKED BY
JW
ISSUED FOR PERMITS/CONSTRUCTION
PROJECT TITLE
MODEL 628 -
GARAGE RIGHT
CLIENT CHESAPEAKE
HOMES OF NC
3100 Smoketree Court, Suite 210 Delaiste NG 27604
Raleigh, NC 27604 (919) 256-3060 (919) 556-0690 Fax
DRAWING TITLE
SECOND FLOOR ELECTRICAL PLANS
SHEET
71

### STRUCTURAL NOTES NC (2018 NCRC): Wind: 115-120 mph

- ENGINEER'S SEAL APPLIES ONLY TO STRUCTURAL COMPONENTS INCLUDING ROOF RAFTERS, HIPS, VALLEYS, RIDGES, FLOORS, WALLS, BEAMS AND HEADERS, COLUMNS, CANTILEVERS, OFFSET LOAD BEARING WALLS, PIER & GIRDER SYSTEM, FOOTING, AND PILING SYSTEM. ENGINEER'S SEAL DOES NOT CERTIFY DIMENSIONAL ACCURACY OR ARCHITECTURAL LAYOUT INCLUDING ROOF SYSTEM. ALL REQUIREMENTS FOR PROFESSIONAL CERTIFICATION SHALL BE PROVIDED BY THE APPROPRIATE PROFESSIONAL. SOUTHERN ENGINEERS, P.A. CERTIFIES ONLY THE STRUCTURAL COMPONENTS AS SPECIFICALLY STATED.
- 2. ALL CONSTRUCTION SHALL CONFORM TO THE LATEST REQUIREMENTS OF THE 2018 NC RESIDENTIAL CODE, PLUS ALL LOCAL CODES AND REGULATIONS. THE STRUCTURAL ENGINEER IS NOT RESPONSIBLE FOR, AND WILL NOT HAVE CONTROL OF, CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES OR PROCEDURES, OR FOR SAFETY PRECAUTIONS AND PROGRAMS IN CONNECTION WITH THE CONSTRUCTION WORK, NOR WILL THE ENGINEER BE RESPONSIBLE FOR THE CONTRACTOR'S FAILURE TO CARRY OUT THE CONSTRUCTION WORK IN ACCORDANCE WITH THE CONTRACT DOCUMENTS. "CONSTRUCTION REVIEW" SERVICES ARE NOT PART OF OUR CONTRACT ALL MEMBERS SHALL BE FRAMED ANCHORED, TIED AND BRACED IN ACCORDANCE WITH GOOD CONSTRUCTION PRACTICE AND THE BUILDING CODE.
- 3. DESIGN LOADS (LISTED AS: LIVE LOAD, DEAD LOAD, DEFLECTION)
- ROOMS OTHER THAN SLEEPING ROOMS: (40 PSF, 10 PSF, L/360) • SLEEPING ROOMS: (30 PSF, 10 PSF, L/360)
- ATTIC WITH PERMANENT STAIR: (40 PSF, 10 PSF, L/360)
- ATTIC WITHOUT PERMANENT STAIR: (20 PSF, 10 PSF, L/360) • ATTIC WITHOUT STORAGE: (10 PSF, 10 PSF, L/240)
- STAIRS: (40 PSF, 10 PSF, L/360) • EXTERIOR BALCONIES: (60 PSF, 10 PSF, L/360)
- DECKS: (40 PSF, 10 PSF, L/360)
- GUARDRAILS AND HANDRAILS: (200 LBS) • PASSSENGER VEHICLE GARAGES: (50 PSF, 10 PSF, L/360)
- FIRE ESCAPES: (40 PSF, 10 PSF, L/360)
- SNOW: (20 PSF)
- 4. WALLS SHALL BE BRACED BY SHEATHING WALLS ON ALL STORIES WITH WOOD STRUCTURAL PANELS. SEE FRAMING NOTES FOR THICKNESS AND NAILING REQUIREMENTS.
- 5. SEE APPENDIX M (DCA6) FOR EXTERIOR DECK REQUIREMENTS INCLUDING ATTACHMENTS FOR LATERAL LOADS.
- 6. CONCRETE SHALL HAVE A MINIMUM 28 DAY STRENGTH OF 3000 PSI AND A MAXIMUM SLUMP OF 5 INCHES UNLESS NOTED OTHERWISE (UNO). AIR ENTRAINED PER TABLE 402.2. ALL CONCRETE SHALL BE PROPORTIONED, MIXED, HANDLED, SAMPLED, TESTED, AND PLACED IN ACCORDANCE WITH ACI STANDARDS. ALL SAMPLES FOR PUMPING SHALL BE TAKEN FROM THE EXIT END OF THE PUMP. CONTROL JOINTS IN SLABS SHALL BE SPACED ON A GRID OF +-30 TIMES THE DEPTH (D). CONTROL JOINTS SHALL BE SAWCUT TO A DEPTH OF I/D. (I.E. 4" CONCRETE SLABS SHALL HAVE 1/4" DEEP CONTROL JOINTS SAWCUT IN SLAB ON A +-10'-0" x +-10'-0" GRID).
- ALLOWABLE SOIL BEARING PRESSURE ASSUMED TO BE 2000 PSF. THE CONTRACTOR MUST CONTACT A GEOTECHNICAL ENGINEER AND THE STRUCTURAL ENGINEER IF UNSATISFACTORY SUBSURFACE CONDITIONS ARE ENCOUNTERED. THE SURFACE AREA ADJACENT TO THE FOUNDATION WALL SHALL BE PROVIDED WITH ADEQUATE DRAINAGE, AND SHALL BE GRADED SO AS TO DRAIN SURFACE WATER AWAY FROM FOUNDATION WALLS.
- 8. ALL FRAMING LUMBER SHALL BE SPF #2 (Fb = 875 PSI) UNLESS NOTED OTHERWISE (UNO). ALL TREATED LUMBER SHALL BE SYP # 2. PLATE MATERIAL MAY BE SPF # 3 OR SYP #3 (Fc(perp) = 425 PSI - MIN).
- 9. L.V.L. SHALL BE LAMINATED VENEER LUMBER: Fb=2600 PSI, Fv=285 PSI, E=1.9x10 PSI. 9.1. P.S.L. SHALL BE PARALLEL STRAND LUMBER: Fb=2900 PSI, Fv=290 PSI, E=2.0x10 PSI. 9.2. L.S.L. SHALL BE LAMINATED STRAND LUMBER: Fb=2250 PSI, Fv=400 PSI, E=1.55x10 PSI. INSTALL ALL CONNECTIONS PER MANUFACTURERS INSTRUCTIONS.
- IO. ALL ROOF TRUSS AND I-JOIST LAYOUTS SHALL BE PREPARED IN ACCORDANCE WITH THE SEALED STRUCTURAL DRAWINGS. TRUSSES AND I-JOISTS SHALL BE INSTALLED ACCORDING TO THE MANUFACTURE'S SPECIFICATIONS. ANY CHANGE IN TRUSS OR I-JOIST LAYOUT SHALL BE COORDINATED WITH SOUTHERN ENGINEERS.
- II. ALL STRUCTURAL STEEL SHALL BE ASTM A-36. STEEL BEAMS SHALL BE SUPPORTED AT EACH END WITH A MINIMUM BEARING LENGTH OF 3 1/2" INCHES AND FULL FLANGE WIDTH. PROVIDE SOLID BEARING FROM BEAM SUPPORT TO FOUNDATION. BEAMS SHALL BE ATTACHED TO EACH SUPPORT WITH TWO LAG SCREWS (1/2" DIAMETER x 4" LONG). LATERAL SUPPORT IS CONSIDERED ADEQUATE PROVIDING THE JOIST ARE TOE NAILED TO THE SOLE PLATE, AND SOLE PLATE IS NAILED OR BOLTED TO THE BEAM FLANGE @ 48" O.C. ALL STEEL TUBING SHALL BE ASTM A500.
- 12. REBAR SHALL BE DEFORMED STEEL, ASTM615, GRADE 60. LAP ALL REBAR SPLICES 30 BAR DIAMETERS
- 13. FLITCH BEAMS SHALL BE BOLTED TOGETHER USING (2) ROWS OF 1/2" DIAMETER BOLTS (ASTM A325) WITH WASHERS PLACED UNDER THE THREADED END OF BOLT. BOLTS SHALL BE SPACED AT 24" O.C. (MAX), AND STAGGERED AT THE TOP AND BOTTOM OF BEAM (2" EDGE DISTANCE), WITH 2 BOLTS LOCATED AT 6" FROM EACH END.
- 14. BRICK LINTELS (WHEN REQUIRED) SHALL BE 3 1/2"x3 1/2"x1/4" STEEL ANGLE FOR UP TO 6'-0" SPAN AND 6"x4"x5/16" STEEL ANGLE WITH 6" LEG VERTICAL FOR SPANS UP TO 9'-O". SEE PLANS FOR SPANS OVER 9'-O". SEE ALSO SECTION R703.8.3 LINTELS.

# FRAMING NOTES

NC (2018 NCRC): Wind: 115-120 mph

- BRACING METHOD AND TYPE: CONTINUOUSLY SHEATHED WSP: CS-WSP. NOTE THAT THE WALL BRACING AMOUNT PROVIDED ON THE PLANS (DETAILS AND SPECIFICATIONS) IS GREATER THAN THE AMOUNT OF WALL BRACING REQUIRED BY SECTION R602.10 OF THE CODE, SEE NOTES BELOW FOR DETAILS AND SPECIFICATIONS FOR WALL BRACING AND WALL FRAMING.
- 2. EXTERIOR WALL SHEATHING: WALLS SHALL BE BRACED BY SHEATHING WALLS ON ALL STORIES WITH WOOD STRUCTURAL PANEL SHEATHING (WSP) (EXPOSURE B: 1/16", EXPOSURE C: 15/32"), SHEATHING SHALL BE ATTACHED WITH 8d NAILS AT A 6"/12" NAILING PATTERN (6" OC AT PANEL EDGES AND 12" OC AT INTERMEDIATE SUPPORTS). INSTALL BLOCKING AT ALL PANEL EDGES.
- 3. WSP SHEATHING SHALL EXTEND TO THE UPPERMOST DOUBLE BEARING PLATE. BLOCK AT ROOF PER SECTION R602.10.4.5 AND ATTACH BRACED WALLS PER CODE. WSP SHEATHING BETWEEN FLOORS SHALL BE SPLICED ALONG CONTINUOUS BAND OR THE WSP SHEATHING MAY BE SPLICED ACROSS STUDS (CONTINUOUS ACROSS FLOOR SYSTEM) WITH BLOCKING AT PANEL EDGES. (MINIMUM 12" BEYOND FLOOR BREAK) OR OTHER APPROVED METHOD.
- 4. <u>"HD" = HOLDOWN:</u> HOLD-DOWN DEVICE (NOTED AS "HD" ON PLANS) SHALL BE AN 800 POUND CAPACITY ASSEMBLY AS NOTED ON PLANS. SEE DETAILS FOR HD ASSEMBLY.
- <u>**GROUND/FIRST FLOOR:</u> USE "HD HOLD-DOWN DETAIL" ON SD SHEET (OR EQUIV.) • <u>**UPPER FLOORS:</u> ATTACH BASE OF KING STUD WITH A SIMPSON CS22 STRAP DOWN ACROSS THE BAND AND DOWN TO A STUD BELOW OR HEADER BELOW. EXTEND STRAP 7" MIN ALONG EACH STUD (OR HEADER) AND ATTACH EACH END W/ (7) 8d NAILS.
- 5. INTERIOR BRACED WALL: (NOTED AS "IBW" ON PLANS) ATTACH 1/2" GYPSUM BOARD (GB) ON EACH SIDE OF WALL WITH A MIN. OF 5d COOLER NAILS OR #6 SCREWS @ 7" O.C. ALONG THE EDGES AND AT INTERMEDIATE SUPPORTS.
- INTERIOR BRACED WALL-WOOD STRUCTURAL PANEL: (NOTED AS "IBW-WSP" ON PLANS). ATTACH ONE SIDE WITH %" WSP SHEATHING WITH 8d NAILS AT A 6"/12" NAILING PATTERN (6" OC AT PANEL EDGES AND 12" OC AT INTERMEDIATE SUPPORTS). INSTALL BLOCKING AT ALL PANEL EDGES. ATTACH GB OVER WSP AS REQUIRED. ATTACH OPPOSITE SIDE WITH 1/2" GB WITH A MIN. OF 5d COOLER NAILS OR #6 SCREWS @ 7" OC ALONG THE EDGES AND AT INTERMEDIATE SUPPORTS

HEADER/BEAM & COLUMN NOTES

- ALL EXTERIOR AND LOAD BEARING HEADERS SHALL BE MIN. (2)2x6 (4" WALL) OR (3)2x6 (6" WALL) WITH (I) SUPPORT STUD, UNLESS NOTED OTHERWISE.
- 2. THE NUMBER SHOWN AT BEAM AND HEADER SUPPORTS INDICATES THE NUMBER OF SUPPORT STUDS REQUIRED IN STUD POCKET OR COLUMN. THE NUMBER OF KING STUDS AT EACH END OF HEADERS IN EXTERIOR WALLS SHALL BE ACCORDING TO ITEM "d" IN TABLE R602.3(5) OR AS BELOW PER NODOL COMMENTARY "KING
- STUDS AT WALL OPENINGS" REVISED 1-9-2020: • UP TO 3' SPAN: (I) KING STUD
- OVER 3' UP TO 6' SPAN: (2) KING STUDS .... OVER 6' UP TO 9' SPAN: (3) KING STUDS ...
- OVER 9' UP TO 12' SPAN: (4) KING STUDS .... OVER 12' UP TO 15' SPAN: (5) KING STUDS


TRUSS SYSTEM REQUIREMENTS NC (2018 NCRC): Wind: 115-120 mph

- TRUSS SYSTEM LAYOUTS (PLACEMENT PLANS) SHALL BE DESIGNED IN ACCORDANCE WITH SEALED STRUCTURAL PLANS. ANY NEED TO CHANGE TRUSSES SHALL BE COORDINATED WITH SOUTHERN ENGINEERS
- TRUSS SCHEMATICS (PROFILES) SHALL BE 2. PREPARED AND SEALED BY TRUSS MANUFACTURER.
- 3. ALL TRUSSES SHALL BE DESIGNED FOR BEARING ON SPF #2 OR #3 PLATES OR LEDGERS (UNO).
- 4. ALL REQUIRED ANCHORS FOR TRUSSES DUE TO UPLIFT OR BEARING SHALL MEET THE REQUIREMENTS AS SPECIFIED ON THE TRUSS SCHEMATICS.

PORCH POST NOTES

- 4X4 (6x6) TRT'D POST (OR EQUAL). • ATTACH TRUSSES (RAFTERS) AT PORCH WITH
- HURRICANE CONNECTORS. POST CAP: SIMPSON AC4-MAX (AC6-MAX) POST CAP AT CORNER: (2) SIMPSON LCE4
- (MITER HEADER AT CORNER). HIGH WIND; ADD (1) SIMPSON H6. 3. POST BASE: SIMPSON ABU44 (ABU66).
- 3.1. <u>MONO:</u> 5/" ANCHOR (EMBED 7") 3.2. CMU: 5/8" ANCHOR (EXTEND TO FOOTING -HIGH WIND ONLY)
- 4. POST BASE: WOOD FOUNDATION: (2) SIMPSON CSI6 STRAPS AT POSTS. EXTEND 12" ONTO EACH POST (UPPER AND LOWER) OR TO GIRDER.
- <u>NOTE:</u> EQUIVALENT POST CAP AND BASE







MPH SD

