

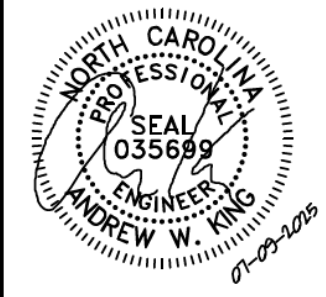








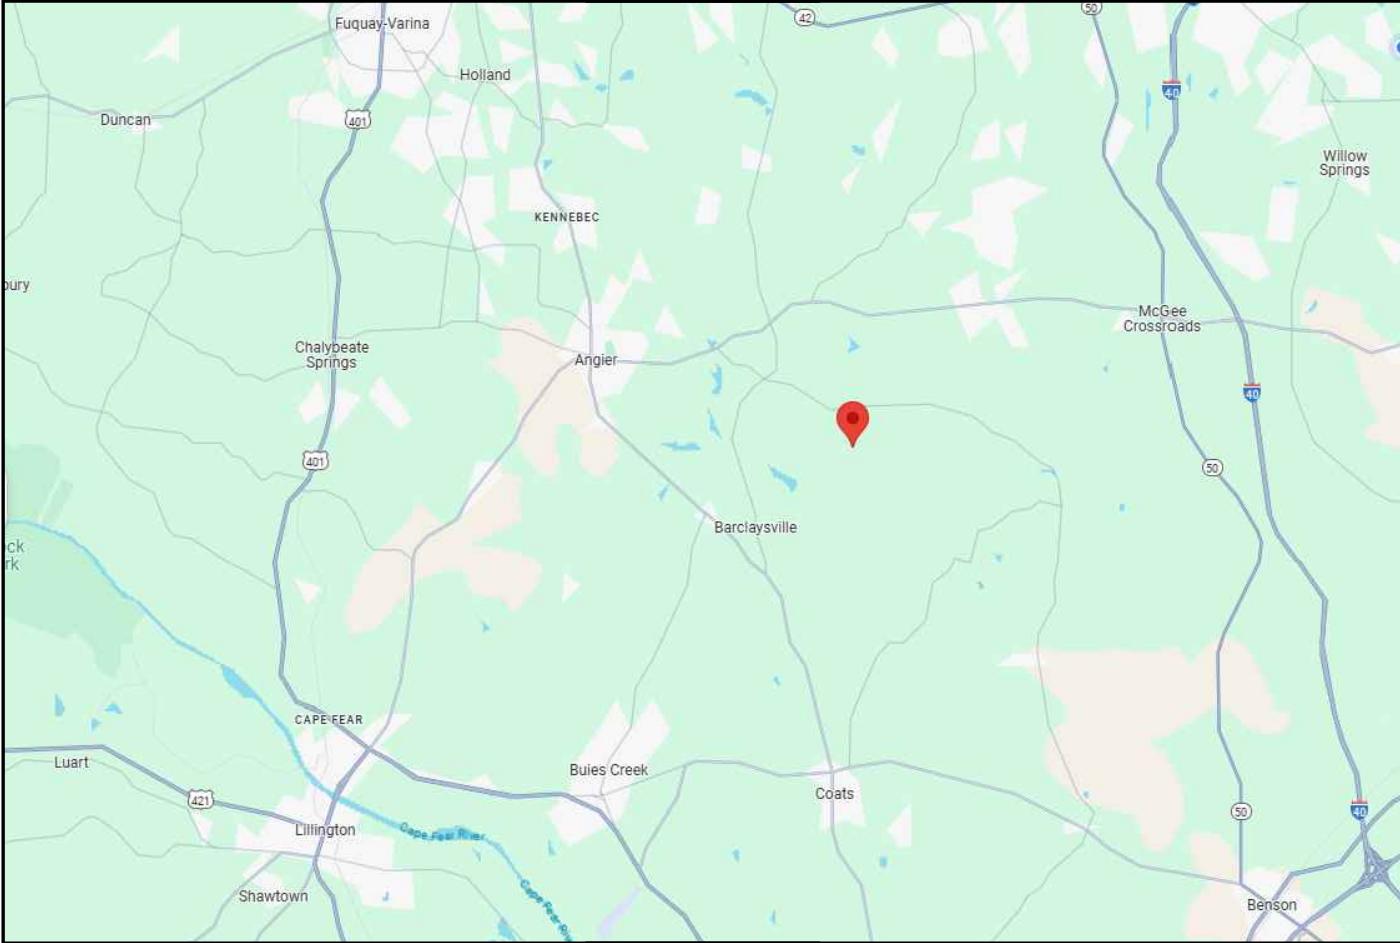


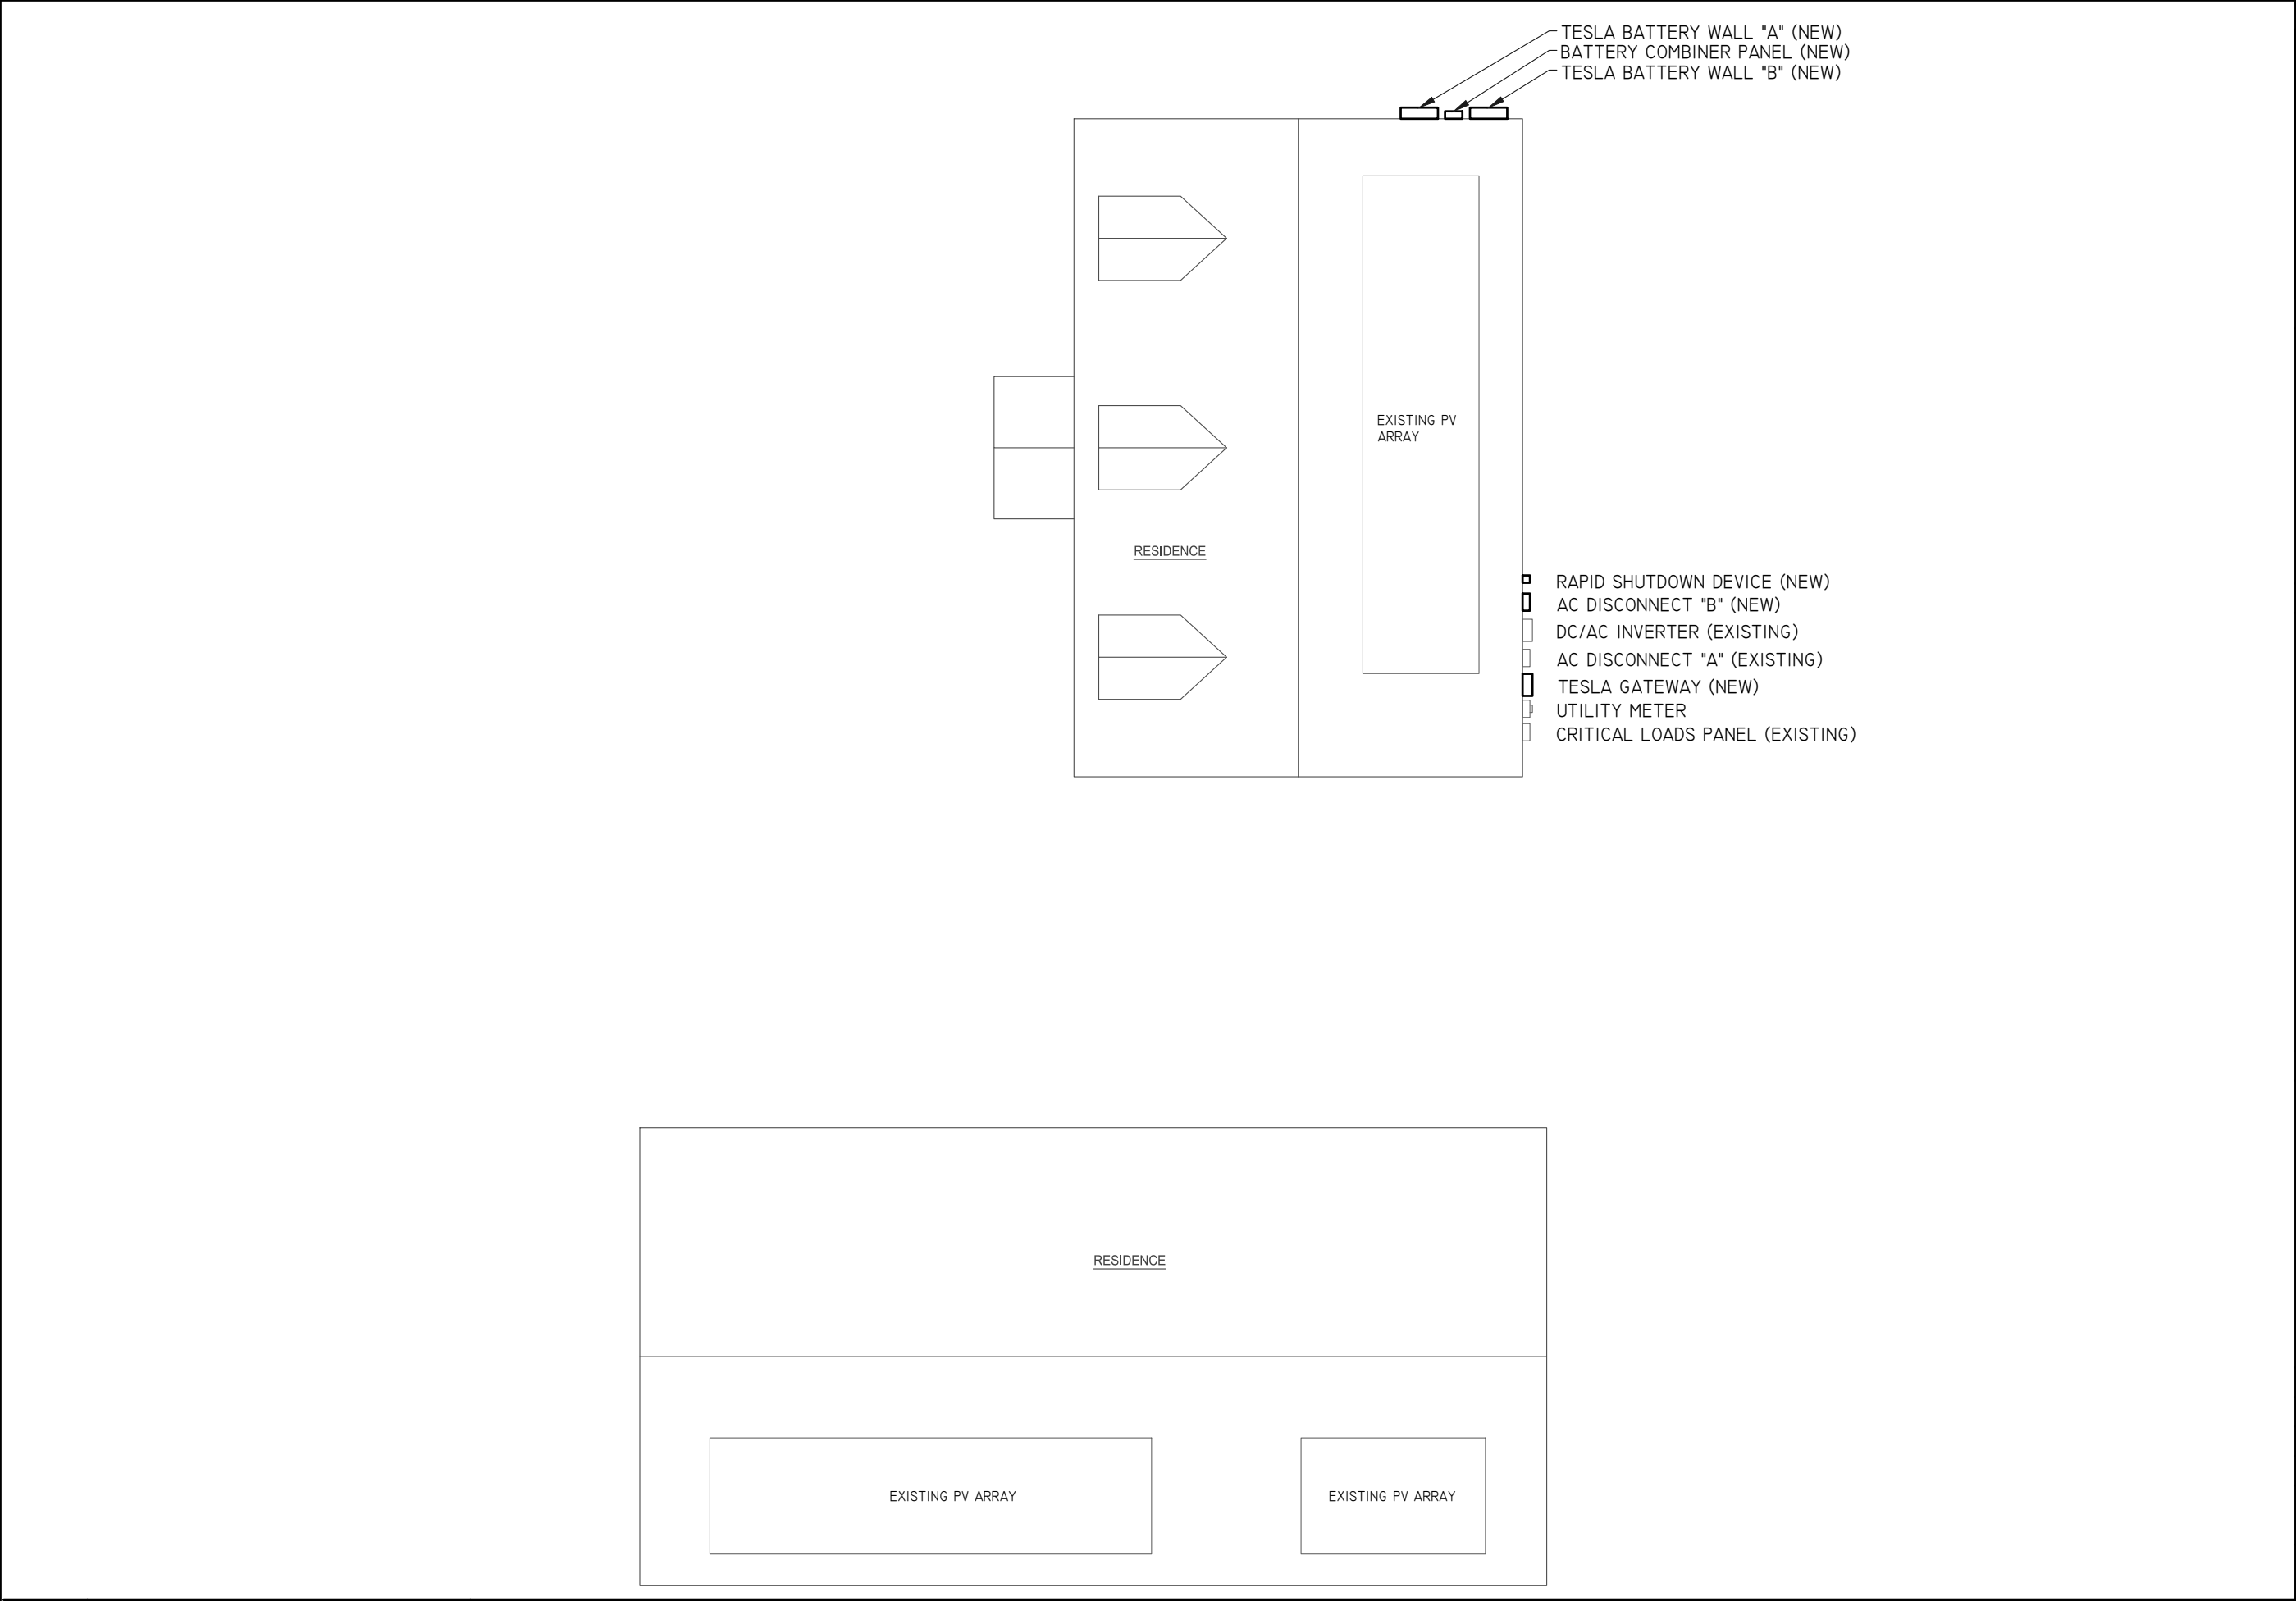


VICINITY MAP		PROPERTY MAP		SEAL:	
					
				ENGINEER:	
				MODEL ENERGY	
				300 FAYETTEVILLE ST. #1430 RALEIGH, NC 27602 919-274-9905 MODELENERGY.COM	
				P-1194	
				JOB TITLE:	
				NEW BATTERY ADDITION	
				RUTH FRAME 1296 YOUNG ROAD ANGIER, NC 27501	
CONSTRUCTION NOTES		ABBREVIATIONS		CODE REFERENCES	
<div><div><div>1. ALL WORK AND EQUIPMENT SHALL BE INSTALLED IN ACCORDANCE WITH THE LATEST NATIONAL, STATE, AND LOCAL CODES AND ORDINANCES</div><div>2. FOLLOW MANUFACTURER'S INSTALLATION INSTRUCTIONS, BEST PRACTICES, AND SPECIFICATIONS</div><div>3. WIRES SHALL BE RATED AND LABELED "SUNLIGHT RESISTANT" WHERE EXPOSED TO AMBIENT CONDITIONS</div><div>4. THE PHOTOVOLTAIC SYSTEM SHALL NOT EXCEED 600 VOLTS OR 800 AMPS</div><div>5. EACH ELECTRICAL APPLIANCE SHALL BE PROVIDED WITH A NAMEPLATE GIVING THE IDENTIFYING NAME AND THE RATING IN VOLTS AND AMPERES, OR VOLTS AND WATTS. IF THE APPLIANCE IS TO BE USED ON A SPECIFIC FREQUENCY OR FREQUENCIES, IT SHALL BE SO MARKED. WHERE MOTOR OVERLOAD PROTECTION EXTERNAL TO THE APPLIANCES IS REQUIRED, THE APPLIANCE SHALL BE SO MARKED</div><div>6. WHERE APPLICABLE, GROUNDING ELECTRODE CONDUCTOR TO BE CONTINUOUS. GROUNDING CRIMPS TO BE IRREVERSIBLE</div><div>7. IN ONE- AND TWO-FAMILY DWELLINGS, LIVE PARTS IN PHOTOVOLTAIC SOURCE CIRCUITS AND PHOTOVOLTAIC OUTPUT CIRCUITS OVER 150 VOLTS TO GROUND, SHALL ONLY BE ACCESSIBLE TO QUALIFIED PERSONS WHILE ENERGIZED.</div><div>8. PHOTOVOLTAIC SYSTEMS SHALL BE PERMANENTLY MARKED AT VARIOUS EQUIPMENT LOCATIONS TO IDENTIFY THAT A PHOTOVOLTAIC SYSTEM IS INSTALLED AND THAT VARIOUS DANGERS ARE PRESENT.</div><div>9. EACH PHOTOVOLTAIC SYSTEM DISCONNECTING MEANS SHALL BE PERMANENTLY MARKED TO IDENTIFY IT AS A PHOTOVOLTAIC SYSTEM DISCONNECT</div><div>10. WHERE ALL TERMINALS OF A DISCONNECTING MEANS MAY BE ENERGIZED IN THE OPEN POSITION, A WARNING SIGN SHALL BE MOUNTED ON OR ADJACENT TO THE DISCONNECT</div><div>11. A PERMANENT LABEL FOR THE DIRECT-CURRENT PHOTOVOLTAIC POWER SOURCE SHALL BE PROVIDED BY THE INSTALLED AT THE DC DISCONNECT MEANS</div><div>12. A PERMANENT PLAQUE OR DIRECTORY, DENOTING ALL ELECTRIC POWER SOURCES SERVING THE PREMISES, SHALL BE INSTALLED AT EACH SERVICE EQUIPMENT LOCATION AND AT LOCATIONS OF ALL POWER PRODUCTION SOURCES.</div><div>13. A PERMANENT PLAQUE OR DIRECTORY SHALL BE PROVIDED DENOTING THE LOCATIONS OF THE SERVICE DISCONNECT MEANS AND THE PHOTOVOLTAIC SYSTEM DISCONNECT MEANS IF THEY ARE NOT LOCATED AT THE SAME LOCATION.</div><div>14. ALL MODULE GROUND CONNECTIONS SHALL BE MADE IN ACCORDANCE WITH NEC SECTION 690.4 (C)</div></div></div> <div><div><div>NOTICE TO CONTRACTOR All construction must comply with current NC Building Codes and is subject to field inspection and verification.</div><div>APPROVED Limited building only review. Permit holder responsible for full compliance with the code</div><div>07/18/2025</div><div></div></div></div> <td><div><div>A AMPERE</div><div>AC ALTERNATING CURRENT</div><div>DC DIRECT CURRENT</div><div>EGC EQUIPMENT GROUNDING CONDUCTOR</div><div>EMT ELECTRICAL METAL TUBING</div><div>GALV GALVANIZED</div><div>GEC GROUNDING ELECTRODE CONDUCTOR</div><div>GND GROUND</div><div>I CURRENT</div><div>IMP CURRENT AT MAXIMUM POWER</div><div>ISC SHORT-CIRCUIT CURRENT</div><div>KVA KILOVOLT AMPERE</div><div>KW KILOWATT</div><div>MAX MAXIMUM</div><div>MIN MINIMUM</div><div>MCB MAIN CIRCUIT BREAKER</div><div>MLO MAIN LUG ONLY</div><div>NOM NOMINAL</div><div>NTS NOT TO SCALE</div><div>PNOM NOMINAL POWER</div><div>PV PHOTOVOLTAIC</div><div>PVC POLYVINYL CHLORIDE</div><div>SN SOLAR NOON</div><div>STC STANDARD TEST CONDITIONS</div><div>TYP TYPICAL</div><div>V VOLT</div><div>VMP VOLTAGE AT MAXIMUM POWER</div><div>Voc OPEN-CIRCUIT VOLTAGE</div><div>W WATT</div></div></td> <td><div><div>2017 NATIONAL ELECTRIC CODE</div><div>2018 NORTH CAROLINA BUILDING CODE</div><div>2018 NORTH CAROLINA RESIDENTIAL CODE</div><div>2018 NORTH CAROLINA FIRE CODE</div></div><div><div>SHEET INDEX</div><div><div>PV1.1 - PROJECT INFORMATION</div><div>PV2.1 - SITE INFORMATION</div><div>PV3.1 - PV3.2 - ELECTRICAL INFORMATION</div><div>PV4.1 - EQUIPMENT LABELS</div></div></div><div><div>SITE CONDITIONS</div><div><div>ASCE 7-10 WIND SPEED - 115 MPH</div><div>EXPOSURE CATEGORY - B</div><div>RISK CATEGORY - II</div></div></div><div><div>LEGEND</div><div><div> DISCONNECT SWITCH</div><div> FUSE</div><div> CIRCUIT BREAKER</div><div> EQUIP. GROUND</div></div></div></td>		<div><div>A AMPERE</div><div>AC ALTERNATING CURRENT</div><div>DC DIRECT CURRENT</div><div>EGC EQUIPMENT GROUNDING CONDUCTOR</div><div>EMT ELECTRICAL METAL TUBING</div><div>GALV GALVANIZED</div><div>GEC GROUNDING ELECTRODE CONDUCTOR</div><div>GND GROUND</div><div>I CURRENT</div><div>IMP CURRENT AT MAXIMUM POWER</div><div>ISC SHORT-CIRCUIT CURRENT</div><div>KVA KILOVOLT AMPERE</div><div>KW KILOWATT</div><div>MAX MAXIMUM</div><div>MIN MINIMUM</div><div>MCB MAIN CIRCUIT BREAKER</div><div>MLO MAIN LUG ONLY</div><div>NOM NOMINAL</div><div>NTS NOT TO SCALE</div><div>PNOM NOMINAL POWER</div><div>PV PHOTOVOLTAIC</div><div>PVC POLYVINYL CHLORIDE</div><div>SN SOLAR NOON</div><div>STC STANDARD TEST CONDITIONS</div><div>TYP TYPICAL</div><div>V VOLT</div><div>VMP VOLTAGE AT MAXIMUM POWER</div><div>Voc OPEN-CIRCUIT VOLTAGE</div><div>W WATT</div></div>	<div><div>2017 NATIONAL ELECTRIC CODE</div><div>2018 NORTH CAROLINA BUILDING CODE</div><div>2018 NORTH CAROLINA RESIDENTIAL CODE</div><div>2018 NORTH CAROLINA FIRE CODE</div></div> <div><div>SHEET INDEX</div><div><div>PV1.1 - PROJECT INFORMATION</div><div>PV2.1 - SITE INFORMATION</div><div>PV3.1 - PV3.2 - ELECTRICAL INFORMATION</div><div>PV4.1 - EQUIPMENT LABELS</div></div></div> <div><div>SITE CONDITIONS</div><div><div>ASCE 7-10 WIND SPEED - 115 MPH</div><div>EXPOSURE CATEGORY - B</div><div>RISK CATEGORY - II</div></div></div> <div><div>LEGEND</div><div><div> DISCONNECT SWITCH</div><div> FUSE</div><div> CIRCUIT BREAKER</div><div> EQUIP. GROUND</div></div></div>		
				CLIENT:	
					
				ISSUED FOR:	
				DATE:	
				CONSTRUCTION	
				06/30/25	
				PROJECT INFORMATION	
				PV1.1	

© 2025 MODEL ENERGY, PLLC EXPRESSLY RESERVES ITS COMMON LAW COPYRIGHT AND OTHER PROPERTY RIGHTS IN THESE PLANS. THESE PLANS ARE NOT TO BE REPRODUCED, CHANGED OR COPIED IN ANY FORM OR MANNER WHATSOEVER, WITHOUT THE WRITTEN PERMISSION AND CONSENT OF MODEL ENERGY, PLLC.



SEAL:

ENGINEER:

MODEL ENERGY

300 FAYETTEVILLE ST.  
#1430  
RALEIGH, NC 27602  
919-274-9905  
MODELENERGY.COM

P-1194

JOB TITLE:

NEW BATTERY ADDITION

RUTH FRAME  
1296 YOUNG ROAD  
ANGIER, NC 27501

CLIENT:

ISSUED FOR:

DATE:


CONSTRUCTION

06/30/25

SITE INFORMATION

PV2.1

© 2025 MODEL ENERGY, PLLC EXPRESSLY RESERVES ITS COMMON LAW COPYRIGHT AND OTHER PROPERTY RIGHTS IN THESE PLANS. THESE PLANS ARE NOT TO BE REPRODUCED, CHANGED OR COPIED IN ANY FORM OR MANNER WHATSOEVER, NOR ARE THEY TO BE ASSIGNED TO ANY THIRD PARTY WITHOUT FIRST OBTAINING THE EXPRESSED WRITTEN PERMISSION AND CONSENT OF MODEL ENERGY, PLLC.

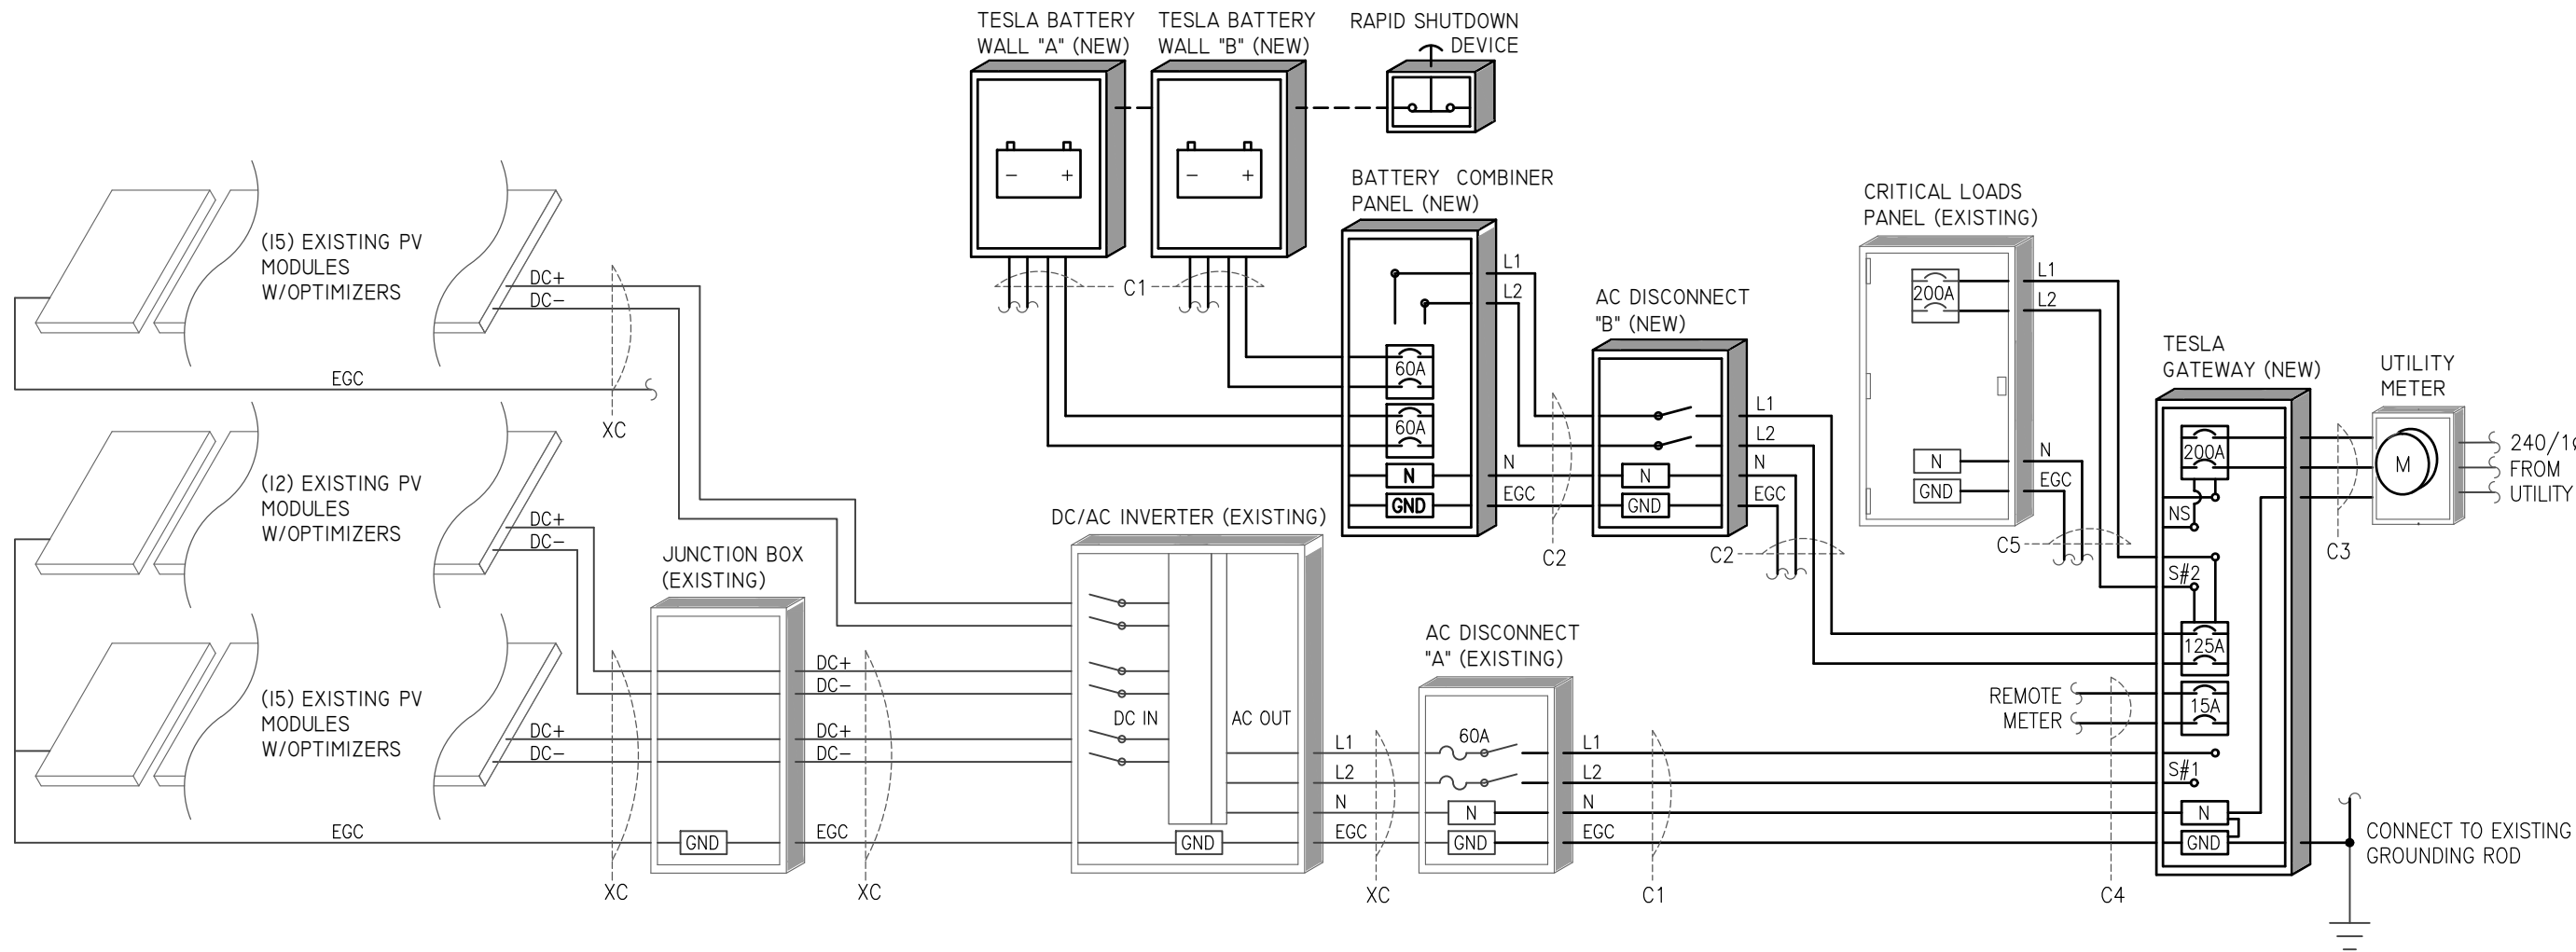

SEAL:

ENGINEER:

MODEL ENERGY

300 FAYETTEVILLE ST.  
#1430  
RALEIGH, NC 27602  
919-274-9905  
MODELENERGY.COM

P-1194

JOB TITLE:

NEW BATTERY ADDITION

RUTH FRAME  
1296 YOUNG ROAD  
ANGIER, NC 27501

CLIENT:

SOUTHERN ENERGY MANAGEMENT  
ENERGY EFFICIENCY & SOLAR POWER

ISSUED FOR: DATE:

CONSTRUCTION 06/30/25

ELECTRICAL INFORMATION

PV3.1

© 2025 MODEL ENERGY, PLLC EXPRESSLY RESERVES ITS COMMON LAW COPYRIGHT AND OTHER PROPERTY RIGHTS IN THESE PLANS. THESE PLANS ARE NOT TO BE REPRODUCED, CHANGED OR COPIED IN ANY FORM OR MANNER WHATSOEVER, NOR ARE THEY TO BE ASSIGNED TO ANY THIRD PARTY WITHOUT FIRST OBTAINING THE EXPRESSED WRITTEN PERMISSION AND CONSENT OF MODEL ENERGY, PLLC.



PV MODULES (EXISTING)	
MAKE	SOLARIA
MODEL	POWERXT-360R-PD
TECHNOLOGY	MONO-CRYST.
NOM. POWER (Pnom)	360 WATTS
NOM. VOLT. (Vmp)	39.50 VOLTS
O.C. VOLT. (Voc)	47.70 VOLTS
MAX. SYS. VOLT.	1000 V (UL)
TEMP. COEF. (Vtc)	-0.27 %/°C
NOM. CURR. (Imp)	9.13 AMPS
S.C. CURR. (Isc)	9.56 AMPS
MAX. SERIES FUSE	15 AMPS

MODULE OPTIMIZER (EXISTING)	
MAKE	SOLAREEDGE
MODEL	P370
DC INPUT:	
RATED POWER	370 WATTS
VOLT. RANGE	8-60
MAX. SCC	11.0 AMPS
MAX. DC INPUT CURRENT	13.75 AMPS
DC OUTPUT:	
MAX. CURRENT	15 AMPS
MAX. VOLT.	60 VOLTS
MAX. SYSTEM VOLT.	1000 VOLTS
MIN. STRING	8 OPTIMIZERS
MAX. STRING	25 OPTIMIZERS
MAX. POWER	
INVERTERS: SE3000H-SE6000H	5700 WATTS
INVERTERS: SE7600H-SE11400H	6000 WATTS

JUNCTION BOX (EXISTING)	
MAKE	SOLADECK
MODEL	0783-3R
PRO. RATING	NEMA 3R
VOLT. RATING	600 VOLTS
AMP RATING	120 AMPS
UL LISTING	UL 50

DC/AC INVERTER (EXISTING)	
MAKE	SOLAREEDGE
MODEL	SE11400H-US
TECHNOLOGY	TRANS-LESS
DC INPUT:	
MAX. POWER	17650 WATTS
MAX. VOLT	480 VOLTS
NOM. VOLT.	400 VOLTS
MAX. CURRENT	30.5 AMPS
MAX. SCC	45 AMPS
STRINGS INPUTS	3 STRINGS
AC OUTPUT:	
RATED POWER	11400 WATTS
MAX. POWER	11400 WATTS
NOM. VOLT.	240 VOLTS
MAX. CURR.	47.5 AMPS
GFP (Y/N)	YES
RPP (Y/N)	YES
GFCI (Y/N)	YES
AFCI (Y/N)	YES
DC DISC. (Y/N)	YES
RAPID SHUTDOWN	AUTOMATIC
PROTECT. RATING	NEMA 4X

DC/AC INVERTER & BATTERY "A"&"B" (NEW)	
MAKE	POWERWALL3
MODEL #	I707000-XX-Y
TECHNOLOGY	TRANS-LESS
NOMINAL BATTERY ENERGY	13.5 kWh
DC INPUT:	
MAX. POWER	20000 WATTS
MAX. VOLT	600 vdc
NOM. VOLT.	60-550 vdc
MAX. CURRENT	13 AMPS
MAX. SCC	15 AMPS
STRINGS INPUTS	6 STRINGS
AC OUTPUT:	
MAX CONT. DISCHARGE POWER	11500 WATTS
MAX CONT. CHARGE POWER	5000 WATTS
NOM. VOLT.	240 VOLTS
MAX. CURR.	48 AMPS
GFP (Y/N)	YES
RPP (Y/N)	YES
GFCI (Y/N)	YES
AFCI (Y/N)	YES
DC DISC. (Y/N)	YES
RAPID SHUTDOWN	AUTOMATIC
PROTECT. RATING	NEMA 4X

CONDUCTOR SCHEDULE													
TAG	CURRENT CARRYING CONDUCTORS				GROUNDING CONDUCTORS				CONDUIT/RACEWAY				NOTES
	QTY.	SIZE	MATERIAL	INSULATION	QTY.	SIZE	MATERIAL	INSULATION	QTY.	SIZE	MATERIAL	LOCATION	
C1	3	6 AWG	COPPER	THWN	1	10 AWG	COPPER	THWN	1	3/4"	NOTE 5	INT/EXT	2,4,5
C2	3	2/0	ALUMINUM	THHN	1	1 AWG	ALUMINUM	THHN	1	3/4",3/4",1"	SER	INT/EXT	2,4,5
C3	3	4/0	ALUMINUM	XHHW-2	1	2/0	ALUMINUM	XHHW-2	1	3/4",3/4",3/4"	SER	INT/EXT	2,4,5
C4	3	12 AWG	COPPER	THWN	1	12 AWG	COPPER	THWN	1	1/2"	NOTE 5	INT/EXT	2,4,5
C5	3	4/0	ALUMINUM	XHHW	1	-	-	-	1	2"	NOTE 5	INT/EXT	2,4,5
XC	-	-	-	-	-	-	-	-	-	-	-	-	3

NOTES:

- MANUFACTURER PROVIDED, UL LISTED WIRING HARNESS FOR USE ON EXPOSED ROOFS
- CONDUIT SIZE SHOWN IS CODE MINIMUM. LARGER SIZES ARE ALLOWED.
- EXISTING CONDUCTORS, FIELD VERIFY
- EQUIPMENT TERMINAL RATING SHALL BE A MINIMUM OF 75°C AT BOTH END OF CONDUCTOR
- PVC, EMT, ROMEX, LFNMC & FMC ARE ACCEPTABLE WHEN USED IN ACCORDANCE WITH ARTICLES 330, 334, 348, 350, 352, 356, & 358 OF THE 2017 NEC

POWER MANAGEMENT SYSTEM (NEW)	
MAKE	TESLA
MODEL	BACKUP GATEWAY
AC VOLTAGE	240 VOLTS
MAX. AC CURR.	200 AMPS
PROTECT. RATING	NEMA 3R
FUSED (Y/N)	YES
FUSE RATING	200 AMPS

NOTES:

- MAIN BREAKER SERVES AS SERVICE DISCONNECT SWITCH.
- CONNECT CRITICAL LOADS PANEL VIA GATEWAY OUTPUTS.
- GATEWAY INTERNAL PANEL (GENERATION OPTION) INSTALLED.
- BACK-FEED BATTERY COMBINER OUTPUT VIA (1) 125A BREAKER IN GATEWAY PANEL.
- CONNECT REMOTE METER VIA (1) 15A BREAKER IN GATEWAY PANEL.
- PCS IN GATEWAY SET TO NO EXPORT OF BATTERY POWER.
- SERVICE DISCONNECT LABEL
- PROVIDE N/G BOND
- PROVIDE GEC

CRITICAL LOADS PANEL (EXISTING)	
MAKE	N/A
MODEL	N/A
ENCL. RATING	NEMA 3R
VOLT. RATING	240 VOLTS
BUS RATING	200 AMPS
UL LIST. (Y/N)	YES
MAIN BREAKER (Y/N)	YES
BREAKER RATING	200 AMPS

NOTES:

- REMOVE SERVICE DISCONNECT LABEL
- REMOVE N/G BOND
- REMOVE GEC

BATTERY COMBINER PANEL (NEW)	
MAKE	N/A
MODEL	N/A
ENCL. RATING	NEMA 3R
VOLT. RATING	240 VOLTS
BUS RATING	125 AMPS
UL LIST. (Y/N)	YES
MAIN BREAKER (Y/N)	NO
BREAKER RATING	N/A

NOTES:

- BATTERY COMBINER OUTPUT VIA (2) 60 AMP BREAKERS AT THE OPPOSITE END OF THE BUS BAR FROM THE INCOMING FEEDERS.
- PROVIDE WITH PERMANENT LABEL THAT READS, "FED BY MULTIPLE POWER SOURCES".


AC DISCONNECT "A" (EXISTING)	
MAKE	EATON
MODEL	N/A
ENCL. RATING	NEMA 3R
VOLT. RATING	240 VOLTS
AMP RATING	60 AMPS
UL LIST. (Y/N)	YES
FUSED (Y/N)	YES
FUSE RATING	60 AMPS

AC DISCONNECT "B" (NEW)	
MAKE	EATON
MODEL	N/A
ENCL. RATING	NEMA 3R
VOLT. RATING	240 VOLTS
AMP RATING	200 AMPS
UL LIST. (Y/N)	YES
FUSED (Y/N)	NO
FUSE RATING	N/A


NOTES:

- LOAD-BREAK RATED
- VISIBLE OPEN
- LOCKABLE IN OPEN POSITION
- INSTALL ADJACENT TO METER
- DISCONNECT TO BE READILY ACCESSIBLE TO UTILITY COMPANY PERSONNEL AT ALL TIMES

SEAL:



ENGINEER:



MODEL ENERGY  
300 FAYETTEVILLE ST.  
#1430  
RALEIGH, NC 27602  
919-274-9905  
MODELENERGY.COM

P1194

JOB TITLE:

NEW BATTERY ADDITION

RUTH FRAME  
1296 YOUNG ROAD  
ANGIER, NC 27501

CLIENT:



SOUTHERN  
ENERGY  
MANAGEMENT  
ENERGY EFFICIENCY & SOLAR POWER

ISSUED FOR:	DATE:
CONSTRUCTION	06/30/25


--	--

ELECTRICAL  
INFORMATION

PV3.2

SOLAR PV SYSTEM EQUIPPED WITH RAPID SHUTDOWN

TURN RAPID SHUTDOWN SWITCH TO THE "OFF" POSITION TO SHUT DOWN PV SYSTEM AND REDUCE SHOCK HAZARD IN THE ARRAY

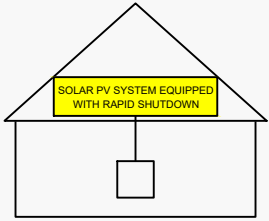

NEC 690.56 (C)(1)(a)  
PLACE WITHIN 3FT OF SERVICE DISCONNECTING MEANS TO WHICH THE PV SYSTEMS ARE CONNECTED AND SHALL INDICATE THE LOCATIONS OF RAPID SHUTDOWN SWITCHES

WARNING: PHOTOVOLTAIC POWER SOURCE

NEC 690.31 (G)(3)&(4)  
PLACE ON ALL JUNCTION BOXES, EXPOSED RACEWAYS, AND OTHER WIRING METHODS EVERY 10' AND ON EVERY SECTION SEPARATED BY ENCLOSURES, WALLS, PARTITIONS, CEILINGS, OR FLOORS.

RAPID SHUTDOWN SWITCH FOR SOLAR PV SYSTEM

NEC 690.56 (C)(3)  
PLACE ON RAPID SHUTDOWN SWITCH OR EQUIPMENT WITH INTEGRATED RAPID SHUTDOWN \*REFLECTIVE\*

WARNING  
MULTIPLE POWER SOURCES ONSITE  
UTILITY SERVICE DISCONNECT LOCATED

NEC 705.10  
PLACE AT SERVICE EQUIPMENT AND PV SYSTEM DISCONNECT MEANS

PV SYSTEM DISCONNECT

NEC 690.13 (B)  
PLACE ON PV SYSTEM DISCONNECTING MEANS.

WARNING  
THREE POWER SUPPLY SOURCES: UTILITY GRID, BATTERY, AND PV SOLAR ELECTRIC SYSTEM

NEC 705.12 (B)(3)  
PLACE ON ALL EQUIPMENT THAT IS SUPPLIED BY BOTH POWER SOURCES

PCS CONTROLLED  
CURRENT SETTING: 200 AMPS

THE MAXIMUM OUTPUT CURRENT FROM THIS SYSTEM TOWARDS THE MAIN PANEL IS CONTROLLED ELECTRICALLY. REFER TO THE MANUFACTURER'S INSTRUCTIONS FOR MORE INFORMATION.

NEC 705.13  
PLACE ON PANELS CONNECTED TO GATEWAY

WARNING

FED BY MULTIPLE POWER SOURCES

TOTAL RATING OF ALL OVERCURRENT DEVICES EXCLUDING UTILITY OVERCURRENT DEVICE SHALL NOT EXCEED AMPACITY OF BUSBAR

NEC 705.12 (B)(2)(3)(c)  
PLACE ADJACENT TO BACK-FED BREAKER

EQUIPMENT LABEL NOTES	
1.	LABELS SHOWN ARE 1/2 THEIR ACTUAL REQUIRED SIZE.
2.	LABEL MATERIAL SHALL BE SUITABLE FOR THE EQUIPMENT ENVIRONMENT.
3.	CONDUIT SHALL BE MARKED WITH REQUIRED LABEL EVERY 10 FEET.

WARNING


ELECTRIC SHOCK HAZARD  
TERMINALS ON THE LINE AND LOAD SIDES MAY BE ENERGIZED IN THE OPEN POSITION

NEC 690.13 (B)  
PLACE ON PV SYSTEM DISCONNECTING MEANS.

WARNING

POWER SOURCE  
OUTPUT CONNECTION  
DO NOT RELOCATE THIS  
OVERCURRENT DEVICE

NEC 705.12 (B)(2)(3)(b)  
PLACE ADJACENT TO BACK-FED BREAKER



ENGINEER:

MODEL ENERGY

300 FAYETTEVILLE ST.  
#1430  
RALEIGH, NC 27602  
919-274-9905  
MODELENERGY.COM


P-1194

JOB TITLE:

NEW BATTERY ADDITION

RUTH FRAME  
1296 YOUNG ROAD  
ANGIER, NC 27501

CLIENT:



ISSUED FOR:	DATE:
CONSTRUCTION	06/30/25

EQUIPMENT LABELS	

PV4.1

# Powerwall 3

## Power Everything

Powerwall 3 is a fully integrated solar and battery system, designed to accelerate the transition to sustainable energy. Customers can receive whole home backup, cost savings, and energy independence by producing and consuming their own energy while participating in grid services. Once installed, customers can manage their system using the Tesla App to customize system behavior to meet their energy goals.

Powerwall 3 achieves this by supporting up to 20 kW DC of solar and providing 11.5 kW AC of continuous power per unit. It has the ability to start heavy loads up to 150 A LRA, meaning a single unit can support the power needs of most homes. Powerwall 3 is designed for mass production, fast and efficient installations, easy system expansion, and simple connection to any electrical service.



# Powerwall 3 Technical Specifications

## System Technical Specifications

Model Number	1707000-xx-y
Nominal Grid Voltage (Input & Output)	120/240 VAC
Grid Type	Split phase
Frequency	60 Hz
Overcurrent Protection Device	Configurable up to 60 A
Solar to Battery to Grid Round Trip Efficiency	89% <sup>1,2</sup>
Solar to Grid Efficiency	97% <sup>3</sup>
Supported Islanding Devices	Backup Gateway 2, Backup Switch
Connectivity	Wi-Fi (2.4 and 5 GHz), Dual-port switched Ethernet, Cellular (LTE/4G <sup>4</sup> )
Hardware Interface	Dry contact relay, Rapid Shutdown (RSD) certified switch and 2-pin connector, RS-485 for meters
AC Metering	Revenue Grade (+/- 0.5%)
Protections	Integrated arc fault circuit interrupter (AFCI), Isolation Monitor Interrupter (IMI), PV Rapid Shutdown (RSD) using Tesla Mid-Circuit Interrupters
Customer Interface	Tesla Mobile App
Warranty	10 years

## Solar Technical Specifications

Maximum Solar STC Input	20 kW
Withstand Voltage	600 V DC
PV DC Input Voltage Range	60 — 550 V DC
PV DC MPPT Voltage Range	150 — 480 V DC
MPPTs	6
Maximum Current per MPPT ( $I_{mp}$ )	13 A <sup>5</sup>
Maximum Short Circuit Current per MPPT ( $I_{sc}$ )	15 A <sup>5</sup>

## Battery Technical Specifications

Nominal Battery Energy	13.5 kWh AC <sup>2</sup>
Maximum Continuous Discharge Power	11.5 kW AC
Maximum Continuous Charge Power	5 kW AC
Output Power Factor Rating	0 - 1 (Grid Code configurable)
Maximum Continuous Current	48 A
Maximum Output Fault Current	10 kA
Load Start Capability (1 s)	150 A LRA
Power Scalability	Up to 4 Powerwall 3 units supported

<sup>1</sup> Typical solar shifting use case.

<sup>2</sup> Values provided for 25°C (77°F), at beginning of life. 3.3 kW charge/discharge power.

<sup>3</sup> Tested using CEC weighted efficiency methodology.

<sup>4</sup> Cellular connectivity subject to network service coverage and signal strength.

<sup>5</sup> Where the DC input current exceeds the MPPT rating, a jumper can be used to combine two MPPTs into a single input to intake DC current up to 26 A  $I_{mp}$  / 30 A  $I_{sc}$ .


# Powerwall 3 Technical Specifications

Environmental Specifications	Operating Temperature	-20°C to 50°C (-4°F to 122°F) <sup>6</sup>
	Operating Humidity (RH)	Up to 100%, condensing
	Storage Temperature	-20°C to 30°C (-4°F to 86°F), up to 95% RH, non-condensing, State of Energy (SOE): 25% initial
	Maximum Elevation	3000 m (9843 ft)
	Environment	Indoor and outdoor rated
	Enclosure Rating	NEMA 3R
	Ingress Rating	IPX7 (Battery & Power Electronics) IPX5 (Wiring Compartment)
	Pollution Rating	PD3
	Operating Noise @ 1 m	< 50 db(A) typical < 62 db(A) maximum

<sup>6</sup> Performance may be de-rated at operating temperatures above 40°C (104°F).

Compliance Information	Certifications	UL 1642, UL 1699B, UL 1741, UL 1741 SA, UL 1741 SB, UL 3741, UL 1973, UL 1998, UL 9540, IEEE 1547-2018, IEEE 1547.1, UN 38.3
	Grid Connection	United States
	Emissions	FCC Part 15 Class B
	Environmental	RoHS Directive 2011/65/EU
	Seismic	AC156, IEEE 693-2005 (high)
	Fire Testing	Meets the unit level performance criteria of UL 9540A

Mechanical Specifications	Dimensions	1099 x 609 x 193 mm (43.25 x 24 x 7.6 in)
	Weight	130 kg (287 lb)
	Mounting Options	Floor or wall mount

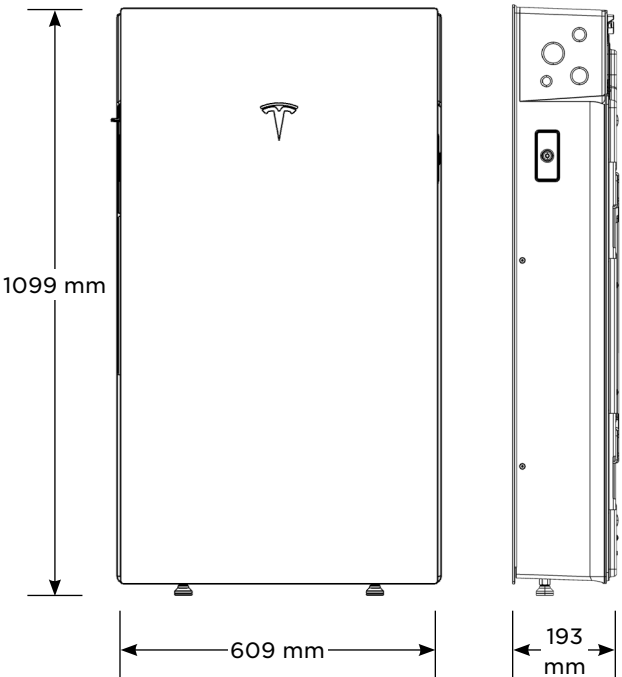



# Solar Shutdown Device Technical Specifications

The Solar Shutdown Device is a Mid-Circuit Interrupter (MCI) and is part of the PV system rapid shutdown (RSD) function in accordance with Article 690 of the applicable NEC. When paired with Powerwall 3, solar array shutdown is initiated by any loss of AC power.

Electrical Specifications	Model	MCI-1	MCI-2
	Nominal Input DC Current Rating ( $I_{MP}$ )	12 A	13 A
	Maximum Input Short Circuit Current ( $I_{SC}$ )	19 A	17 A
	Maximum System Voltage (PVHCS)	600 V DC	1000 V DC <sup>7</sup>
<sup>7</sup> Maximum System Voltage is limited by Powerwall to 600 V DC.			
RSD Module Performance	Maximum Number of Devices per String	5	5
	Control	Power Line Excitation	Power Line Excitation
	Passive State	Normally Open	Normally Open
	Maximum Power Consumption	7 W	7 W
	Warranty	25 years	25 years
Environmental Specifications	Operating Temperature	-40°C to 50°C (-40°F to 122°F)	-45°C to 70°C (-49°F to 158°F)
	Storage Temperature	-30°C to 70°C (-22°F to 158°F)	-30°C to 70°C (-22°F to 158°F)
	Enclosure Rating	NEMA 4X / IP65	NEMA 4X / IP65
Mechanical Specifications	Electrical Connections	MC4 Connector	MC4 Connector
	Housing	Plastic	Plastic
	Dimensions	125 x 150 x 22 mm (5 x 6 x 1 in)	173 x 45 x 22 mm (6.8 x 1.8 x 1 in)
	Weight	350 g (0.77 lb)	120 g (0.26 lb)
	Mounting Options	ZEP Home Run Clip M4 Screw (#10) M8 Bolt (5/16") Nail / Wood screw	Wire Clip
Compliance Information	Certifications	UL 1741 PVRSE, UL 3741, PVRSA (Photovoltaic Rapid Shutdown Array)	
	RSD Initiation Method	External System Shutdown Switch or Powerwall 3 Enable Switch	

## UL 3741 PV Hazard Control (and PVRSA) Compatibility

The following categories of solar module meet the UL 3741 PVHCS listing when installed with Powerwall 3 and Solar Shutdown Devices.

Tesla Solar Roof	<a href="#">PV Hazard Control System: BIPV compliance document</a>
Tesla or Hanwha (Q.Peak Duo BLK or BLK-G6+) Modules certified for use with ZEP racking	<a href="#">PV Hazard Control System: ZS PVHCS compliance document</a>
Other module and racking combinations	<a href="#">PV Hazard Control System: Generic PV Array compliance document</a>

# Backup Gateway 2

Backup Gateway 2 controls connection to the grid when paired with Powerwall 3, automatically detecting outages and providing seamless transition to backup power. Backup Gateway 2 also provides energy metering for solar self-consumption, time-based control, and backup operation.


In this system configuration, Powerwall 3 acts as the Site Controller, with the Backup Gateway 2 Site Controller disabled.

Performance Specifications	Model Number	1232100-xx-y	User Interface	Tesla App
	AC Voltage (Nominal)	120/240 V	Operating Modes	Support for solar self-consumption, time-based control, and backup
	Feed-in Type	Split phase	Backup Transition	Automatic disconnect for seamless backup
	Grid Frequency	60 Hz	Modularity	Supports up to 10 AC-coupled Powerwalls
	Current Rating	200 A	Optional Internal Panelboard	200 A 6-space / 12 circuit breakers Siemens QP or Square D HOM breakers rated 10 - 80A or Eaton BR breakers rated 10 - 125A
	Maximum Supply Short Circuit Current	10 kA <sup>8</sup>	Warranty	10 years
	Overcurrent Protection Device	100 - 200 A, Service entrance rated <sup>8</sup>	<sup>8</sup> When protected by Class J fuses, Backup Gateway 2 is suitable for use in circuits capable of delivering not more than 22kA symmetrical amperes.	
	Overvoltage Category	Category IV	<sup>9</sup> The customer is expected to provide internet connectivity for Backup Gateway 2; cellular should not be used as the primary mode of connectivity. Cellular connectivity subject to network operator service coverage and signal strength.	
	Internal Primary AC Meter	Revenue accurate (+/- 0.2%)		
	Internal Auxiliary AC Meter	Revenue accurate (+/- 2%)		

Environmental Specifications	Operating Temperature	-20°C to 50°C (-4°F to 122°F)
	Operating Humidity (RH)	Up to 100%, condensing
	Maximum Elevation	3000 m (9843 ft)
	Environment	Indoor and outdoor rated
	Enclosure Type	NEMA 3R

Compliance Information	Certifications	UL 67, UL 869A, UL 916, UL 1741 PCS, CSA 22.2 0.19, CSA 22.2 205
	Emmissions	FCC Part 15, ICES 003

Mechanical Specifications	Dimensions	660 x 411 x 149 mm (26 x 16 x 6 in)
	Weight	20.4 kg (45 lb)
	Mounting options	Wall mount, Semi-flush mount

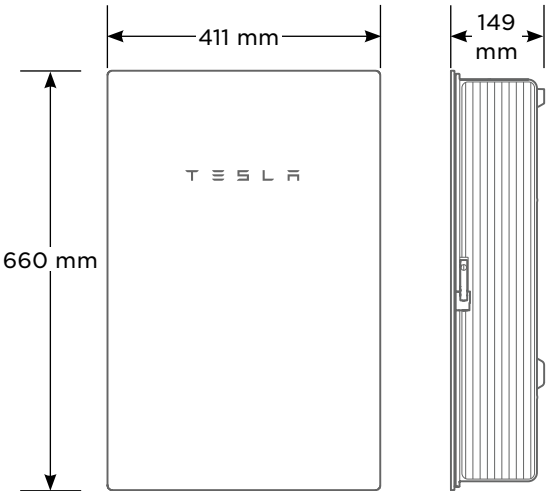

# Backup Switch

The Tesla Backup Switch controls connection to the grid in a Powerwall system, and can be easily installed behind the utility meter or in a standalone meter panel downstream of the utility meter.

The Backup Switch automatically detects grid outages, providing a seamless transition to backup power. It communicates directly with Powerwall, allowing home energy usage monitoring from any mobile device with the Tesla app.

Performance Specifications	Model Number	1624171-xx-y
	Continuous Load Rating	200 A, 120/240 V split phase
	Maximum Supply Short Circuit Current	22 kA with breaker <sup>10</sup>
	Communication	CAN
	AC Meter	Revenue accurate (+/- 0.5%)
	Expected Service Life	21 years
	Warranty	10 years


<sup>10</sup> Breaker maximum supply short circuit current rating must be equal to or greater than the available fault current.

Environmental Specifications	Operating Temperature	-40°C to 50°C (-40°F to 122°F)
	Storage Temperature	-40°C to 85°C (-40°F to 185°F)
	Enclosure Rating	NEMA 3R
	Pollution Rating	PD3

Compliance Information	Safety Standards	USA: UL 414, UL 2735, UL 916, CA Prop 65
	Emmissions	FCC, ICES

Mechanical Specifications	Dimensions	176 x 205 x 74 mm (6.9 x 8.1 x 2.9 in)
	Weight	2.8 lb
	Meter and Socket Compatibility	ANSI Type 2S, ringless or ring type
	External Service Interface	Contactor manual override <sup>11</sup> Reset button
	Conduit Compatibility	1/2-inch NPT


<sup>11</sup> Manually overrides the contactor position during a service event.

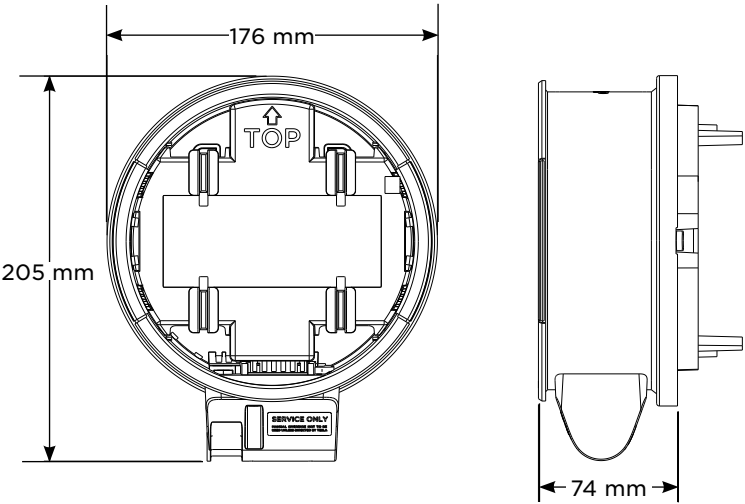

# Powerwall 3 Example System Configurations

## Powerwall 3 with Backup Switch

Whole Home Backup

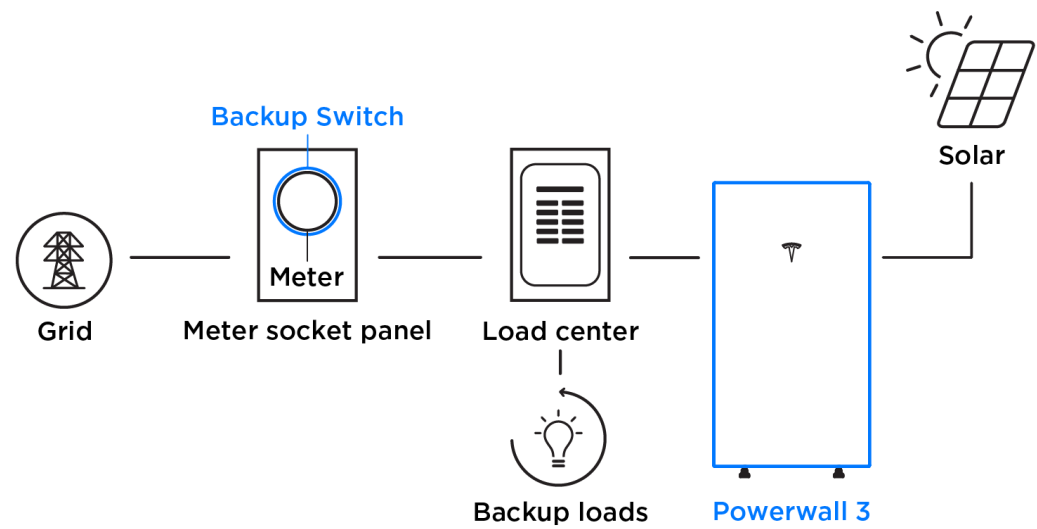

## Powerwall 3 with Backup Gateway 2

Partial Home Backup

