

Trenco
818 Soundside Rd
Edenton, NC 27932

Re: 3466766
CHESAPEAKE HOMES - PLAN 2343 A w/ 3rd GARAGE - 2nd FLR

The truss drawing(s) referenced below have been prepared by Truss Engineering Co. under my direct supervision based on the parameters provided by Stock Building Supply.

Pages or sheets covered by this seal: T30361341 thru T30361353

My license renewal date for the state of North Carolina is December 31, 2023.

North Carolina COA: C-0844



April 19, 2023

O'Regan, Philip

IMPORTANT NOTE: The seal on these truss component designs is a certification that the engineer named is licensed in the jurisdiction(s) identified and that the designs comply with ANSI/TPI 1. These designs are based upon parameters shown (e.g., loads, supports, dimensions, shapes and design codes), which were given to MiTek or TRENCO. Any project specific information included is for MiTek's or TRENCO's customers file reference purpose only, and was not taken into account in the preparation of these designs. MiTek or TRENCO has not independently verified the applicability of the design parameters or the designs for any particular building. Before use, the building designer should verify applicability of design parameters and properly incorporate these designs into the overall building design per ANSI/TPI 1, Chapter 2.


| | | | | | |
|----------------|-------------|---------------------|----------|----------|---|
| Job 3466766 | Truss F1 | Truss Type Floor | Qty 9 | Ply 1 | CHESAPEAKE HOMES - PLAN 2343 A w/ 3rd GARAGE T30361341 Job Reference (optional) |
|----------------|-------------|---------------------|----------|----------|---|

Builders FirstSource (Middlesex, NC), Middlesex, NC - 27557,

Run: 8.63 S Nov 19 2022 Print: 8.630 S Nov 19 2022 MiTek Industries, Inc. Wed Apr 19 09:49:25

Page: 1

ID:YWJywHlbtMZKC4uTd?nNwzczi-RfC?PsB70Hq3NSgPqnL8w3uITXbGKwCrCDoi7J4zJC?f

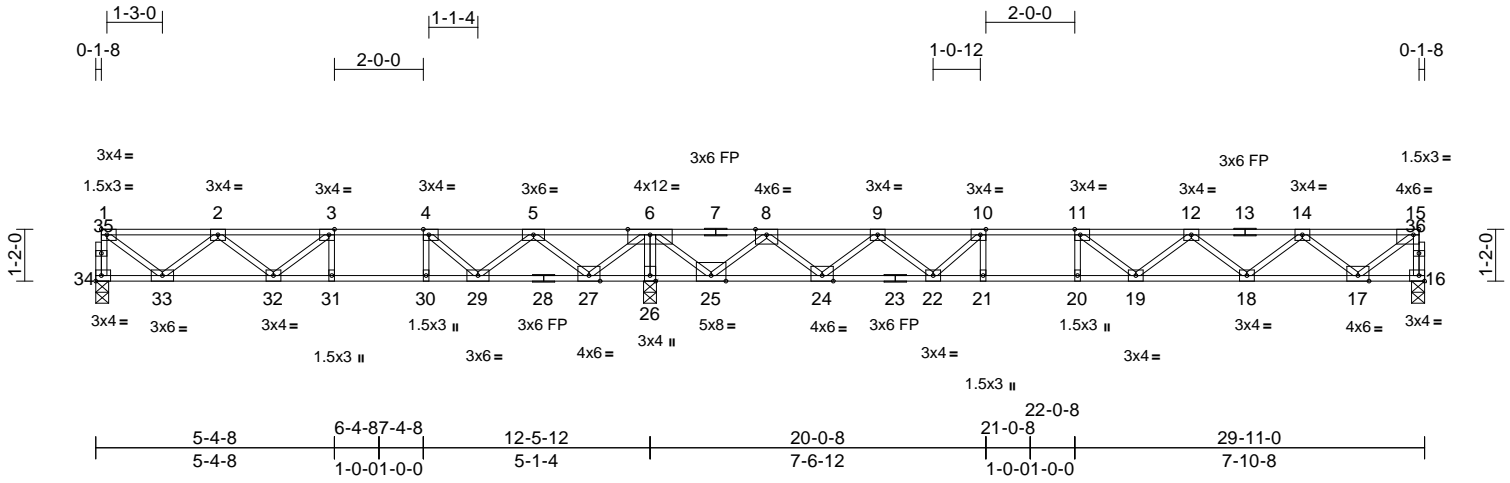

Scale = 1:51.9

Plate Offsets (X, Y): [3:0-1-8,Edge], [4:0-1-8,Edge], [10:0-1-8,Edge], [11:0-1-8,Edge], [15:0-1-8,Edge]

| Loading | (psf) | Spacing | 2-0-0 | CSI | DEFL | in | (loc) | l/defl | L/d | PLATES | GRIP |
|---------|-------|-----------------|-----------------|----------|------|----------|-------|--------|------|--------|--------------------------------|
| TCLL | 40.0 | Plate Grip DOL | 1.00 | TC | 0.79 | Vert(LL) | -0.25 | 19-20 | >835 | 480 | MT20 244/190 |
| TCDL | 10.0 | Lumber DOL | 1.00 | BC | 0.91 | Vert(CT) | -0.34 | 19-20 | >613 | 360 | |
| BCLL | 0.0 | Rep Stress Incr | YES | WB | 0.73 | Horz(CT) | 0.04 | 16 | n/a | n/a | |
| BCDL | 5.0 | Code | IRC2015/TPI2014 | Matrix-S | | | | | | | Weight: 147 lb FT = 20%F, 11%E |

LUMBER

| | |
|-----------|---|
| TOP CHORD | 2x4 SP No.2(flat) |
| BOT CHORD | 2x4 SP No.1(flat) *Except* 28-23:2x4 SP No.2(flat), 23-16:2x4 SP SS(flat) |
| WEBS | 2x4 SP No.3(flat) |
| OTHERS | 2x4 SP No.3(flat) |

BRACING

| | |
|-----------|--|
| TOP CHORD | Structural wood sheathing directly applied or 5-7-14 oc purlins, except end verticals. |
| BOT CHORD | Rigid ceiling directly applied or 6-0-0 oc bracing. |

REACTIONS (size) 16=0-3-8, 26=0-3-8, 34=0-3-8
 Max Grav 16=844 (LC 4), 26=1936 (LC 1), 34=591 (LC 3)

FORCES (lb) - Maximum Compression/Maximum Tension

| | |
|-----------|--|
| TOP CHORD | 1-34=-583/0, 15-16=-839/0, 1-2=-645/0, 2-3=-1398/64, 3-4=-1494/312, 4-5=-1042/686, 5-6=0/1284, 6-8=0/878, 8-9=-1406/12, 9-10=-2577/0, 10-11=-3068/0, 11-12=-3011/0, 12-14=-2344/0, 14-15=-974/0 |
| BOT CHORD | 33-34=0/35, 32-33=0/1211, 31-32=-312/1494, 30-31=-312/1494, 29-30=-312/1494, 27-29=-986/615, 26-27=-2100/0, 25-26=-2100/0, 24-25=-273/647, 22-24=0/2120, 21-22=0/3068, 20-21=0/3068, 19-20=0/3068, 18-19=0/2842, 17-18=0/1826, 16-17=0/50 |
| WEBS | 6-26=-1902/0, 10-21=-14/341, 11-20=-283/43, 3-31=-282/0, 4-30=0/332, 1-33=0/779, 2-33=-736/0, 2-32=-130/243, 3-32=-123/317, 6-27=0/1154, 5-27=-1052/0, 5-29=0/734, 4-29=-907/0, 6-25=0/1533, 8-25=-1441/0, 8-24=0/1038, 9-24=-976/0, 9-22=0/658, 10-22=-867/0, 15-17=0/1179, 14-17=-1109/0, 14-18=0/675, 12-18=-648/0, 12-19=0/289, 11-19=-291/254 |

NOTES

- Unbalanced floor live loads have been considered for this design.
 - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
 - Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - CAUTION, Do not erect truss backwards.
- LOAD CASE(S)** Standard



April 19, 2023

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




818 Soundside Road
Edenton, NC 27932

| | | | | | |
|----------------|-------------|---------------------|----------|----------|---|
| Job 3466766 | Truss F2 | Truss Type Floor | Qty 1 | Ply 1 | CHESAPEAKE HOMES - PLAN 2343 A w/ 3rd GARAGE T30361342 Job Reference (optional) |
|----------------|-------------|---------------------|----------|----------|---|

Builders FirstSource (Middlesex, NC), Middlesex, NC - 27557,

Run: 8.63 S Nov 19 2022 Print: 8.630 S Nov 19 2022 MiTek Industries, Inc. Wed Apr 19 09:49:27
ID:GFV0jk10Ec2v8aEcYxb5Lozczrl-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrCDoi7J4zJC?f

Page: 1

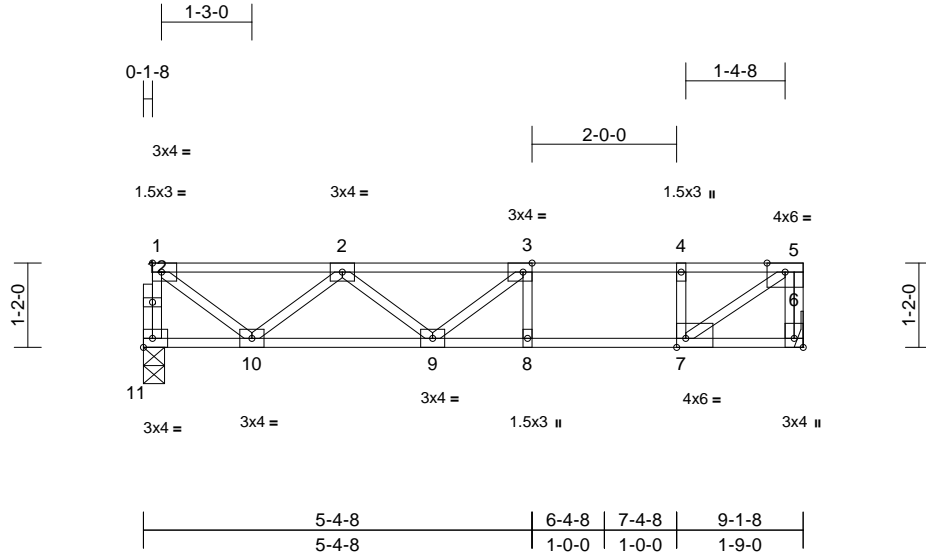

Scale = 1:31.9

Plate Offsets (X, Y): [3:0-1-8,Edge], [6:Edge,0-1-8], [7:0-1-8,Edge]

| Loading | (psf) | Spacing | 2-0-0 | CSI | DEFL | in | (loc) | l/defl | L/d | PLATES | GRIP | |
|---------|-------|-----------------|-----------------|----------|------|----------|-------|--------|------|--------|---------------|-----------------|
| TCLL | 40.0 | Plate Grip DOL | 1.00 | TC | 0.77 | Vert(LL) | -0.14 | 8-9 | >765 | 480 | MT20 | 244/190 |
| TCDL | 10.0 | Lumber DOL | 1.00 | BC | 0.82 | Vert(CT) | -0.19 | 8-9 | >571 | 360 | | |
| BCLL | 0.0 | Rep Stress Incr | YES | WB | 0.48 | Horz(CT) | 0.01 | 6 | n/a | n/a | | |
| BCDL | 5.0 | Code | IRC2015/TPI2014 | Matrix-S | | | | | | | Weight: 47 lb | FT = 20%F, 11%E |

LUMBER

- TOP CHORD 2x4 SP No.2(flat)
- BOT CHORD 2x4 SP No.1(flat)
- WEBS 2x4 SP No.3(flat)
- OTHERS 2x4 SP No.3(flat)

BRACING

- TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
- BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

- REACTIONS** (size) 6= Mechanical, 11=0-3-8
Max Grav 6=488 (LC 1), 11=482 (LC 1)

- FORCES** (lb) - Maximum Compression/Maximum Tension

- TOP CHORD 1-11=-472/0, 5-6=-558/0, 1-2=-504/0, 2-3=-991/0, 3-4=-841/0, 4-5=-841/0
- BOT CHORD 10-11=0/28, 9-10=0/953, 8-9=0/841, 7-8=0/841, 6-7=0/0
- WEBS 5-7=0/1011, 3-8=-241/0, 4-7=-346/0, 1-10=0/607, 2-10=-585/0, 2-9=0/132, 3-9=-30/228

NOTES

- Unbalanced floor live loads have been considered for this design.
- Refer to girder(s) for truss to truss connections.
- This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- CAUTION, Do not erect truss backwards.

LOAD CASE(S) Standard



April 19, 2023

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



818 Soundside Road
Edenton, NC 27932


| | | | | | |
|----------------|-------------|----------------------------|----------|----------|---|
| Job 3466766 | Truss F3 | Truss Type Floor Girder | Qty 1 | Ply 1 | CHESAPEAKE HOMES - PLAN 2343 A w/ 3rd GARAGE T30361343 Job Reference (optional) |
|----------------|-------------|----------------------------|----------|----------|---|

Builders FirstSource (Middlesex, NC), Middlesex, NC - 27557,

Run: 8.63 S Nov 19 2022 Print: 8.630 S Nov 19 2022 MiTek Industries, Inc. Wed Apr 19 09:49:27

Page: 1

Id:dUqKKGq2NpnywrqZ_FERzcrP-RfC?PsB70Hq3NSgPqnL8w3uTXbGKWrCDoi7J4zJC?f

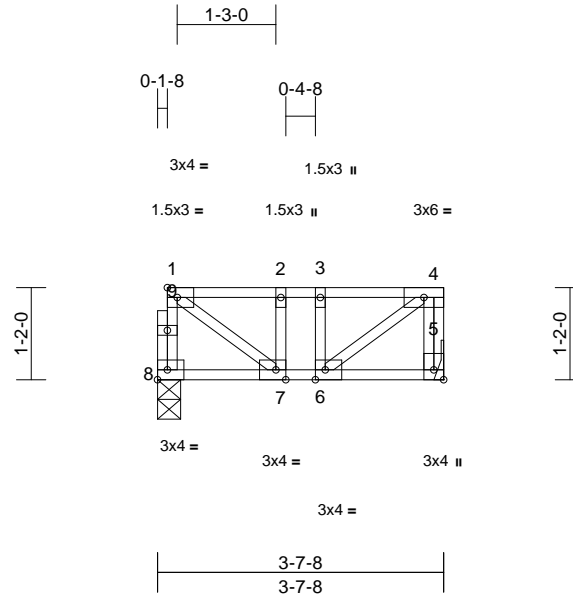

Scale = 1:29.2

Plate Offsets (X, Y): [5:Edge,0-1-8], [6:0-1-8,Edge], [7:0-1-8,Edge]

| Loading | (psf) | Spacing | 2-0-0 | CSI | DEFL | in | (loc) | l/defl | L/d | PLATES | GRIP | |
|---------|-------|-----------------|-----------------|----------|------|----------|-------|--------|------|--------|---------------|-----------------|
| TCLL | 40.0 | Plate Grip DOL | 1.00 | TC | 0.25 | Vert(LL) | -0.01 | 5-6 | >999 | 480 | MT20 | 244/190 |
| TCDL | 10.0 | Lumber DOL | 1.00 | BC | 0.32 | Vert(CT) | -0.01 | 5-6 | >999 | 360 | | |
| BCLL | 0.0 | Rep Stress Incr | NO | WB | 0.26 | Horz(CT) | 0.00 | 5 | n/a | n/a | | |
| BCDL | 5.0 | Code | IRC2015/TPI2014 | Matrix-S | | | | | | | Weight: 23 lb | FT = 20%F, 11%E |

LUMBER

TOP CHORD 2x4 SP No.2(flat)
 BOT CHORD 2x4 SP No.2(flat)
 WEBS 2x4 SP No.3(flat)
 OTHERS 2x4 SP No.3(flat)

- 1) Dead + Floor Live (balanced): Lumber Increase=1.00,
 Plate Increase=1.00
 Uniform Loads (lb/ft)
 Vert: 5-8=-10, 1-4=-100
 Concentrated Loads (lb)
 Vert: 3=-388 (B)

BRACING

TOP CHORD Structural wood sheathing directly applied or
 3-7-8 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc
 bracing.

REACTIONS (size) 5= Mechanical, 8=0-3-8
 Max Grav 5=430 (LC 4), 8=354 (LC 3)

FORCES (lb) - Maximum Compression/Maximum
 Tension

TOP CHORD 1-8=-358/0, 4-5=-399/0, 1-2=-435/0,
 2-3=-435/0, 3-4=-435/0
 BOT CHORD 7-8=0/21, 6-7=0/435, 5-6=0/0
 WEBS 1-7=0/523, 4-6=0/538, 2-7=-223/0,
 3-6=-454/0

NOTES

- Unbalanced floor live loads have been considered for this design.
- Refer to girder(s) for truss to truss connections.
- This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- CAUTION, Do not erect truss backwards.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 468 lb down at 2-0-0 on top chord. The design/selection of such connection device(s) is the responsibility of others.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard



April 19, 2023

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



818 Soundside Road
 Edenton, NC 27932


| | | | | | |
|----------------|-------------|----------------------------|----------|----------|---|
| Job 3466766 | Truss F4 | Truss Type Floor Girder | Qty 1 | Ply 1 | CHESAPEAKE HOMES - PLAN 2343 A w/ 3rd GARAGE T30361344 Job Reference (optional) |
|----------------|-------------|----------------------------|----------|----------|---|

Builders FirstSource (Middlesex, NC), Middlesex, NC - 27557,

Run: 8.63 S Nov 19 2022 Print: 8.630 S Nov 19 2022 MiTek Industries, Inc. Wed Apr 19 09:49:27

Page: 1

ID:Vo7hJfIF52bOLoq83Xg9nRzcqp-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrcDoi7J4zJC?f

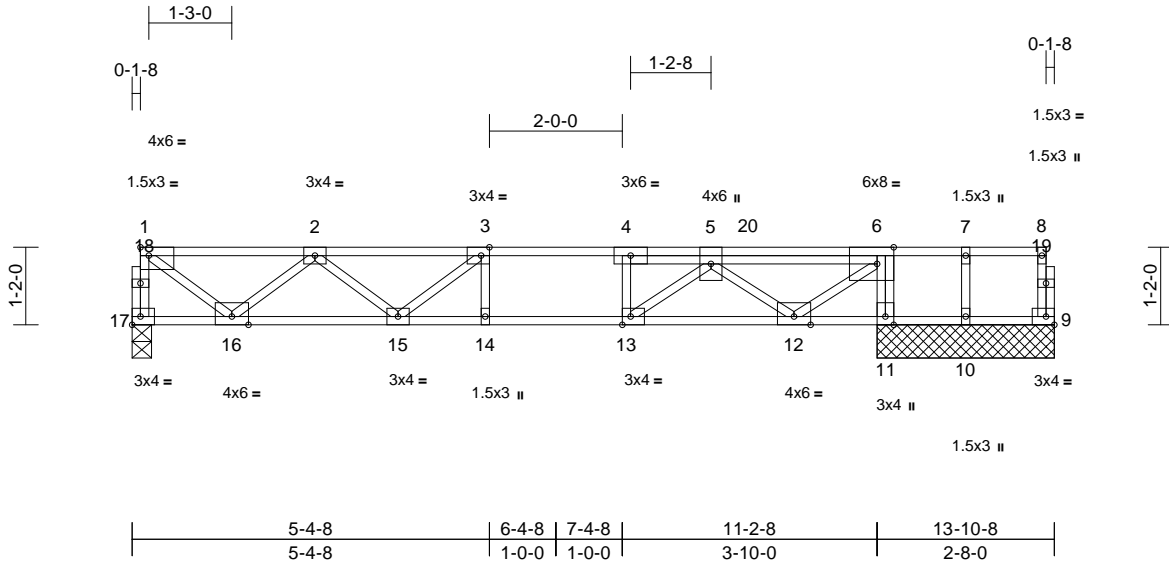

Scale = 1:34.7

Plate Offsets (X, Y): [1:Edge,0-1-8], [3:0-1-8,Edge], [6:0-3-0,Edge], [13:0-1-8,Edge]

| Loading | (psf) | Spacing | 2-0-0 | CSI | DEFL | in | (loc) | l/defl | L/d | PLATES | GRIP | |
|---------|-------|-----------------|-----------------|----------|------|----------|-------|--------|------|--------|---------------|-----------------|
| TCLL | 40.0 | Plate Grip DOL | 1.00 | TC | 0.45 | Vert(LL) | -0.08 | 14 | >999 | 480 | MT20 | 244/190 |
| TCDL | 10.0 | Lumber DOL | 1.00 | BC | 0.66 | Vert(CT) | -0.10 | 14 | >999 | 360 | | |
| BCLL | 0.0 | Rep Stress Incr | NO | WB | 0.50 | Horz(CT) | 0.02 | 9 | n/a | n/a | | |
| BCDL | 5.0 | Code | IRC2015/TPI2014 | Matrix-S | | | | | | | Weight: 74 lb | FT = 20%F, 11%E |

LUMBER
TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.2(flat)
WEBS 2x4 SP No.3(flat)
OTHERS 2x4 SP No.3(flat)

BRACING
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (size) 9=2-8-0, 10=2-8-0, 11=2-8-0, 17=0-3-8
Max Grav 9=66 (LC 1), 10=51 (LC 1), 11=1036 (LC 1), 17=663 (LC 1)

FORCES (lb) - Maximum Compression/Maximum Tension
TOP CHORD 1-17=-658/0, 8-9=-56/0, 1-2=-740/0, 2-3=-1668/0, 3-4=-1925/0, 4-5=-1932/0, 5-6=-956/0, 6-7=-9/0, 7-8=-3/0
BOT CHORD 16-17=0/39, 15-16=0/1383, 14-15=0/1925, 13-14=0/1925, 12-13=0/1801, 11-12=0/127, 10-11=0/3, 9-10=0/3
WEBS 3-14=-10/0, 4-13=-52/0, 6-11=-980/0, 1-16=0/894, 2-16=-838/0, 2-15=0/371, 3-15=-328/0, 6-12=0/1052, 5-12=-1073/0, 5-13=0/157, 7-10=-69/0

NOTES
1) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
2) Gable studs spaced at 1-4-0 oc.
3) This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
4) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
5) CAUTION, Do not erect truss backwards.

6) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 330 lb down at 9-3-4 on top chord. The design/selection of such connection device(s) is the responsibility of others.
7) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).
LOAD CASE(S) Standard
1) Dead + Floor Live (balanced): Lumber Increase=1.00, Plate Increase=1.00
Uniform Loads (lb/ft)
Vert: 9-17=-10, 1-8=-100
Concentrated Loads (lb)
Vert: 20=-330 (F)




April 19, 2023

| | | | | | |
|----------------|-------------|---------------------|----------|----------|---|
| Job 3466766 | Truss F5 | Truss Type Floor | Qty 2 | Ply 1 | CHESAPEAKE HOMES - PLAN 2343 A w/ 3rd GARAGE T30361345 Job Reference (optional) |
|----------------|-------------|---------------------|----------|----------|---|

Builders FirstSource (Middlesex, NC), Middlesex, NC - 27557,

Run: 8.63 S Nov 19 2022 Print: 8.630 S Nov 19 2022 MiTek Industries, Inc. Wed Apr 19 09:49:28
ID:pydddU5S1Rsv9JiFISijm7gzczpv-RfC?PsB70Hq3NSgPqnl8w3uITXbGKWrCDoi7J4zJC?f

Page: 1

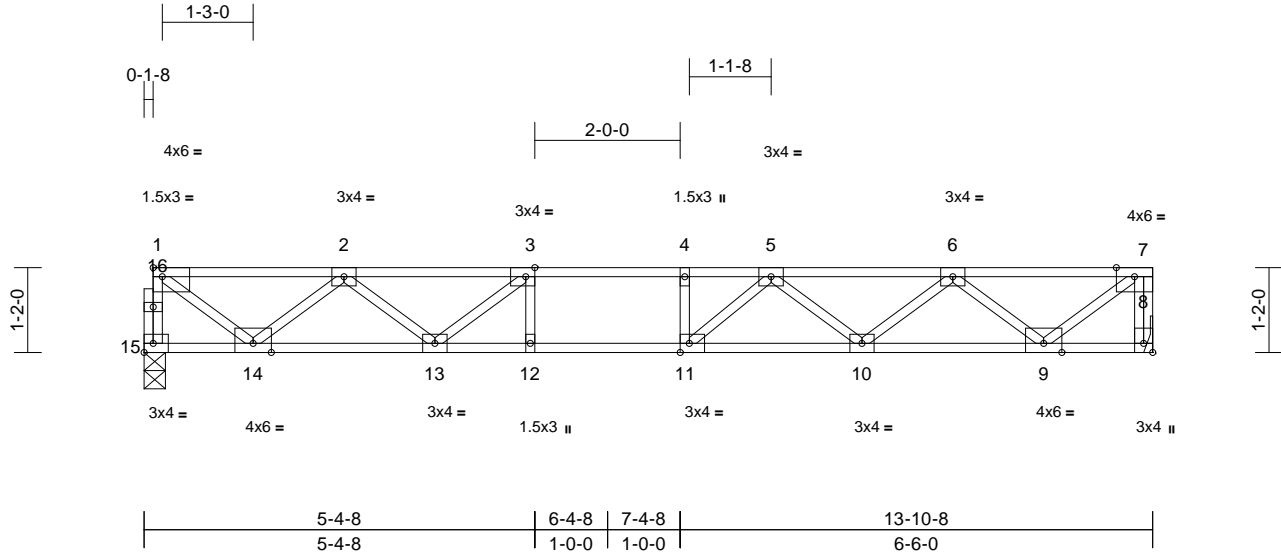

Scale = 1:31.7

Plate Offsets (X, Y): [1:Edge,0-1-8], [3:0-1-8,Edge], [8:Edge,0-1-8], [11:0-1-8,Edge]

| Loading | (psf) | Spacing | 2-0-0 | CSI | DEFL | in | (loc) | l/defl | L/d | PLATES | GRIP | |
|---------|-------|-----------------|-----------------|----------|------|----------|-------|--------|------|--------|---------------|-----------------|
| TCLL | 40.0 | Plate Grip DOL | 1.00 | TC | 0.60 | Vert(LL) | -0.17 | 10-11 | >963 | 480 | MT20 | 244/190 |
| TCDL | 10.0 | Lumber DOL | 1.00 | BC | 1.00 | Vert(CT) | -0.22 | 10-11 | >727 | 360 | | |
| BCLL | 0.0 | Rep Stress Incr | YES | WB | 0.50 | Horz(CT) | 0.04 | 8 | n/a | n/a | | |
| BCDL | 5.0 | Code | IRC2015/TPI2014 | Matrix-S | | | | | | | Weight: 70 lb | FT = 20%F, 11%E |

LUMBER

TOP CHORD 2x4 SP No.2(flat)
 BOT CHORD 2x4 SP No.2(flat)
 WEBS 2x4 SP No.3(flat)
 OTHERS 2x4 SP No.3(flat)

BRACING

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 2-2-0 oc bracing.

REACTIONS (size) 8= Mechanical, 15=0-3-8
 Max Grav 8=749 (LC 1), 15=743 (LC 1)

FORCES (lb) - Maximum Compression/Maximum Tension

TOP CHORD 1-15=-740/0, 7-8=-742/0, 1-2=-843/0, 2-3=-1969/0, 3-4=-2397/0, 4-5=-2397/0, 5-6=-1973/0, 6-7=-840/0
 BOT CHORD 14-15=0/44, 13-14=0/1573, 12-13=0/2397, 11-12=0/2397, 10-11=0/2310, 9-10=0/1586, 8-9=0/0
 WEBS 3-12=-53/160, 4-11=-192/0, 1-14=0/1019, 2-14=-950/0, 2-13=0/528, 3-13=-643/0, 7-9=0/1054, 6-9=-970/0, 6-10=0/504, 5-10=-439/0, 5-11=-110/400

NOTES

- 1) Unbalanced floor live loads have been considered for this design.
- 2) Refer to girder(s) for truss to truss connections.
- 3) This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 4) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- 5) CAUTION, Do not erect truss backwards.

LOAD CASE(S) Standard



April 19, 2023

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




818 Soundside Road
Edenton, NC 27932

| | | | | | |
|----------------|-------------|---------------------|----------|----------|---|
| Job 3466766 | Truss F6 | Truss Type Floor | Qty 2 | Ply 1 | CHESAPEAKE HOMES - PLAN 2343 A w/ 3rd GARAGE T30361346 Job Reference (optional) |
|----------------|-------------|---------------------|----------|----------|---|

Builders FirstSource (Middlesex, NC), Middlesex, NC - 27557,

Run: 8.63 S Nov 19 2022 Print: 8.630 S Nov 19 2022 MiTek Industries, Inc. Wed Apr 19 09:49:28
ID:h?OZuGiCVJYBKxMKBDbhU6zczpa-RfC?PsB70Hq3NSgPqnL8w3uiTXbGKWrCdoi7J4zJC?f

Page: 1

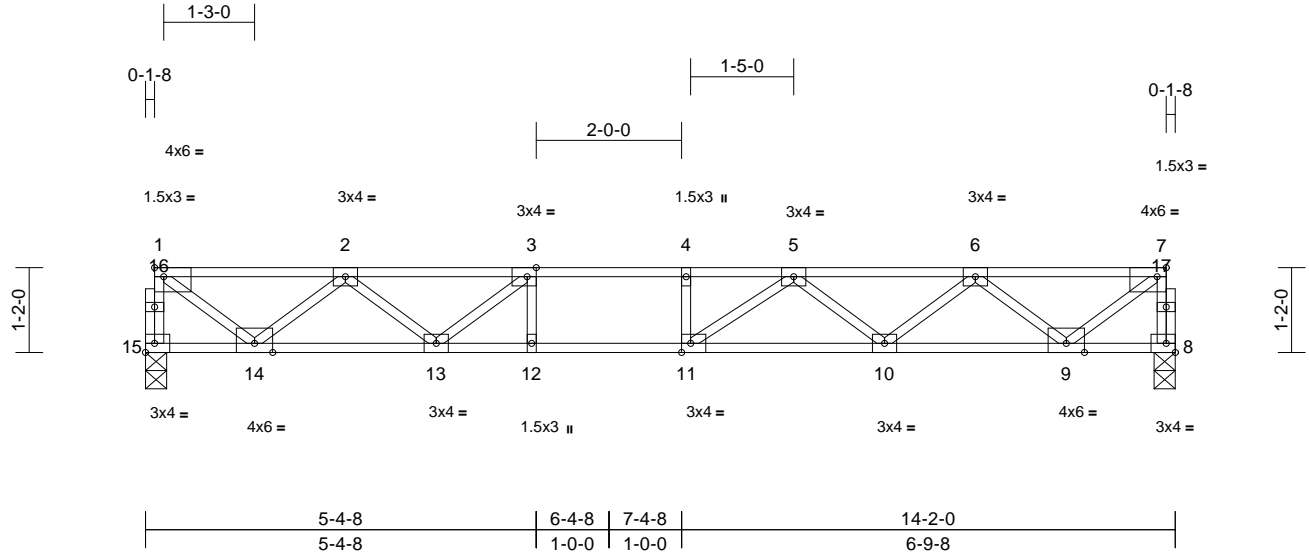

Scale = 1:31.7

Plate Offsets (X, Y): [1:Edge,0-1-8], [3:0-1-8,Edge], [7:0-1-8,Edge], [11:0-1-8,Edge]

| Loading | (psf) | Spacing | 2-0-0 | CSI | DEFL | in | (loc) | l/defl | L/d | PLATES | GRIP | |
|---------|-------|-----------------|-----------------|----------|------|----------|-------|--------|------|--------|---------------|-----------------|
| TCLL | 40.0 | Plate Grip DOL | 1.00 | TC | 0.62 | Vert(LL) | -0.18 | 10-11 | >915 | 480 | MT20 | 244/190 |
| TCDL | 10.0 | Lumber DOL | 1.00 | BC | 0.80 | Vert(CT) | -0.24 | 10-11 | >687 | 360 | | |
| BCLL | 0.0 | Rep Stress Incr | YES | WB | 0.50 | Horz(CT) | 0.03 | 8 | n/a | n/a | | |
| BCDL | 5.0 | Code | IRC2015/TPI2014 | Matrix-S | | | | | | | Weight: 70 lb | FT = 20%F, 11%E |

LUMBER

TOP CHORD 2x4 SP No.2(flat)
 BOT CHORD 2x4 SP No.1(flat)
 WEBS 2x4 SP No.3(flat)
 OTHERS 2x4 SP No.3(flat)

BRACING

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (size) 8=0-3-8, 15=0-3-8

Max Grav 8=759 (LC 1), 15=759 (LC 1)

FORCES (lb) - Maximum Compression/Maximum Tension

TOP CHORD 1-15=-756/0, 7-8=-752/0, 1-2=-864/0,
 2-3=-2028/0, 3-4=-2495/0, 4-5=-2495/0,
 5-6=-2036/0, 6-7=-861/0

BOT CHORD 14-15=0/45, 13-14=0/1610, 12-13=0/2495,
 11-12=0/2495, 10-11=0/2391, 9-10=0/1624,
 8-9=0/45

WEBS 3-12=-51/189, 4-11=-171/0, 1-14=0/1045,
 2-14=-972/0, 2-13=0/550, 3-13=-695/0,
 7-9=0/1042, 6-9=-993/0, 6-10=0/537,
 5-10=-462/0, 5-11=-102/418

NOTES

- 1) Unbalanced floor live loads have been considered for this design.
- 2) This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 3) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.

LOAD CASE(S) Standard



April 19, 2023

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




818 Soundside Road
 Edenton, NC 27932

| | | | | | |
|----------------|-------------|---------------------|----------|----------|---|
| Job 3466766 | Truss F7 | Truss Type Floor | Qty 4 | Ply 1 | CHESAPEAKE HOMES - PLAN 2343 A w/ 3rd GARAGE T30361347 Job Reference (optional) |
|----------------|-------------|---------------------|----------|----------|---|

Builders FirstSource (Middlesex, NC), Middlesex, NC - 27557,

Run: 8.63 S Nov 19 2022 Print: 8.630 S Nov 19 2022 MiTek Industries, Inc. Wed Apr 19 09:49:28
ID:3Jqan2ogluP7mEdsXCo74zcoA-RfC?PsB70Hq3NSgPqnL8w3uITxBGKWrCdoi7J4zJC?f

Page: 1

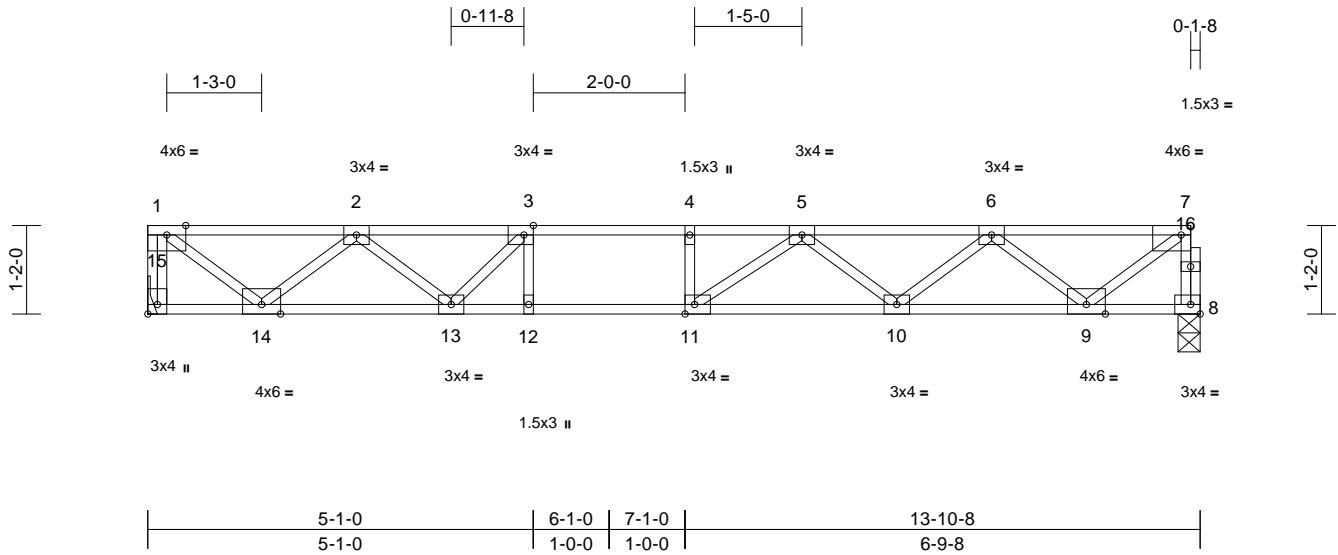

Scale = 1:30.4
Plate Offsets (X, Y): [3:0-1-8,Edge], [7:0-1-8,Edge], [11:0-1-8,Edge], [15:Edge,0-1-8]

| Loading | (psf) | Spacing | 2-0-0 | CSI | DEFL | in | (loc) | l/defl | L/d | PLATES | GRIP | |
|---------|-------|-----------------|-----------------|----------|------|----------|-------|--------|------|--------|---------------|-----------------|
| TCLL | 40.0 | Plate Grip DOL | 1.00 | TC | 0.64 | Vert(LL) | -0.18 | 10-11 | >915 | 480 | MT20 | 244/190 |
| TCDL | 10.0 | Lumber DOL | 1.00 | BC | 0.84 | Vert(CT) | -0.24 | 10-11 | >682 | 360 | | |
| BCLL | 0.0 | Rep Stress Incr | YES | WB | 0.50 | Horz(CT) | 0.03 | 8 | n/a | n/a | | |
| BCDL | 5.0 | Code | IRC2015/TPI2014 | Matrix-S | | | | | | | Weight: 70 lb | FT = 20%F, 11%E |

LUMBER

TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.1(flat)
WEBS 2x4 SP No.3(flat)
OTHERS 2x4 SP No.3(flat)

BRACING

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (size) 8=0-3-8, 15= Mechanical
Max Grav 8=743 (LC 1), 15=749 (LC 1)

FORCES (lb) - Maximum Compression/Maximum Tension
TOP CHORD 1-15=-745/0, 7-8=-735/0, 1-2=-838/0, 2-3=-1984/0, 3-4=-2378/0, 4-5=-2378/0, 5-6=-1980/0, 6-7=-839/0

BOT CHORD 14-15=0/0, 13-14=0/1565, 12-13=0/2378, 11-12=0/2378, 10-11=0/2311, 9-10=0/1584, 8-9=0/44

WEBS 3-12=-39/228, 4-11=-161/0, 1-14=0/1051, 2-14=-947/0, 2-13=0/567, 3-13=-669/0, 7-9=0/1015, 6-9=-970/0, 6-10=0/516, 5-10=-431/0, 5-11=-122/376

NOTES

- 1) Unbalanced floor live loads have been considered for this design.
- 2) Refer to girder(s) for truss to truss connections.
- 3) This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 4) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- 5) CAUTION, Do not erect truss backwards.

LOAD CASE(S) Standard



April 19, 2023

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



818 Soundside Road
Edenton, NC 27932

| | | | | | |
|----------------|-------------|---------------------|----------|----------|---|
| Job 3466766 | Truss F8 | Truss Type Floor | Qty 1 | Ply 1 | CHESAPEAKE HOMES - PLAN 2343 A w/ 3rd GARAGE T30361348 Job Reference (optional) |
|----------------|-------------|---------------------|----------|----------|---|

Builders FirstSource (Middlesex, NC), Middlesex, NC - 27557,

Run: 8.63 S Nov 19 2022 Print: 8.630 S Nov 19 2022 MiTek Industries, Inc. Wed Apr 19 09:49:29
ID:mnVD05KGxURAPXc41m?6vMzczU-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrCDoi7J4zJC?f

Page: 1

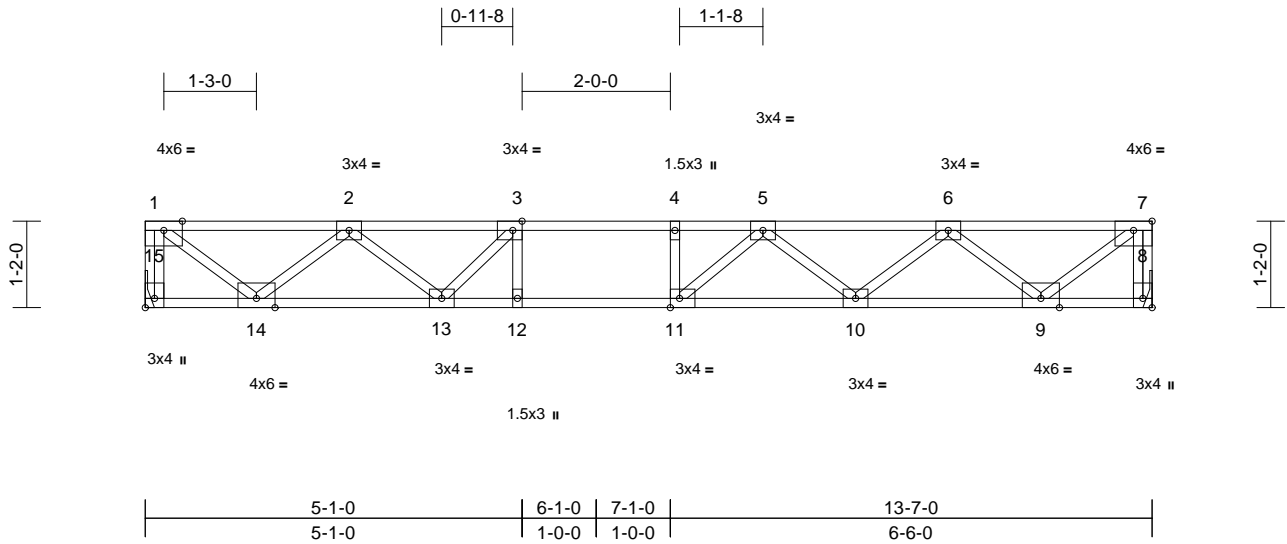


Plate Offsets (X, Y): [3:0-1-8,Edge], [8:Edge,0-1-8], [11:0-1-8,Edge], [15:Edge,0-1-8]

| Loading | (psf) | Spacing | 2-0-0 | CSI | DEFL | in | (loc) | l/defl | L/d | PLATES | GRIP | |
|---------|-------|-----------------|-----------------|----------|------|----------|-------|--------|------|--------|---------------|-----------------|
| TCLL | 40.0 | Plate Grip DOL | 1.00 | TC | 0.59 | Vert(LL) | -0.16 | 10-11 | >999 | 480 | MT20 | 244/190 |
| TCDL | 10.0 | Lumber DOL | 1.00 | BC | 0.77 | Vert(CT) | -0.21 | 10-11 | >770 | 360 | | |
| BCLL | 0.0 | Rep Stress Incr | YES | WB | 0.49 | Horz(CT) | 0.03 | 8 | n/a | n/a | | |
| BCDL | 5.0 | Code | IRC2015/TPI2014 | Matrix-S | | | | | | | Weight: 69 lb | FT = 20%F, 11%E |

LUMBER

TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.1(flat)
WEBS 2x4 SP No.3(flat)

BRACING

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (size) 8= Mechanical, 15= Mechanical
Max Grav 8=733 (LC 1), 15=733 (LC 1)

FORCES (lb) - Maximum Compression/Maximum Tension

TOP CHORD 1-15=-729/0, 7-8=-725/0, 1-2=-817/0, 2-3=-1923/0, 3-4=-2283/0, 4-5=-2283/0, 5-6=-1917/0, 6-7=-818/0
BOT CHORD 14-15=0/0, 13-14=0/1527, 12-13=0/2283, 11-12=0/2283, 10-11=0/2229, 9-10=0/1546, 8-9=0/0
WEBS 3-12=-46/205, 4-11=-176/0, 1-14=0/1025, 2-14=-925/0, 2-13=0/540, 3-13=-623/0, 7-9=0/1026, 6-9=-948/0, 6-10=0/483, 5-10=-406/0, 5-11=-125/357

NOTES

- Unbalanced floor live loads have been considered for this design.
- Refer to girder(s) for truss to truss connections.
- This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.

LOAD CASE(S) Standard



April 19, 2023

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ENGINEERING BY
TRENCO
A MiTek Affiliate


818 Soundside Road
Edenton, NC 27932

| | | | | | |
|----------------|-------------|---------------------|----------|----------|---|
| Job 3466766 | Truss F9 | Truss Type Floor | Qty 3 | Ply 1 | CHESAPEAKE HOMES - PLAN 2343 A w/ 3rd GARAGE T30361349 Job Reference (optional) |
|----------------|-------------|---------------------|----------|----------|---|

Builders FirstSource (Middlesex, NC), Middlesex, NC - 27557,

Run: 8.63 S Nov 19 2022 Print: 8.630 S Nov 19 2022 MiTek Industries, Inc. Wed Apr 19 09:49:29
ID:Quo1Ed5nrNESDwBEVduzezczmV-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrCDoi7J4zJC7f

Page: 1

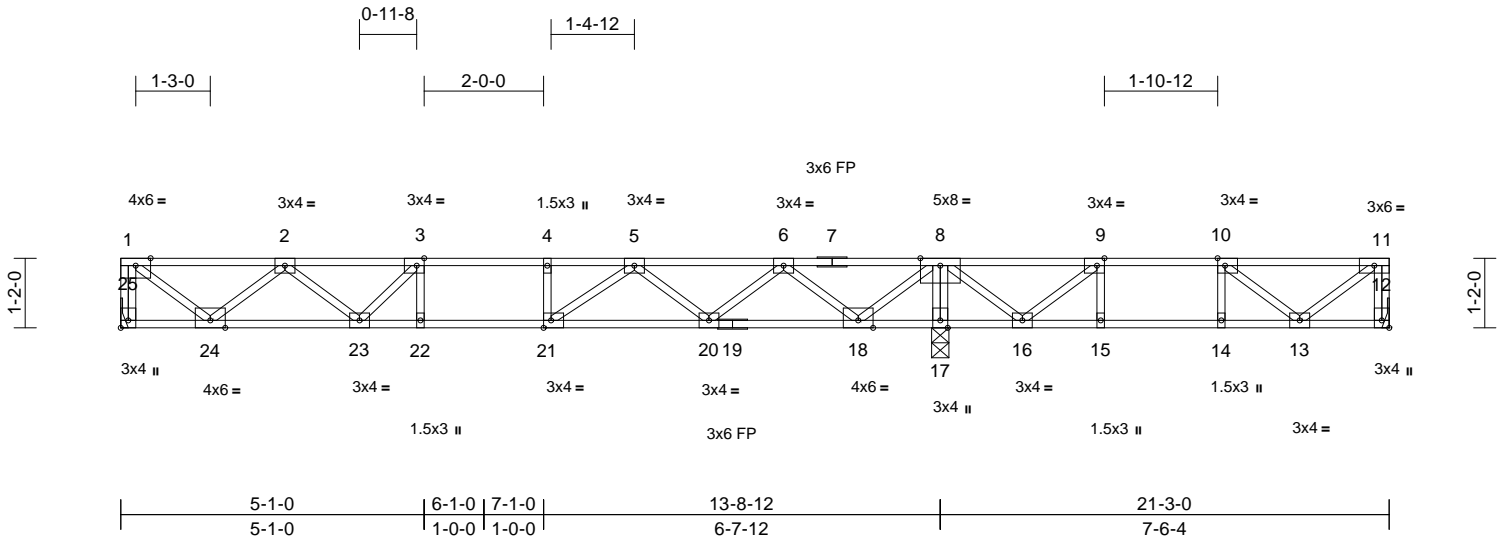

Scale = 1:38.6

Plate Offsets (X, Y): [3:0-1-8,Edge], [9:0-1-8,Edge], [10:0-1-8,Edge], [12:Edge,0-1-8], [21:0-1-8,Edge], [25:Edge,0-1-8]

| Loading | (psf) | Spacing | 2-0-0 | CSI | DEFL | in (loc) | l/defl | L/d | PLATES | GRIP | | |
|---------|-------|-----------------|-----------------|----------|------|----------|--------|-------|--------|------|----------------|-----------------|
| TCLL | 40.0 | Plate Grip DOL | 1.00 | TC | 0.58 | Vert(LL) | -0.13 | 20-21 | >999 | 480 | MT20 | 244/190 |
| TCDL | 10.0 | Lumber DOL | 1.00 | BC | 0.76 | Vert(CT) | -0.17 | 20-21 | >971 | 360 | | |
| BCLL | 0.0 | Rep Stress Incr | YES | WB | 0.53 | Horz(CT) | 0.03 | 12 | n/a | n/a | | |
| BCDL | 5.0 | Code | IRC2015/TPI2014 | Matrix-S | | | | | | | Weight: 107 lb | FT = 20%F, 11%E |

LUMBER
TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.2(flat)
WEBS 2x4 SP No.3(flat)

BRACING
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.


REACTIONS (size) 12= Mechanical, 17=0-3-8, 25= Mechanical
Max Uplift 12=5 (LC 3)
Max Grav 12=363 (LC 4), 17=1347 (LC 1), 25=696 (LC 10)

FORCES (lb) - Maximum Compression/Maximum Tension
TOP CHORD 1-25=-691/0, 11-12=-362/0, 1-2=-768/0, 2-3=-1782/0, 3-4=-2071/0, 4-5=-2071/0, 5-6=-1481/0, 6-8=-231/92, 8-9=-142/549, 9-10=-566/217, 10-11=-322/48
BOT CHORD 24-25=0/0, 23-24=0/1438, 22-23=0/2071, 21-22=0/2071, 20-21=0/1887, 18-20=0/1028, 17-18=-987/0, 16-17=-987/0, 15-16=-217/566, 14-15=-217/566, 13-14=-217/566, 12-13=0/0
WEBS 3-22=-75/129, 4-21=-192/0, 8-17=-1296/0, 1-24=0/964, 2-24=-872/0, 2-23=0/448, 3-23=-469/0, 8-18=0/1123, 6-18=-1052/0, 6-20=0/637, 5-20=-588/0, 5-21=0/462, 8-16=0/625, 11-13=-60/403, 9-16=-772/0, 10-13=-312/216, 9-15=0/222, 10-14=-185/0

NOTES
1) Unbalanced floor live loads have been considered for this design.
2) Refer to girder(s) for truss to truss connections.
3) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 5 lb uplift at joint 12.

- This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- CAUTION, Do not erect truss backwards.

LOAD CASE(S) Standard

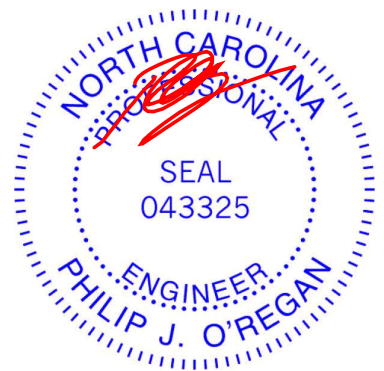

April 19, 2023

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




818 Soundside Road
Edenton, NC 27932

| | | | | | |
|----------------|--------------|---------------------|----------|----------|---|
| Job 3466766 | Truss F10 | Truss Type Floor | Qty 6 | Ply 1 | CHESAPEAKE HOMES - PLAN 2343 A w/ 3rd GARAGE T30361350 Job Reference (optional) |
|----------------|--------------|---------------------|----------|----------|---|

Builders FirstSource (Middlesex, NC), Middlesex, NC - 27557,

Run: 8.63 S Nov 19 2022 Print: 8.630 S Nov 19 2022 MiTek Industries, Inc. Wed Apr 19 09:49:29
ID:gRQjg8pQzHxfRWjI6iyOlzczlZ-RfC?PsB70Hq3NSgPqnL8w3uITXbGKwRCDoi7J4zJC?f

Page: 1

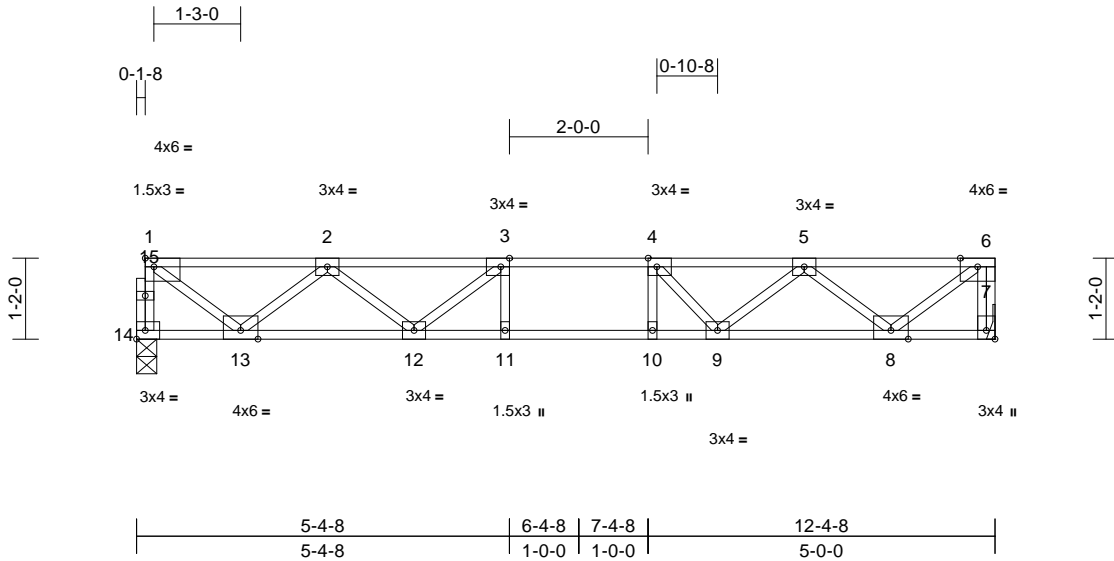

Scale = 1:33.2

Plate Offsets (X, Y): [1:Edge,0-1-8], [3:0-1-8,Edge], [4:0-1-8,Edge], [7:Edge,0-1-8]

| Loading | (psf) | Spacing | 2-0-0 | CSI | DEFL | in | (loc) | l/defl | L/d | PLATES | GRIP | |
|---------|-------|-----------------|-----------------|----------|------|----------|-------|--------|------|--------|---------------|-----------------|
| TCLL | 40.0 | Plate Grip DOL | 1.00 | TC | 0.42 | Vert(LL) | -0.11 | 11-12 | >999 | 480 | MT20 | 244/190 |
| TCDL | 10.0 | Lumber DOL | 1.00 | BC | 0.84 | Vert(CT) | -0.14 | 11-12 | >999 | 360 | | |
| BCLL | 0.0 | Rep Stress Incr | YES | WB | 0.44 | Horz(CT) | 0.02 | 7 | n/a | n/a | | |
| BCDL | 5.0 | Code | IRC2015/TPI2014 | Matrix-S | | | | | | | Weight: 63 lb | FT = 20%F, 11%E |

LUMBER

TOP CHORD 2x4 SP No.2(flat)
 BOT CHORD 2x4 SP No.2(flat)
 WEBS 2x4 SP No.3(flat)
 OTHERS 2x4 SP No.3(flat)

BRACING

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (size) 7= Mechanical, 14=0-3-8

Max Grav 7=667 (LC 1), 14=661 (LC 1)

FORCES (lb) - Maximum Compression/Maximum Tension

TOP CHORD 1-14=-655/0, 6-7=-662/0, 1-2=-736/0,
 2-3=-1659/0, 3-4=-1908/0, 4-5=-1673/0,
 5-6=-731/0

BOT CHORD 13-14=0/1377, 11-12=0/1908,
 10-11=0/1908, 9-10=0/1908, 8-9=0/1367,
 7-8=0/0

WEBS 3-11=-110/100, 4-10=-90/167, 1-13=0/890,
 2-13=-834/0, 2-12=0/391, 3-12=-443/0,
 6-8=0/917, 5-8=-828/0, 5-9=0/440,
 4-9=-480/0

NOTES

- 1) Unbalanced floor live loads have been considered for this design.
- 2) Refer to girder(s) for truss to truss connections.
- 3) This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 4) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- 5) CAUTION, Do not erect truss backwards.

LOAD CASE(S) Standard



April 19, 2023

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




818 Soundside Road
 Edenton, NC 27932

| | | | | | |
|----------------|-------------|-------------------------------------|----------|----------|---|
| Job 3466766 | Truss K1 | Truss Type Floor Supported Gable | Qty 1 | Ply 1 | CHESAPEAKE HOMES - PLAN 2343 A w/ 3rd GARAGE T30361351 Job Reference (optional) |
|----------------|-------------|-------------------------------------|----------|----------|---|

Builders FirstSource (Middlesex, NC), Middlesex, NC - 27557,

Run: 8.63 S Nov 19 2022 Print: 8.630 S Nov 19 2022 MiTek Industries, Inc. Wed Apr 19 09:49:30
ID:MWSodRjDCwz?kD8vsKgl6Wzczuk-RfC?PsB70Hq3NSgPqnL8w3ulTXbGKWRCdoi7J4zJC7f

Page: 1

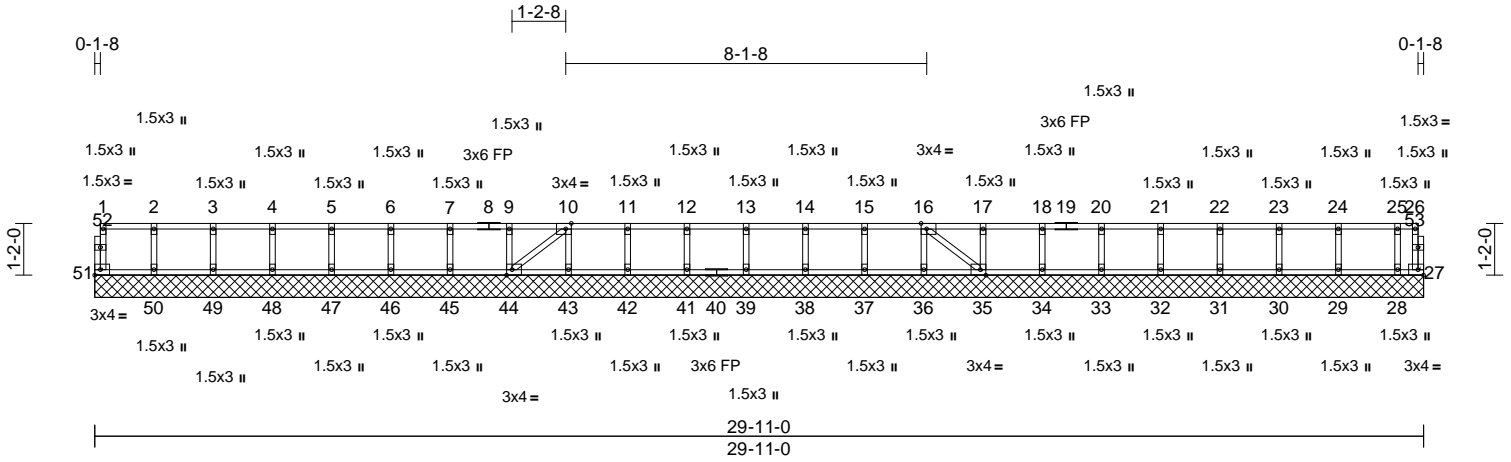

Scale = 1:51.9

Plate Offsets (X, Y): [10:0-1-8,Edge], [16:0-1-8,Edge], [35:0-1-8,Edge], [44:0-1-8,Edge]

| Loading | (psf) | Spacing | 2-0-0 | CSI | DEFL | in | (loc) | l/defl | L/d | PLATES | GRIP | |
|---------|-------|-----------------|-----------------|----------|------|-----------|-------|--------|-----|--------|----------------|-----------------|
| TCLL | 40.0 | Plate Grip DOL | 1.00 | TC | 0.08 | Vert(LL) | n/a | - | n/a | 999 | MT20 | 244/190 |
| TCDL | 10.0 | Lumber DOL | 1.00 | BC | 0.01 | Vert(TL) | n/a | - | n/a | 999 | | |
| BCLL | 0.0 | Rep Stress Incr | YES | WB | 0.03 | Horiz(TL) | 0.00 | 35 | n/a | n/a | | |
| BCDL | 5.0 | Code | IRC2015/TPI2014 | Matrix-S | | | | | | | Weight: 128 lb | FT = 20%F, 11%E |

LUMBER
TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.2(flat)
WEBS 2x4 SP No.3(flat)
OTHERS 2x4 SP No.3(flat)

BRACING
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS (size)
27=29-11-0, 28=29-11-0,
29=29-11-0, 30=29-11-0,
31=29-11-0, 32=29-11-0,
33=29-11-0, 34=29-11-0,
35=29-11-0, 36=29-11-0,
37=29-11-0, 38=29-11-0,
39=29-11-0, 41=29-11-0,
42=29-11-0, 43=29-11-0,
44=29-11-0, 45=29-11-0,
46=29-11-0, 47=29-11-0,
48=29-11-0, 49=29-11-0,
50=29-11-0, 51=29-11-0

Max Uplift 27=8 (LC 1)
Max Grav 27=8 (LC 1), 28=121 (LC 1),
29=152 (LC 1), 30=145 (LC 1),
31=147 (LC 1), 32=147 (LC 1),
33=147 (LC 1), 34=147 (LC 1),
35=154 (LC 1), 36=139 (LC 1),
37=147 (LC 1), 38=147 (LC 1),
39=147 (LC 1), 41=147 (LC 1),
42=147 (LC 1), 43=141 (LC 1),
44=152 (LC 1), 45=147 (LC 1),
46=147 (LC 1), 47=147 (LC 1),
48=147 (LC 1), 49=146 (LC 1),
50=152 (LC 1), 51=48 (LC 1)

FORCES (lb) - Maximum Compression/Maximum Tension

TOP CHORD 1-51=-44/0, 26-27=0/8, 1-2=-3/0, 2-3=-3/0,
3-4=-3/0, 4-5=-3/0, 5-6=-3/0, 6-7=-3/0,
7-9=-3/0, 9-10=-3/0, 10-11=-9/0, 11-12=-9/0,
12-13=-9/0, 13-14=-9/0, 14-15=-9/0,
15-16=-9/0, 16-17=0/0, 17-18=0/0,
18-20=0/0, 20-21=0/0, 21-22=0/0, 22-23=0/0,
23-24=0/0, 24-25=0/0, 25-26=0/0
BOT CHORD 50-51=0/3, 49-50=0/3, 48-49=0/3, 47-48=0/3,
46-47=0/3, 45-46=0/3, 44-45=0/3, 43-44=0/9,
42-43=0/9, 41-42=0/9, 39-41=0/9, 38-39=0/9,
37-38=0/9, 36-37=0/9, 35-36=0/9, 34-35=0/0,
33-34=0/0, 32-33=0/0, 31-32=0/0, 30-31=0/0,
29-30=0/0, 28-29=0/0, 27-28=0/0
WEBS 2-50=-138/0, 3-49=-133/0, 4-48=-134/0,
5-47=-133/0, 6-46=-133/0, 7-45=-133/0,
9-44=-133/0, 10-43=-128/0, 11-42=-133/0,
12-41=-133/0, 13-39=-133/0, 14-38=-133/0,
15-37=-133/0, 16-36=-126/0, 17-35=-133/0,
18-34=-133/0, 20-33=-133/0, 21-32=-133/0,
22-31=-134/0, 23-30=-132/0, 24-29=-138/0,
25-28=-110/0, 10-44=-9/0, 16-35=-12/0

NOTES
1) Gable requires continuous bottom chord bearing.
2) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
3) Gable studs spaced at 1-4-0 oc.
4) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 8 lb uplift at joint 27.
5) This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
6) Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.

LOAD CASE(S) Standard



April 19, 2023

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




818 Soundside Road
Edenton, NC 27932

| | | | | | |
|----------------|-------------|-------------------------------------|----------|----------|---|
| Job 3466766 | Truss K2 | Truss Type Floor Supported Gable | Qty 1 | Ply 1 | CHESAPEAKE HOMES - PLAN 2343 A w/ 3rd GARAGE T30361352 Job Reference (optional) |
|----------------|-------------|-------------------------------------|----------|----------|---|

Builders FirstSource (Middlesex, NC), Middlesex, NC - 27557,

Run: 8.63 S Nov 19 2022 Print: 8.630 S Nov 19 2022 MiTek Industries, Inc. Wed Apr 19 09:49:30
ID:gl7ID8faX58JwpMfEwYqbFzczeE-RfC?PsB70Hq3NSgPqnL8w3ulTXbGKWRcDoi7J4zJC?f

Page: 1

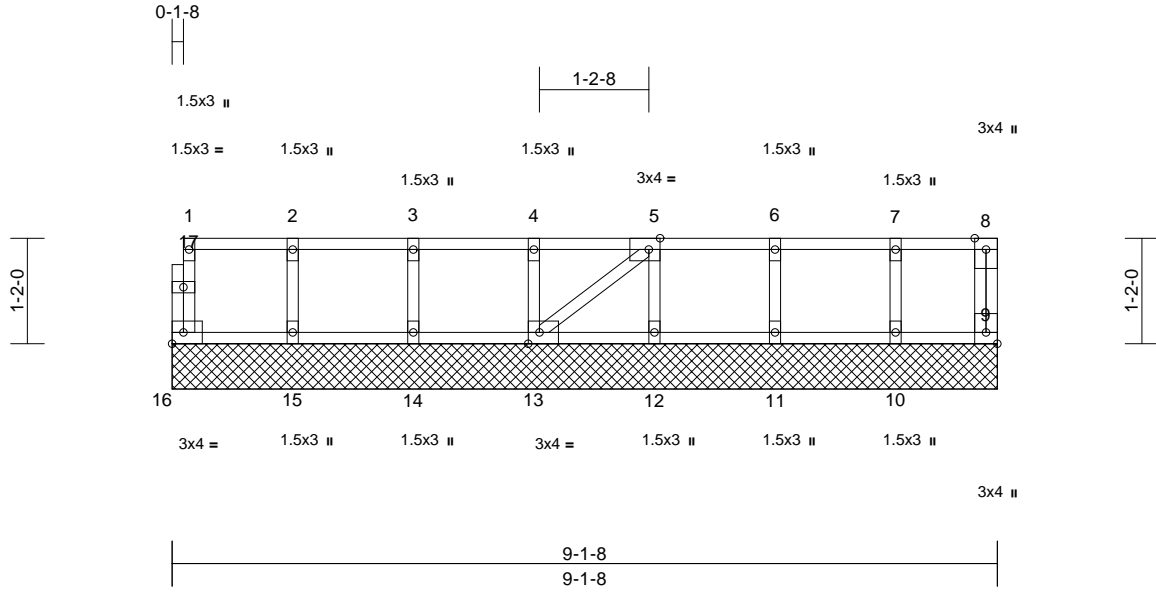

Scale = 1:25.5
Plate Offsets (X, Y): [5:0-1-8,Edge], [9:Edge,0-1-8], [13:0-1-8,Edge]

| Loading | (psf) | Spacing | 2-0-0 | CSI | DEFL | in | (loc) | l/defl | L/d | PLATES | GRIP | |
|---------|-------|-----------------|-----------------|----------|------|-----------|-------|--------|-----|--------|---------------|-----------------|
| TCLL | 40.0 | Plate Grip DOL | 1.00 | TC | 0.08 | Vert(LL) | n/a | - | n/a | 999 | MT20 | 244/190 |
| TCDL | 10.0 | Lumber DOL | 1.00 | BC | 0.01 | Vert(TL) | n/a | - | n/a | 999 | | |
| BCLL | 0.0 | Rep Stress Incr | YES | WB | 0.03 | Horiz(TL) | 0.00 | 9 | n/a | n/a | | |
| BCDL | 5.0 | Code | IRC2015/TPI2014 | Matrix-S | | | | | | | Weight: 43 lb | FT = 20%F, 11%E |

LUMBER
TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.2(flat)
WEBS 2x4 SP No.3(flat)
OTHERS 2x4 SP No.3(flat)

6) CAUTION, Do not erect truss backwards.
LOAD CASE(S) Standard

BRACING
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (size) 9=9-1-8, 10=9-1-8, 11=9-1-8, 12=9-1-8, 13=9-1-8, 14=9-1-8, 15=9-1-8, 16=9-1-8
Max Grav 9=40 (LC 1), 10=142 (LC 1), 11=148 (LC 1), 12=148 (LC 1), 13=145 (LC 1), 14=146 (LC 1), 15=152 (LC 1), 16=48 (LC 1)

FORCES (lb) - Maximum Compression/Maximum Tension
TOP CHORD 1-16=-44/0, 8-9=-36/0, 1-2=-3/0, 2-3=-3/0, 3-4=-3/0, 4-5=-3/0, 5-6=0/0, 6-7=0/0, 7-8=0/0
BOT CHORD 15-16=0/3, 14-15=0/3, 13-14=0/3, 12-13=0/0, 11-12=0/0, 10-11=0/0, 9-10=0/0
WEBS 2-15=-138/0, 3-14=-133/0, 4-13=-134/0, 5-12=-135/0, 6-11=-135/0, 7-10=-129/0, 5-13=0/3

- NOTES**
- Gable requires continuous bottom chord bearing.
 - Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
 - Gable studs spaced at 1-4-0 oc.
 - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
 - Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.




April 19, 2023

| | | | | | |
|----------------|-------------|-------------------------------------|----------|----------|---|
| Job 3466766 | Truss K9 | Truss Type Floor Supported Gable | Qty 1 | Ply 1 | CHESAPEAKE HOMES - PLAN 2343 A w/ 3rd GARAGE T30361353 Job Reference (optional) |
|----------------|-------------|-------------------------------------|----------|----------|---|

Builders FirstSource (Middlesex, NC), Middlesex, NC - 27557,

Run: 8.63 S Nov 19 2022 Print: 8.630 S Nov 19 2022 MiTek Industries, Inc. Wed Apr 19 09:49:30
ID:NqzeoxXMdvv7nlg6L3GKQEzclx-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrCDoi7J4zJC?f

Page: 1

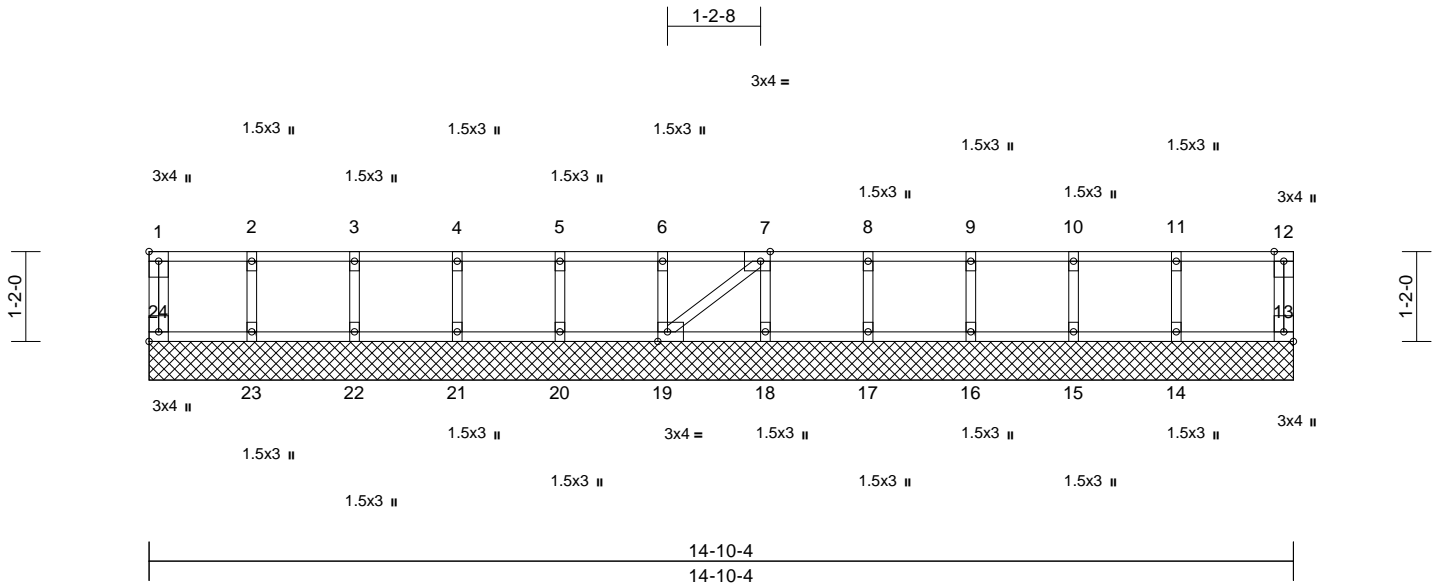

Scale = 1:29.9
Plate Offsets (X, Y): [1:Edge,0-1-8], [7:0-1-8,Edge], [13:Edge,0-1-8], [19:0-1-8,Edge], [24:Edge,0-1-8]

| Loading | (psf) | Spacing | 2-0-0 | CSI | DEFL | in | (loc) | l/defl | L/d | PLATES | GRIP | |
|---------|-------|-----------------|-----------------|----------|------|-----------|-------|--------|-----|--------|---------------|-----------------|
| TCLL | 40.0 | Plate Grip DOL | 1.00 | TC | 0.10 | Vert(LL) | n/a | - | n/a | 999 | MT20 | 244/190 |
| TCDL | 10.0 | Lumber DOL | 1.00 | BC | 0.01 | Vert(TL) | n/a | - | n/a | 999 | | |
| BCLL | 0.0 | Rep Stress Incr | YES | WB | 0.04 | Horiz(TL) | 0.00 | 19 | n/a | n/a | | |
| BCDL | 5.0 | Code | IRC2015/TPI2014 | Matrix-S | | | | | | | Weight: 66 lb | FT = 20%F, 11%E |

LUMBER
TOP CHORD 2x4 SP No.2(flat)
BOT CHORD 2x4 SP No.2(flat)
WEBS 2x4 SP No.3(flat)
OTHERS 2x4 SP No.3(flat)

BRACING
TOP CHORD Structural wood sheathing directly applied or 10-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (size)
13=14-10-4, 14=14-10-4,
15=14-10-4, 16=14-10-4,
17=14-10-4, 18=14-10-4,
19=14-10-4, 20=14-10-4,
21=14-10-4, 22=14-10-4,
23=14-10-4, 24=14-10-4
Max Grav 13=61 (LC 1), 14=171 (LC 1),
15=140 (LC 1), 16=148 (LC 1),
17=146 (LC 1), 18=147 (LC 1),
19=147 (LC 1), 20=147 (LC 1),
21=147 (LC 1), 22=145 (LC 1),
23=156 (LC 1), 24=52 (LC 1)

FORCES (lb) - Maximum Compression/Maximum Tension
TOP CHORD 1-24=-47/0, 12-13=-56/0, 1-2=0/0, 2-3=0/0,
3-4=0/0, 4-5=0/0, 5-6=0/0, 6-7=0/0, 7-8=0/0,
8-9=0/0, 9-10=0/0, 10-11=0/0, 11-12=0/0
BOT CHORD 23-24=0/0, 22-23=0/0, 21-22=0/0, 20-21=0/0,
19-20=0/0, 18-19=0/0, 17-18=0/0, 16-17=0/0,
15-16=0/0, 14-15=0/0, 13-14=0/0
WEBS 2-23=-142/0, 3-22=-131/0, 4-21=-134/0,
5-20=-133/0, 6-19=-133/0, 7-18=-133/0,
8-17=-133/0, 9-16=-135/0, 10-15=-127/0,
11-14=-155/0, 7-19=0/0

NOTES
1) Gable requires continuous bottom chord bearing.
2) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).

- Gable studs spaced at 1-4-0 oc.
- This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Recommend 2x6 strongbacks, on edge, spaced at 10-00-00 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.

LOAD CASE(S) Standard



April 19, 2023

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




818 Soundside Road
Edenton, NC 27932

Symbols

PLATE LOCATION AND ORIENTATION



Center plate on joint unless x, y offsets are indicated. Dimensions are in ft-in-sixteenths. Apply plates to both sides of truss and fully embed teeth.

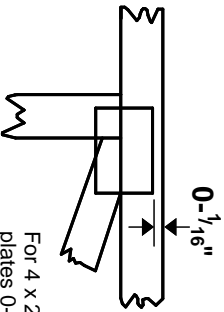

For 4 x 2 orientation, locate plates 0- 1/16" from outside edge of truss.



This symbol indicates the required direction of slots in connector plates.

* Plate location details available in **MITek 20/20 software** or upon request.

PLATE SIZE

4 X 4


The first dimension is the plate width measured perpendicular to slots. Second dimension is the length parallel to slots.

LATERAL BRACING LOCATION



Indicated by symbol shown and/or by text in the bracing section of the output. Use T or I bracing if indicated.

BEARING




Indicates location where bearings (supports) occur. Icons vary but reaction section indicates joint number where bearings occur. Min size shown is for crushing only.

Industry Standards:

ANSI/TP1: National Design Specification for Metal Plate Connected Wood Truss Construction.
DSB-89: Design Standard for Bracing, Building Component Safety Information, Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses.

Numbering System

6-4-8
dimensions shown in ft-in-sixteenths
(Drawings not to scale)

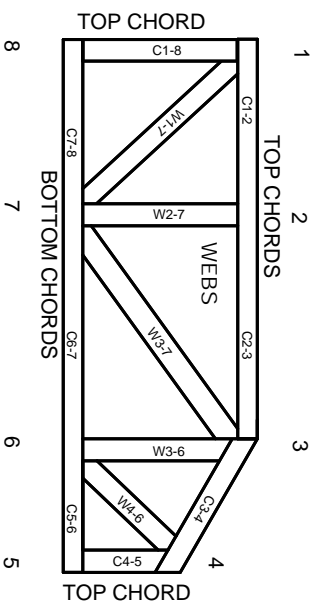

JOINTS ARE GENERALLY NUMBERED/LETTERED CLOCKWISE AROUND THE TRUSS STARTING AT THE JOINT FARTHEST TO THE LEFT.

CHORDS AND WEBS ARE IDENTIFIED BY END JOINT NUMBERS/LETTERS.

PRODUCT CODE APPROVALS

ICC-ES Reports:

ESR-1311, ESR-1352, ESR1988
ER-3907, ESR-2362, ESR-1397, ESR-3282

Trusses are designed for wind loads in the plane of the truss unless otherwise shown.

Lumber design values are in accordance with ANSI/TP1 section 6.3 These truss designs rely on lumber values established by others.

© 2012 MITteK® All Rights Reserved



MITek Engineering Reference Sheet: Mill-7473 rev. 5/19/2020



General Safety Notes

Failure to Follow Could Cause Property Damage or Personal Injury

1. Additional stability bracing for truss system, e.g. diagonal or X-bracing, is always required. See BCSI.
2. Truss bracing must be designed by an engineer. For wide truss spacing, individual lateral braces themselves may require bracing, or alternative Tor I bracing should be considered.
3. Never exceed the design loading shown and never stack materials on inadequately braced trusses.
4. Provide copies of this truss design to the building designer, erection supervisor, property owner and all other interested parties.
5. Cut members to bear tightly against each other.
6. Place plates on each face of truss at each joint and embed fully. Knots and wane at joint locations are regulated by ANSI/TP1 1.
7. Design assumes trusses will be suitably protected from the environment in accord with ANSI/TP1 1.
8. Unless otherwise noted, moisture content of lumber shall not exceed 19% at time of fabrication.
9. Unless expressly noted, this design is not applicable for use with fire retardant, preservative treated, or green lumber.
10. Camber is a non-structural consideration and is the responsibility of truss fabricator. General practice is to camber for dead load deflection.
11. Plate type, size, orientation and location dimensions indicated are minimum plating requirements.
12. Lumber used shall be of the species and size, and in all respects, equal to or better than that specified.
13. Top chords must be sheathed or purlins provided at spacing indicated on design.
14. Bottom chords require lateral bracing at 10 ft. spacing, or less, if no ceiling is installed, unless otherwise noted.
15. Connections not shown are the responsibility of others.
16. Do not cut or alter truss member or plate without prior approval of an engineer.
17. Install and load vertically unless indicated otherwise.
18. Use of green or treated lumber may pose unacceptable environmental, health or performance risks. Consult with project engineer before use.
19. Review all portions of this design (front, back, words and pictures) before use. Reviewing pictures alone is not sufficient.
20. Design assumes manufacture in accordance with ANSI/TP1 1 Quality Criteria.
21. The design does not take into account any dynamic or other loads other than those expressly stated.