

Job 72315766	Truss A1	Truss Type Truss	Qty 12	Ply 1	PRO BLDRS SUPPLY PLAN # 2 HOLLY RF Job Reference (optional)
-----------------	-------------	---------------------	-----------	----------	--

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Micah Clayton

Run: 8.62 S Sep 22 2022 Print: 8.620 S Sep 22 2022 MiTek Industries, Inc. Wed Apr 26 19:57:55

Page: 1

ID:fuHK0Mp8XDuU3hpOA3OS5cyMrac-53wEgruj\_WRxmgFDIluns7rtoKwaYjVd0ZFibczMlrx

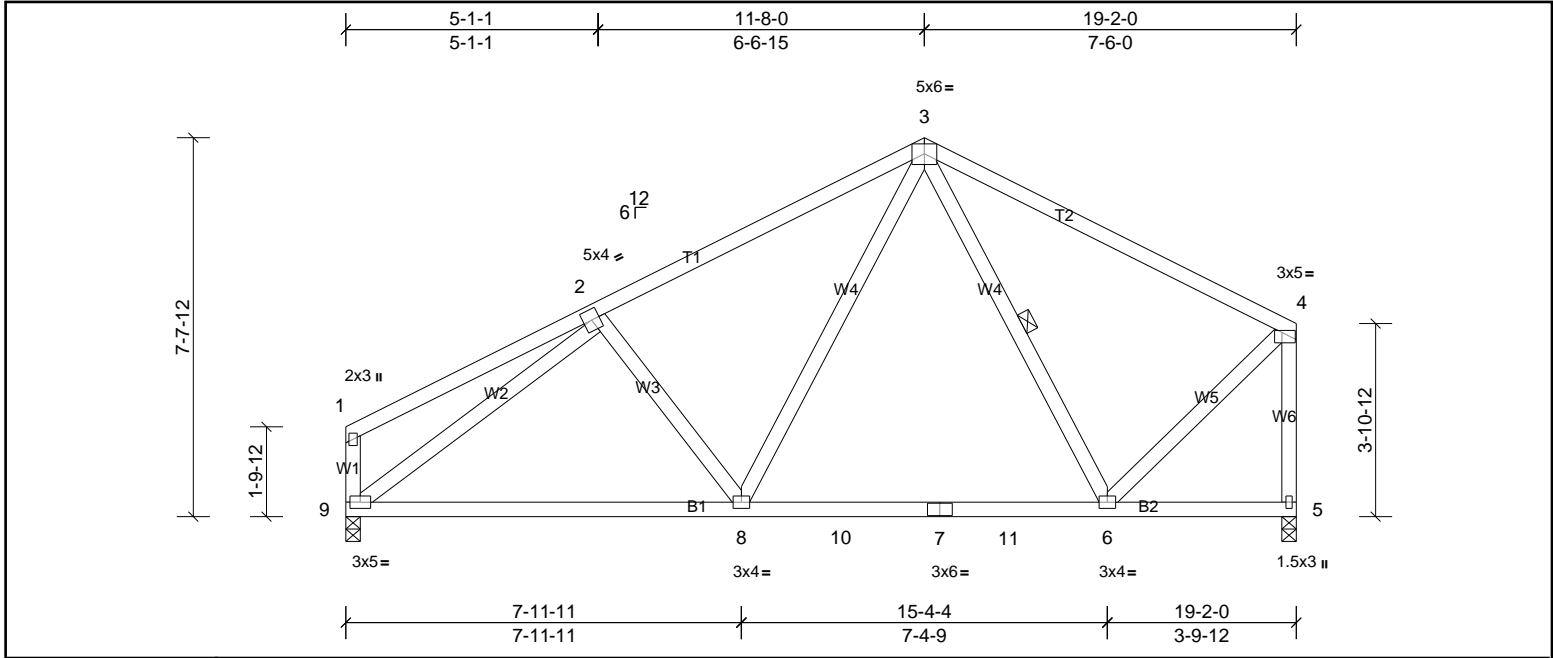


Plate Offsets (X, Y): [4:0-3-4,0-2-8]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.83	Vert(LL)	-0.12	6-8	>999	240	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.58	Vert(CT)	-0.18	8-9	>999	180		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.65	Horz(CT)	0.01	5	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MSH							Weight: 115 lb	FT = 20%

LUMBER		BRACING	
TOP CHORD	2x4 SP No.2	TOP CHORD	Structural wood sheathing directly applied or 2-2-0 oc purlins, except end verticals.
BOT CHORD	2x4 SP No.2	BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS	2x4 SP No.3	WEBS	1 Row at midpt

REACTIONS	(lb/size)	5=755/0-3-8, (min. 0-1-8), 9=755/0-3-8, (min. 0-1-8)
	Max Horiz	9=192 (LC 9)
	Max Uplift	5=87 (LC 11), 9=107 (LC 10)

FORCES	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD	2-3=-789/304, 3-4=-509/217, 4-5=-728/210
BOT CHORD	8-9=-169/717, 8-10=-45/478, 7-10=-45/478, 7-11=-45/478, 6-11=-45/478
WEBS	3-8=-71/366, 2-9=-852/221, 4-6=-7/506

- NOTES**
- Unbalanced roof live loads have been considered for this design.
  - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCCL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
  - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
  - \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
  - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 107 lb uplift at joint 9 and 87 lb uplift at joint 5.
  - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



This design is based upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of the Building Designer. Building Designer shall verify all design information on this sheet for conformance with conditions and requirements of the specific building and governing codes and ordinances. Building Designer accepts responsibility for the correctness or accuracy of the design information as it may relate to a specific building. Certification is valid only when truss is fabricated by a UFPI plant. Bracing shown is for lateral support of truss members only and does not replace erection and permanent bracing. Refer to Building Component Safety Information (BCSI) for general guidance regarding storage, erection and bracing available from SBCA and Truss Plate Institute.



Job 72315766	Truss A1G	Truss Type Truss	Qty 1	Ply 1	PRO BLDRS SUPPLY PLAN # 2 HOLLY RF Job Reference (optional)
-----------------	--------------	---------------------	----------	----------	--

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Micah Clayton

Run: 8.62 S Sep 22 2022 Print: 8.620 S Sep 22 2022 MiTek Industries, Inc. Wed Apr 26 19:57:56

Page: 1

ID:U2ebGPtv73eencHYWKVsLtyMraW-2R1\_5XwzW7he?\_OcP9wFxFyWkKjR0mRwTtlsgVzMLrv

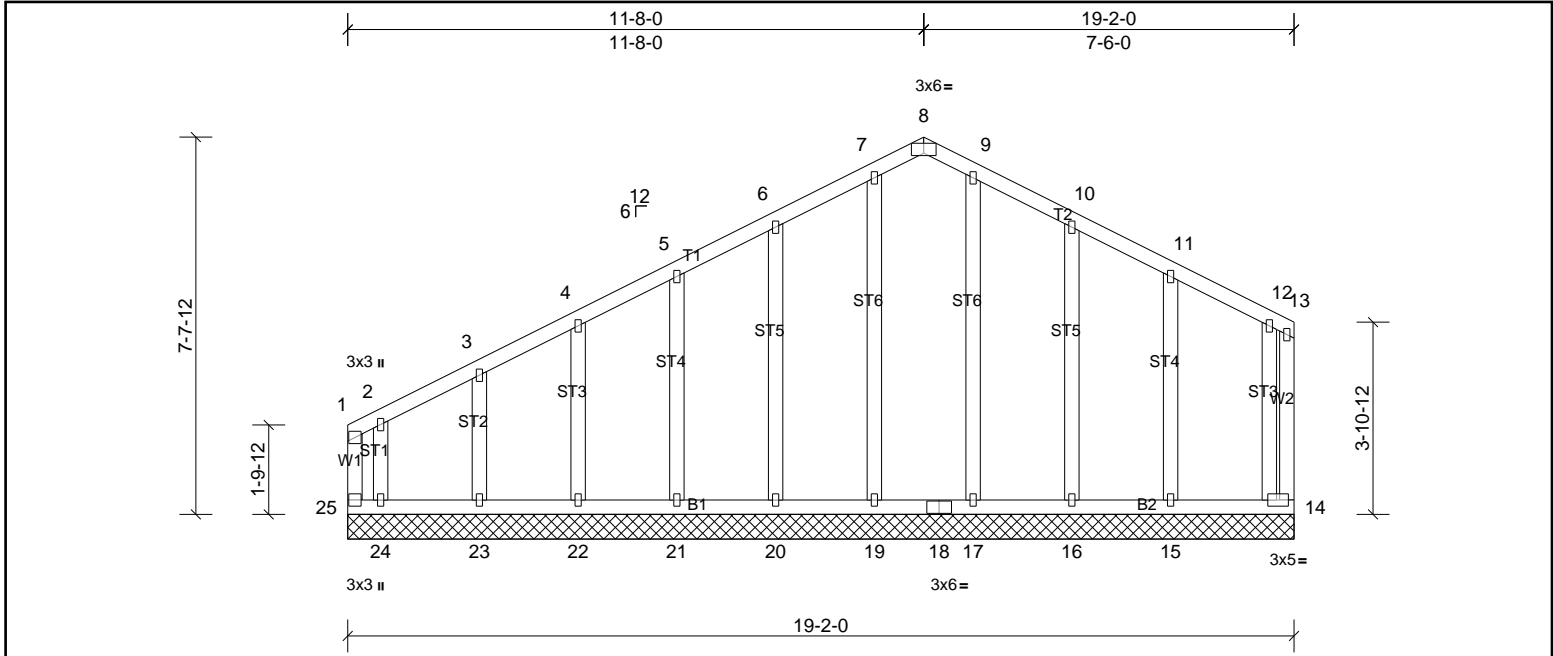


Plate Offsets (X, Y): [8:0-3-0,Edge]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.29	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.17	Vert(TL)	n/a	-	n/a	999		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.11	Horiz(TL)	0.00	14	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MR							Weight: 135 lb	FT = 20%

**LUMBER**  
TOP CHORD 2x4 SP No.2  
BOT CHORD 2x4 SP No.2  
WEBS 2x4 SP No.3  
OTHERS 2x4 SP No.3

**BRACING**  
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.  
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

**REACTIONS** All bearings 19-2-0.  
(lb) - Max Horiz 25=192 (LC 7)  
Max Uplift All uplift 100 (lb) or less at joint(s) 14, 15, 16, 20, 21, 22, 23 except 24=-416 (LC 7), 25=-262 (LC 8)  
Max Grav All reactions 250 (lb) or less at joint(s) 14, 15, 16, 17, 19, 20, 21, 22, 23 except 24=299 (LC 8), 25=455 (LC 7)

**FORCES** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES**
- Unbalanced roof live loads have been considered for this design.
  - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
  - Truss designed for wind loads in the plane of the truss only.
  - All plates are 1.5x3 MT20 unless otherwise indicated.
  - Gable requires continuous bottom chord bearing.
  - Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
  - Gable studs spaced at 2-0-0 oc.
  - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
  - \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
  - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 14, 20, 21, 22, 23, 16, 15 except (jt=lb) 25=262, 24=415.
  - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



This design is based upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of the Building Designer. Building Designer shall verify all design information on this sheet for conformance with conditions and requirements of the specific building and governing codes and ordinances. Building Designer accepts responsibility for the correctness or accuracy of the design information as it may relate to a specific building. Certification is valid only when truss is fabricated by a UFPI plant. Bracing shown is for lateral support of truss members only and does not replace erection and permanent bracing. Refer to Building Component Safety Information (BCSI) for general guidance regarding storage, erection and bracing available from SBCA and Truss Plate Institute.



Job 72315766	Truss A2	Truss Type Truss	Qty 7	Ply 1	PRO BLDRS SUPPLY PLAN # 2 HOLLY RF Job Reference (optional)
-----------------	-------------	---------------------	----------	----------	--

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Micah Clayton

Run: 8.62 S Sep 22 2022 Print: 8.620 S Sep 22 2022 MiTek Industries, Inc. Wed Apr 26 19:57:56

Page: 1

ID:uus9TF7SPDAoAgpOhXsY95yMraC-2R1\_5XwzW7he?\_OcP9wFxyWEn8c20d?wTtIsgVzMrIv

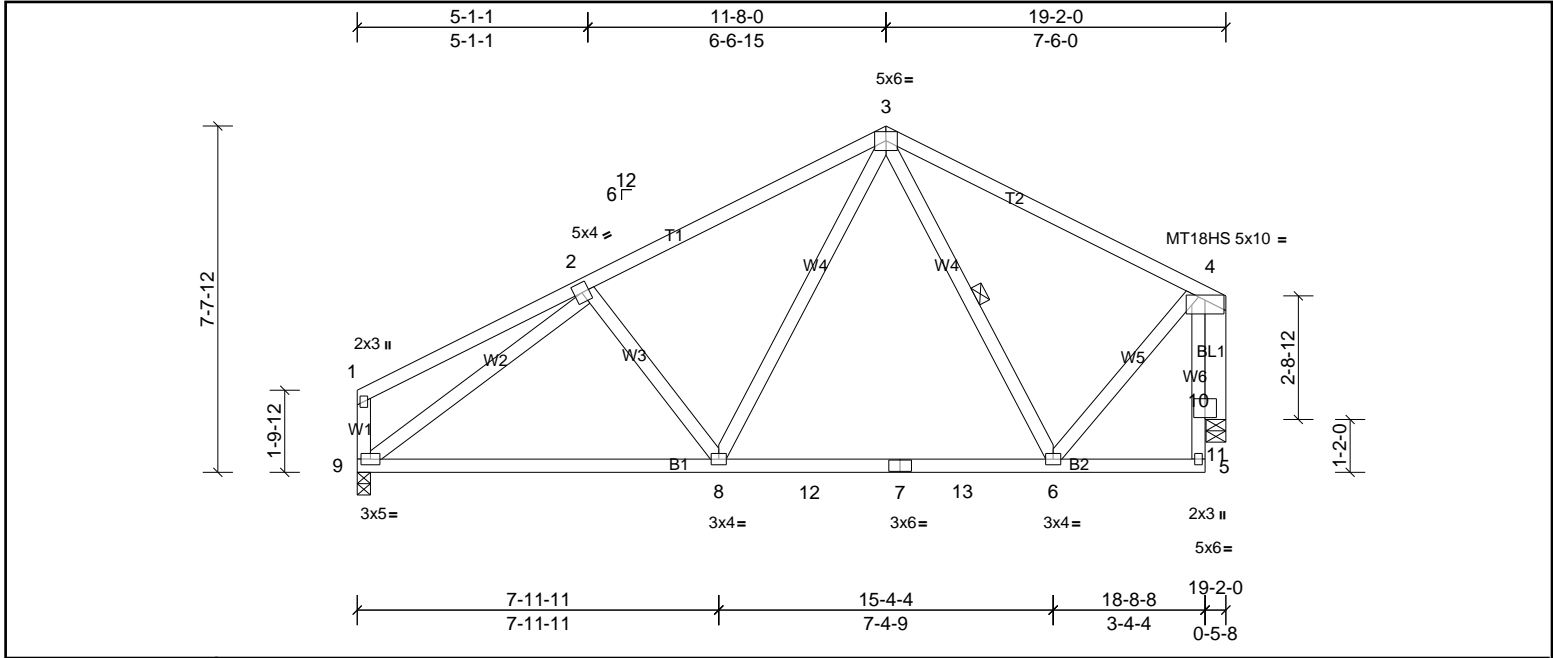


Plate Offsets (X, Y): [4:0-3-4,0-0-8]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.67	Vert(LL)	-0.11	6-8	>999	240	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.58	Vert(CT)	-0.18	8-9	>999	180	MT18HS	244/190
BCLL	0.0*	Rep Stress Incr	YES	WB	0.65	Horz(CT)	0.03	11	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MSH							Weight: 120 lb	FT = 20%

LUMBER		BRACING	
TOP CHORD	2x4 SP No.2	TOP CHORD	Structural wood sheathing directly applied or 5-7-8 oc purlins, except end verticals.
BOT CHORD	2x4 SP No.2	BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS	2x4 SP No.3	WEBS	1 Row at midpt
OTHERS	2x6 SP No.2		3-6

**REACTIONS** (lb/size) 9=752/0-3-8, (min. 0-1-8), 11=722/0-5-4, (min. 0-1-8)  
 Max Horiz 9=151 (LC 7)  
 Max Uplift 9=99 (LC 10), 11=-82 (LC 10)

**FORCES** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.  
 TOP CHORD 2-3=-785/282, 3-4=-505/184  
 BOT CHORD 8-9=-247/714, 8-12=-82/470, 7-12=-82/470, 7-13=-82/470, 6-13=-82/470  
 WEBS 4-6=-24/441, 3-8=-79/368, 2-9=-849/200, 4-11=-734/208

- NOTES**
- Unbalanced roof live loads have been considered for this design.
  - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCCL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
  - All plates are MT20 plates unless otherwise indicated.
  - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
  - \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
  - Bearing at joint(s) 11 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
  - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 99 lb uplift at joint 9 and 82 lb uplift at joint 11.
  - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



This design is based upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of the Building Designer. Building Designer shall verify all design information on this sheet for conformance with conditions and requirements of the specific building and governing codes and ordinances. Building Designer accepts responsibility for the correctness or accuracy of the design information as it may relate to a specific building. Certification is valid only when truss is fabricated by a UFPI plant. Bracing shown is for lateral support of truss members only and does not replace erection and permanent bracing. Refer to Building Component Safety Information (BCSI) for general guidance regarding storage, erection and bracing available from SBCA and Truss Plate Institute.



Job 72315766	Truss A2G	Truss Type Truss	Qty 1	Ply 1	PRO BLDRS SUPPLY PLAN # 2 HOLLY RF Job Reference (optional)
-----------------	--------------	---------------------	----------	----------	--

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Micah Clayton

Run: 8.620 S Sep 22 2022 Print: 8.620 S Sep 22 2022 MiTek Industries, Inc. Wed Apr 26 19:57:57

Page: 1

ID:fiscjoQ8XuJFgWDBfHoPfmMrZp-WebMItxbHRVd8zoztRUUmTV8Y0tIBf3iXUPCzMlru

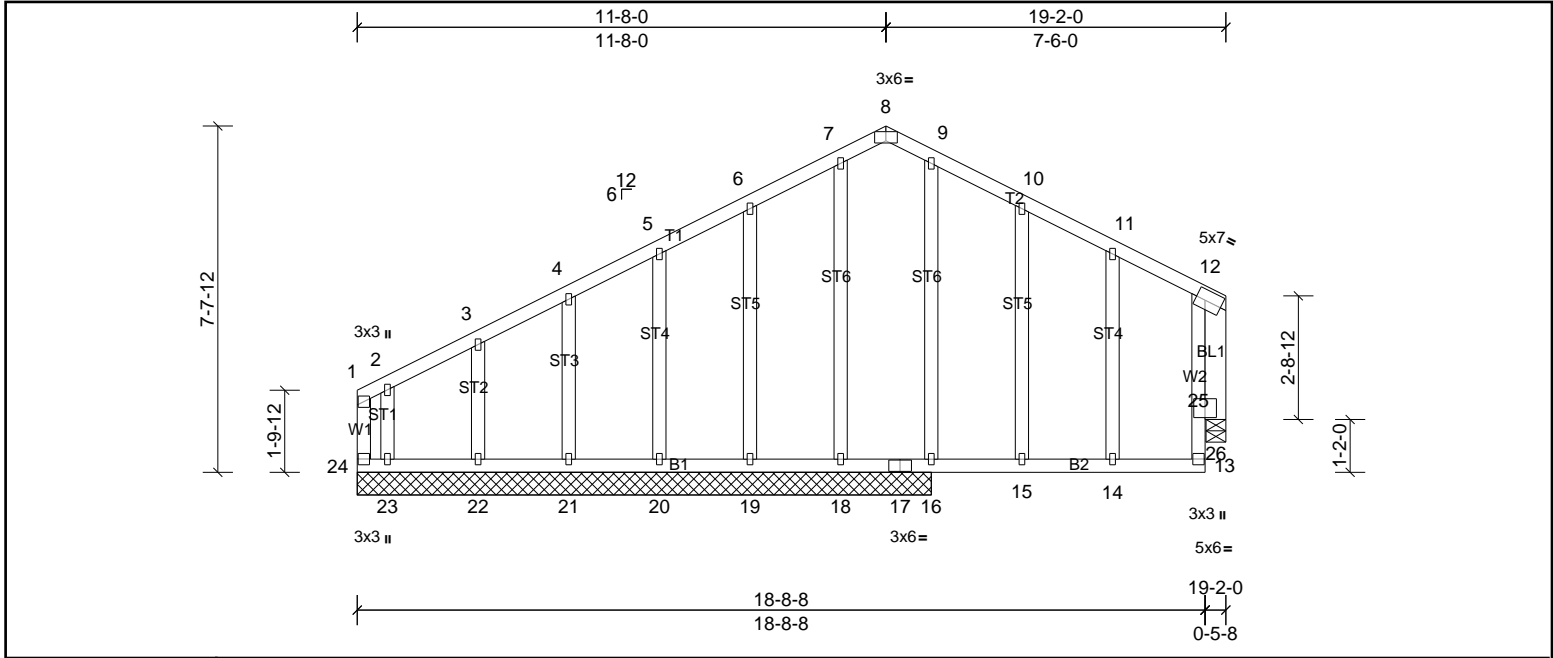


Plate Offsets (X, Y): [8:0-3-0,Edge], [12:0-2-8,0-2-12]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.31	Vert(LL)	0.04	14-15	>999	240	MT20	244/190
TCDL	18.0	Lumber DOL	1.15	BC	0.35	Vert(CT)	-0.08	14-15	>992	180		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.24	Horz(CT)	-0.01	26	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MSH							Weight: 135 lb	FT = 20%

LUMBER	BRACING
TOP CHORD 2x4 SP No.2	TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD 2x4 SP No.2	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 2x4 SP No.3	
OTHERS 2x4 SP No.3 *Except* BL1:2x6 SP No.2	

REACTIONS
All bearings 12-8-0. except 26=0-5-4
(lb) - Max Horiz 24=151 (LC 7)
Max Uplift All uplift 100 (lb) or less at joint(s) 16, 19, 20, 21, 22, 26 except 18=-115 (LC 22), 23=-442 (LC 10), 24=-123 (LC 6)
Max Grav All reactions 250 (lb) or less at joint(s) 18, 19, 20, 21, 22, 23 except 16=507 (LC 1), 24=475 (LC 14), 26=305 (LC 22)

FORCES
(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-24=-258/55
WEBS 9-16=-263/29, 12-26=-311/121

- NOTES**
- Unbalanced roof live loads have been considered for this design.
  - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCCL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed ; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
  - Truss designed for wind loads in the plane of the truss only.
  - All plates are 1.5x3 MT20 unless otherwise indicated.
  - Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
  - Gable studs spaced at 2-0-0 oc.
  - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
  - \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
  - Bearing at joint(s) 26 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
  - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 16, 19, 20, 21, 22, 26 except (jt=lb) 24=123, 18=114, 23=441.
  - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



Job 72315766	Truss B1	Truss Type Truss	Qty 13	Ply 1	PRO BLDRS SUPPLY PLAN # 2 HOLLY RF Job Reference (optional)
-----------------	-------------	---------------------	-----------	----------	--

UFPI Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Micah Clayton

Run: 8.62 S Sep 22 2022 Print: 8.620 S Sep 22 2022 MiTek Industries, Inc. Wed Apr 26 19:57:57

Page: 1

ID:cvZfrw3N2A\_kXfmNGvFrJXyM7\_cWebMltxbHRpVd8zoztRUUmTKGyW4l?E3iXUPCzMLru

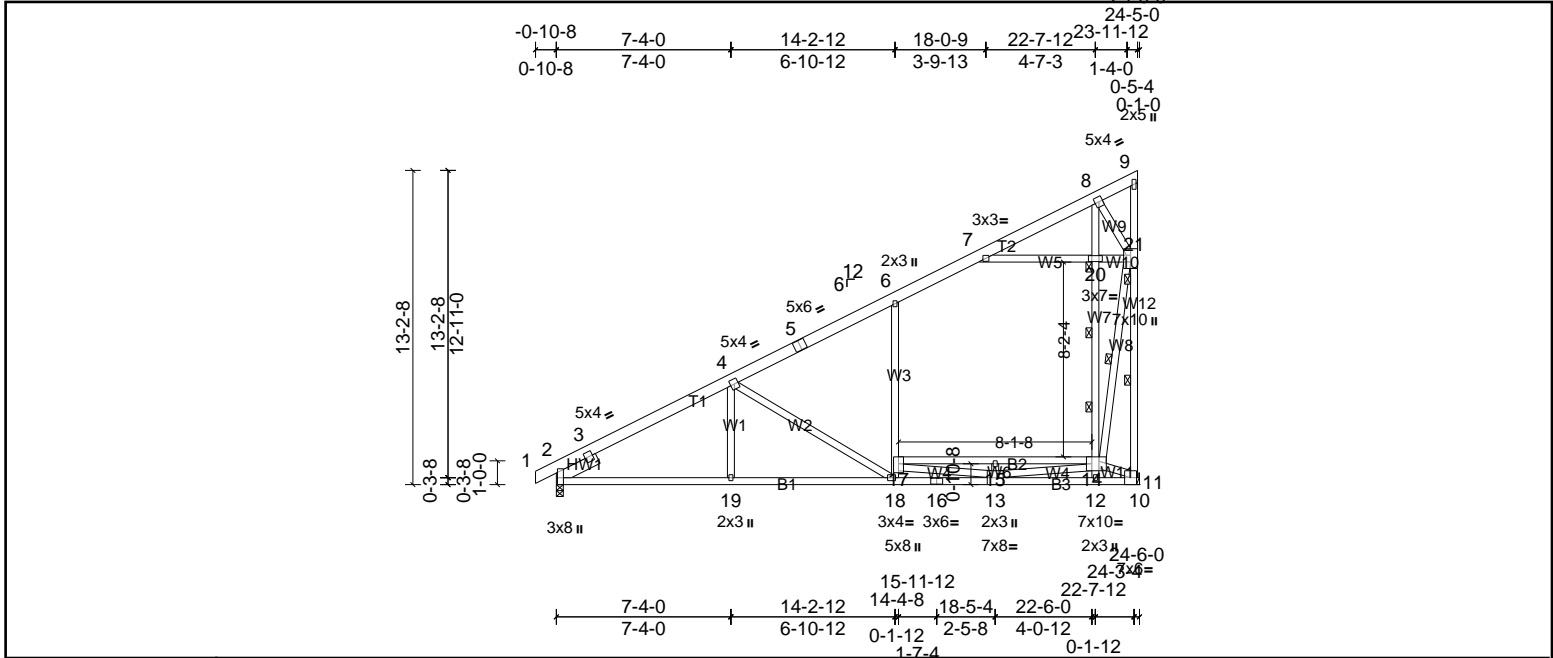


Plate Offsets (X, Y): [2:0-5-14,Edge], [14:0-2-12,Edge]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.98	Vert(LL)	-0.42	18-19	>697	240	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.72	Vert(CT)	-0.86	18-19	>338	180		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.97	Horz(CT)	-0.02	2	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MSH		Attic	-0.19	14-17	>517	360	Weight: 224 lb	FT = 20%

LUMBER	BRACING
TOP CHORD 2x6 SP No.2	TOP CHORD Structural wood sheathing directly applied, except end verticals.
BOT CHORD 2x4 SP No.2	BOT CHORD Rigid ceiling directly applied or 3-1-4 oc bracing. Except:
WEBS 2x4 SP No.2 *Except* W12:2x4 SP SS, W1,W2,W6,W10,W9:2x4 SP No.3	7-11-0 oc bracing: 14-17
SLIDER Left 2x6 SP No.2 -- 1-11-0	WEBS 1 Row at midpt 14-21
REACTIONS (lb/size) 2=1084/0-3-8, (min. 0-1-8), 11=1178/ Mechanical, (min. 0-1-8)	WEBS 2 Rows at 1/3 pts 9-11, 14-20
Max Horiz 2=505 (LC 10)	
Max Uplift 2=48 (LC 10), 11=209 (LC 10)	
Max Grav 2=1084 (LC 1), 11=1427 (LC 2)	
FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.	
TOP CHORD 2-3=-551/6, 3-4=-1644/63, 4-5=-1107/0, 5-6=-969/0, 6-7=-776/6, 7-8=-422/942, 11-21=-2759/570	
BOT CHORD 2-19=-537/1404, 18-19=-507/1404, 16-18=-280/1056, 13-16=-280/1056, 12-13=-2790/631, 11-12=-2580/592, 15-17=-552/986, 14-15=-552/986	
WEBS 4-19=0/291, 4-18=-704/338, 17-18=-64/447, 6-17=0/391, 14-20=-1702/704, 8-20=-1644/716, 7-20=-1695/490, 13-15=-492/0, 11-14=-666/2896, 20-21=-1636/478, 8-21=-474/1445, 14-21=-1010/3973, 13-14=-294/3092, 13-17=-1212/638	

- NOTES**
- 1) Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed; end vertical left exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
  - 2) The Fabrication Tolerance at joint 14 = 4%
  - 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
  - 4) \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
  - 5) Ceiling dead load (5.0 psf) on member(s). 6-7, 7-20, 20-21
  - 6) Bottom chord live load (40.0 psf) and additional bottom chord dead load (0.0 psf) applied only to room. 15-17, 14-15
  - 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 209 lb uplift at joint 11 and 48 lb uplift at joint 2.
  - 8) This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
  - 9) Attic room checked for L/360 deflection.



Job 72315766	Truss B1G	Truss Type Truss	Qty 1	Ply 1	PRO BLDRS SUPPLY PLAN # 2 HOLLY RF Job Reference (optional)
-----------------	--------------	---------------------	----------	----------	--

UFPI Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Micah Clayton

Run: 8.62 S Sep 22 2022 Print: 8.620 S Sep 22 2022 MiTek Industries, Inc. Wed Apr 26 19:57:58

Page: 1

ID:8fntY7EiWnm0AnzsG5kh2yMedJ-WebMltxbHRpVd8zoztRUUmTPDY1LIC3iXUPCzMLru

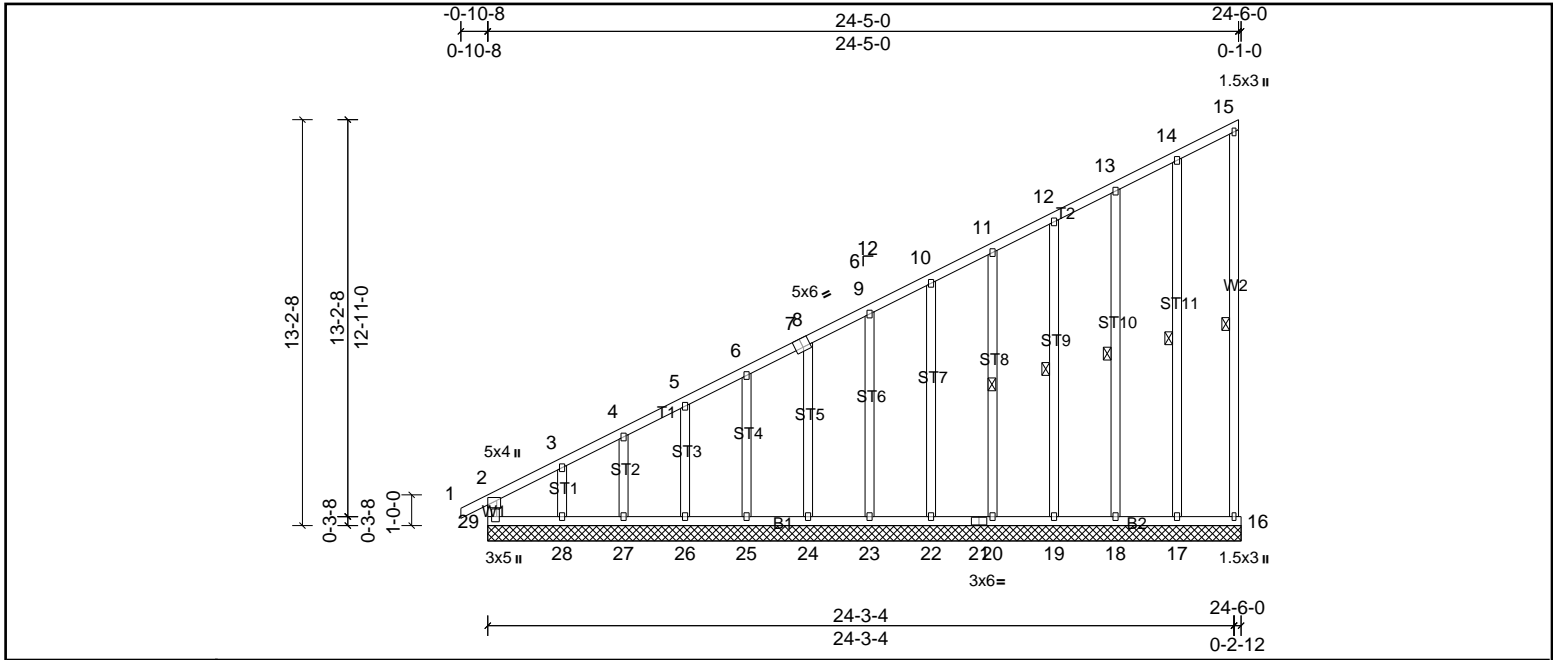


Plate Offsets (X, Y): [7:0-3-0,Edge], [29:0-2-0,0-1-8]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.69	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.32	Vert(CT)	n/a	-	n/a	999		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.14	Horz(CT)	n/a	-	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MR							Weight: 207 lb	FT = 20%

LUMBER	BRACING
TOP CHORD 2x4 SP No.2	TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD 2x4 SP No.2	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 2x4 SP No.3	WEBS 1 Row at midpt 15-16, 14-17, 13-18, 12-19, 11-20
OTHERS 2x4 SP No.3	

**REACTIONS** All bearings 24-6-0.  
 (lb) - Max Horiz 29=494 (LC 10)  
 Max Uplift All uplift 100 (lb) or less at joint(s) 16, 17, 18, 19, 20, 22, 23, 24, 25, 26 except 28=334 (LC 10)  
 Max Grav All reactions 250 (lb) or less at joint(s) 16, 17, 18, 19, 20, 22, 23, 24, 25, 26, 27, 28 except 29=402 (LC 10)

**FORCES** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.  
 TOP CHORD 2-29=-297/91, 2-3=-638/233, 3-4=-506/182, 4-5=-478/174, 5-6=-424/154, 6-7=-375/128, 7-8=-365/137, 8-9=-325/120, 9-10=-275/103  
 WEBS 3-28=-154/267

- NOTES**
- 1) Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCCL=6.0psf; BCCL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed; end vertical left exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
  - 2) Truss designed for wind loads in the plane of the truss only.
  - 3) All plates are 2x3 MT20 unless otherwise indicated.
  - 4) Gable requires continuous bottom chord bearing.
  - 5) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
  - 6) Gable studs spaced at 2-0-0 oc.
  - 7) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
  - 8) \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
  - 9) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 16, 17, 18, 19, 20, 22, 23, 24, 25, 26 except (jt=lb) 28=333.
  - 10) This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



Job 72315766	Truss B2	Truss Type Truss	Qty 7	Ply 1	PRO BLDRS SUPPLY PLAN # 2 HOLLY RF Job Reference (optional)
-----------------	-------------	---------------------	----------	----------	--

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Micah Clayton

Run: 8.62 S Sep 22 2022 Print: 8.620 S Sep 22 2022 MiTek Industries, Inc. Wed Apr 26 19:57:58

Page: 1

ID:c6tg3iLW322DAX9Rw2PyQryMed1\_-q9iWCxE2kxMFIY?Xayj0z0dExLVUZJCxBEzkNzMirt

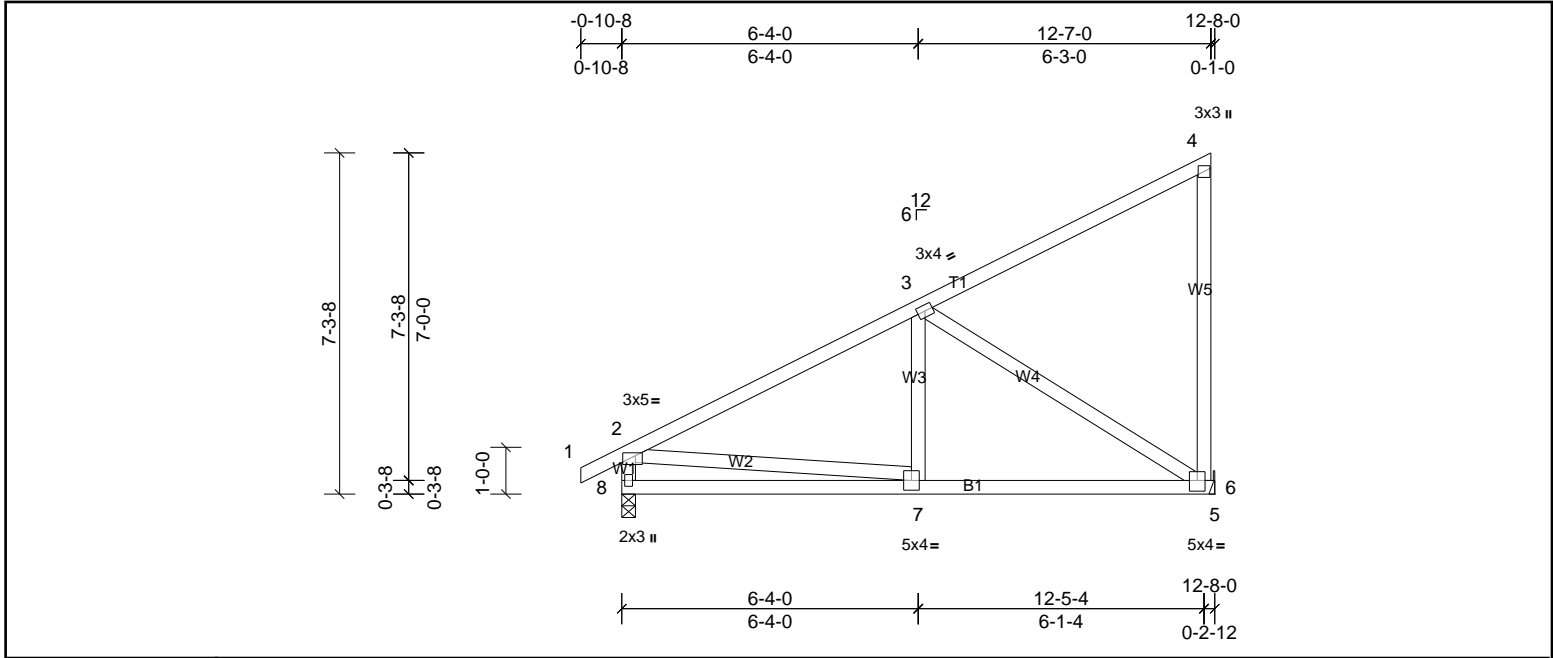


Plate Offsets (X, Y): [2:0-3-4,0-0-12], [6:0-2-0,0-2-12]

Loading	(psf)	Spacing		CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	2-0-0	TC	0.48	Vert(LL)	0.06	7-8	>999	240	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.39	Vert(CT)	-0.07	6-7	>999	180		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.53	Horz(CT)	-0.01	6	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MSH							Weight: 76 lb	FT = 20%

LUMBER		BRACING	
TOP CHORD	2x4 SP No.2	TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD	2x4 SP No.2	BOT CHORD	Rigid ceiling directly applied or 7-7-1 oc bracing.
WEBS	2x4 SP No.3		

REACTIONS	(lb/size)	
	6=494/ Mechanical, (min. 0-1-8), 8=555/0-3-8, (min. 0-1-8)	
	Max Horiz	8=255 (LC 10)
	Max Uplift	6=175 (LC 10), 8=82 (LC 7)

FORCES	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD	2-3=-598/385, 2-8=-499/335
BOT CHORD	7-8=-521/260, 6-7=-559/465
WEBS	3-7=-281/255, 3-6=-537/647, 2-7=-39/264

- NOTES**
- Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCCL=6.0psf; BCCL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed; end vertical left exposed; porch left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
  - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
  - \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
  - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 82 lb uplift at joint 8 and 175 lb uplift at joint 6.
  - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



This design is based upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of the Building Designer. Building Designer shall verify all design information on this sheet for conformance with conditions and requirements of the specific building and governing codes and ordinances. Building Designer accepts responsibility for the correctness or accuracy of the design information as it may relate to a specific building. Certification is valid only when truss is fabricated by a UFPI plant. Bracing shown is for lateral support of truss members only and does not replace erection and permanent bracing. Refer to Building Component Safety Information (BCSI) for general guidance regarding storage, erection and bracing available from SBCA and Truss Plate Institute.



Job 72315766	Truss B2G	Truss Type Truss	Qty 1	Ply 1	PRO BLDRS SUPPLY PLAN # 2 HOLLY RF Job Reference (optional)
-----------------	--------------	---------------------	----------	----------	--

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Micah Clayton

Run: 8.62 S Sep 22 2022 Print: 8.620 S Sep 22 2022 MiTek Industries, Inc. Wed Apr 26 19:57:58

Page: 1

ID:kQktVa6f\_j67sm3kgUZz0LyMec1-q9lWCxE2kxMFIY?Xayj0z0YjxDWUXVCxBEzknZMlrt

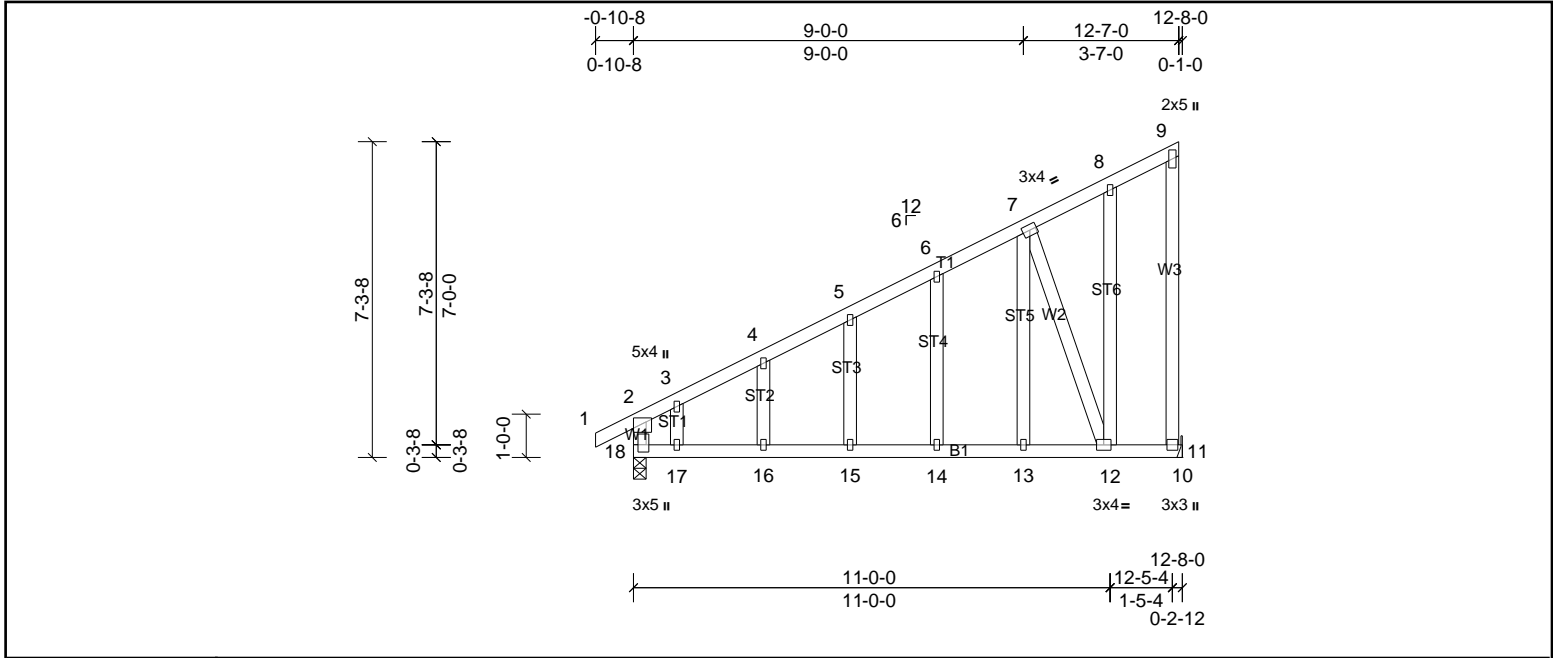


Plate Offsets (X, Y): [18:0-2-0,0-1-4]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.77	Vert(LL)	0.33	15-16	>447	240	MT20	244/190
TCDL	18.0	Lumber DOL	1.15	BC	0.90	Vert(CT)	-0.35	15-16	>426	180		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.65	Horz(CT)	0.01	11	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MSH							Weight: 91 lb	FT = 20%

LUMBER		BRACING	
TOP CHORD	2x4 SP No.2	TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD	2x4 SP No.2	BOT CHORD	Rigid ceiling directly applied or 6-9-12 oc bracing.
WEBS	2x4 SP No.3		
OTHERS	2x4 SP No.3		

**REACTIONS** (lb/size) 11=591/ Mechanical, (min. 0-1-8), 18=671/0-3-8, (min. 0-1-8)  
 Max Horiz 18=255 (LC 10)  
 Max Uplift 11=-175 (LC 10), 18=-82 (LC 7)

**FORCES** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.  
 TOP CHORD 2-3=-563/219, 3-4=-536/224, 4-5=-491/241, 5-6=-458/259, 6-7=-414/273, 9-11=-280/260, 2-18=-515/297  
 BOT CHORD 17-18=-423/411, 16-17=-423/411, 15-16=-423/411, 14-15=-423/411, 13-14=-423/411, 12-13=-423/411  
 WEBS 7-13=-636/566, 8-12=-468/407, 7-12=-1075/1111

- NOTES**
- 1) Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed; end vertical left exposed; porch left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
  - 2) Truss designed for wind loads in the plane of the truss only.
  - 3) All plates are 1.5x3 MT20 unless otherwise indicated.
  - 4) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
  - 5) Gable studs spaced at 2-0-0 oc.
  - 6) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
  - 7) \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
  - 8) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 175 lb uplift at joint 11 and 82 lb uplift at joint 18.
  - 9) This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.





Job 72315766	Truss B3	Truss Type Truss	Qty 10	Ply 1	PRO BLDRS SUPPLY PLAN # 2 HOLLY RF Job Reference (optional)
-----------------	-------------	---------------------	-----------	----------	--

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Micah Clayton

Run: 8.62 S Sep 22 2022 Print: 8.620 S Sep 22 2022 MiTek Industries, Inc. Wed Apr 26 19:57:58

Page: 1

ID:bNU6i03jXhsW7GidzKxBv0yMeYD-q9lWCxE2kxMFIY?Xayj0z0WAXC6UTyCxBzEzKzNzMIrt

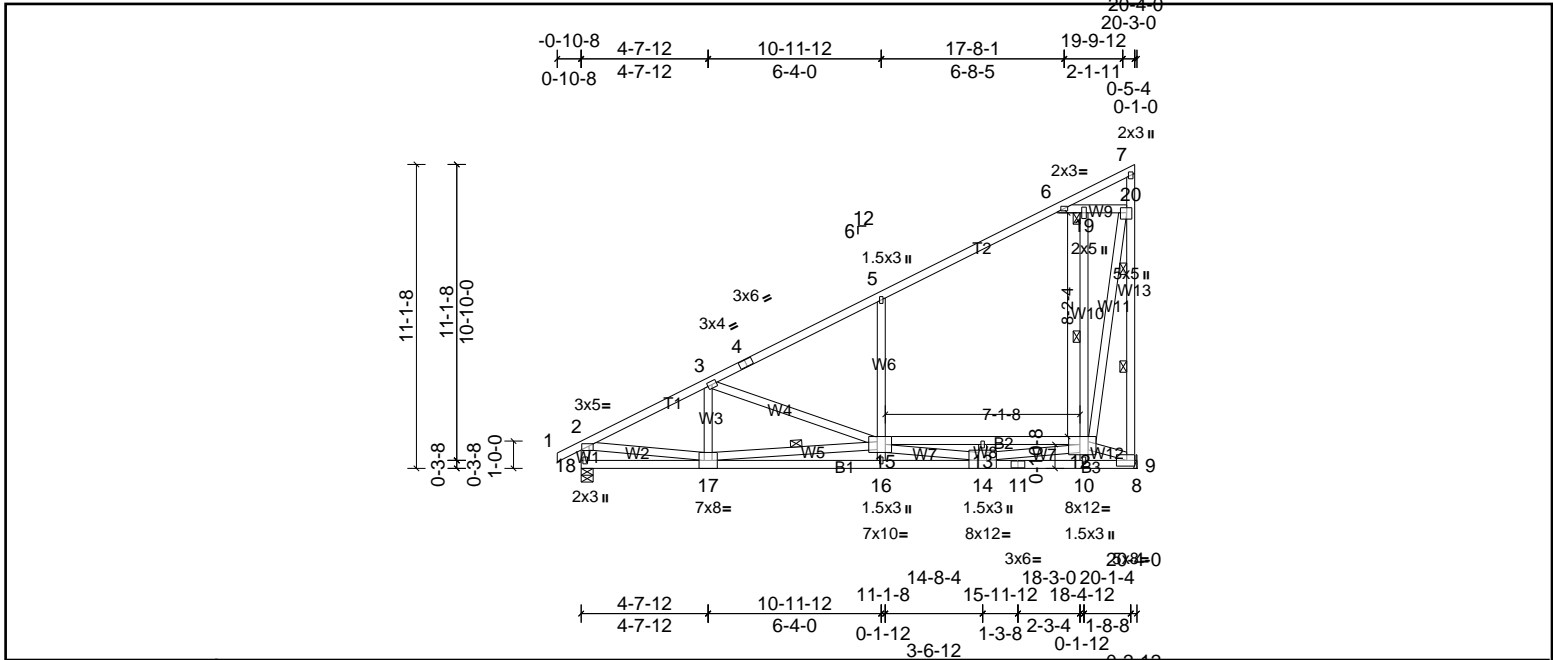


Plate Offsets (X, Y): [2:0-1-12,0-1-0], [9:0-3-8,0-2-8], [12:0-5-0,Edge], [15:0-2-12,Edge], [20:0-2-4,0-2-4]

Loading	(psf)	Spacing	2-10-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.93	Vert(LL)	-0.32	16-17	>743	240	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.99	Vert(CT)	-0.64	16-17	>373	180		
BCLL	0.0*	Rep Stress Incr	NO	WB	0.94	Horz(CT)	0.04	9	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MSH		Attic	-0.14	12-15	>594	360	Weight: 174 lb	FT = 20%

LUMBER	BRACING
TOP CHORD 2x4 SP No.2	TOP CHORD 2-0-0 oc purlins (3-9-10 max.), except end verticals (Switched from sheeted: Spacing > 2-0-0).
BOT CHORD 2x4 SP SS *Except* B2:2x4 SP No.1, B3:2x4 SP No.2	BOT CHORD Rigid ceiling directly applied or 3-4-9 oc bracing. Except:
WEBS 2x4 SP No.3 *Except* W13:2x4 SP SS, W6,W10,W9,W12,W11:2x4 SP No.2, W7:2x4 SP No.1	WEBS 3-9-0 oc bracing: 12-15
REACTIONS (lb/size) 9=1382/ Mechanical, (min. 0-1-8), 18=1304/0-5-4, (min. 0-1-9)	WEBS 1 Row at midpt 12-19, 15-17
Max Horiz 18=581 (LC 10)	WEBS 2 Rows at 1/3 pts 7-9
Max Uplift 9=244 (LC 10), 18=50 (LC 30)	JOINTS 1 Brace at Jt(s): 7, 19, 2
Max Grav 9=1682 (LC 2), 18=1312 (LC 2)	
FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.	
TOP CHORD 2-3=-1878/68, 3-4=-890/0, 4-5=-776/0, 5-6=-831/0, 9-20=-2796/603, 2-18=-1273/181	
BOT CHORD 17-18=-664/324, 16-17=-1210/4477, 14-16=-1282/4657, 11-14=-2357/579, 10-11=-2357/579, 9-10=-2226/565, 13-15=-1621/0, 12-13=-1621/0	
WEBS 3-17=-7/450, 5-15=-540/367, 10-12=0/287, 12-19=-463/307, 6-19=-735/188, 19-20=-730/190, 2-17=0/1540, 13-14=-589/0, 14-15=-2722/1183, 12-14=-733/4726, 15-17=-2875/598, 3-15=-1013/470, 9-12=-632/2475, 12-20=-693/2958	

- NOTES**
- 1) Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed; end vertical left exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
  - 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
  - 3) \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
  - 4) Ceiling dead load (5.0 psf) on member(s): 5-6, 6-19, 19-20
  - 5) Bottom chord live load (40.0 psf) and additional bottom chord dead load (0.0 psf) applied only to room. 13-15, 12-13
  - 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 244 lb uplift at joint 9 and 50 lb uplift at joint 18.
  - 7) This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
  - 8) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
  - 9) Attic room checked for L/360 deflection.



Job 72315766	Truss B3G	Truss Type Truss	Qty 1	Ply 1	PRO BLDRS SUPPLY PLAN # 2 HOLLY RF Job Reference (optional)
-----------------	--------------	---------------------	----------	----------	--

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Micah Clayton

Run: 8.62 S Sep 22 2022 Print: 8.620 S Sep 22 2022 MiTek Industries, Inc. Wed Apr 26 19:57:58

Page: 1

ID:AptPIB9s7xwABRTwqtumigyMeLB\_-q9IWCxE2kxMFIY?Xayj0z0bhxNLUFSxBEzkNzMIrt

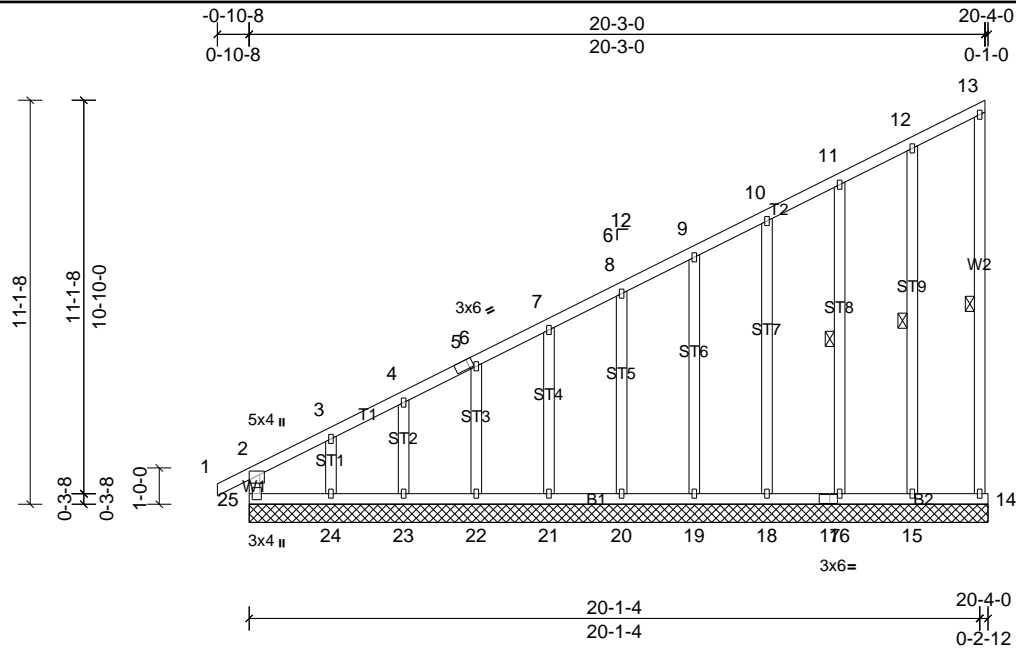


Plate Offsets (X, Y): [5:0-1-10,Edge], [17:0-2-8,0-1-8], [25:0-2-0,0-1-0]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.58	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.27	Vert(CT)	n/a	-	n/a	999		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.14	Horz(CT)	n/a	-	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MR							Weight: 157 lb	FT = 20%

LUMBER	BRACING
TOP CHORD 2x4 SP No.2	TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD 2x4 SP No.2	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 2x4 SP No.3	WEBS 1 Row at midpt 13-14, 12-15, 11-16
OTHERS 2x4 SP No.3	

**REACTIONS** All bearings 20-4-0.  
 (lb) - Max Horiz 25=410 (LC 10)  
 Max Uplift All uplift 100 (lb) or less at joint(s) 14, 15, 16, 18, 19, 20, 21, 22 except 24=-293 (LC 10)  
 Max Grav All reactions 250 (lb) or less at joint(s) 14, 15, 16, 18, 19, 20, 21, 22, 23, 24 except 25=337 (LC 10)

**FORCES** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.  
 TOP CHORD 2-3=-528/194, 3-4=-410/149, 4-5=-377/129, 5-6=-368/139, 6-7=-324/120, 7-8=-275/103

- NOTES**
- 1) Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed ; end vertical left exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
  - 2) Truss designed for wind loads in the plane of the truss only.
  - 3) All plates are 1.5x3 MT20 unless otherwise indicated.
  - 4) Gable requires continuous bottom chord bearing.
  - 5) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
  - 6) Gable studs spaced at 2-0-0 oc.
  - 7) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
  - 8) \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
  - 9) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 14, 15, 16, 18, 19, 20, 21, 22 except (jt=lb) 24=293.
  - 10) This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



Job 72315766	Truss B4	Truss Type Truss	Qty 1	Ply 1	PRO BLDRS SUPPLY PLAN # 2 HOLLY RF Job Reference (optional)
-----------------	-------------	---------------------	----------	----------	--

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Micah Clayton

Run: 8.62 S Sep 22 2022 Print: 8.620 S Sep 22 2022 MiTek Industries, Inc. Wed Apr 26 19:57:59

Page: 1

ID:jrYOKuSuxNsCZpYPHMD615yMdw-S0j7Ysp23DsS7B5IUyZBYlJYADx9MARzWGqzMrS

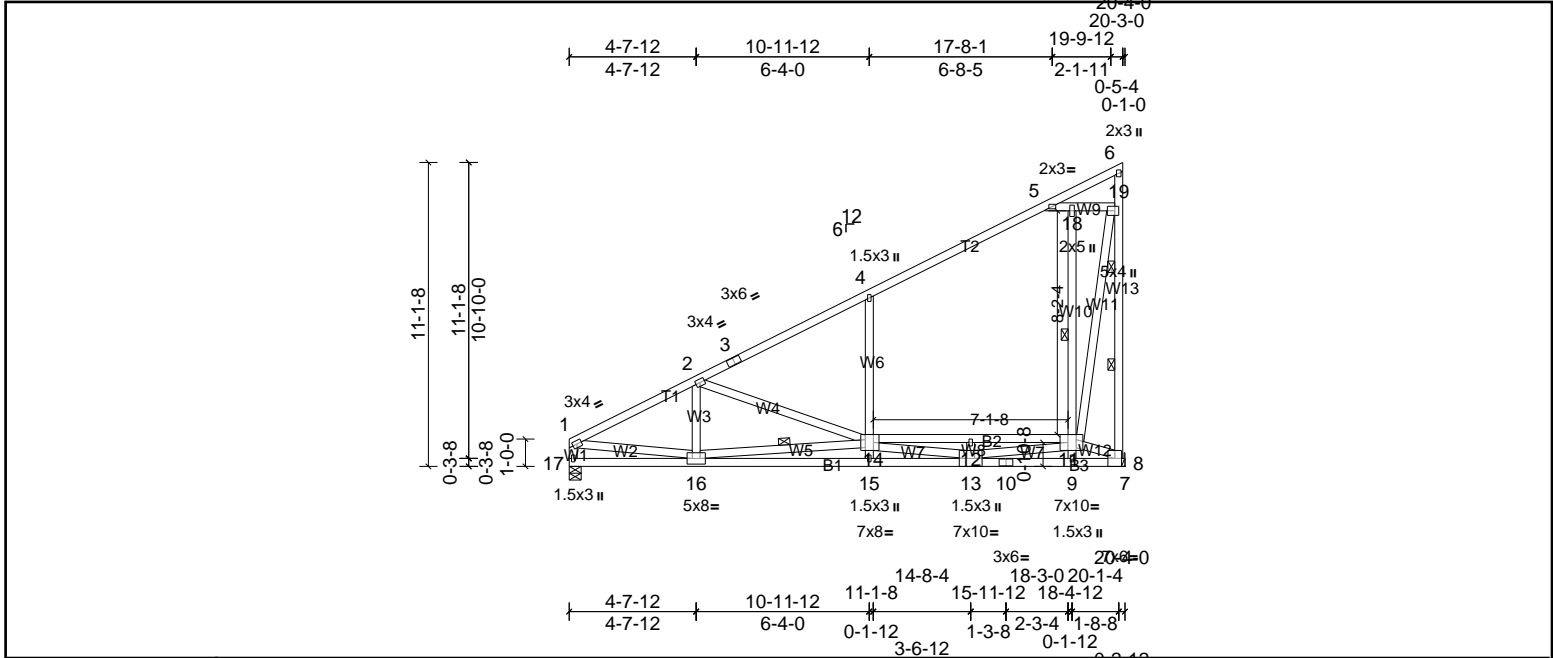


Plate Offsets (X, Y): [11:0-3-8,Edge], [14:0-2-8,Edge], [19:0-2-0,0-1-12]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.69	Vert(LL)	-0.26	15	>914	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	1.00	Vert(CT)	-0.52	15-16	>459		180
BCLL	0.0*	Rep Stress Incr	YES	WB	0.88	Horz(CT)	0.04	8	n/a		n/a
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MSH		Attic	0.12	11-14	>731	Weight: 172 lb	FT = 20%

LUMBER		BRACING	
TOP CHORD	2x4 SP No.2	TOP CHORD	Structural wood sheathing directly applied or 4-8-7 oc purlins, except end verticals.
BOT CHORD	2x4 SP No.2	BOT CHORD	Rigid ceiling directly applied or 2-2-0 oc bracing. Except:
WEBS	2x4 SP No.3 *Except* W13,W6,W10,W9,W7:2x4 SP No.2	WEBS	4-8-0 oc bracing: 11-14
<b>REACTIONS</b>	(lb/size) 8=977/ Mechanical, (min. 0-1-8), 17=858/0-5-4, (min. 0-1-8)	WEBS	1 Row at midpt
	Max Horiz 17=392 (LC 10)	WEBS	2 Rows at 1/3 pts
	Max Uplift 8=172 (LC 10), 17=12 (LC 10)		
	Max Grav 8=1189 (LC 2), 17=874 (LC 2)		
<b>FORCES</b>	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.		
TOP CHORD	1-2=-1332/51, 2-3=-638/0, 3-4=-557/0, 4-5=-593/1, 8-19=-1995/430, 1-17=-846/66		
BOT CHORD	16-17=-458/213, 15-16=-843/3106, 13-15=-898/3248, 10-13=-1703/416, 9-10=-1703/416, 8-9=-1599/404, 12-14=-1099/0, 11-12=-1099/0		
WEBS	2-16=0/307, 4-14=-371/256, 11-18=-343/224, 5-18=-523/131, 18-19=-518/132, 1-16=0/1106, 8-11=-451/1777, 11-19=-500/2124, 12-13=-416/0, 13-14=-1932/838, 11-13=-515/3327, 14-16=-1965/407, 2-14=-718/334		

- NOTES**
- 1) Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed; end vertical left exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
  - 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
  - 3) \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
  - 4) Ceiling dead load (5.0 psf) on member(s). 4-5, 5-18, 18-19
  - 5) Bottom chord live load (40.0 psf) and additional bottom chord dead load (0.0 psf) applied only to room. 12-14, 11-12
  - 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 172 lb uplift at joint 8 and 12 lb uplift at joint 17.
  - 7) This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
  - 8) Attic room checked for L/360 deflection.



Job 72315766	Truss B5	Truss Type Truss	Qty 3	Ply 1	PRO BLDRS SUPPLY PLAN # 2 HOLLY RF Job Reference (optional)
-----------------	-------------	---------------------	----------	----------	--

UFPI Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Micah Clayton

Run: 8.62 S Sep 22 2022 Print: 8.620 S Sep 22 2022 MiTek Industries, Inc. Wed Apr 26 19:57:59

Page: 1

ID:txoZj96Kq9vMoDnryzGnyMdaC-S0j7jYysp23DsS7B5llyZBYjqLepD?CMArzWGqzMrS

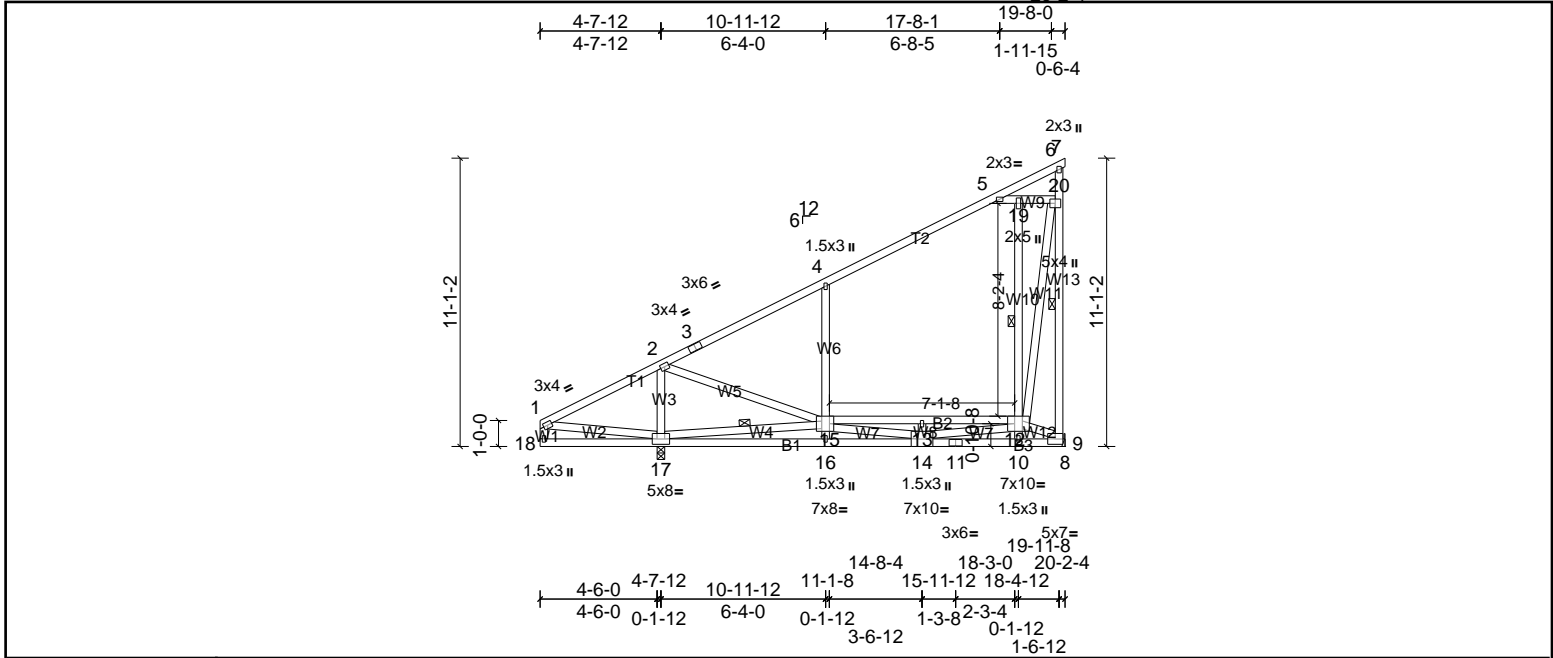


Plate Offsets (X, Y): [12:0-3-4,Edge], [15:0-2-0,Edge]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.81	Vert(LL)	0.13	16	>999	240	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.64	Vert(CT)	-0.23	13-15	>785	180		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.62	Horz(CT)	0.02	9	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MSH		Attic	-0.06	12-15	>999	360	Weight: 171 lb	FT = 20%

LUMBER		BRACING	
TOP CHORD	2x4 SP No.2	TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD	2x4 SP No.2 *Except* B1:2x4 SP No.1	BOT CHORD	Rigid ceiling directly applied or 6-0-0 oc bracing. Except:
WEBS	2x4 SP No.3 *Except* W6,W10,W9,W7,W13:2x4 SP No.2	WEBS	5-1-0 oc bracing: 12-15
<b>REACTIONS</b>	(lb/size) 9=726/ Mechanical, (min. 0-1-8), 17=1101/0-3-8, (min. 0-1-8)		1 Row at midpt
	Max Horiz 17=393 (LC 10)		12-19, 15-17, 6-9
	Max Uplift 9=175 (LC 10), 17=13 (LC 10)		
	Max Grav 9=942 (LC 18), 17=1120 (LC 2)		
<b>FORCES</b>	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.		
TOP CHORD	1-2=-207/270, 2-3=-481/0, 3-4=-406/0, 4-5=-427/0, 9-20=-1395/327		
BOT CHORD	16-17=-675/1659, 14-16=-719/1738, 11-14=-899/289, 10-11=-899/289, 9-10=-825/281, 13-15=-970/0, 12-13=-970/0		
WEBS	4-15=-404/263, 12-19=-412/241, 5-19=-370/103, 19-20=-369/105, 1-17=-208/301, 2-17=-719/147, 15-17=-1776/355, 2-15=0/560, 9-12=-320/935, 12-20=-389/1519, 13-14=-418/0, 14-15=-709/680, 12-14=-358/2141		

- NOTES**
- 1) Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed; end vertical left exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
  - 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
  - 3) \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
  - 4) Ceiling dead load (5.0 psf) on member(s). 4-5, 5-19, 19-20
  - 5) Bottom chord live load (40.0 psf) and additional bottom chord dead load (0.0 psf) applied only to room. 13-15, 12-13
  - 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 13 lb uplift at joint 17 and 175 lb uplift at joint 9.
  - 7) This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
  - 8) Attic room checked for L/360 deflection.



Job 72315766	Truss B6	Truss Type Truss	Qty 6	Ply 1	PRO BLDRS SUPPLY PLAN # 2 HOLLY RF Job Reference (optional)
-----------------	-------------	---------------------	----------	----------	--

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Micah Clayton

Run: 8.62 S Sep 22 2022 Print: 8.620 S Sep 22 2022 MiTek Industries, Inc. Wed Apr 26 19:57:59

Page: 1

ID:bg\_dW0rbSvbcboA25EEFyMdzF-S0j7YySp23DsS7B5IUyZBYkPLb8Dx9MArzWGqzMrIs

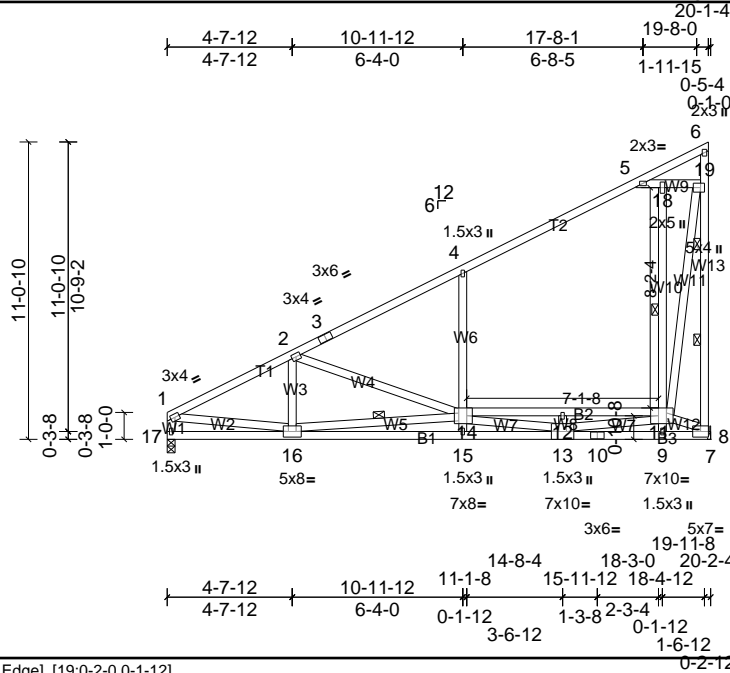


Plate Offsets (X, Y): [11:0-3-8,Edge], [14:0-2-8,Edge], [19:0-2-0,0-1-12]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.71	Vert(LL)	-0.25	15	>936	240	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.81	Vert(CT)	-0.50	15-16	>473	180		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.88	Horz(CT)	0.03	8	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MSH		Attic	0.11	11-14	>760	360	Weight: 171 lb	FT = 20%

LUMBER		BRACING	
TOP CHORD	2x4 SP No.2	TOP CHORD	Structural wood sheathing directly applied or 4-8-13 oc purlins, except end verticals.
BOT CHORD	2x4 SP No.2 *Except* B1:2x4 SP No.1	BOT CHORD	Rigid ceiling directly applied or 4-4-7 oc bracing. Except:
WEBS	2x4 SP No.3 *Except* W13,W6,W10,W9,W7:2x4 SP No.2		4-4-0 oc bracing: 11-14
<b>REACTIONS</b>	(lb/size) 8=971/ Mechanical, (min. 0-1-8), 17=851/0-3-8, (min. 0-1-8)	WEBS	1 Row at midpt
	Max Horiz 17=389 (LC 10)	WEBS	2 Rows at 1/3 pts
	Max Uplift 8=170 (LC 10), 17=12 (LC 10)		
	Max Grav 8=1186 (LC 2), 17=865 (LC 2)		
<b>FORCES</b>	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.		
TOP CHORD	1-2=-1318/51, 2-3=-608/0, 3-4=-525/0, 4-5=-557/0, 8-19=-1986/422, 1-17=-838/67		
BOT CHORD	16-17=-456/213, 15-16=-868/3199, 13-15=-921/3337, 10-13=-1560/377, 9-10=-1560/377, 8-9=-1454/365, 12-14=-1210/16, 11-12=-1210/16		
WEBS	2-16=-4/320, 4-14=-374/257, 11-18=-366/233, 5-18=-498/127, 18-19=-494/128, 1-16=0/1091, 8-11=-415/1644, 11-19=-501/2126, 14-16=-2071/434, 2-14=-737/340, 12-13=-415/0, 13-14=-1909/828, 11-13=-508/3294		

- NOTES**
- Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCCL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed; end vertical left exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
  - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
  - \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
  - Ceiling dead load (5.0 psf) on member(s). 4-5, 5-18, 18-19
  - Bottom chord live load (40.0 psf) and additional bottom chord dead load (0.0 psf) applied only to room. 12-14, 11-12
  - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 170 lb uplift at joint 8 and 12 lb uplift at joint 17.
  - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
  - Attic room checked for L/360 deflection.



Job 72315766	Truss B6G	Truss Type Truss	Qty 1	Ply 1	PRO BLDRS SUPPLY PLAN # 2 HOLLY RF Job Reference (optional)
-----------------	--------------	---------------------	----------	----------	--

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Micah Clayton

Run: 8.62 S Sep 22 2022 Print: 8.620 S Sep 22 2022 MiTek Industries, Inc. Wed Apr 26 19:58:00

Page: 1

ID:Jl1e1vMK8w1wEUkkgG1sVyMdU?-wDHVxuzUaMB4UbiNe??B5O5zal3ByZxVOVj3pGzMLrr

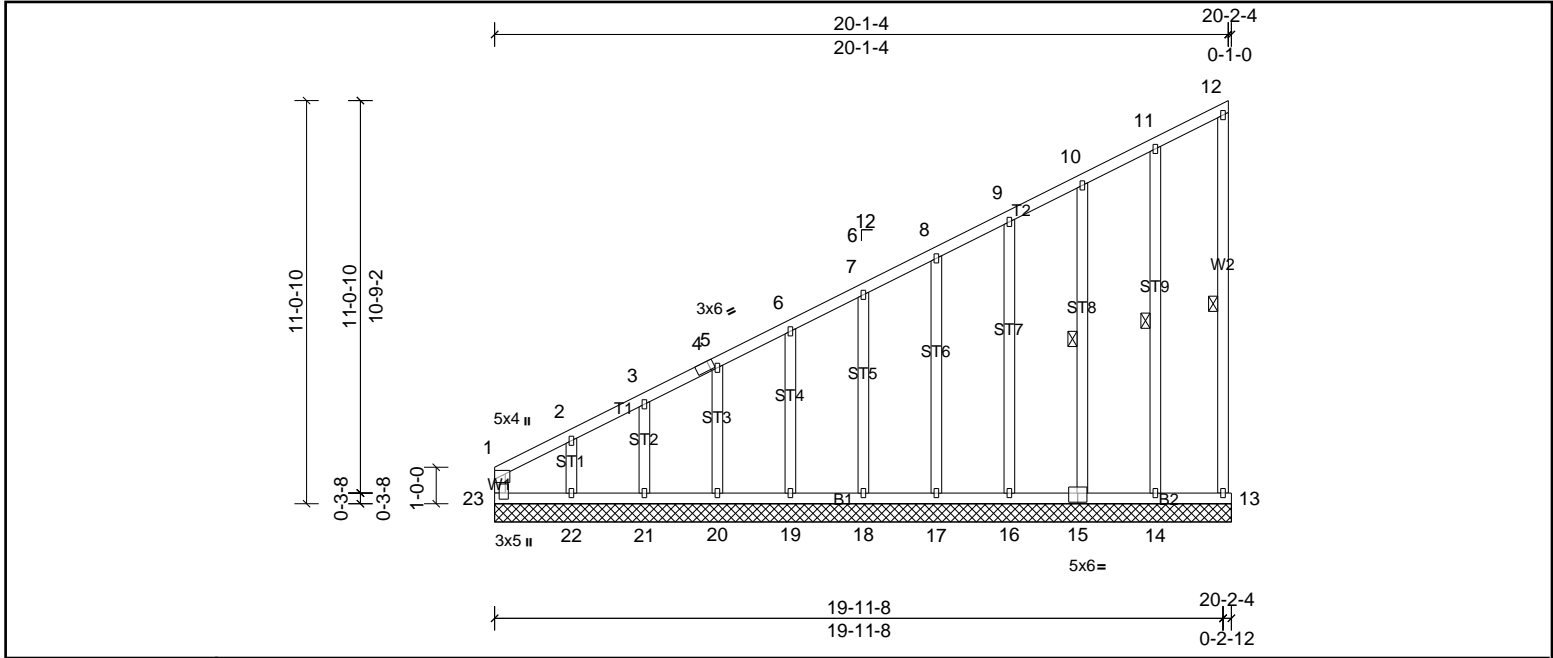


Plate Offsets (X, Y): [4:0-1-10,Edge], [15:0-3-0,0-3-0], [23:0-2-0,0-1-8]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.49	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.31	Vert(TL)	n/a	-	n/a	999		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.14	Horiz(TL)	n/a	-	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MR							Weight: 154 lb	FT = 20%

LUMBER	BRACING
TOP CHORD 2x4 SP No.2	TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD 2x4 SP No.2	BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing, Except: 10-0-0 oc bracing: 14-15,13-14.
WEBS 2x4 SP No.3	WEBS 1 Row at midpt
OTHERS 2x4 SP No.3	

**REACTIONS** All bearings 20-2-4.  
 (lb) - Max Horiz 23=389 (LC 10)  
 Max Uplift All uplift 100 (lb) or less at joint(s) 13, 14, 15, 16, 17, 18, 19, 20 except 22=302 (LC 10)  
 Max Grav All reactions 250 (lb) or less at joint(s) 13, 14, 15, 16, 17, 18, 19, 20, 21, 22 except 23=374 (LC 10)

**FORCES** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.  
 TOP CHORD 1-23=-291/84, 1-2=-525/193, 2-3=-414/151, 3-4=-379/130, 4-5=-369/140, 5-6=-326/121, 6-7=-276/104

- NOTES**
- 1) Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed ; end vertical left exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
  - 2) Truss designed for wind loads in the plane of the truss only.
  - 3) All plates are 1.5x3 MT20 unless otherwise indicated.
  - 4) Gable requires continuous bottom chord bearing.
  - 5) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
  - 6) Gable studs spaced at 2-0-0 oc.
  - 7) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
  - 8) \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
  - 9) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 13, 14, 15, 16, 17, 18, 19, 20 except (jt=lb) 22=301.
  - 10) This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



This design is based upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of the Building Designer. Building Designer shall verify all design information on this sheet for conformance with conditions and requirements of the specific building and governing codes and ordinances. Building Designer accepts responsibility for the correctness or accuracy of the design information as it may relate to a specific building. Certification is valid only when truss is fabricated by a UFPI plant. Bracing shown is for lateral support of truss members only and does not replace erection and permanent bracing. Refer to Building Component Safety Information (BCSI) for general guidance regarding storage, erection and bracing available from SBCA and Truss Plate Institute.



Job 72315766	Truss C1	Truss Type Truss	Qty 2	Ply 1	PRO BLDRS SUPPLY PLAN # 2 HOLLY RF Job Reference (optional)
-----------------	-------------	---------------------	----------	----------	--

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Micah Clayton

Run: 8.62 S Sep 22 2022 Print: 8.620 S Sep 22 2022 MiTek Industries, Inc. Wed Apr 26 19:58:00

Page: 1

ID:eda?0uMBNpieU3O2yeyxOWyMdTP-wDHVxuzUaMB4UbiNe??B5O5zHlv2ySRVOVj3pGzMr

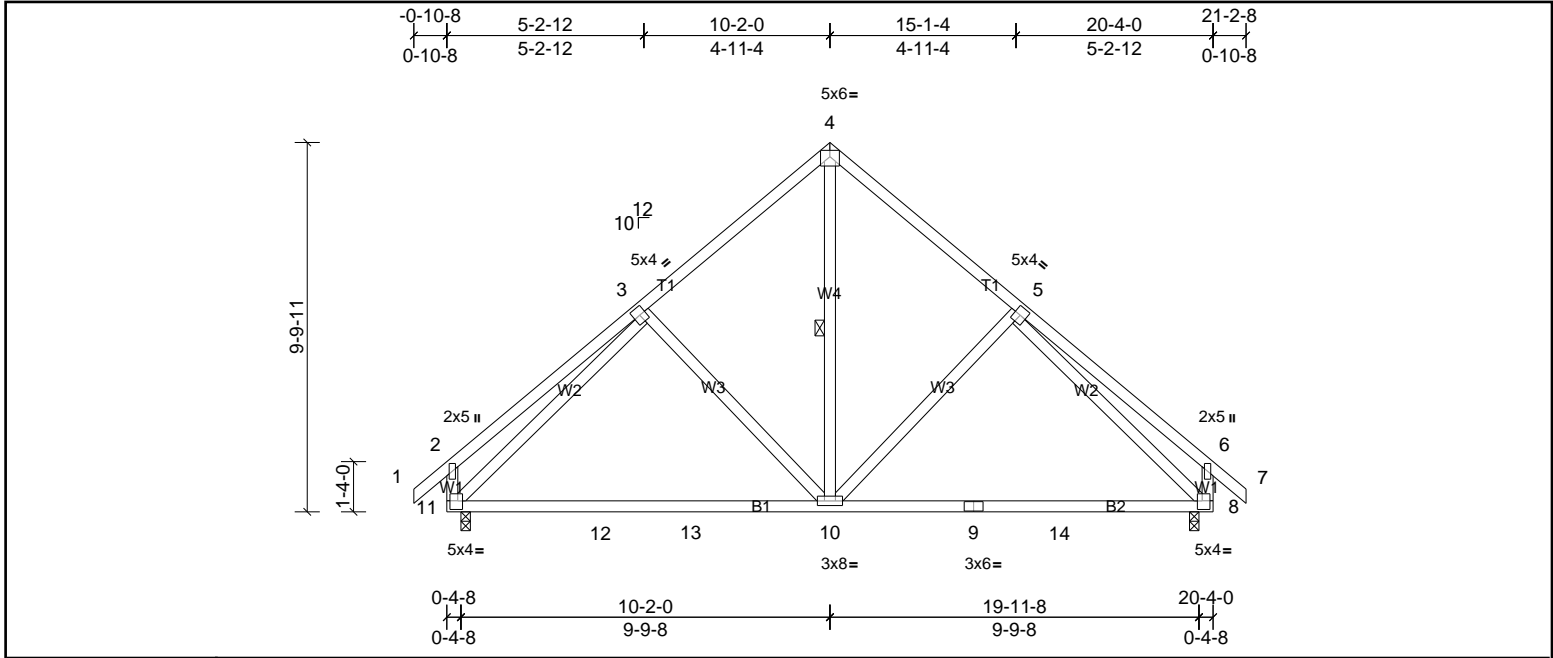


Plate Offsets (X, Y): [8:0-1-8,0-2-12], [11:0-1-8,0-2-12]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.51	Vert(LL)	0.34	10-11	>701	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.96	Vert(CT)	-0.40	10-11	>603		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.62	Horz(CT)	0.02	8	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MSH						Weight: 131 lb	FT = 20%

LUMBER		BRACING	
TOP CHORD	2x4 SP No.2	TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD	2x4 SP No.2	BOT CHORD	Rigid ceiling directly applied or 2-2-0 oc bracing.
WEBS	2x4 SP No.3	WEBS	1 Row at midpt 4-10

REACTIONS	(lb/size)	8=863/0-3-0, (min. 0-1-8), 11=863/0-3-0, (min. 0-1-8)
	Max Horiz	11=280 (LC 9)
	Max Uplift	8=106 (LC 11), 11=106 (LC 10)

FORCES	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD	2-3=-306/418, 3-4=-692/652, 4-5=-692/652, 5-6=-306/418, 2-11=-339/364, 6-8=-337/364
BOT CHORD	11-12=-287/621, 12-13=-287/621, 10-13=-287/621, 9-10=-287/569, 9-14=-287/569, 8-14=-287/569
WEBS	4-10=-690/525, 5-10=-260/246, 3-10=-260/246, 3-11=-620/211, 5-8=-620/211

- NOTES**
- Unbalanced roof live loads have been considered for this design.
  - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCCL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed; end vertical left and right exposed; porch left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
  - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
  - \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
  - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 106 lb uplift at joint 11 and 106 lb uplift at joint 8.
  - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



This design is based upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of the Building Designer. Building Designer shall verify all design information on this sheet for conformance with conditions and requirements of the specific building and governing codes and ordinances. Building Designer accepts responsibility for the correctness or accuracy of the design information as it may relate to a specific building. Certification is valid only when truss is fabricated by a UFPI plant. Bracing shown is for lateral support of truss members only and does not replace erection and permanent bracing. Refer to Building Component Safety Information (BCSI) for general guidance regarding storage, erection and bracing available from SBCA and Truss Plate Institute.



Job 72315766	Truss C1G	Truss Type Truss	Qty 1	Ply 1	PRO BLDRS SUPPLY PLAN # 2 HOLLY RF Job Reference (optional)
-----------------	--------------	---------------------	----------	----------	--

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Micah Clayton

Run: 8.62 S Sep 22 2022 Print: 8.620 S Sep 22 2022 MiTek Industries, Inc. Wed Apr 26 19:58:00

Page: 1

ID: ?bOu3cQKCLLwarG?lCX65ZyMdk-wDHVxuzUaMB4UbiNe??B5O50015YyZTVOVj3pGzMirr

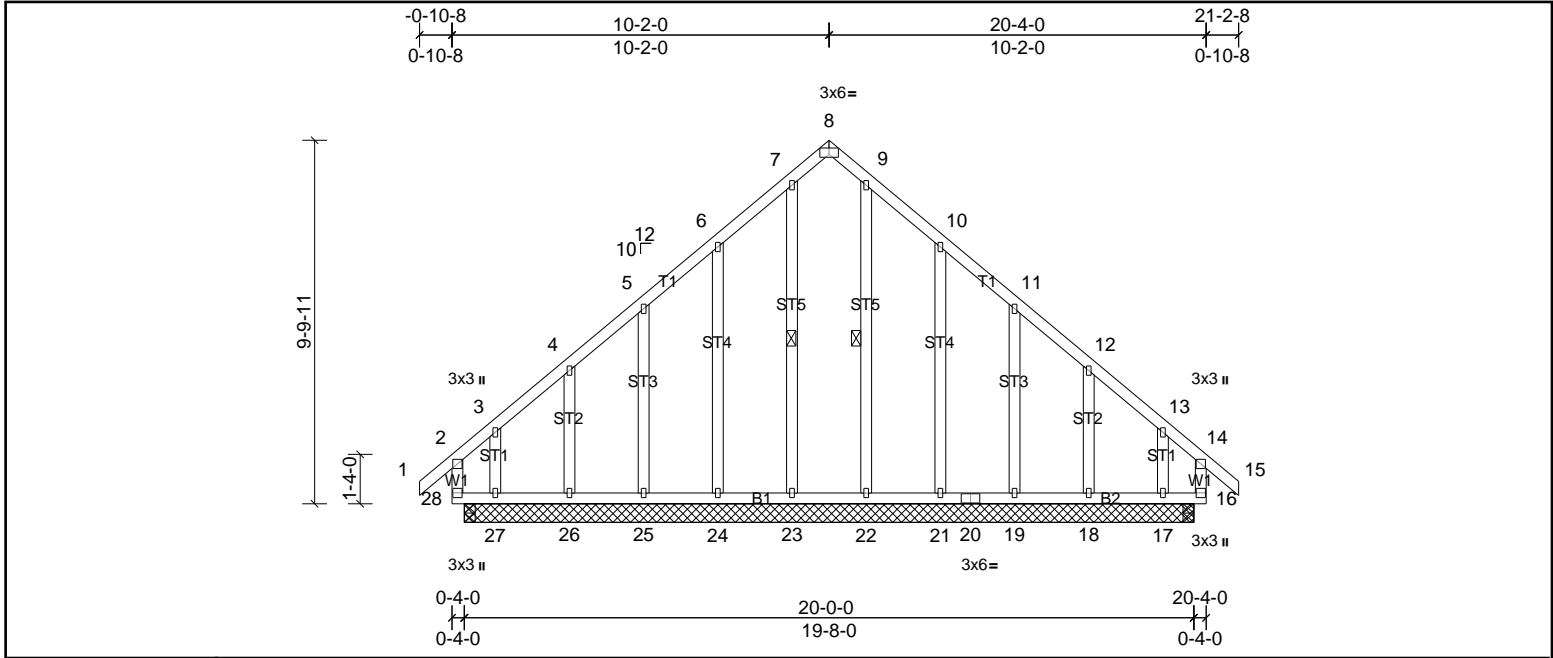


Plate Offsets (X, Y): [8:0-3-0,Edge]

Loading	(psf)	Spacing		CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	20.0	Plate Grip DOL	2-0-0	TC	0.27	Vert(LL)	0.00	27-28	>999	240	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.16	Vert(CT)	0.00	27-28	>999	180		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.17	Horz(CT)	0.00	16	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MR							Weight: 152 lb	FT = 20%

LUMBER		BRACING	
TOP CHORD	2x4 SP No.2	TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD	2x4 SP No.2	BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS	2x4 SP No.3	WEBS	1 Row at midpt
OTHERS	2x4 SP No.3		7-23, 9-22

**REACTIONS**  
 All bearings 19-8-0. except 28=0-3-8, 16=0-3-8  
 (lb) - Max Horiz 27=280 (LC 9)  
 Max Uplift All uplift 100 (lb) or less at joint(s) 18, 19, 25, 26 except 16=177 (LC 9), 17=270 (LC 11), 21=132 (LC 11), 24=131 (LC 10), 27=279 (LC 10), 28=209 (LC 8)  
 Max Grav All reactions 250 (lb) or less at joint(s) 18, 19, 21, 22, 23, 24, 25, 26 except 16=270 (LC 6), 17=262 (LC 9), 27=283 (LC 8), 28=300 (LC 7)

**FORCES**  
 (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.  
 TOP CHORD 6-7=-214/283, 9-10=-214/283

- NOTES**
- 1) Unbalanced roof live loads have been considered for this design.
  - 2) Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCCL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
  - 3) Truss designed for wind loads in the plane of the truss only.
  - 4) All plates are 1.5x3 MT20 unless otherwise indicated.
  - 5) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
  - 6) Gable studs spaced at 2-0-0 oc.
  - 7) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
  - 8) \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
  - 9) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 25, 26, 19, 18 except (jt=lb) 28=208, 16=177, 24=130, 27=279, 21=132, 17=270.
  - 10) This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



This design is based upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of the Building Designer. Building Designer shall verify all design information on this sheet for conformance with conditions and requirements of the specific building and governing codes and ordinances. Building Designer accepts responsibility for the correctness or accuracy of the design information as it may relate to a specific building. Certification is valid only when truss is fabricated by a UFPI plant. Bracing shown is for lateral support of truss members only and does not replace erection and permanent bracing. Refer to Building Component Safety Information (BCSI) for general guidance regarding storage, erection and bracing available from SBCA and Truss Plate Institute.






Job 72315766	Truss V1	Truss Type Truss	Qty 1	Ply 1	PRO BLDRS SUPPLY PLAN # 2 HOLLY RF Job Reference (optional)
-----------------	-------------	---------------------	----------	----------	--

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Micah Clayton

Run: 8.62 S Sep 22 2022 Print: 8.620 S Sep 22 2022 MiTek Industries, Inc. Wed Apr 26 19:58:00

Page: 1

ID: jrYOKuSuxNsCZpYPHMD615yMdeW-wDHVxuzUaMB4UbiNe??B5O513I56yZrVOVj3pGzMirr

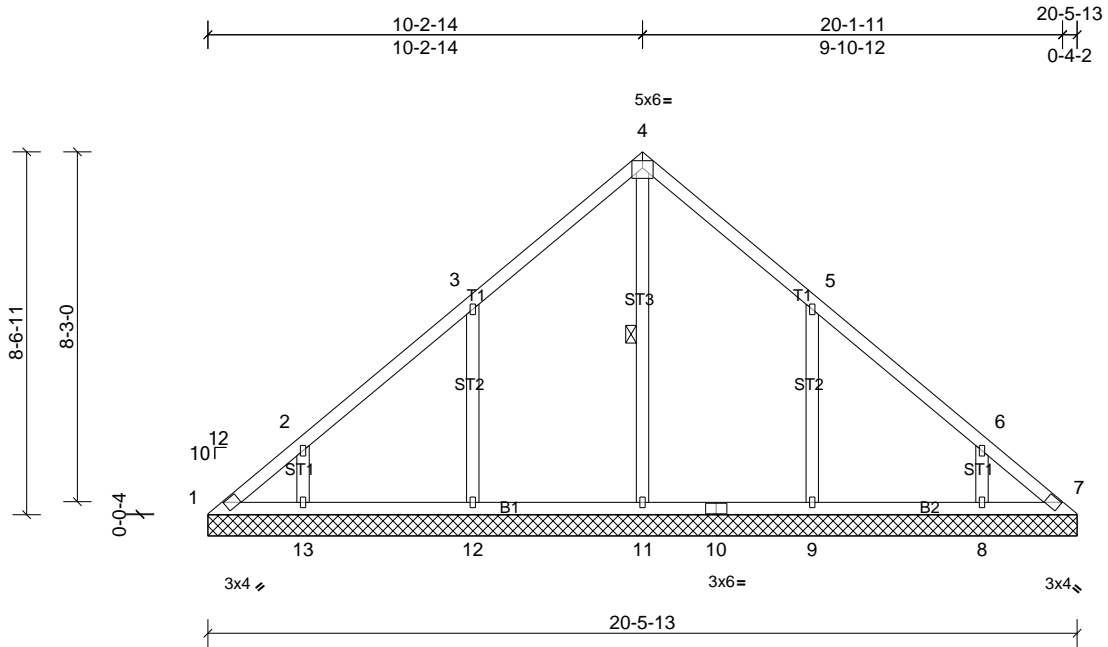

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.20	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.19	Vert(TL)	n/a	-	n/a	999		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.15	Horiz(TL)	0.01	7	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MSH							Weight: 98 lb	FT = 20%

LUMBER	BRACING
TOP CHORD 2x4 SP No.2	TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD 2x4 SP No.2	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
OTHERS 2x4 SP No.3	WEBS 1 Row at midpt 4-11

REACTIONS
All bearings 20-5-13.
(lb) - Max Horiz 1=216 (LC 7)
Max Uplift All uplift 100 (lb) or less at joint(s) 1, 7 except 8=-145 (LC 11), 9=-200 (LC 11), 12=-203 (LC 10), 13=-127 (LC 10)
Max Grav All reactions 250 (lb) or less at joint(s) 1, 7 except 8=283 (LC 18), 9=445 (LC 18), 11=399 (LC 20), 12=444 (LC 17), 13=295 (LC 17)

FORCES
(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
WEBS 3-12=-321/250, 5-9=-321/249

- NOTES**
- Unbalanced roof live loads have been considered for this design.
  - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCCL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
  - All plates are 1.5x3 MT20 unless otherwise indicated.
  - Gable requires continuous bottom chord bearing.
  - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
  - \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
  - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 7 except (jt=lb) 12=202, 13=126, 9=200, 8=145.
  - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



This design is based upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of the Building Designer. Building Designer shall verify all design information on this sheet for conformance with conditions and requirements of the specific building and governing codes and ordinances. Building Designer accepts responsibility for the correctness or accuracy of the design information as it may relate to a specific building. Certification is valid only when truss is fabricated by a UFPI plant. Bracing shown is for lateral support of truss members only and does not replace erection and permanent bracing. Refer to Building Component Safety Information (BCSI) for general guidance regarding storage, erection and bracing available from SBCA and Truss Plate Institute.




Job 72315766	Truss V2	Truss Type Truss	Qty 1	Ply 1	PRO BLDRS SUPPLY PLAN # 2 HOLLY RF Job Reference (optional)
-----------------	-------------	---------------------	----------	----------	--

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Micah Clayton

Run: 8.62 S Sep 22 2022 Print: 8.620 S Sep 22 2022 MiTek Industries, Inc. Wed Apr 26 19:58:00

Page: 1

ID:PIEBVp5i3mVA32FQ47ijZyMdaD-wDHVxuzUaMB4UbiNe??B5O50OI4RyXvVOVj3pGzMr

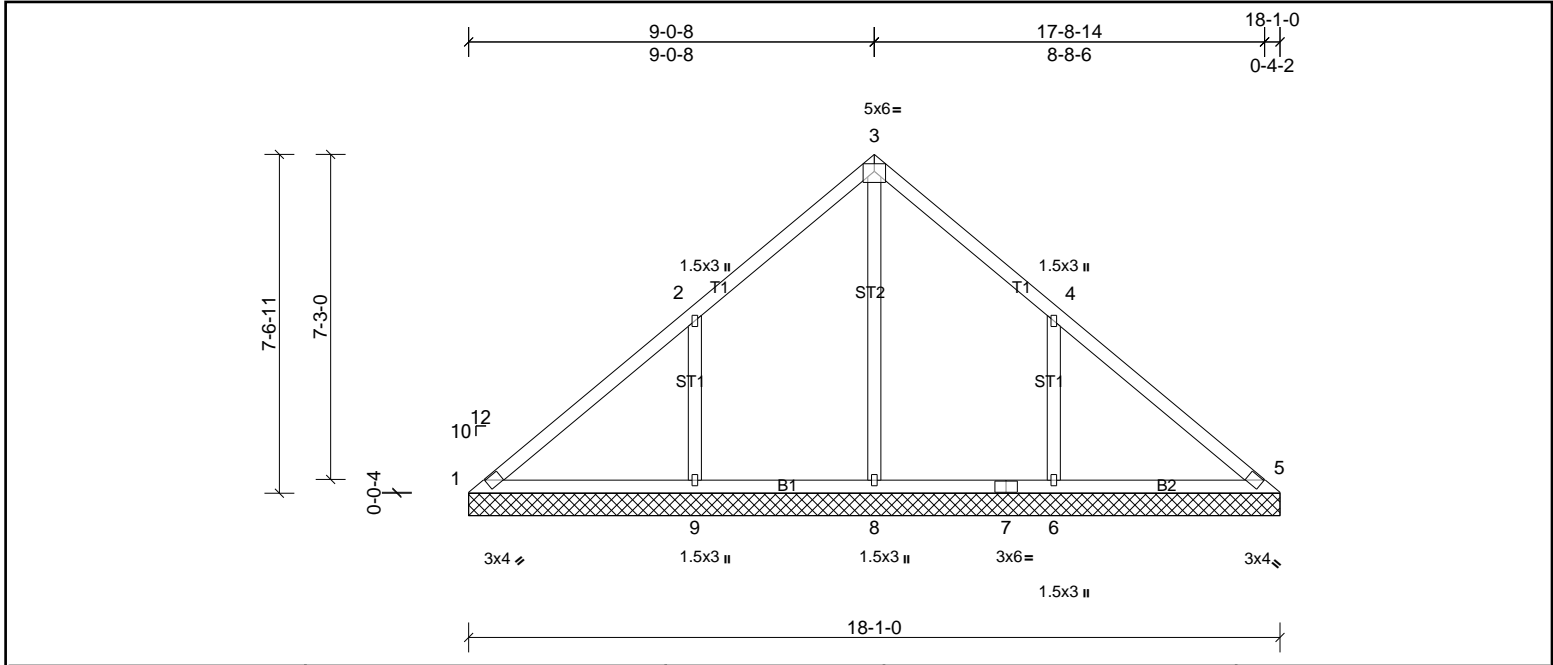

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.31	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.23	Vert(TL)	n/a	-	n/a	999		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.27	Horiz(TL)	0.00	5	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MSH							Weight: 82 lb	FT = 20%

LUMBER	BRACING
TOP CHORD 2x4 SP No.2	TOP CHORD Structural wood sheathing directly applied or 10-0-0 oc purlins.
BOT CHORD 2x4 SP No.2	BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.
OTHERS 2x4 SP No.3	

REACTIONS
All bearings 18-1-0.
(lb) - Max Horiz 1=190 (LC 7)
Max Uplift All uplift 100 (lb) or less at joint(s) 1 except 6=-239 (LC 11), 9=-236 (LC 10)
Max Grav All reactions 250 (lb) or less at joint(s) 1, 5 except 6=522 (LC 18), 8=457 (LC 17), 9=539 (LC 17)

FORCES
(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
WEBS 3-8=-267/2, 2-9=-363/266, 4-6=-359/267

- NOTES**
- Unbalanced roof live loads have been considered for this design.
  - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCCL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
  - Gable requires continuous bottom chord bearing.
  - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
  - \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
  - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1 except (jt=lb) 9=236, 6=238.
  - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



This design is based upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of the Building Designer. Building Designer shall verify all design information on this sheet for conformance with conditions and requirements of the specific building and governing codes and ordinances. Building Designer accepts responsibility for the correctness or accuracy of the design information as it may relate to a specific building. Certification is valid only when truss is fabricated by a UFPI plant. Bracing shown is for lateral support of truss members only and does not replace erection and permanent bracing. Refer to Building Component Safety Information (BCSI) for general guidance regarding storage, erection and bracing available from SBCA and Truss Plate Institute.




Job 72315766	Truss V3	Truss Type Truss	Qty 1	Ply 1	PRO BLDRS SUPPLY PLAN # 2 HOLLY RF Job Reference (optional)
-----------------	-------------	---------------------	----------	----------	--

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Micah Clayton

Run: 8.62 S Sep 22 2022 Print: 8.620 S Sep 22 2022 MiTek Industries, Inc. Wed Apr 26 19:58:01

Page: 1

ID:PIEBVp5i3mVA32FQ47ijZyMdaD-OPrt8E\_6LFJx6lHaCjWQeCeCO9Qnh0Qfd9SdLizMlrq

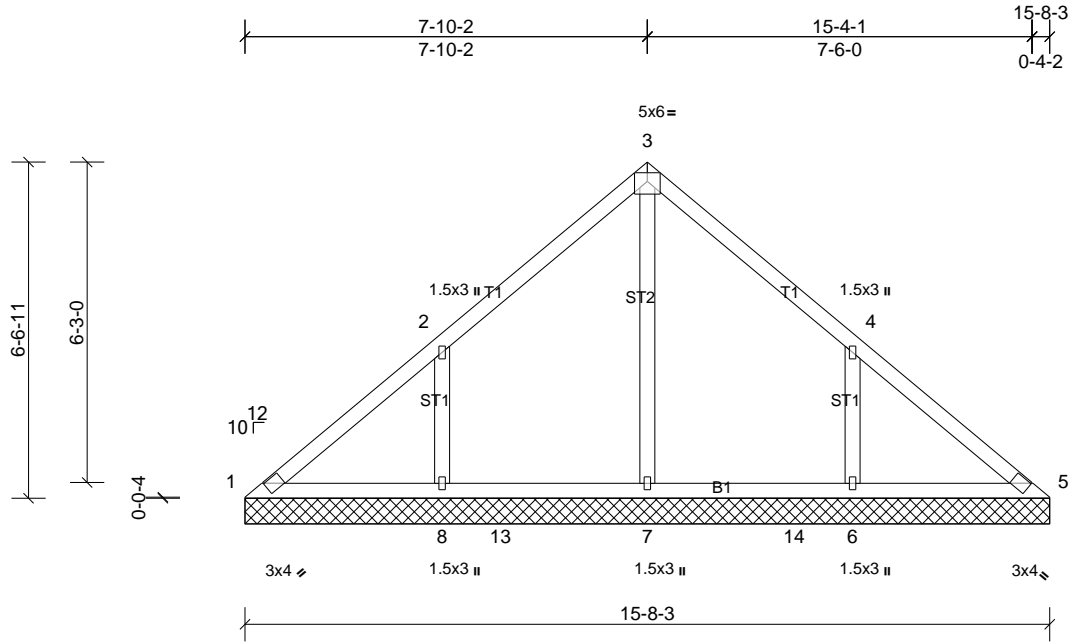

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.23	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.16	Vert(TL)	n/a	-	n/a	999		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.19	Horiz(TL)	0.00	5	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MSH							Weight: 69 lb	FT = 20%

LUMBER	BRACING
TOP CHORD 2x4 SP No.2	TOP CHORD Structural wood sheathing directly applied or 10-0-0 oc purlins.
BOT CHORD 2x4 SP No.2	BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.
OTHERS 2x4 SP No.3	

REACTIONS
All bearings 15-8-3.
(lb) - Max Horiz 1=-165 (LC 6)
Max Uplift All uplift 100 (lb) or less at joint(s) 1 except 6=-196 (LC 11), 8=-200 (LC 10)
Max Grav All reactions 250 (lb) or less at joint(s) 1, 5 except 6=430 (LC 18), 7=436 (LC 17), 8=433 (LC 17)

FORCES
(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- WEBS** 3-7=-260/0, 2-8=-314/233, 4-6=-314/231
- NOTES**
- Unbalanced roof live loads have been considered for this design.
  - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCCL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
  - Gable requires continuous bottom chord bearing.
  - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
  - \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
  - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1 except (jt=lb) 8=199, 6=196.
  - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



This design is based upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of the Building Designer. Building Designer shall verify all design information on this sheet for conformance with conditions and requirements of the specific building and governing codes and ordinances. Building Designer accepts responsibility for the correctness or accuracy of the design information as it may relate to a specific building. Certification is valid only when truss is fabricated by a UFPI plant. Bracing shown is for lateral support of truss members only and does not replace erection and permanent bracing. Refer to Building Component Safety Information (BCSI) for general guidance regarding storage, erection and bracing available from SBCA and Truss Plate Institute.




Job 72315766	Truss V4	Truss Type Truss	Qty 1	Ply 1	PRO BLDRS SUPPLY PLAN # 2 HOLLY RF Job Reference (optional)
-----------------	-------------	---------------------	----------	----------	--

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Micah Clayton

Run: 8.62 S Sep 22 2022 Print: 8.620 S Sep 22 2022 MiTek Industries, Inc. Wed Apr 26 19:58:01

Page: 1

ID:PIEBVp5i3rnVA32FQ47ijZyMdaD-OPrt8E\_6LfJx6iHaCjWQeCeDA9RPh1pfd9SdLizMlrq

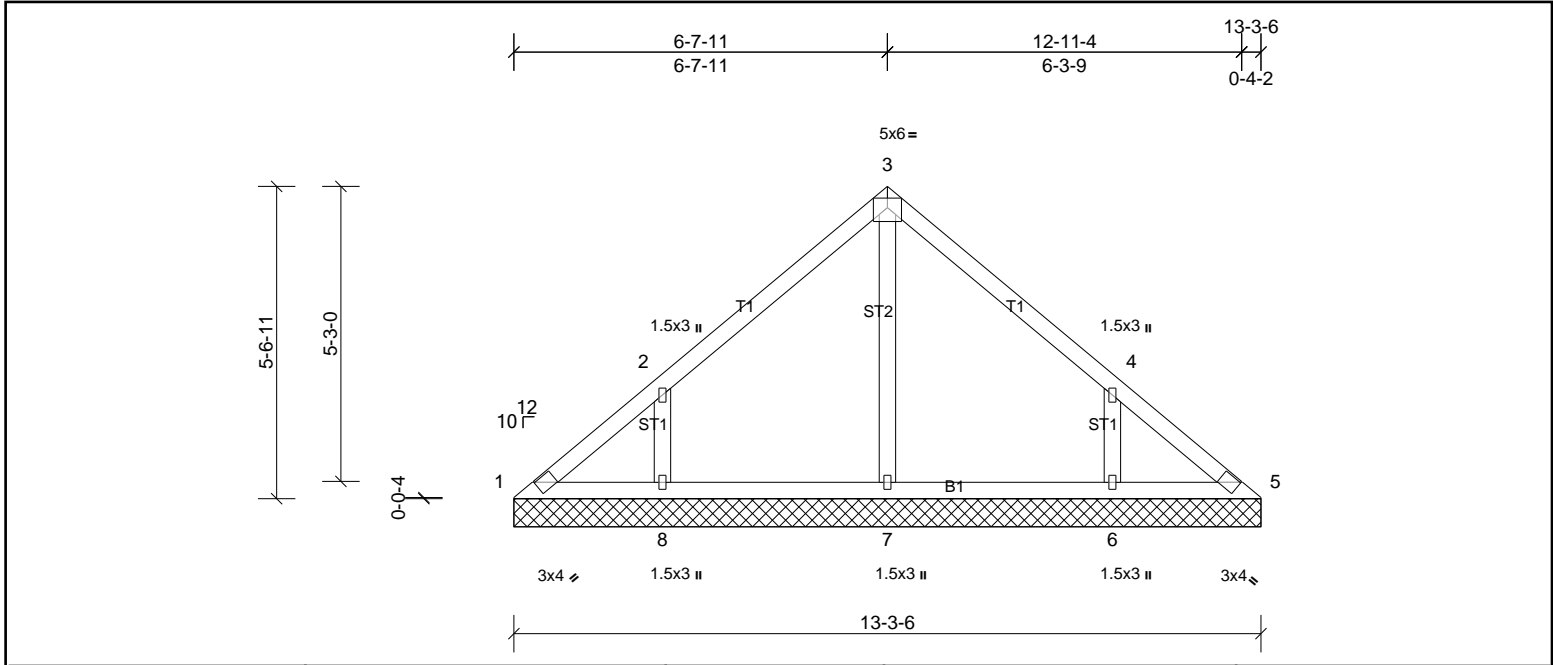

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.18	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.12	Vert(TL)	n/a	-	n/a	999		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.10	Horiz(TL)	0.00	5	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MSH							Weight: 56 lb	FT = 20%

LUMBER		BRACING	
TOP CHORD	2x4 SP No.2	TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD	2x4 SP No.2	BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.
OTHERS	2x4 SP No.3		

REACTIONS	
	All bearings 13-3-6.
(lb) - Max Horiz	1=-139 (LC 6)
Max Uplift	All uplift 100 (lb) or less at joint(s) 1 except 6=-168 (LC 11), 8=-172 (LC 10)
Max Grav	All reactions 250 (lb) or less at joint(s) 1, 5 except 6=346 (LC 18), 7=265 (LC 1), 8=350 (LC 17)

FORCES	
	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
WEBS	2-8=-287/216, 4-6=-287/214

- NOTES**
- Unbalanced roof live loads have been considered for this design.
  - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCCL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
  - Gable requires continuous bottom chord bearing.
  - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
  - \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
  - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1 except (jt=lb) 8=171, 6=168.
  - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



This design is based upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of the Building Designer. Building Designer shall verify all design information on this sheet for conformance with conditions and requirements of the specific building and governing codes and ordinances. Building Designer accepts responsibility for the correctness or accuracy of the design information as it may relate to a specific building. Certification is valid only when truss is fabricated by a UFPI plant. Bracing shown is for lateral support of truss members only and does not replace erection and permanent bracing. Refer to Building Component Safety Information (BCSI) for general guidance regarding storage, erection and bracing available from SBCA and Truss Plate Institute.




Job 72315766	Truss V5	Truss Type Truss	Qty 1	Ply 1	PRO BLDRS SUPPLY PLAN # 2 HOLLY RF Job Reference (optional)
-----------------	-------------	---------------------	----------	----------	--

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Micah Clayton

Run: 8.62 S Sep 22 2022 Print: 8.620 S Sep 22 2022 MiTek Industries, Inc. Wed Apr 26 19:58:01

Page: 1

ID:PIEBVp5i3rnVA32FQ47ijZyMdaD-OPrt8E\_6LfJx6lHaCjWQeDeD19RPh18fd9SdLizMlrq

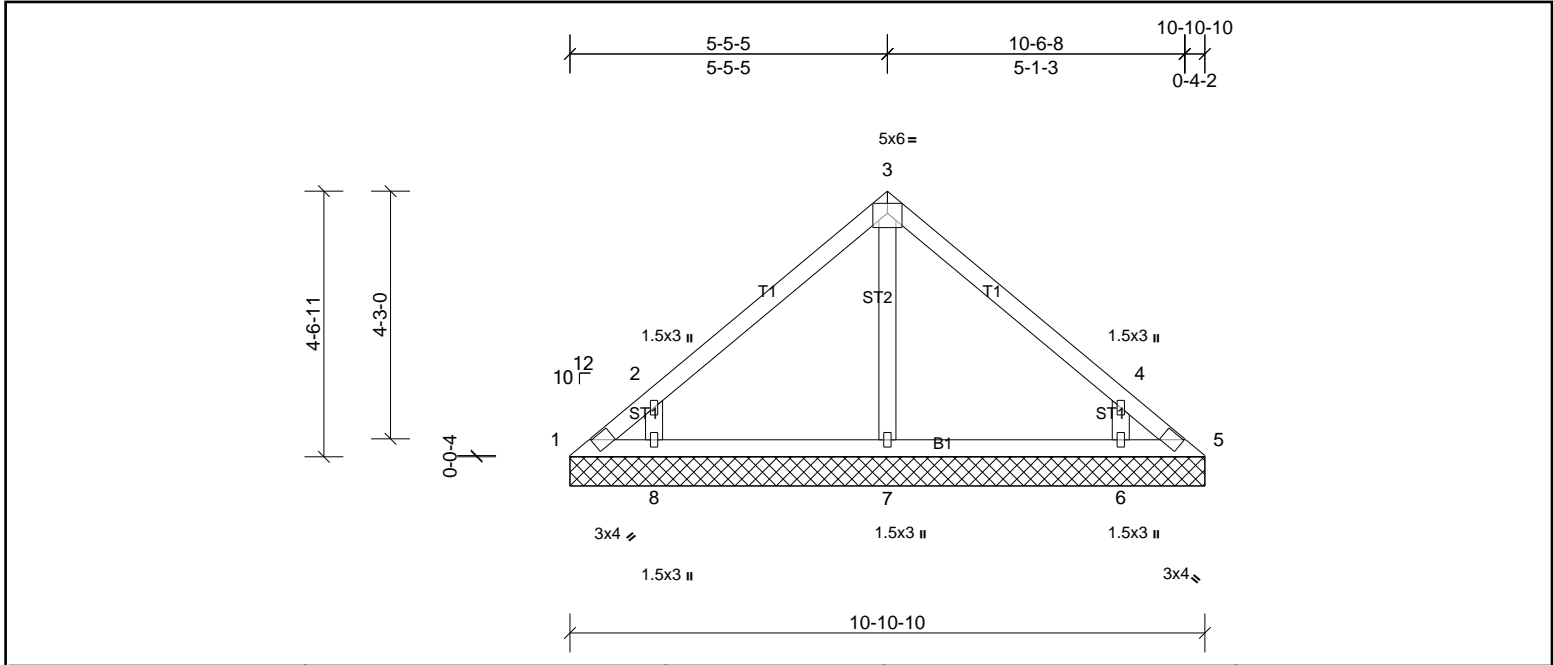

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.19	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.12	Vert(TL)	n/a	-	n/a	999		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.08	Horiz(TL)	0.00	5	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MSH							Weight: 44 lb	FT = 20%

LUMBER	BRACING
TOP CHORD 2x4 SP No.2	TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD 2x4 SP No.2	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
OTHERS 2x4 SP No.3	

REACTIONS
All bearings 10-10-10.
(lb) - Max Horiz 1=-113 (LC 8)
Max Uplift All uplift 100 (lb) or less at joint(s) 1, 5 except 6=-158 (LC 11), 8=-162 (LC 10)
Max Grav All reactions 250 (lb) or less at joint(s) 1, 5, 7 except 6=330 (LC 18), 8=335 (LC 17)

FORCES
(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

WEBS
2-8=-329/262, 4-6=-329/260

- NOTES**
- Unbalanced roof live loads have been considered for this design.
  - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCCL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
  - Gable requires continuous bottom chord bearing.
  - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
  - \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
  - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 5 except (jt=lb) 8=162, 6=157.
  - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



This design is based upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of the Building Designer. Building Designer shall verify all design information on this sheet for conformance with conditions and requirements of the specific building and governing codes and ordinances. Building Designer accepts responsibility for the correctness or accuracy of the design information as it may relate to a specific building. Certification is valid only when truss is fabricated by a UFPI plant. Bracing shown is for lateral support of truss members only and does not replace erection and permanent bracing. Refer to Building Component Safety Information (BCSI) for general guidance regarding storage, erection and bracing available from SBCA and Truss Plate Institute.




Job 72315766	Truss V6	Truss Type Truss	Qty 1	Ply 1	PRO BLDRS SUPPLY PLAN # 2 HOLLY RF Job Reference (optional)
-----------------	-------------	---------------------	----------	----------	--

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Micah Clayton

Run: 8.62 S Sep 22 2022 Print: 8.620 S Sep 22 2022 MiTek Industries, Inc. Wed Apr 26 19:58:01

Page: 1

ID:PIEBVp5i3rnVA32FQ47jizyMdaD-OPrt8E\_6LfJx6lHaCjWQeCeCs9P8h1Wfd9SdLizMlrq

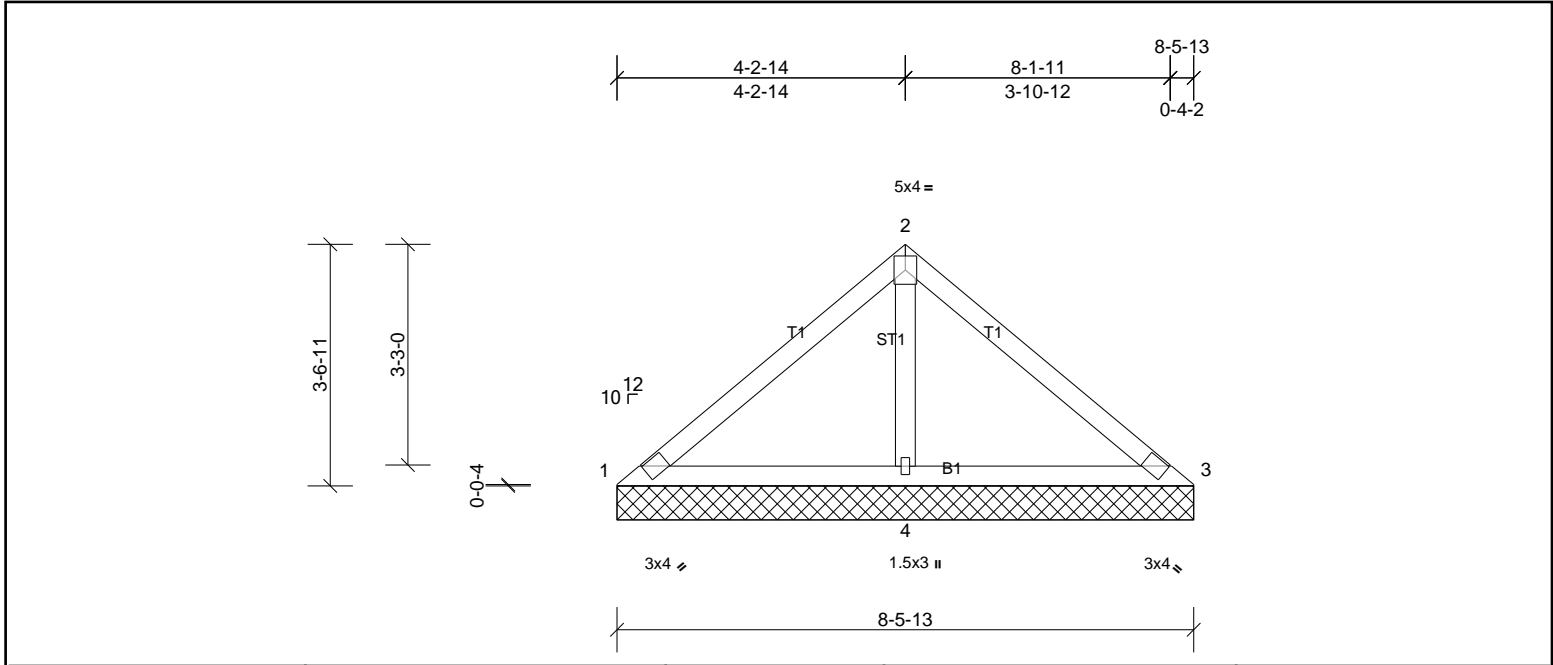

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.20	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.20	Vert(TL)	n/a	-	n/a	999		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.12	Horiz(TL)	0.00	3	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MSH							Weight: 32 lb	FT = 20%

LUMBER		BRACING	
TOP CHORD	2x4 SP No.2	TOP CHORD	Structural wood sheathing directly applied or 8-5-13 oc purlins.
BOT CHORD	2x4 SP No.2	BOT CHORD	Rigid ceiling directly applied or 6-0-0 oc bracing.
OTHERS	2x4 SP No.3		
<b>REACTIONS</b>	(lb/size)	1=44/8-5-13, (min. 0-1-8), 3=44/8-5-13, (min. 0-1-8), 4=591/8-5-13, (min. 0-1-8)	
	Max Horiz	1=87 (LC 6)	
	Max Uplift	1=10 (LC 22), 3=10 (LC 21), 4=111 (LC 10)	
	Max Grav	1=74 (LC 21), 3=74 (LC 22), 4=591 (LC 1)	
<b>FORCES</b>	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.		
<b>WEBS</b>	2-4=439/185		

- NOTES**
- Unbalanced roof live loads have been considered for this design.
  - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCCL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
  - Gable requires continuous bottom chord bearing.
  - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
  - \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
  - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 10 lb uplift at joint 1, 10 lb uplift at joint 3 and 111 lb uplift at joint 4.
  - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



This design is based upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of the Building Designer. Building Designer shall verify all design information on this sheet for conformance with conditions and requirements of the specific building and governing codes and ordinances. Building Designer accepts responsibility for the correctness or accuracy of the design information as it may relate to a specific building. Certification is valid only when truss is fabricated by a UFPI plant. Bracing shown is for lateral support of truss members only and does not replace erection and permanent bracing. Refer to Building Component Safety Information (BCSI) for general guidance regarding storage, erection and bracing available from SBCA and Truss Plate Institute.




Job 72315766	Truss V7	Truss Type Truss	Qty 1	Ply 1	PRO BLDRS SUPPLY PLAN # 2 HOLLY RF Job Reference (optional)
-----------------	-------------	---------------------	----------	----------	--

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Micah Clayton

Run: 8.62 S Sep 22 2022 Print: 8.620 S Sep 22 2022 MiTek Industries, Inc. Wed Apr 26 19:58:01

Page: 1

ID:rjYsZbmOlefYEVW5YEVNQGYMdQJ-OPrt8E\_6LfJx6lHaCjWQeCeEa9Rih2Sfd9SdLizMlrq

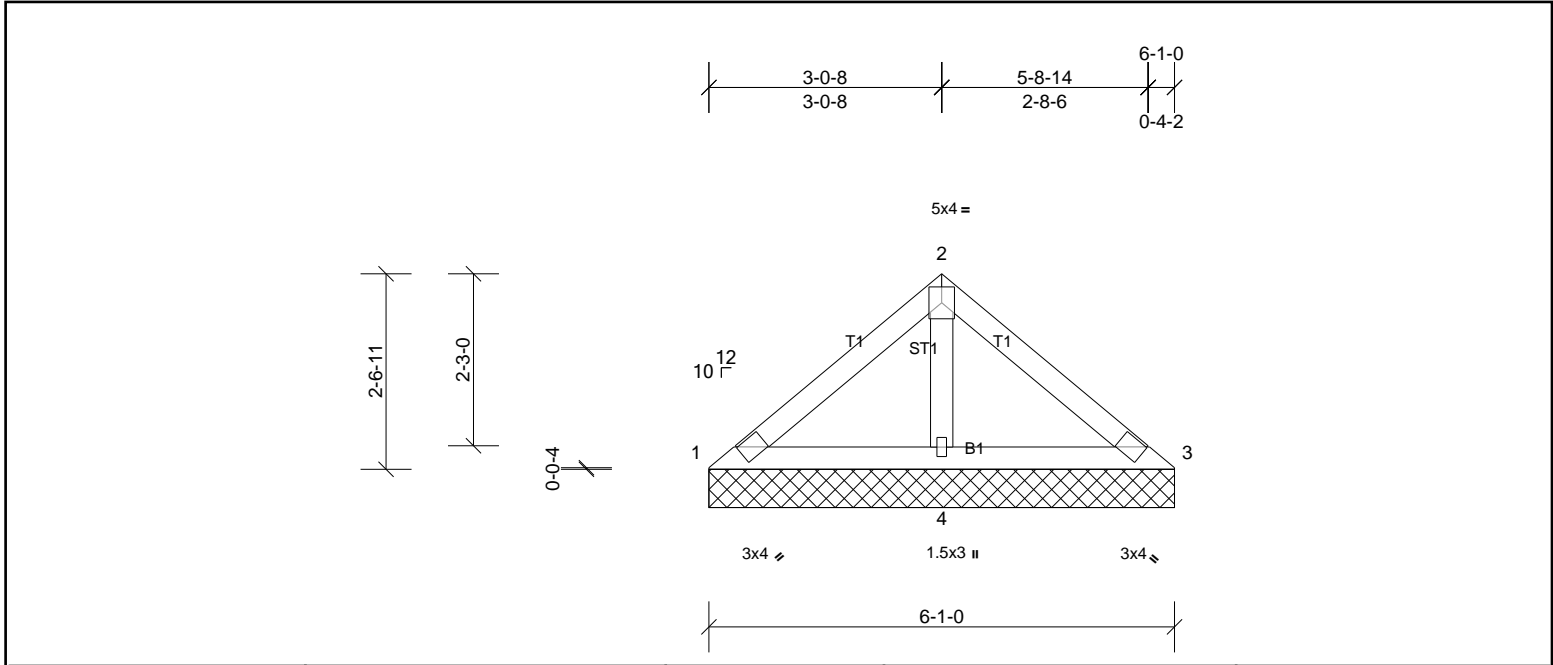

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.09	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.10	Vert(TL)	n/a	-	n/a	999		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.06	Horiz(TL)	0.00	3	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MSH							Weight: 22 lb	FT = 20%

LUMBER		BRACING	
TOP CHORD	2x4 SP No.2	TOP CHORD	Structural wood sheathing directly applied or 6-1-0 oc purlins.
BOT CHORD	2x4 SP No.2	BOT CHORD	Rigid ceiling directly applied or 6-0-0 oc bracing.
OTHERS	2x4 SP No.3		

REACTIONS	(lb/size)	1=56/6-1-0, (min. 0-1-8), 3=56/6-1-0, (min. 0-1-8), 4=375/6-1-0, (min. 0-1-8)
Max Horiz	1=61 (LC 7)	
Max Uplift	3=9 (LC 11), 4=61 (LC 10)	
Max Grav	1=72 (LC 21), 3=72 (LC 22), 4=375 (LC 1)	

**FORCES** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.  
**WEBS** 2-4=-257/102

- NOTES**
- 1) Unbalanced roof live loads have been considered for this design.
  - 2) Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCCL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
  - 3) Gable requires continuous bottom chord bearing.
  - 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
  - 5) \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
  - 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 9 lb uplift at joint 3 and 61 lb uplift at joint 4.
  - 7) This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



This design is based upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of the Building Designer. Building Designer shall verify all design information on this sheet for conformance with conditions and requirements of the specific building and governing codes and ordinances. Building Designer accepts responsibility for the correctness or accuracy of the design information as it may relate to a specific building. Certification is valid only when truss is fabricated by a UFPI plant. Bracing shown is for lateral support of truss members only and does not replace erection and permanent bracing. Refer to Building Component Safety Information (BCSI) for general guidance regarding storage, erection and bracing available from SBCA and Truss Plate Institute.



Job 72315766	Truss V8	Truss Type Truss	Qty 1	Ply 1	PRO BLDRS SUPPLY PLAN # 2 HOLLY RF Job Reference (optional)
-----------------	-------------	---------------------	----------	----------	--

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Micah Clayton

Run: 8.62 S Sep 22 2022 Print: 8.620 S Sep 22 2022 MiTek Industries, Inc. Wed Apr 26 19:58:02

Page: 1

ID:GIE?CdoG2Z165yFgEM242vyMdQG-sbPFLa\_k6zRojvsmmQ1fBpAPAZn4QVdospCAt8zMLrp

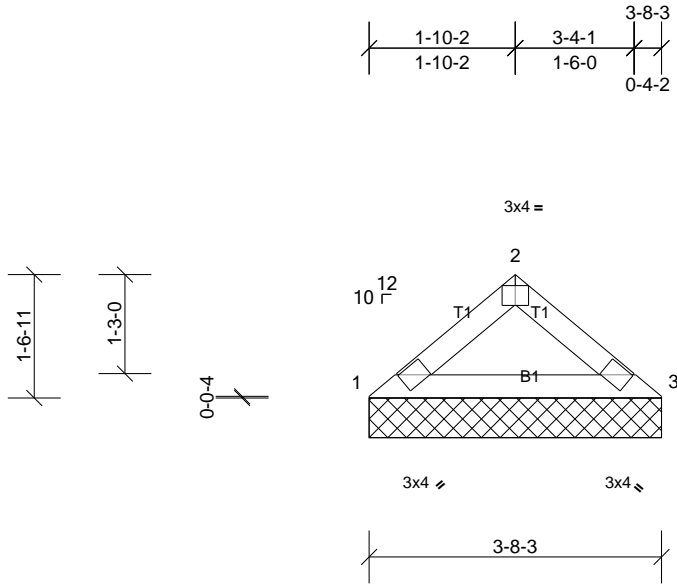


Plate Offsets (X, Y): [2:0-2-0,Edge]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.10	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.09	Vert(TL)	n/a	-	n/a	999		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.00	Horiz(TL)	0.00	3	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MP							Weight: 11 lb	FT = 20%

**LUMBER**

TOP CHORD 2x4 SP No.2  
BOT CHORD 2x4 SP No.2

**BRACING**

TOP CHORD Structural wood sheathing directly applied or 3-8-3 oc purlins.  
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

**REACTIONS**

(lb/size) 1=147/3-8-3, (min. 0-1-8), 3=147/3-8-3, (min. 0-1-8)  
Max Horiz 1=35 (LC 6)  
Max Uplift 1=18 (LC 10), 3=18 (LC 11)

**FORCES**

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

**NOTES**

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 18 lb uplift at joint 1 and 18 lb uplift at joint 3.
- This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



This design is based upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of the Building Designer. Building Designer shall verify all design information on this sheet for conformance with conditions and requirements of the specific building and governing codes and ordinances. Building Designer accepts responsibility for the correctness or accuracy of the design information as it may relate to a specific building. Certification is valid only when truss is fabricated by a UFPI plant. Bracing shown is for lateral support of truss members only and does not replace erection and permanent bracing. Refer to Building Component Safety Information (BCSI) for general guidance regarding storage, erection and bracing available from SBCA and Truss Plate Institute.

