


Job 72317272REP1	Truss A3H	Truss Type Truss	Qty 6	Ply 1	SMITH DOUGLAS/AVONDALE BEH Job Reference (optional)
---------------------	--------------	---------------------	----------	----------	--------------------------------------------------------

UFP Mid Atlantic LLC, 5631 S. NC 62, Burlington, NC, Kelly Langley

Run: 8.51 S Oct 22 2021 Print: 8.620 S Sep 22 2022 MiTek Industries, Inc. Thu Jul 20 12:09:15

Page: 1

ID: gNZz358t5Vv1G5zYbV8?k4yvZ97-2X?wYQ41Z5mC_Nt88pD1cemrgKFPAlne6k8vywywBZK



Repair for a 12" long split in the vertical at joint 7.

Add a new 2x4 SP or SPF No.2 beside the truss vertical, and attach 1/2" Plywood or 7/16" OSB (APA Rated Sheathing Exposure 1) gusset to both sides of truss as shown with two rows of 10d (.131" x 3") nails spaced 4" oc in all members from each face, driven through both sheets of plywood.

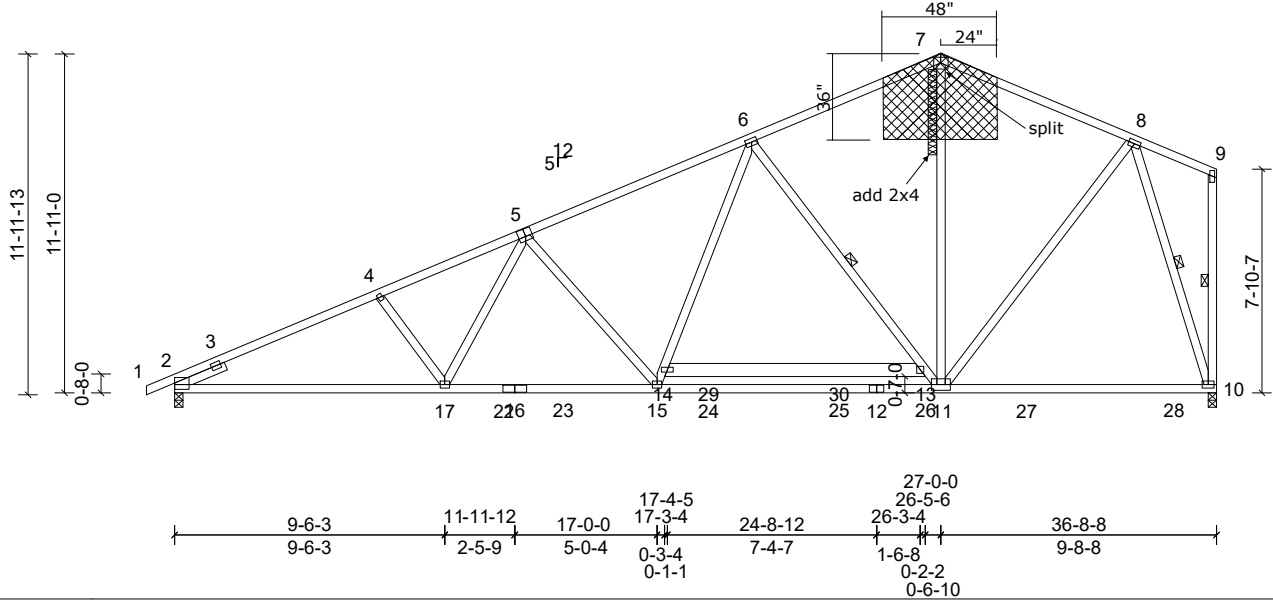


Plate Offsets (X, Y): [2:Edge,0-2-11], [5:0-3-0,0-3-4]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	20.0	Plate Grip DOL	1.15	TC	0.88	Vert(LL)	-0.31	10-11	>999	240	MT20	244/190
TCDL	10.0	Lumber DOL	1.15	BC	0.91	Vert(CT)	-0.52	10-11	>845	180	MT18HS	244/190
BCLL	0.0*	Rep Stress Incr	YES	WB	0.91	Horz(CT)	0.10	10	n/a	n/a		
BCDL	10.0	Code	IRC2015/TPI2014	Matrix-MSH							Weight: 251 lb	FT = 20%

LUMBER	BRACING
TOP CHORD 2x4 SP No.2 "Except" T1:2x4 SP No.1	TOP CHORD Structural wood sheathing directly applied or 2-2-0 oc purlins, except end verticals.
BOT CHORD 2x4 SP No.1 "Except" B3:2x6 SP No.2	BOT CHORD Rigid ceiling directly applied or 8-2-9 oc bracing. Except:
WEBS 2x4 SP No.3	6-0-0 oc bracing: 13-14
SLIDER Left 2x4 SP No.3 - 1-11-0	WEBS 1 Row at midpt 9-10, 8-10, 6-11

REACTIONS	(lb/size)	2=1598/0-3-8, (min. 0-1-14), 10=1572/0-3-8, (min. 0-2-0)
Max Horiz	2=324 (LC 9)	
Max Uplift	2=221 (LC 10), 10=123 (LC 10)	
Max Grav	2=1598 (LC 1), 10=1709 (LC 2)	

FORCES	(lb) - Max Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD	2-3=-1310/0, 3-4=-3015/637, 4-5=-2862/620, 5-6=-2358/514, 6-7=-1263/397, 7-8=-1258/391
BOT CHORD	2-17=-575/2713, 17-22=-440/2480, 16-22=-440/2480, 16-23=-440/2480, 15-23=-440/2480, 15-24=-185/1876, 24-25=-185/1876, 12-25=-185/1876, 12-26=-185/1876, 11-26=-185/1876, 11-27=-97/500, 27-28=-97/500, 10-28=-97/500
WEBS	8-10=-1604/301, 5-17=-613/76, 5-15=-662/313, 14-15=-143/767, 6-14=-84/968, 6-13=-1108/369, 11-13=-1297/312, 7-11=-95/631, 8-11=-35/980

- NOTES (8)**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph (3-second gust) Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=35ft; Cat. II; Exp B; Enclosed; MWFRS (envelope) exterior zone and C-C Exterior (2) zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - All plates are MT20 plates unless otherwise indicated.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 221 lb uplift at joint 2 and 123 lb uplift at joint 10.
 - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
 - This repair has been prepared based on information and use conditions supplied by client. Designer has made a good faith effort to outline damage and repair conditions as reported by client. When actual field conditions do not approximate those indicated on this drawing, client shall immediately inform the engineer and refrain from applying the repair.



This design is based upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of the Building Designer. Building Designer shall verify all design information on this sheet for conformance with conditions and requirements of the specific building and governing codes and ordinances. Building Designer accepts responsibility for the correctness or accuracy of the design information as it may relate to a specific building. Certification is valid only when truss is fabricated by a UFPI plant. Bracing shown is for lateral support of truss members only and does not replace erection and permanent bracing. Refer to Building Component Safety Information (BCSI) for general guidance regarding storage, erection and bracing available from SBCA and Truss Plate Institute.

