
Harnett County Department of Public Health

Improvement Permit

A b	uilding permit cannot be issued with only an Improvement Permit
	PROPERTY LOCATION: 22 Oleander (n (SR 1229)
ISSUED TO: Weaver homes	SUBDIVISION WEST Preserve LOT # 33
NEW REPAIR EXPANSION	Site Improvements required prior to Construction Authorization Issuance:
Type of Structure: 54'x60' SFD	
Proposed Wastewater System Type: 25 % reduce	TION
Projected Daily Flow: 360 GPD	
Number of bedrooms: 3 Number of Occupa	nts: 6 max
Basement Yes 🖾 No	1100
	ed based on final location and elevations of facilities
	Well Distance from wellfeet Permit valid for:
	No expiration
Permit conditions:	
11 1	
Audicinal State Assessed A Political	PECITS Date: 6-16-23 SEE ATTACHED SITE SKETCH
Authorized State Agent::	the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This
site is subject to revocation if the site plan, plat, or the intended use chi	anges. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of
the Laws and Rules for Sewage Treatment and Disposal and to conditions	
	Construction Authorization
	Construction Authorization
	(Required for Building Permit)
	54, .1955, .1956, .1957, .1958. and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance
with the attached system layout.	
ISSUED TO: Weaver homes	PROPERTY LOCATION: 22 Oleander (n (sr 1229) SUBDIVISION West Preserve LOT # 33
DOUBLE TO: DO ROVE HOMES	CHARLIST DOLLING TO THE 23
cuinta' (CD)	
Facility Type: 54 ×60' SFD	№
Basement? Yes No Basement Fixtu	ires? Yes 🔼 No
Type of Wastewater System** 25%	reduction (Initial) Wastewater Flow: 360 GPD
(See note below, if applicable)	
25%	reduction (Repair)
Installation Requirements/Conditions	Number of trenches
1100	Exact length of each trench 225 feet Trench Spacing: 9 Feet on Center
	tract length of each trench reet french spacing reet on center
Pump Tank Sizegallons	Trenches shall be installed on contour at a Soil Cover:
	Maximum Trench Depth of: 18-22 inches (Maximum soil cover shall not exceed
	(Trench bottoms shall be level to +/-1/4" 36" above the trench bottom)
	in all directions)
Pump Requirements:ft. TDH vs	inches below pipe
	Aggregate Depth: inches above pipe
Conditions:	
Conditions:	
WATER LINES (INCLUDING IRRIGATION) MUST B	E 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.
NO UTILITIES ALLOWED IN INITIAL OR REPAIR D	RAIN FIELD AREA.
**If applicable: I understand the system type specified	is different from the type specified on the application. I accept the specifications of this permit.
Owner/Legal Representative Signature:	Date:
This Construction Authorization is subject to revocation if the site plan, p	Date:
	the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH
/	
Authorized State Agent: Mal M	1 EHr 1-14-22
Authorized State Agent:	Date: 6-16-23 Construction Authorization Expiration Date: 6-16-28
	Construction Authorization Evaluation Date: A - 16-14

Harnett County Department of Public Health Site Sketch

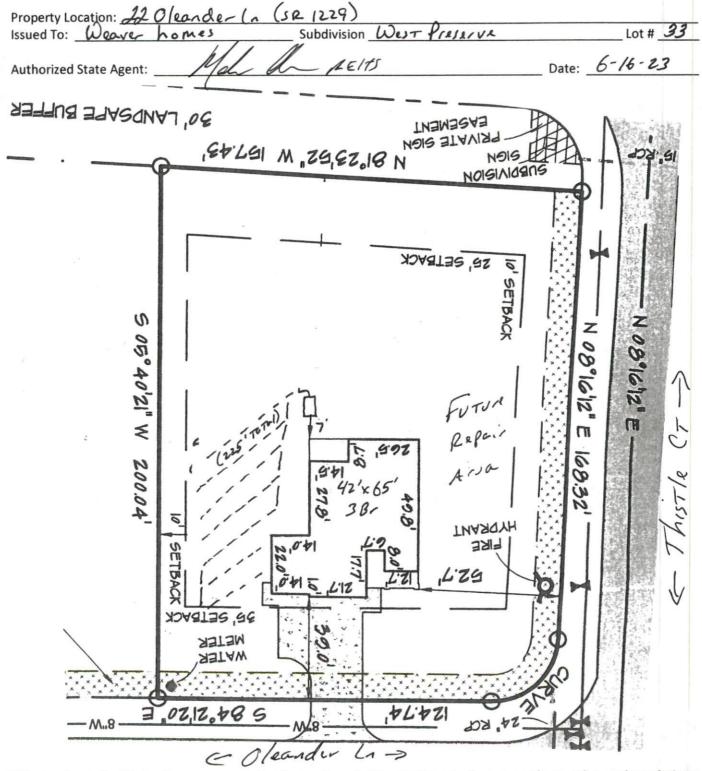

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.