



PYRO CHEM KITCHEN KNIGHT II FIRE SUPPRESSION SYSTEM

U.L. 300 LISTED - NFPA17A

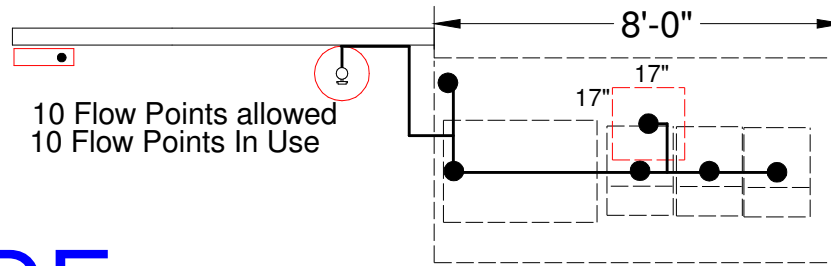

UL300 UPGRADE

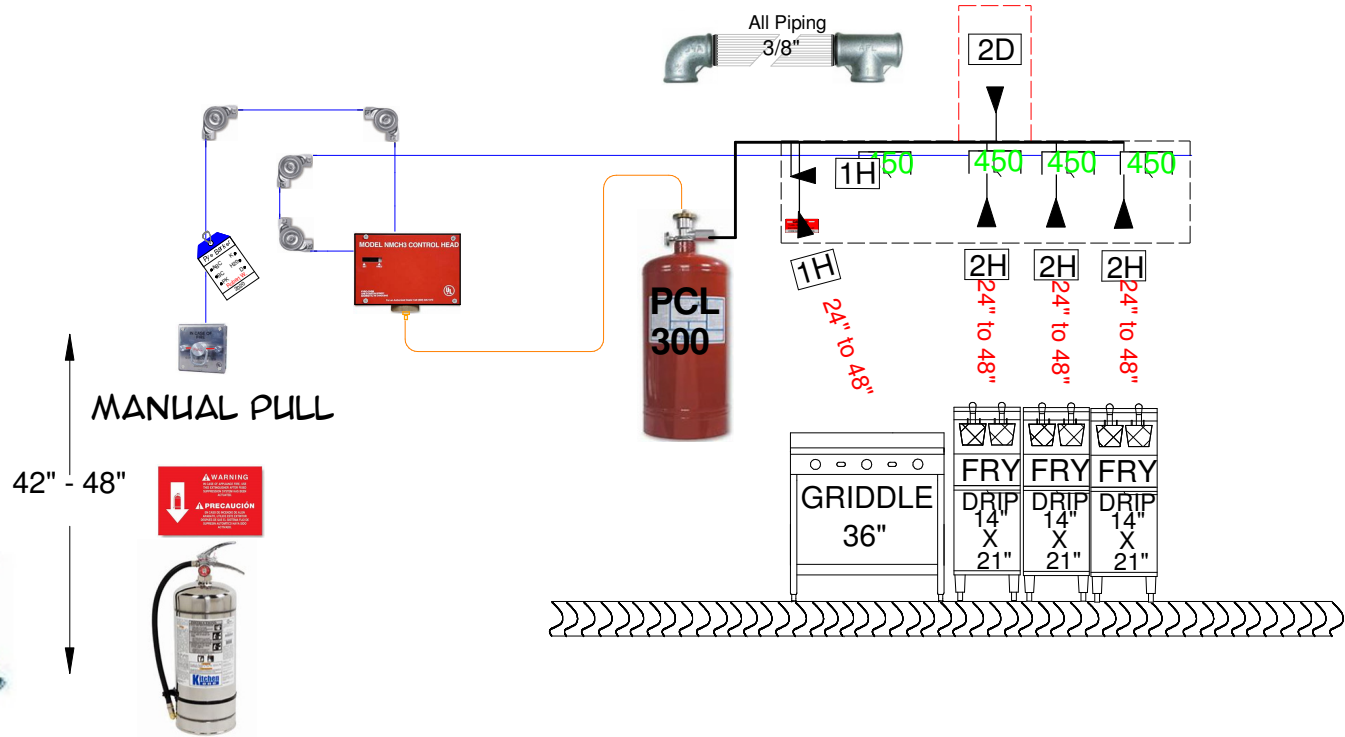

Control Head, pipe routings, remote pull station and gas valve locations are for reference only, locations may change.

- (1) ALL GAS AND ELECTRICAL APPLIANCES UNDER HOOD SHUT DOWN
- (2) EXHAUST FAN CONTINUES TO RUN ON DISCHARGE OF FIRE SYSTEM
- (3) FRESH AIR FAN SHUTS DOWN ON DISCHARGE OF FIRE SYSTEM
- (4) FIRE ALARM SYSTEM ACTIVATES IF BUILDING IS EQUIPPED WITH A FIRE ALARM
- (5) HOOD LIGHTS TURN OFF IF REQUIRED BY AHJ
- (6) REMOTE PULL STATION LOCATED 10' TO 20' FROM HOOD & 48" FROM FINISHED FLOOR
- (7) HVAC SYSTEM SHUTS DOWN WHEN FIRE SYSTEM IS ACTIVATED, IF REQUIRED BY AHJ
- (8) CLASS "K" FIRE EXTINGUISHER LOCATED NOT MORE THAN 30' FROM HOOD



Pye-Barker Fire & Safety
 130 Wolfpack Lane
 Durham NC 27704

DRAWN Robert W. DATE: 2-18-20 SHEET 1 OF 1

J R FOOD MART
 920 SOUTH MAIN STREET
 LILLINGTON, NC 27546