
## Harnett County Department of Public Health

SR, 1403

Improvement Permit

	property Location 369 Fm	11 A SSurance Ly Fuguer Varina, 2:
ISSUED TO: Javier Orliz Hernande  NEW REPAIR   EXPANSION	Z SUBDIVISION	101 #
NEW REPAIR TEXPANSION	Site Improvements re	quired prior to Construction Authorization Issuance:
Type of Structure: SFD 4.6' × 35'		1
Proposed Wastewater System Type: 25% TIGISUCT	N N	
Projected Daily Flow: 360 GPD		
Number of bedrooms: 3 Number of Occupa	ints:6max	
Basement Yes No		
/	red based on final location and elevations of facilities	
Type of Water Supply: Community Public		Permit valid for: Five years
Permit conditions:	1. 190000000 05000000000000000000000000000	☐ No expiration
M. I	10 710 77	CEE ATTACHED CITE CHETCH
Authorized State Agent: Ames C Manha	Date: 7-18-23	SEE ATTACHED SITE SKETCH secking with appropriate governing bodies in meeting their requirements. This
		nership of the site. This permit is subject to compliance with the provisions of
the Laws and Rules for Sewage Treatment and Disposal and to conditions	of this permit.	
1	C. A. C. A. A. C. C.	
	Construction Authorization	
	(Required for Building Permit)	
The construction and installation requirements of Rules .1950, .1952, .19 with the attached system layout.	<ol> <li>1955, 1956, 1957, 1958. and 1959 are incorporated by references</li> </ol>	s into this permit and shall be met. Systems shall be installed in accordance
ISSUED TO: Javier Ortiz Hern	ANDEZ PROPERTY LOCATION: 369	Full Assurance, in fuguery varing
Facility Type: SFD 46' x 35'	New Expansion Repair	
racility Type: 110 TG X 35	_ New    Expansion    Repair	
	ures? Yes Ato	2/2
Type of Wastewater System**	STON System	(Initial) Wastewater Flow: 360 GPD
(See note below, if applicable ()	1 - 2 - 2 -	
Low 1'40/3/1	6 / 50% 1291 sucous (Repair)	
Installation Requirements/Conditions	Number of trenches 2.	
Septic Tank Size 1000 gallons	Exact length of each trench 150 feet  Trenches shall be installed on contour at a	Trench Spacing: Feet on Center
Pump Tank Sizegallons		
	Maximum Trench Depth of: 18" inches	(Maximum soil cover shall not exceed
	(Trench bottoms shall be level to +/-1/4"	36" above the trench bottom)
	in all directions)	above the trener bettom)
Pump Requirements:ft. TDH vs	_GPM	6 inches below pipe
rump requirements it. 1011 45	_0111	
Confidence		Aggregate Depth: inches above pipe /2 inches total
Conditions:		Inches total
WATER LINES (INCLUDING IRRIGATION) MILET R	F 10FF FDOM ANY DADT OF CERTIC SYSTEM OR	DEDAID ADEA
WATER LINES (INCLUDING IRRIGATION) MUST B		KEPAIK AKEA.
NO UTILITIES ALLOWED IN INITIAL OR REPAIR D	RAIN FIELD AREA.	
**If applicable: I understand the system type specified	is different from the type specified on the application	n. I accept the specifications of this permit.
David and Brown and State of the State of th		
Owner/Legal Representative Signature:		Date:
	lat, or the intended use changes. The Construction Authorization shall not	
Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.  SEE ATTACHED SITE SKETCH		
\$	n/ / 1	_
Authorized State Agent: Date: 7-18-23		
Authorized State Agent: Date: 7-18-23  Construction Authorization Expiration Date: 7-18-28		

## Harnett County Department of Public Health Site Sketch

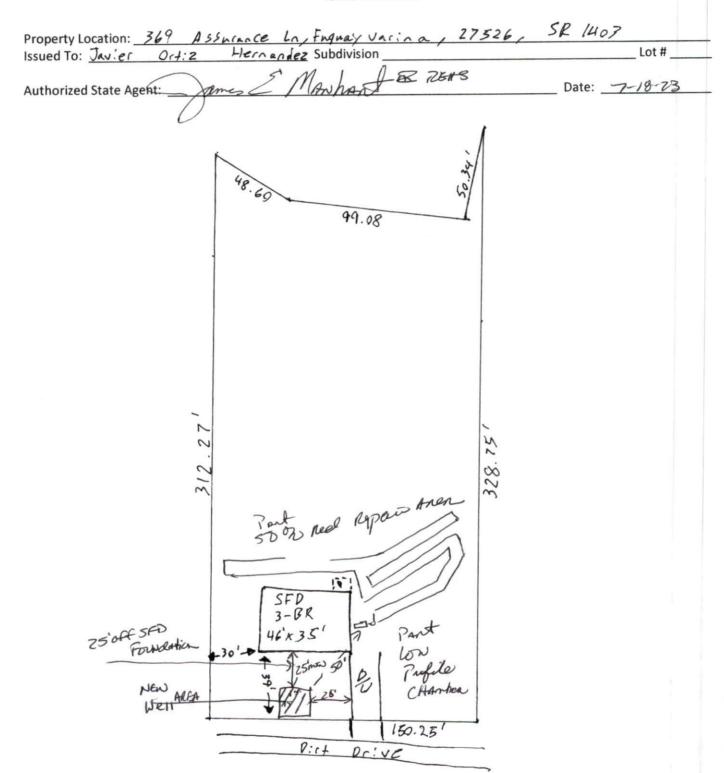

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.