

OPERATIONS PERMIT

Name: (owner) John Campbell Builder New Installation Septic Tank
 Property Location: SR# 1120 Repairs Nitrification Line
 Subdivision STONE CROSS Lot # 11
 TAX ID# _____ Quadrant # _____


Contractor: Com B. Hauling & Backhoe Registration # _____
850-0155 Service
 Basement with Plumbing: Garage:
 Water Supply: Well Public Community
 Distance From Well: 50 ft.

SYSTEM INSTALLED AS BEST
 AS COULD BE AS SHOWN -
 AS SHOWN SYSTEM WOULD BE GOING
 UP HILL AT LEAST 5 FEET

Following are the specifications for the sewage disposal system on above captioned property.

Type of system: Conventional Other _____
 Size of tank: Septic Tank: 1000 gallons Pump Tank: _____ gallons
 Subsurface Drainage Field: No. of ditches 2 exact length of each ditch 75 ft. width of ditches 3 ft. depth of ditches 36 in.
 French Drain: _____ Linear feet

PERMIT NO. 17304 Date: 03-16-01
 Inspected by: Joe Waters
 Environmental Health Specialist

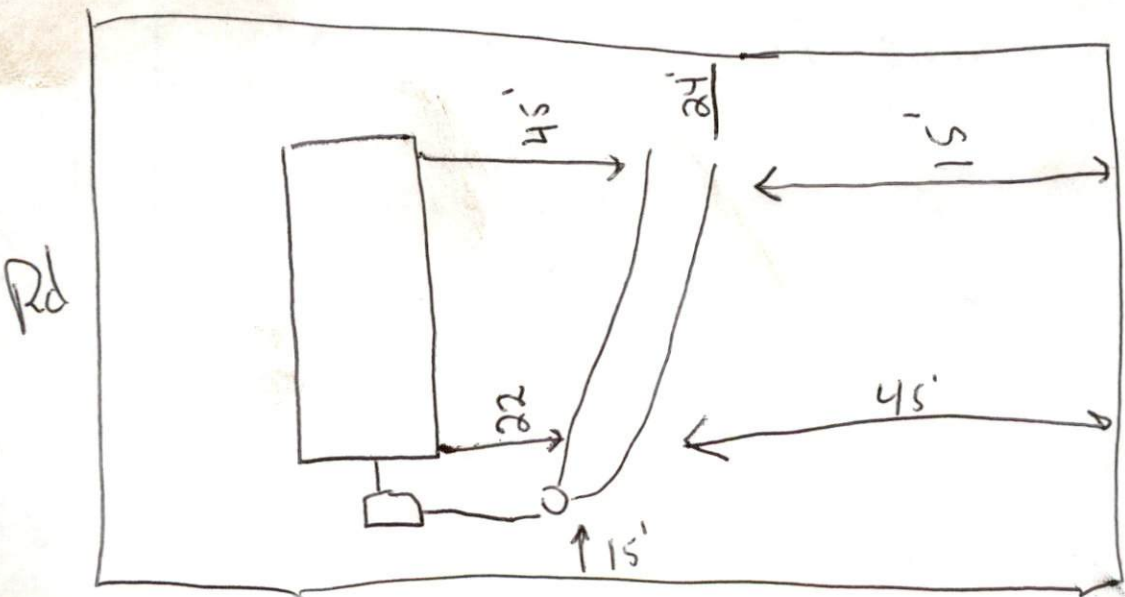

MCP-100
 STB-814
 1-20-01