THIS LAYOUT IS INTENDED FOR THE PURPOSE OF TRUSS LOCATION AND PLACEMENT ONLY. REFER TO THE BUILDING PLANS FOR ACTUAL BUILDING CONSTRUCTION.

TRUSSES TO BE DESIGNED AT 24" ON CENTER

Truss Connector Total List

Qty Product Manuf

Simpson

Simpson


Simpson


Simpson

HUS26

JUS24

TBE4

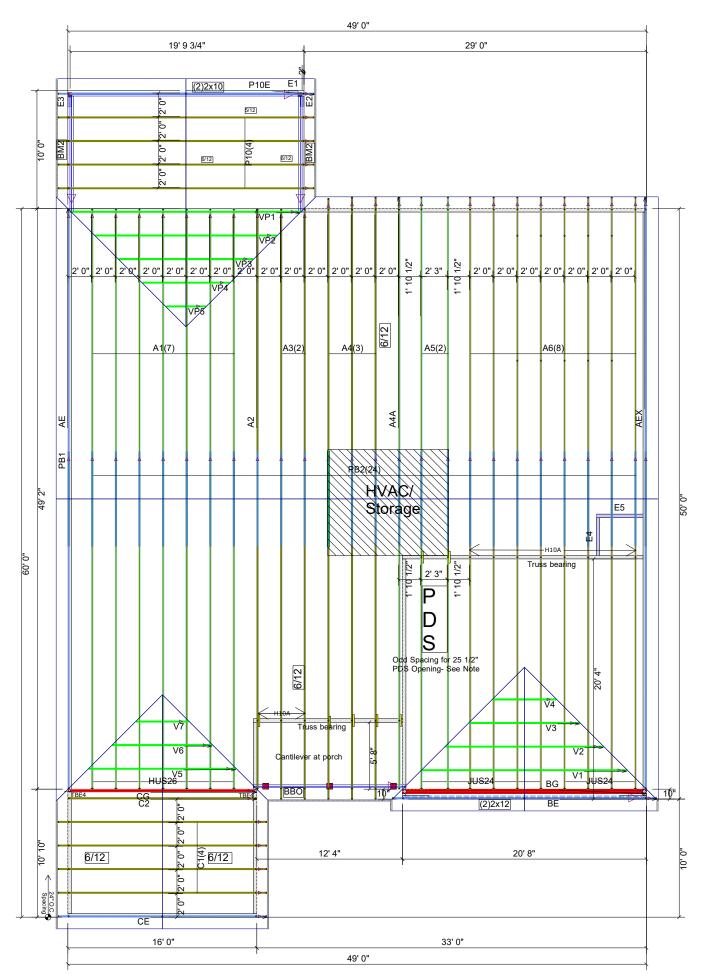

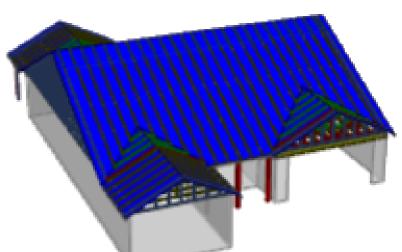



DEDICATED TO QUALITY AND EXCELLENCE 200 EMMETT ROAD DUNN, NORTH CAROLINA 28334 PHONE: 910-892-8400 FAX: 910-892-8384

Ϋ́

OVE		) - RH	ORDER: 37645	SHIP DATE: 2023
LOT 175 - BIRCHWOOD GROVE	KB HOME	(20 CVD PATIC	P.O. NUMBER: PO #	REV:
LOT 175 - BIR	KB	149.2115 - B - 10X20 CVD PATIO - RH		PRINT DATE:
	CUSTOMER:	MODEL: 149	SCALE: NOT TO SCALE	DRAWN BY:

TOP LIVE: 20 PSF

TOP DEAD: 10 PSF

**BOTM DEAD: 10 PSF** 

WIND SPD: 130 MPH

## GENERAL NOTES:

DO NOT CUT OR MODIFY TRUSSES.

TRUSSES ARE SPACED 24" ON CENTER UNLESS NOTED OTHERWISE.

REFER TO THE INDIVIDUAL TRUSS
DESIGN DRAWINGS FOR THE LOCATION

DESIGN DRAWINGS FOR THE LOCATION
OF LATERAL BRACING AND MULTI-PLY
CONNECTION REQUIREMENTS.

PER ANSI TPI 1-2002 THE TRUSS
ENGINEER IS RESPONSIBLE FOR

PER ANSI TPI 1-2002 THE TRUSS ENGINEER IS RESPONSIBLE FOR TRUSS TO TRUSS CONNECTIONS AND TRUSS PLY TO PLY CONNECTIONS. THIS TRUSS PLACEMENT PLAN RECCOMENDS TRUSS TO BEARING CONNECTIONS WHICH SHALL BE REVIEWED BY THE BUILDING DESIGNER. IT IS THE RESPONSIBILITY OF THE BUILDING DESIGNER TO RESOLVE ALL ROOF FORCES ADEQUATELY TO THE FOUNDATION.