

OPERATIONS PERMIT

Name: (owner) MIKE + Susan Denton New Installation Septic Tank
 Property Location: SR# 2007 Clayhole Repairs Nitrification Line
 Subdivision _____ Lot # 2
 TAX ID# _____ Quadrant # _____
 Contractor: Harold Chappell Registration # _____

Basement with Plumbing: Garage:
 Water Supply: Well Public Community
 Distance From Well: 50' ft.

Following are the specifications for the sewage disposal system on above captioned property.

Type of system: Conventional Other _____

Size of tank: Septic Tank: 1000 gallons Pump Tank: _____ gallons


Subsurface Drainage Field No. of ditches 3 exact length of each ditch 133 ft. width of ditches 3 ft. depth of ditches 18-20 in.

French Drain: — Linear feet

Date: 10-22-98

PERMIT NO. 15114

Inspected by: James E. Mendenhall
Environmental Health Specialist

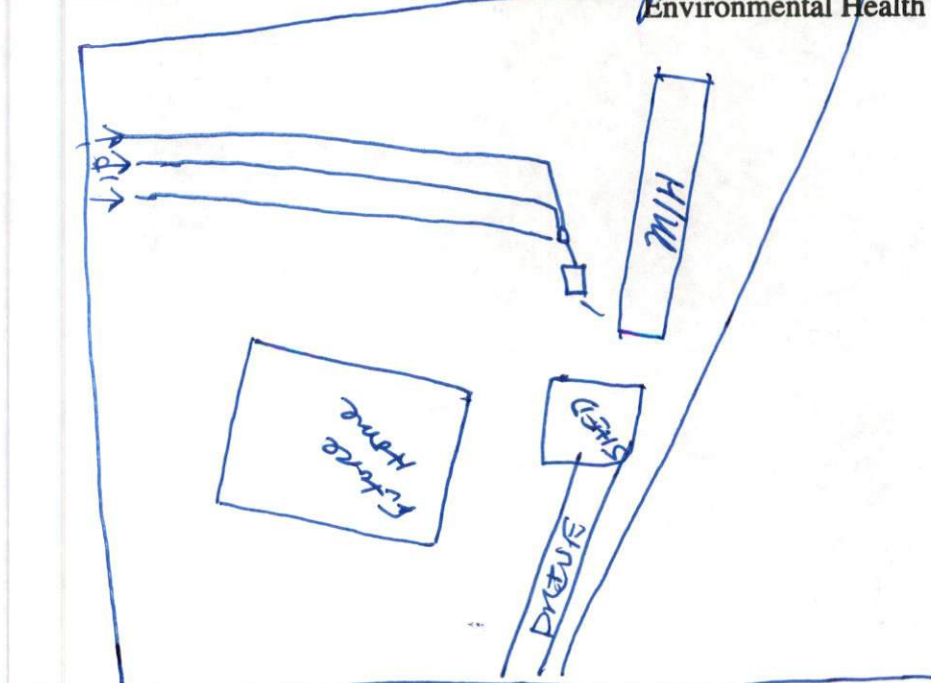

SR 2007