

OPERATIONS PERMIT


Name: (owner) HomeCo Builders Panny Norris New Installation Septic Tank
 Property Location: SR# 115 Buffalo Lake Repairs Nitrification Line
 Subdivision Aestiva Lot # 10
 TAX ID# _____ Quadrant # _____
 Contractor: Ted Brown Registration # _____

Basement with Plumbing: Garage:
 Water Supply: Well Public Community
 Distance From Well: 50 ft.

Following are the specifications for the sewage disposal system on above captioned property.

Type of system: Conventional Other Polystyrene Aggregate Trench
 Size of tank: Septic Tank: 1000 gallons Pump Tank: 1000 gallons
 Subsurface Drainage Field: No. of ditches 1 exact length of each ditch 180 ft. width of ditches 3 ft. depth of ditches 18 in.
 French Drain: _____ Linear feet

PERMIT NO. 11436 Date: 10-26-2000
 Inspected by: Jan Lark
 Environmental Health Specialist

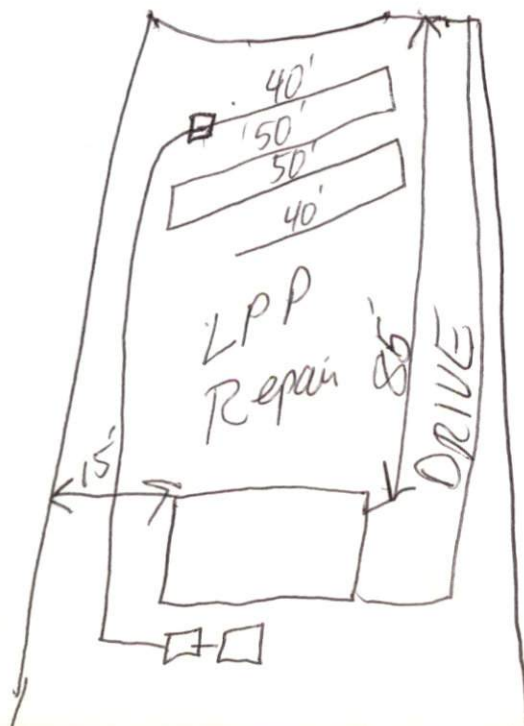

* needs pump, alarm, alarm box, floats and d-box checked.
 * Drainfield installed correctly. VWD 24 Aug 2000