

HTE# 09-521728R

Harrist County Department of Public Health

25306

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: SARAH COTE
 NEW REPAIR EXPANSION
 Type of Structure: Man Home (16'x80')
 Proposed Wastewater System Type: 25% REDUCTION SYSTEM
 Projected Daily Flow: 360 GPD
 Number of bedrooms: 3 Number of Occupants: 6 max
 Basement Yes No
 Pump Required: Yes No May be required based on final location and elevations of facilities
 Type of Water Supply: Community Public Well Distance from well 100 feet
 Permit conditions: SEE NOTES ON SITE SKETCH

PROPERTY LOCATION: PONDEROSA RD
 SUBDIVISION BROOKSTONE LOT # 55

Site Improvements required prior to Construction Authorization Issuance:

Permit valid for: Five years
 No expiration

Authorized State Agent: [Signature] Date: 4/2/09 SEE ATTACHED SITE SKETCH

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: SARAH COTE PROPERTY LOCATION: PONDEROSA RD
 SUBDIVISION BROOKSTONE LOT # 55

Facility Type: Man Home (16'x80') New Expansion Repair
 Basement? Yes No Basement Fixtures? Yes No
 Type of Wastewater System** 25% REDUCTION SYSTEM (Initial) Wastewater Flow: 360 GPD
 (See note below, if applicable)

LPR (Repair)

Installation Requirements/Conditions

Septic Tank Size <u>1000</u> gallons	Number of trenches <u>1</u>	Trench Spacing: <u>9</u> Feet on Center
Pump Tank Size <u>1000</u> gallons	Exact length of each trench <u>300</u> feet	Soil Cover: <u>6</u> inches
	Trenches shall be installed on contour at a	(Maximum soil cover shall not exceed
	Maximum Trench Depth of: <u>12</u> inches	36" above the trench bottom)
	(Trench bottoms shall be level to +/- 1/4"	
	in all directions)	

Pump Requirements: _____ ft. TDH vs. _____ GPM _____ inches below pipe

Aggregate Depth: _____ inches above pipe
 _____ inches total

Conditions: SEE NOTES ON SITE SKETCH

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: [Signature] Date: 4/2/09
 Construction Authorization Expiration Date: 4/2/14

HTE# 09-5-21728 R


Permit # 25306

Harnett County Department of Public Health Site Sketch

ISSUED TO: SARAH COYE PROPERTY LOCATION: PONDEROSA RD
SUBDIVISION BROOKSTONE LOT # 55

Authorized State Agent: [Signature] DS (OLIVER TOLKSCOFF) Date: 4/2/09

- * CONTRACTOR TO MEET ON SITE PRIOR TO DOING ANY WORK
- * SOIL DEPTH TO BE RECHECKED AFTER TREE REMOVAL
- * FRENCH DRAIN 1 FOOT WIDE 30" DEEP
- * 6"-10" OF COVER NEEDED OVER DRAINFIELD
- * THIS PERMIT BASED ON PROPOSAL FROM APPLICANT'S SOIL SCIENTIST

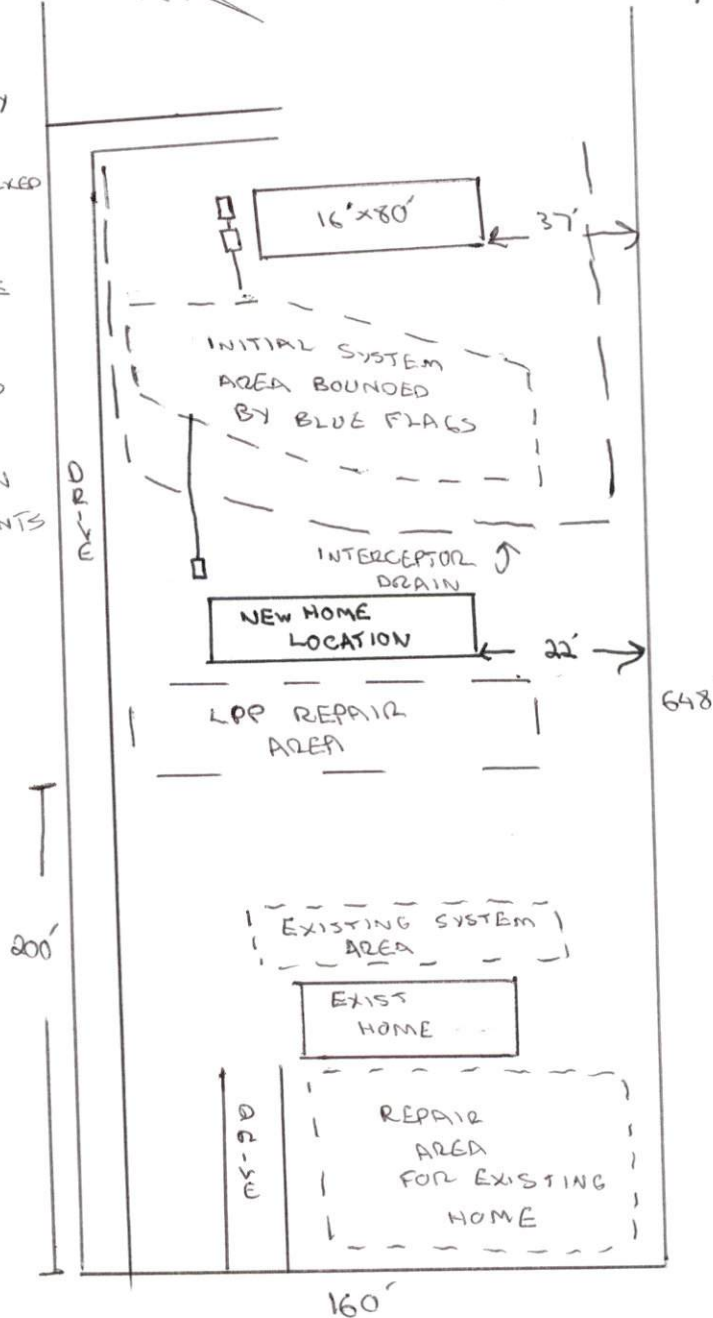

REVISED FOR NEW HOME LOCATION
4/15/09
OT