

HTE# 09-5-21831

Harnett County Department of Public Health Improvement Permit

25139

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Kenneth Johnson PROPERTY LOCATION: SR 1560 Feetus RD
 NEW REPAIR EXPANSION SUBDIVISION _____ LOT # _____
 Type of Structure: DWmH Site Improvements required prior to Construction Authorization Issuance: _____
 Proposed Wastewater System Type: 25% REDUCTION (ACCEPTED)
 Projected Daily Flow: 360 GPD
 Number of bedrooms: 3 Number of Occupants: 6 max
 Basement Yes No
 Pump Required: Yes No May be required based on final location and elevations of facilities
 Type of Water Supply: Community Public Well Distance from well _____ feet Permit valid for: Five years
 Permit conditions: WATER LINE TO BE RUN 10' around septic system No expiration

Authorized State Agent: James E. Mankin Date: 4-16-09 SEE ATTACHED SITE SKETCH
 The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Kenneth Johnson PROPERTY LOCATION: SR 1560 Feetus RD
 Facility Type: DWmH New Expansion Repair
 Basement? Yes No Basement Fixtures? Yes No
 Type of Wastewater System** 25% REDUCTION system (Initial) Wastewater Flow: 360 GPD
 (See note below, if applicable)
25% REDUCTION system (Repair)
 Installation Requirements/Conditions
 Septic Tank Size 1000 gallons Number of trenches 3
 Pump Tank Size _____ gallons Exact length of each trench 100 feet Trench Spacing: 9 Feet on Center
 Trenches shall be installed on contour at a Soil Cover: 6 inches
 Maximum Trench Depth of: 24" inches (Maximum soil cover shall not exceed
 (Trench bottoms shall be level to +/- 1/4" 36" above the trench bottom)
 in all directions)
 Pump Requirements: _____ ft. TDH vs. _____ GPM Aggregate Depth: 6 inches below pipe
 _____ inches above pipe
 Conditions: WATER LINE TO BE RUN 10' around septic system 12 inches total

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: James E. Mankin Date: 4-16-09
 Construction Authorization Expiration Date: 4-16-14

HTE# 09-5-21831

Permit # 25139


Harnett County Department of Public Health Site Sketch

ISSUED TO: Kenneth Johnson PROPERTY LOCATOR: SR 1560 Festus RD
SUBDIVISION _____ LOT # _____

Authorized State Agent: James E. Markham Jones Date: 4-16-09

* NOTE
HOME ALREADY
SET UP AT EVALUATION.

* RUN WATER LINE
10' OFF (ACROSS)
SEPTIC SYSTEM.

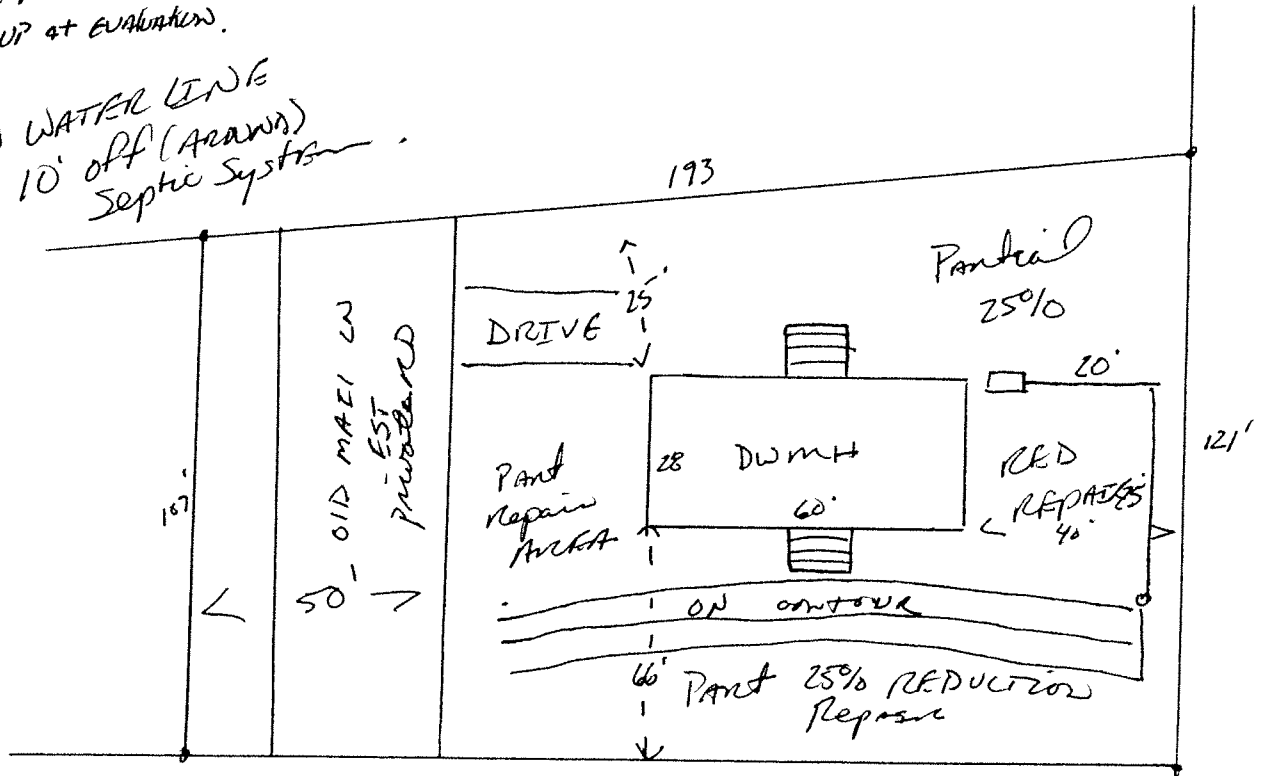

SR 1560 Festus RD